

VISIT...

LANZAROTE
Caliente.COM


A VISUAL DICTIONARY OF

Architecture




FRANCIS D.K. CHING

A VISUAL DICTIONARY OF
ARCHITECTURE

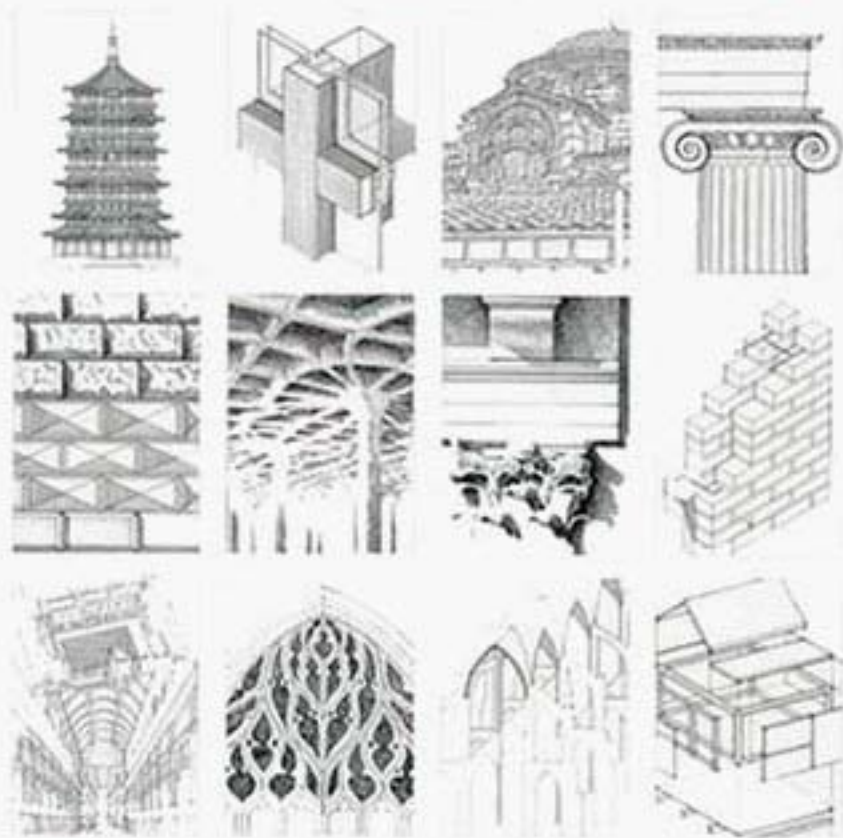

FRANCIS D.K. CHING

A
VISUAL DICTIONARY
OF
ARCHITECTURE

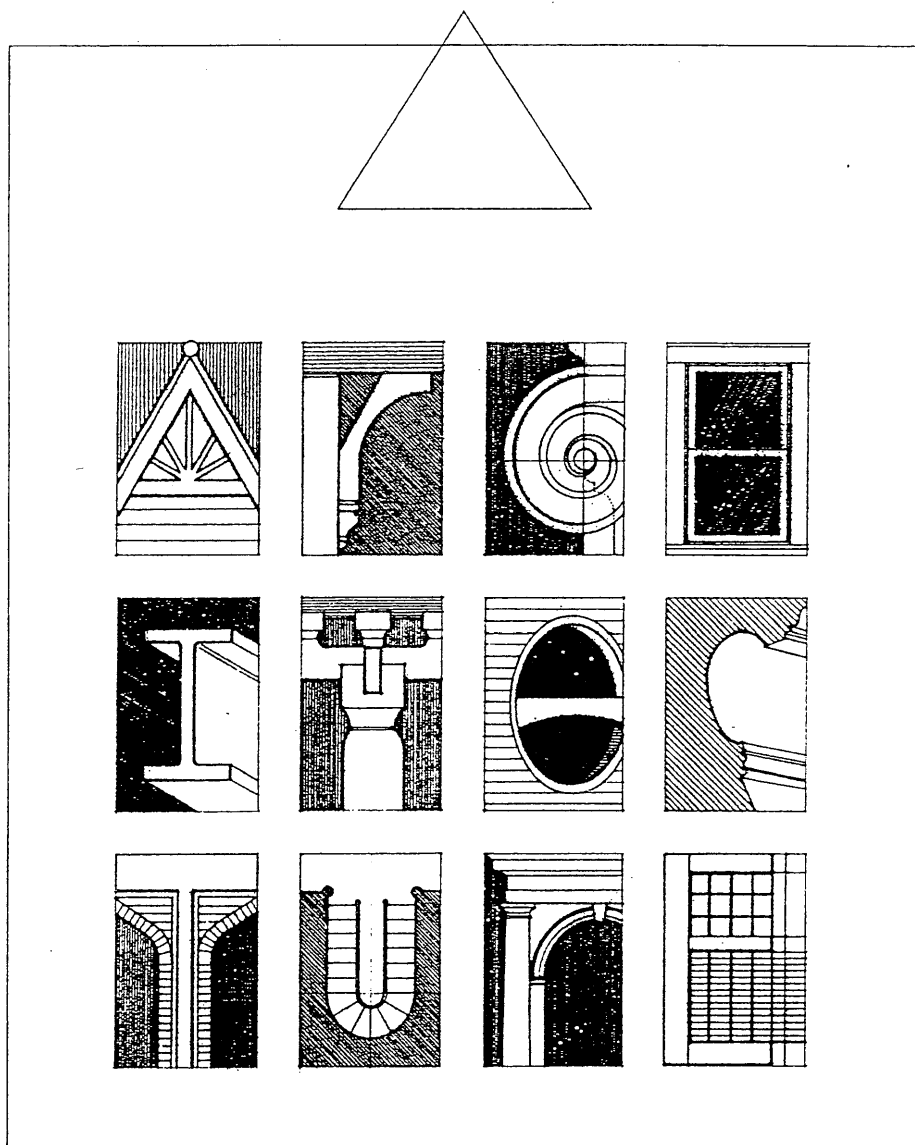

FRANCIS D.K. CHING













A VNR BOOK



JOHN WILEY & SONS, INC.

NEW YORK CHICHESTER WEINHEIM BRISBANE SINGAPORE TORONTO

A VISUAL DICTIONARY OF ARCHITECTURE

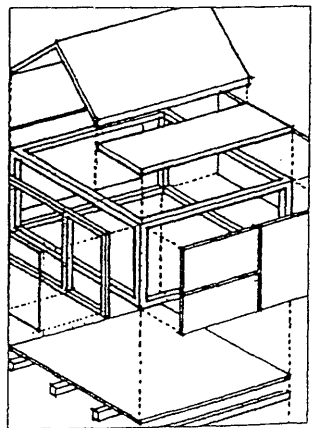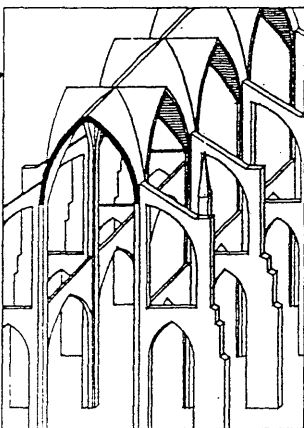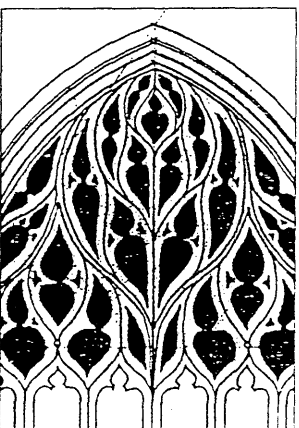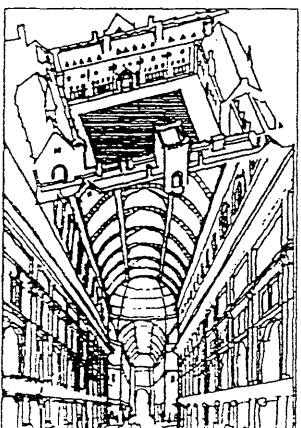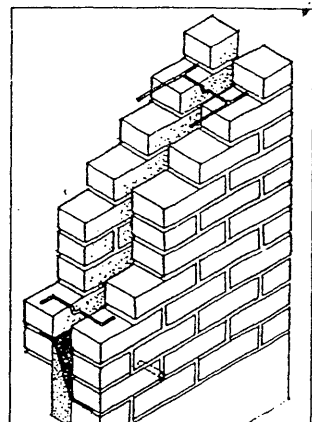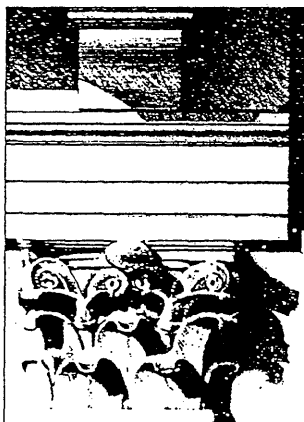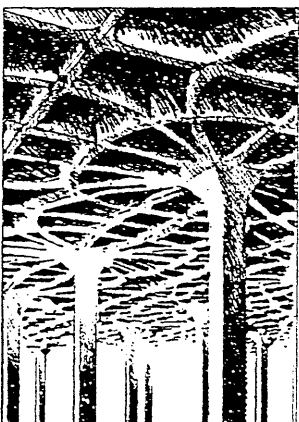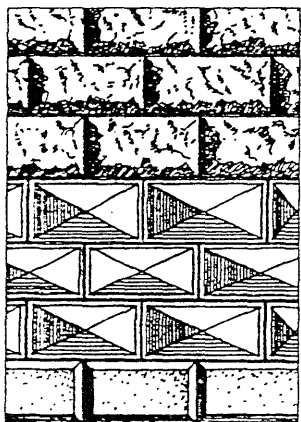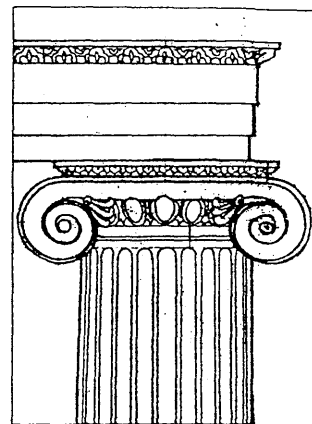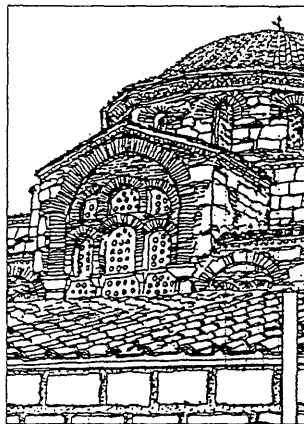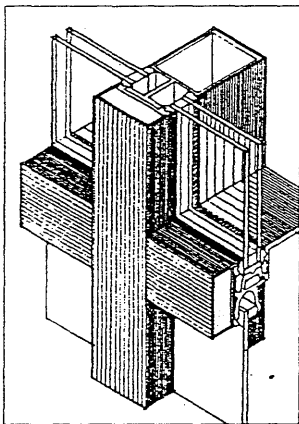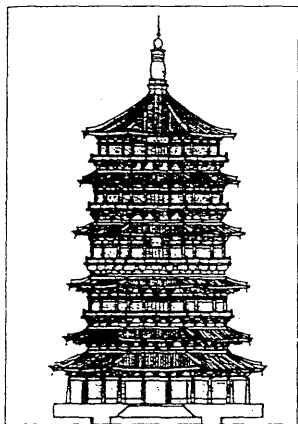

ARCH.
FRANCIS D.K. CHING
FERNANDEZ

This book is printed on acid-free paper. ☹

Copyright © 1995 by John Wiley & Sons, Inc. All rights reserved.

Published simultaneously in Canada.

No part of this publication may be reproduced, stored in a retrieval system or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, scanning or otherwise, except as permitted under Sections 107 or 108 of the 1976 United States Copyright Act, without either the prior written permission of the Publisher, or authorization through payment of the appropriate per-copy fee to the Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923, (978) 750-8400, fax (978) 750-4744. Requests to the Publisher for permission should be addressed to the Permissions Department, John Wiley & Sons, Inc., 605 Third Avenue, New York, NY 10158-0012, (212) 850-6011, fax (212) 850-6008, E-Mail: PERMREQ@WILEY.COM.

This publication is designed to provide accurate and authoritative information in regard to the subject matter covered. It is sold with the understanding that the publisher is not engaged in rendering professional services. If professional advice or other expert assistance is required, the services of a competent professional person should be sought.

Library of Congress Cataloging-in-Publication Data:

ISBN 0-471-28451-3

Printed in the United States of America.

20 19 18 17 16 15 14 13 12

CONTENTS

PREFACE 7

ARCHITECTURE 9

ARCH 12

BEAM 15

BRICK 18

BUILDING 21

CABLE STRUCTURE 28

CEILING 30

CERAMIC 32

CHURCH 35

COLOR 38

COLUMN 40

CONCRETE 42

CONSTRUCTION 48

DESIGN 52

DOME 60

DOOR 62

DRAWING 66

ELECTRICITY 74

ELEVATOR 80

FASTENING 82

FIREPLACE 87

FIRE SAFETY 88

FLOOR 92

FORCE 96

FORTIFICATION 98

FOUNDATION 100

FRAME 104

GEOMETRY 108

GLASS 112

HARDWARE 114

HEAT 117

HISTORY 128

HOUSE 136

JOINERY 140

LIGHT 142

LOAD 151

MASONRY 155

MATERIAL 161

MEASURE 166

MEMBRANE 168

METAL 169

MOISTURE CONTROL 176

ORDER 179

ORNAMENT 182

PAINT 187

PLASTER 188

PLASTIC 192

PLATE 194

PLUMBING 196

REINFORCED CONCRETE 202

ROOF 208

ROOM 216

SHELL 219

SITEWORK 221

SOIL 224

SOLAR ENERGY 226

SOUND 228

STAIR 233

STONE 236

STRUCTURE 238

SURVEY 246

TEMPLE 248

THEATER 256

TRUSS 259

VAULT 262

VISION 264

WALL 266


WINDOW 271

WOOD 276

INDEX 285

This is a book for the curious to browse as well as a desktop reference for the student of architecture. The compilation of words and definitions is not intended to be exhaustive. Rather, the selection is designed to be comprehensive enough to reflect the rich, complex, and multidimensional nature of architecture.

Architecture is an art for all to learn because all are concerned with it. –John Ruskin • Architecture depends on Order, Arrangement, Eurythmy, Symmetry, Propriety, and Economy. All of these must be built with due reference to durability, convenience, and beauty. Durability will be assured when foundations are carried down to the solid ground and materials wisely and liberally selected; convenience, when the arrangement of the apartments is faultless and presents no hindrance to use, and when each class of building is assigned to its suitable and appropriate exposure; and beauty, when the appearance of the work is pleasing and in good taste, and when its members are in due proportion according to correct principles of symmetry. –Vitruvius • Architecture is the masterly, correct and magnificent play of masses brought together in light. –Le Corbusier • Anyone entering on the study of architecture must understand that even though a plan may have abstract beauty on paper, the four facades may seem well-balanced and the total volume well-proportioned, the building itself may turn out to be poor architecture. Internal space, that space which cannot be completely represented in any form, which can be grasped and felt only through direct experience, is the protagonist of architecture. To grasp space, to know how to see it, is the key to the understanding of building. –Bruno Zevi • Architecture, painting, and sculpture are called the fine arts. They appeal to the eye as music does to the ear. But architecture is not judged by visual appeal alone. Buildings affect all of the human senses – sound, smell, touch, taste, and vision. –Forrest Wilson • It became apparent to us that architecture is generally assumed to be a highly specialized system with a set of prescribed technical goals rather than a sensual social art responsive to real human desires and feelings. This limitation is most frighteningly manifested in the reliance on two-dimensional diagrams that lay more stress on the quantifiable features of building organization than on the polychromatic and three-dimensional qualities of the whole architectural experience. –Kent Bloomer & Charles Moore • The only way you can build, the only way you can get the building into being, is through the measurable. You must follow the laws of nature and use quantities of brick, methods of construction, and engineering. But in the end, when the building becomes part of living, it evokes unmeasurable qualities, and the spirit of its existence takes over. –Louis Kahn • Built environments have various purposes: to shelter people and their activities and possessions from the elements, from human and animal enemies, and from supernatural powers; to establish place; to create a humanized, safe area in a profane and potentially dangerous world; to stress social identity and indicate status; and so on. Thus the origins of architecture are best understood if one takes a wider view and considers sociocultural factors, in the broadest sense, to be more important than climate, technology, materials, and economy. In any situation, it is the interplay of all these factors that best explains the form of buildings. No single explanation will suffice, because buildings – even apparently humble dwellings – are more than material objects or structures. They are institutions, basic cultural phenomena. People think environments before they build them. Thought orders space, time, activity, status, roles, and behavior. But giving physical expression to ideas is valuable. Encoding ideas makes them useful mnemonics; ideas help behavior by reminding people of how to act, how to behave, and what is expected of them. It is important to stress that all built environments – buildings, settlements, and landscapes – are one way of ordering the world by making ordering systems visible. The essential step, therefore, is the ordering or organizing of the environment. –Amos Rapaport • Ruskin said: 'Great nations write their autobiographies in three manuscripts, the book of their deeds, the book of their words and the book of their art. Not one of these books can be understood unless we read the two others, but of the three the only trustworthy one is the last.' On the whole I think this is true. If I had to say which was telling the truth about society, a speech by a minister of housing or the actual buildings put up in his time, I should believe the buildings. –Kenneth Clark • We require of any building, that it act well, and do the things it was intended to do in the best way; that it speak well, and say the things it was intended to say in the best words; that it look well, and please us by its presence, whatever it has to do or say. –John Ruskin • Architecture also exists without necessary assistance from an architect; and architects sometimes create buildings which are not architecture. –Norval White • Architecture is produced by ordinary people, for ordinary people; therefore it should be easily comprehensible to all. –Steen Eiler Rasmussen

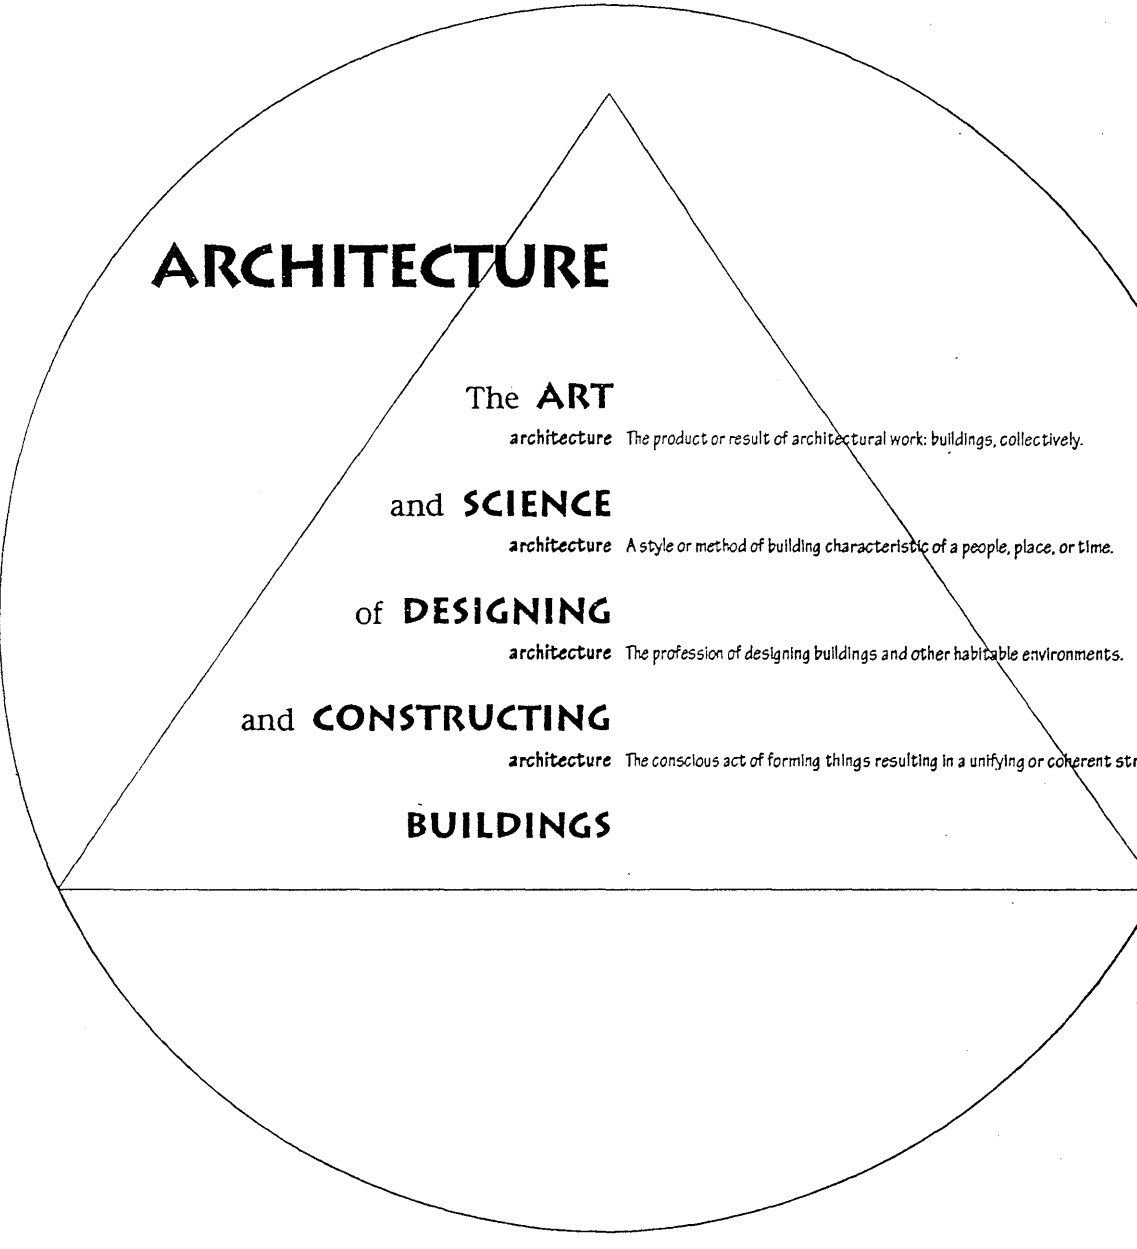

ARCHITECTURE

The **ART**

architecture The product or result of architectural work: buildings, collectively.

and **SCIENCE**

architecture A style or method of building characteristic of a people, place, or time.

of **DESIGNING**

architecture The profession of designing buildings and other habitable environments.

and **CONSTRUCTING**

architecture The conscious act of forming things resulting in a unifying or coherent structure.

BUILDINGS

ARCHITECTURE

art

The conscious use of skill, craft, and creative imagination in the production of what is beautiful, appealing, or of more than ordinary significance.



aesthetics

The branch of philosophy that deals with the nature of art, beauty, and taste, with a view to establishing the meaning and validity of critical judgments concerning works of art. Also, esthetics.

beauty



The aggregate of qualities in a person or thing that gives intense pleasure to the senses or deep satisfaction to the mind or spirit, whether arising from harmony of form or color, excellence of craft, truthfulness, originality, or other, often unspecifiable property.

taste

Critical judgment, discernment, or appreciation of what is fitting, harmonious, or beautiful prevailing in a culture or personal to an individual.

delight

A high degree of pleasure or enjoyment.

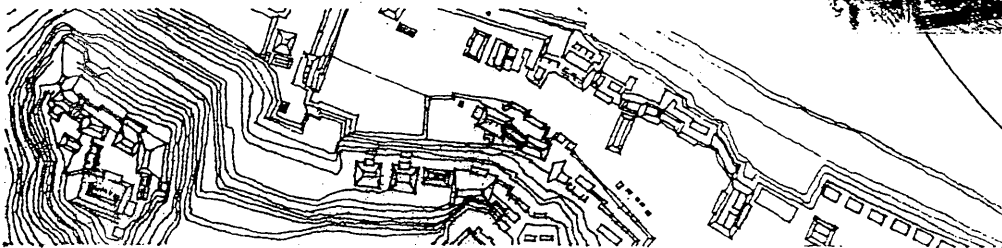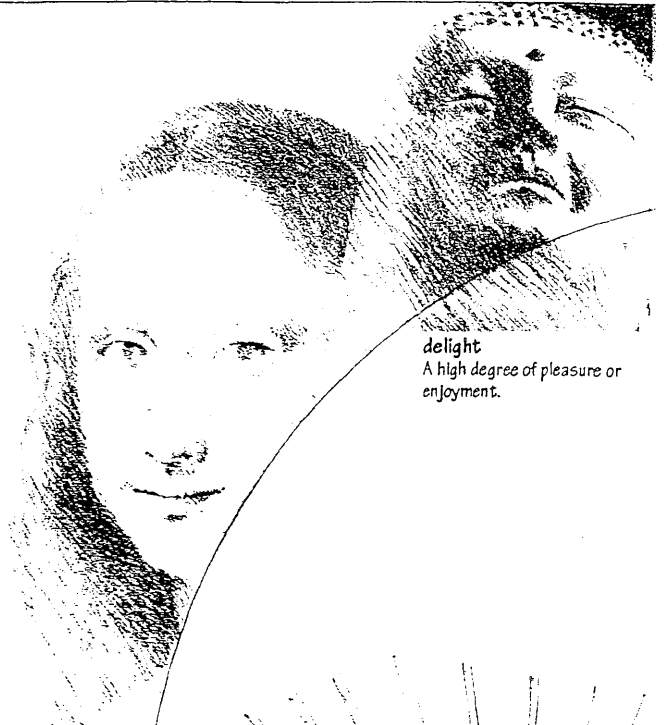

commodity
Something of value, use, or convenience.

environmental design

The ordering of the physical environment by means of architecture, engineering, construction, landscape architecture, urban design, and city planning.

urban design

The aspect of architecture and city planning that deals with the design of urban structures and spaces.

city planning


The activity or profession of determining the future physical arrangement and condition of a community, involving an appraisal of the current conditions, a forecast of future requirements, a plan for the fulfillment of these requirements, and proposals for legal, financial, and constructional programs to implement the plan. Also called town planning, urban planning.

interior design

The art, business, or profession of planning the design and supervising the execution of architectural interiors, including their color schemes, furnishings, fittings, finishes, and sometimes architectural features.

space planning

The aspect of architecture and interior design that deals with the planning, layout, design, and furnishing of spaces within a proposed or existing building.



technology

Applied science: the branch of knowledge that deals with the creation and use of technical methods and materials, and their interrelation with life, society, and the environment.

technics


The science of an art or of the arts in general.

tectonics

The science or art of shaping, ornamenting, or assembling materials in construction.

architectonics

The unifying structure or concept of an artistic work.




firmness

The state or quality of being solidly constructed.


engineering

The art and science of applying scientific principles to practical ends in the design and construction of structures, equipment, and systems.

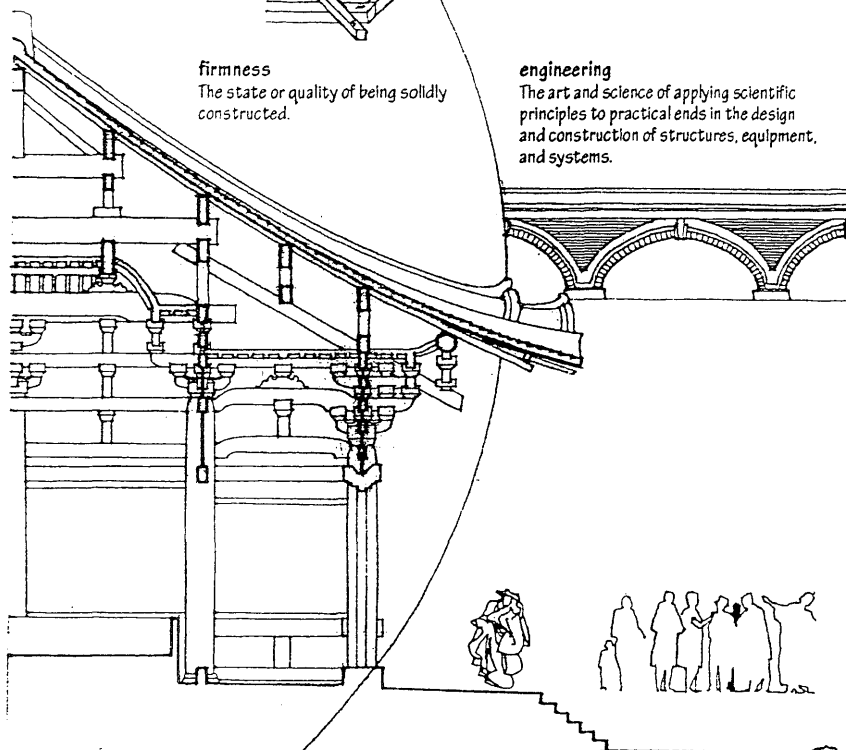

science

A branch of knowledge dealing with a body of facts or truths obtained by direct observation, experimental investigation, and methodical study, systematically arranged and showing the operation of general laws.

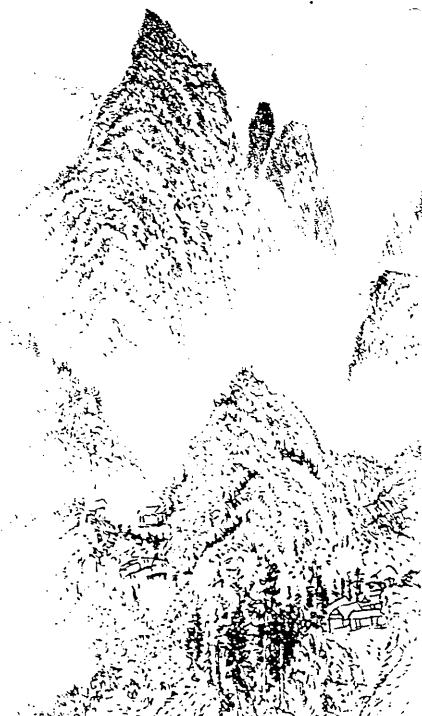

behavioral science

Any of the sciences, as sociology and anthropology, that seek to discover general truths from the observation of human behavior in society.

sociology

The science of human social institutions and relationships: specif. the study of the origin, development, structure, functioning, and collective behavior of organized groups of human beings.

anthropology

The science of human beings: specif. the study of the origins, physical and cultural development, and environmental and social relations of humankind.



landscape architecture

The art, business, or profession of designing, arranging, or modifying the features of a landscape for aesthetic or practical reasons.



ARCH

A curved structure for spanning an opening, designed to support a vertical load primarily by axial compression.

masonry arch

An arch constructed of individual stone or brick voussoirs.

voussoir

Any of the wedge-shaped units in a masonry arch or vault, having side cuts converging at one of the arch centers.

springer

The first voussoir resting on the impost of an arch.

keystone

The wedge-shaped, often embellished voussoir at the crown of an arch, serving to lock the other voussoirs in place.

extrados

The exterior curve, surface, or boundary of the visible face of an arch. Also called back.

archivolt

A decorative molding or band on the face of an arch following the curve of the intrados.

intrados

The inner curve or surface of an arch forming the concave underside.

rise

The height of an arch from the springing line to the highest point of the intrados.

spring

The point at which an arch, vault, or dome rises from its support. Also called springing.

crown

The highest part or point of a convex construction, as an arch, vault, or roadway.

haunch



Either side of an arch curving down from the crown to the impost.

impost

The uppermost part of an abutment, often in the form of a block, capital, or molding, from which an arch springs.

spandrel

The triangular-shaped, sometimes ornamented area between the extrados of two adjoining arches, or between the left or right extrados of an arch and the rectangular framework surrounding it. Also called spandril.

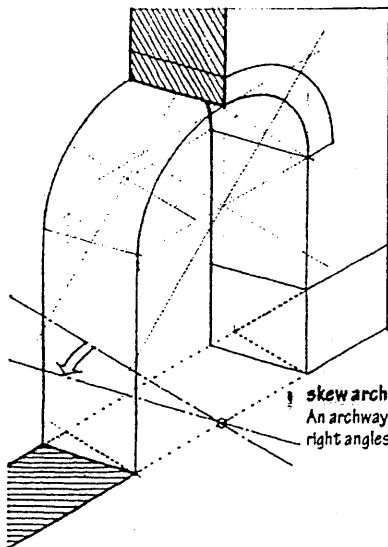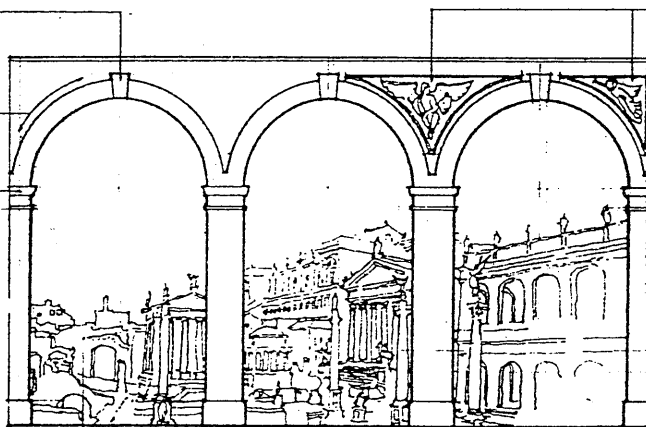

skew arch

An archway having sides or jambs not at right angles with the face of its abutments.

order

Any of several concentric rings of masonry forming an arch, esp. when each projects beyond the one below.

lag


A crosspiece connecting the ribs in a centering. Also called bolster.


centering

A temporary framework for supporting a masonry arch or vault during construction until the work can support itself.


camber piece

A board used as centering for a flat arch, slightly crowned to allow for settling of the arch. Also called camber slip.



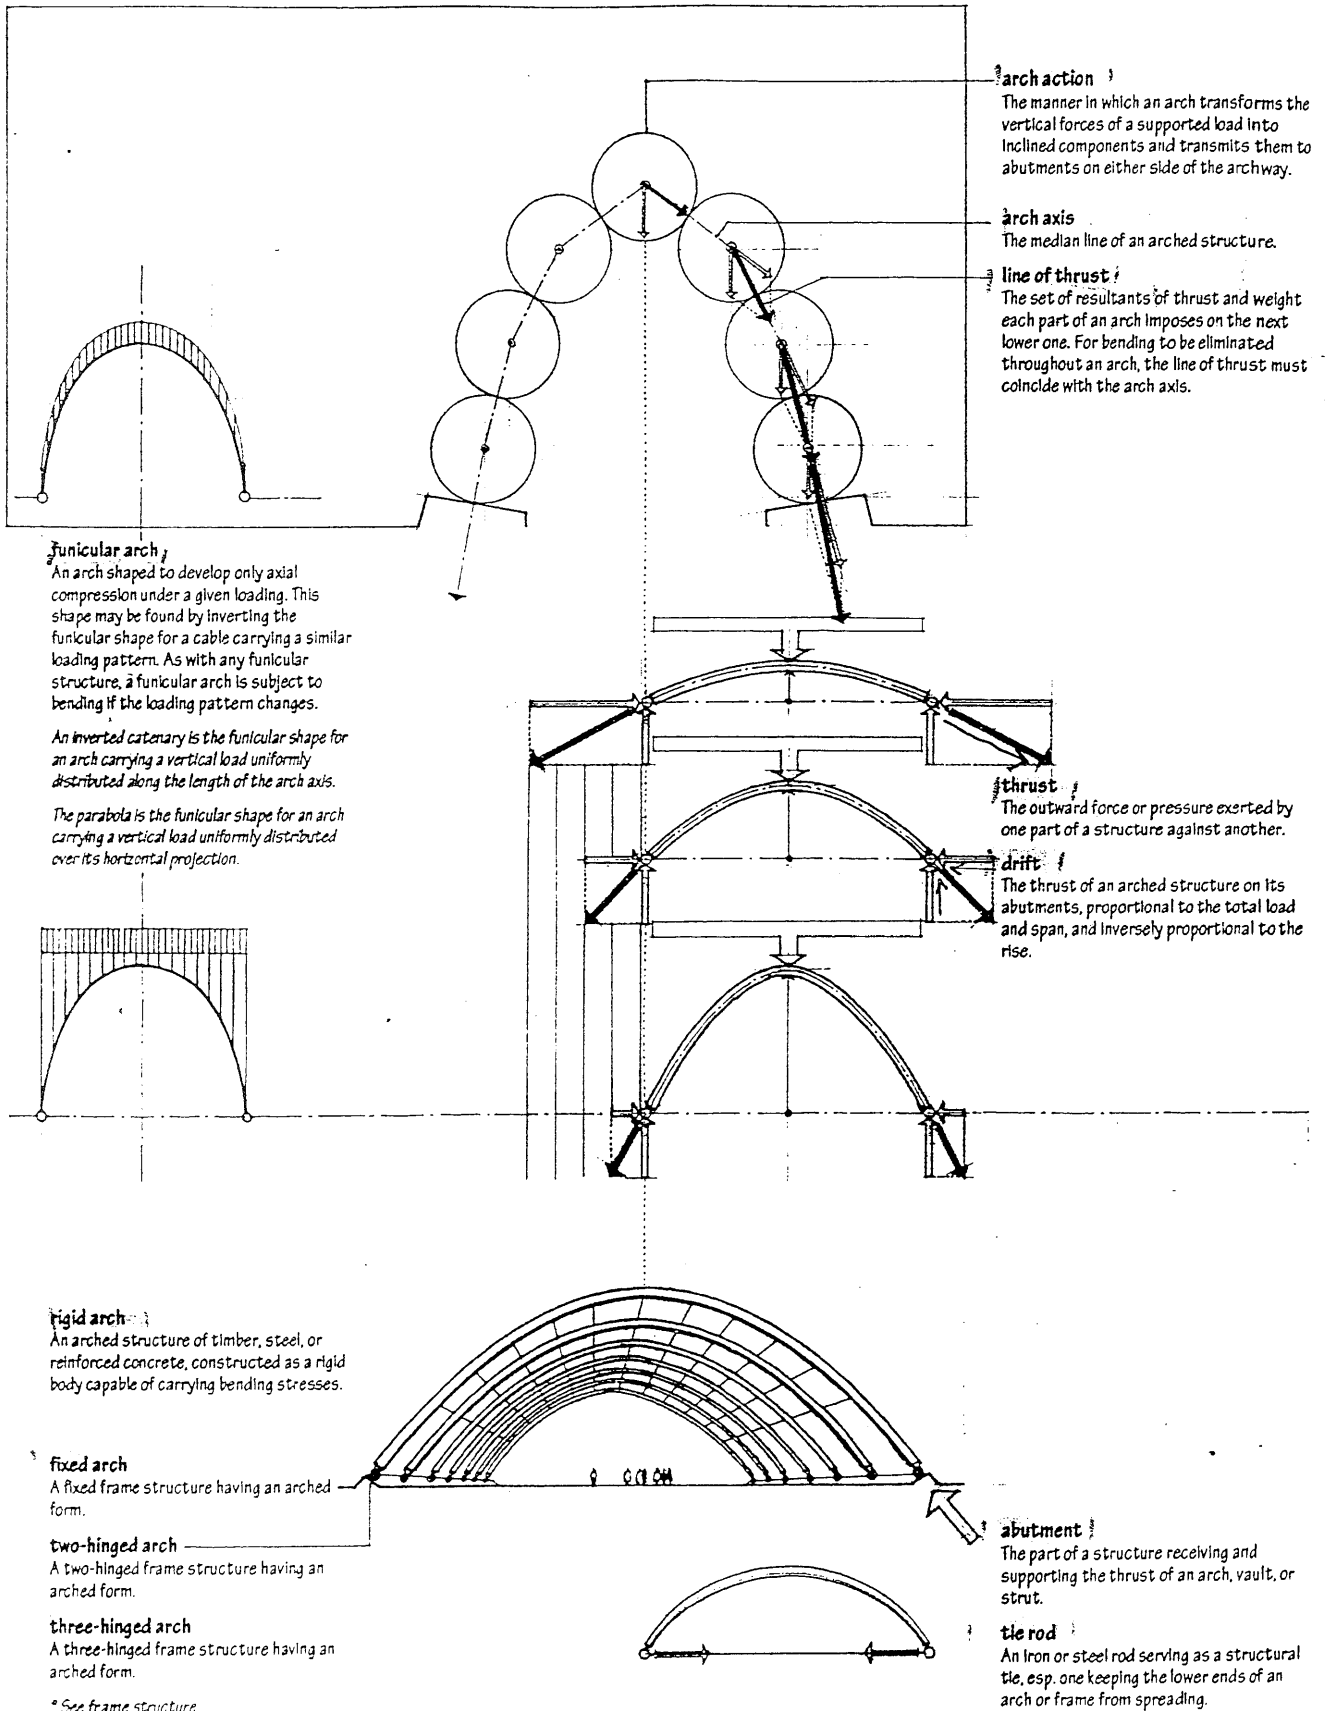


ARCH




flat arch

An arch having a horizontal intrados with voussoirs radiating from a center below, often built with a slight camber to allow for settling. Also called **jack arch**.




French arch

A flat arch having voussoirs inclined to the same angle on each side of the center.

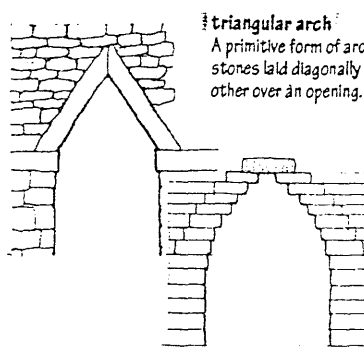


triangular arch

A primitive form of arch consisting of two stones laid diagonally to support each other over an opening.




round arch

An arch having a continuously curved intrados, esp. a semicircular one.




Roman arch

An arch having a semicircular intrados.




rampant arch

An arch having one impost higher than the other.




stilted arch

An arch resting on imposts treated as downward continuations of the archvolute.




bell arch

A round arch resting on two large corbels with curved faces.




horseshoe arch

An arch having an intrados that widens above the springing before narrowing to a rounded crown. Also called **Moorish arch**.




trefoil arch

An arch having a cusped intrados with three round or pointed foils.




basket-handle arch

A three-centered arch having a crown with a radius much greater than that of the outer pair of curves. Also called **anse de panier**.




pointed arch

An arch having a pointed crown.




equilateral arch $2r = s$

A pointed arch having two centers and radii equal to the span.




lancet arch

A pointed arch having two centers and radii greater than the span.




drop arch

A pointed arch having two centers and radii less than the span.




Gothic arch $1r = s$

A pointed arch, esp. one having two centers and equal radii.

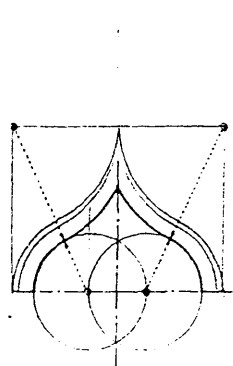

Tudor arch $4r = s$

A four-centered arch having an inner pair of curves with a radius much greater than that of the outer pair.




surbased arch

An arch having a rise of less than half the span.


ogee arch

A pointed arch, each haunch of which is a double curve with the concave side uppermost.


A rigid structural member designed to carry and transfer transverse loads across space to supporting elements.

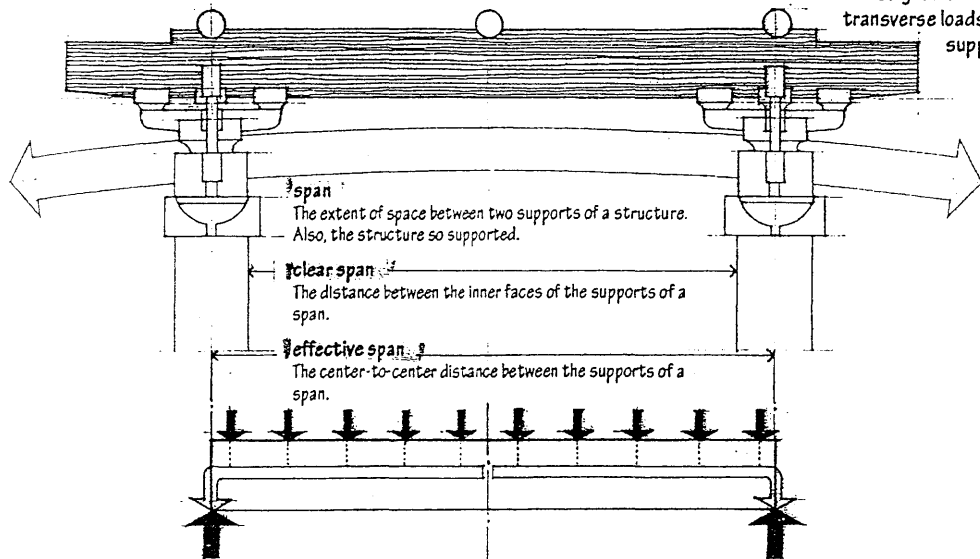


bending moment
An external moment tending to cause part of a structure to rotate or bend, equal to the algebraic sum of the moments about the neutral axis of the section under consideration.




resisting moment
An internal moment equal and opposite to a bending moment, generated by a force couple to maintain equilibrium of the section being considered.




deflection
The perpendicular distance a spanning member deviates from a true course under transverse loading, increasing with load and span, and decreasing with an increase in the moment of inertia of the section or the modulus of elasticity of the material.

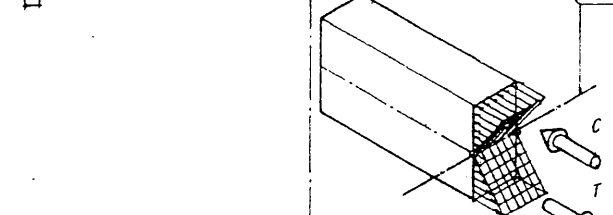

camber
A slight convex curvature intentionally built into a beam, girder, or truss to compensate for an anticipated deflection.




transverse shear
An external shear force at a cross section of a beam or other member subject to bending, equal to the algebraic sum of transverse forces on one side of the section.




neutral axis
An imaginary line passing through the centroid of the cross section of a beam or other member subject to bending, along which no bending stresses occur.


bending stress
A combination of compressive and tension stresses developed at a cross section of a structural member to resist a transverse force, having a maximum value at the surface furthest from the neutral axis.



vertical shearing stress
The shearing stress developed along a cross section of a beam to resist transverse shear, having a maximum value at the neutral axis and decreasing nonlinearly toward the outer faces.

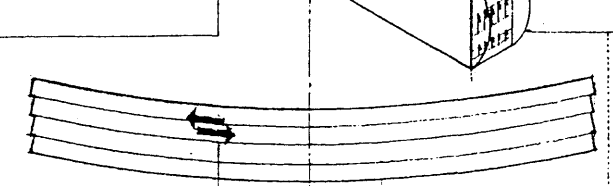

horizontal shearing stress
The shearing stress developed to prevent slippage along longitudinal planes of a beam under transverse loading, equal at any point to the vertical shearing stress at that point. Also called longitudinal shearing stress.



BEAM

flexure formula

A formula defining the relationship between bending moment, bending stress, and the cross-sectional properties of a beam. Bending stress is directly proportional to bending moment and inversely proportional to the moment of inertia of a beam section.

$$f_b = M/c \quad (1)$$

where

f_b = extreme fiber stress in bending

M = bending moment

c = distance from neutral axis to the outermost surface in bending

if

$$1/c = S \quad (2)$$

then

$$f_b = M/S$$

moment of inertia


The sum of the products of each element of an area and the square of its distance from a coplanar axis of rotation. Moment of inertia is a geometric property that indicates how the cross-sectional area of a structural member is distributed and does not reflect the intrinsic physical properties of a material.

section modulus

A geometric property of a cross section, defined as the moment of inertia of the section divided by the distance from the neutral axis to the most remote surface.


While halving a beam span reduces the bending stresses by a factor of 2, doubling the depth reduces the bending stresses by a factor of 4.

The efficiency of a beam is increased by configuring the cross section to provide the required moment of inertia or section modulus with the smallest possible area, usually by making the section deep with most of the material at the extremities where the maximum bending stresses occur.

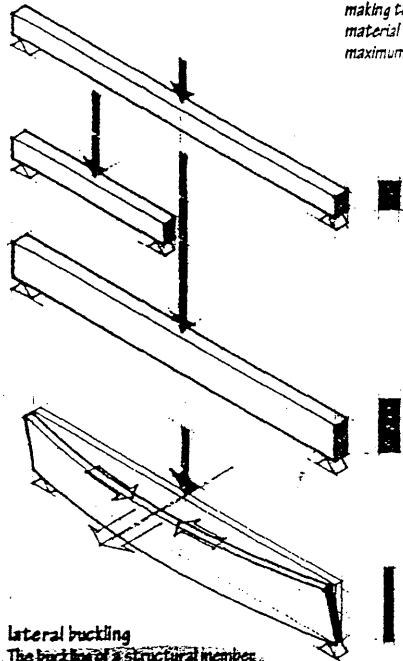


lateral buckling

The buckling of a structural member reduced by compressive stresses acting on a slender portion insufficiently rigid in the lateral direction.



shear center

The point in the cross-sectional plane of a structural member through which a transverse load must pass in order to prevent torsion or twisting of the member about a longitudinal axis.




4 x 10 timber beam

$$33.25 \text{ in}^2 = \text{Area of section}$$

$$250 \text{ in}^4 = I \text{ about } x-x \text{ axis}$$

$$52.6 \text{ in}^3 = S$$




W 14 x 38 steel beam

$$11.20 \text{ in}^2 = \text{Area of section}$$

$$386 \text{ in}^4 = I \text{ about } x-x \text{ axis}$$

$$54.7 \text{ in}^3 = S$$

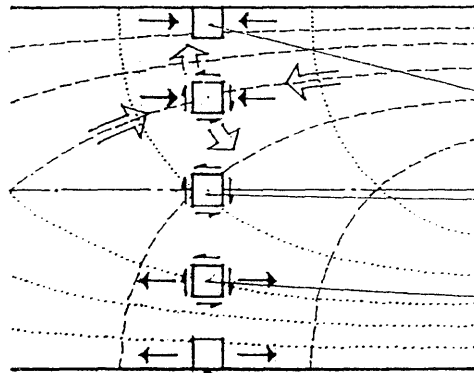


principal stresses

The tensile and compressive stresses resulting from the interaction of bending and shear stresses at a cross section of a beam.

At the extreme surfaces of a beam, only bending stresses exist and the principal stresses are equivalent to the tensile and compressive stresses resulting from bending.

At the neutral axis of the section, only shear stresses exist and these can be resolved into tensile and compressive stresses acting at 45° angles to the neutral axis.

For an intermediate element subject to both bending and shear stresses, the principal stresses have an inclination determined by the relative magnitudes of these stresses.

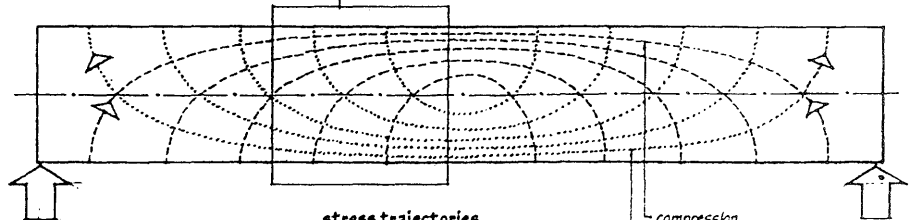

stress trajectories

Lines depicting the direction but not the magnitude of the principal stresses in a beam.


compression
tension

shear diagram


A graphic representation of the variation in magnitude of the external shears present in a structure for a given set of transverse loads and support conditions.

moment diagram


A graphic representation of the variation in magnitude of the bending moments present in a structure for a given set of transverse loads and support conditions. The overall deflected shape of a structure subject to bending can often be inferred from the shape of its moment diagram.




Concentrated loads produce external shears which are constant in magnitude between the loads.



Uniformly distributed loads produce linearly varying shears.




Concentrated loads produce bending moments which vary linearly between loads.



Uniformly distributed loads produce parabolically varying moments.

cantilever

A beam or other rigid structural member extending beyond a fulcrum and supported by a balancing member or a downward force behind the fulcrum.




positive shear

A net resultant of shear forces that acts vertically upward on the left part of the structure being considered.

negative shear

A net resultant of shear forces that acts vertically downward on the left part of the structure being considered.




positive moment

A bending moment that produces a concave curvature at a section of a structure.


inflection point

A point at which a structure changes curvature from convex to concave or vice versa as it deflects under a transverse load; theoretically an internal hinge and therefore a point of zero moment.



negative moment

A bending moment that produces a convex curvature at a section of a structure.

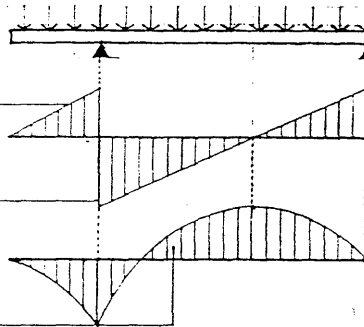


simple beam

A beam resting on simple supports at both ends, which are free to rotate and have no moment resistance. As with any statically determinate structure, the values of all reactions, shears, and moments for a simple beam are independent of its cross-sectional shape and material.

cantilever beam

A projecting beam supported at only one fixed end.



overhanging beam


A simple beam extending beyond one of its supports. The overhang reduces the positive moment at midspan while developing a negative moment at the base of the cantilever over the support.

Assuming a uniformly distributed load, the projection for which the moment over the support is equal and opposite to the moment at midspan is approximately $1/3$ of the span.

double overhanging beam


A simple beam extending beyond both of its supports.

Assuming a uniformly distributed load, the projections for which the moments over the supports are equal and opposite to the moment at midspan are approximately $1/3$ of the span.

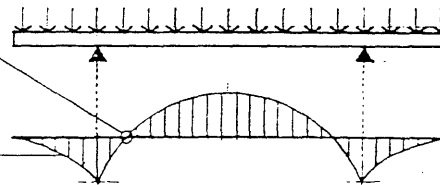


haunch

The part of a beam that is thickened or deepened to develop greater moment resistance. The efficiency of a beam can be increased by shaping its length in response to the moment and shear values which typically vary along its longitudinal axis.



suspended-span

A simple beam supported by the cantilevers of two adjoining spans with pinned construction joints at points of zero moment. Also called hung-span.

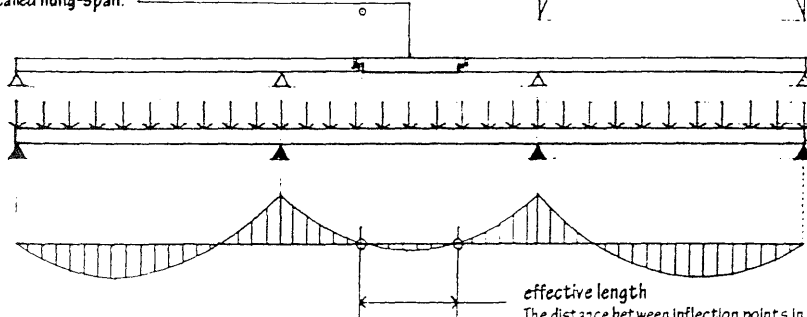

effective length

The distance between inflection points in the span of a fixed-end or continuous beam, equivalent in nature to the actual length of a simply supported beam.

fixed-end beam

A beam having both ends restrained against translation and rotation. The fixed ends transfer bending stresses, increase the rigidity of the beam, and reduce its maximum deflection.

continuous beam

A beam extending over more than two supports in order to develop greater rigidity and smaller moments than a series of simple beams having similar spans and loading. Both fixed-end and continuous beams are indeterminate structures for which the values of all reactions, shears, and moments are dependent not only on span and loading but also on cross-sectional shape and material.

BRICK

A masonry unit of clay, formed into a rectangular prism while plastic and hardened by drying in the sun or firing in a kiln.

common brick

Brick made for general building purposes and not specially treated for color and texture. Also called building brick.

facing brick

Brick made of special clays for facing a wall, often treated to produce the desired color and surface texture. Also called face brick.

brick type

A designation indicating the permissible variation in size, color, chipping, and distortion allowed in a facing brick unit.

FBX



Facing brick suitable for use where a minimum variation in size, narrow color range, and high degree of mechanical perfection are required.

FBS

Facing brick suitable for use where a wider color range and greater variation in size are permitted than for type FBX.

FBA

Facing brick suitable for use where particular effects are desired resulting from nonuniformity in size, color, and texture of the individual units.

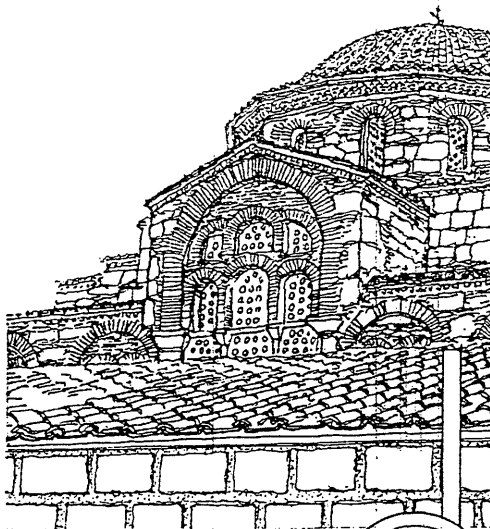

soft-mud process

The process of forming brick by molding relatively wet clay having a moisture content of 20% to 30%.

sandstruck brick

Brick formed in the soft-mud process with a mold lined with sand to prevent sticking, producing a matte-textured surface.

waterstruck brick

Brick formed in the soft-mud process with a mold lubricated with water to prevent sticking, producing a smooth, dense surface.

stiff-mud process

The process of forming brick and structural tile by extruding stiff but plastic clay having a moisture content of 12% to 15% through a die and cutting the extrusion to length with wires before firing.

dry-press process

The process of forming brick by molding relatively dry clay having a moisture content of 5% to 7% under high pressure, resulting in sharp-edged, smooth-surfaced bricks.

kiln

A furnace or oven for burning, baking, or drying something, esp. one for firing pottery, baking bricks, or drying timber.

flashing

Firing brick units alternately with too much or too little air to vary their face color.

cull

A brick or timber rejected as being of inferior quality.

brick grade


A designation indicating the durability of a brick unit when exposed to weathering. The U.S. is divided into three weathering regions - severe, moderate, and negligible - according to annual winter rainfall and the annual number of freezing-cycle days. Brick is graded for use in each region according to compressive strength, maximum water absorption, and maximum saturation coefficient.

MW

A brick grade suitable for exposure to moderate weathering, as when used above grade on surfaces unlikely to be permeated with water in subfreezing temperatures.

SW

A brick grade suitable for exposure to severe weathering, as when in contact with the ground or used on surfaces likely to be permeated with water in subfreezing temperatures.

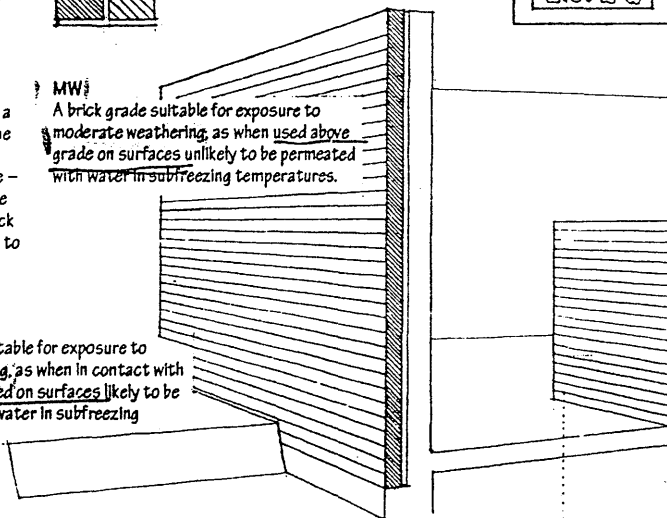

NW

A brick grade suitable for exposure to negligible weathering as when used as a backup or in interior masonry.

absorption


The weight of water absorbed by a clay masonry unit when immersed in either cold or boiling water for a stated length of time, expressed as a percentage of the weight of the dry unit.

saturation coefficient

The ratio of the weight of water absorbed by a clay masonry unit immersed in cold water to the weight absorbed when immersed in boiling water, indicating the probable resistance of the brick to the action of freezing and thawing.


suction

The weight of water absorbed by a clay masonry unit when partially immersed for one minute, expressed in grams or ounces per minute. Also called initial rate of absorption.



efflorescence

A white, powdery deposit that forms on an exposed masonry or concrete surface, caused by the leaching and crystallization of soluble salts from within the material.



firebrick

A brick made of fire clay and used for lining furnaces and fireplaces.

fire clay



A refractory clay used in the making of firebricks, crucibles, and other objects exposed to high temperatures.

refractory

A material having the ability to retain its physical shape and chemical identity when subjected to high temperatures.

clinker

A dense, hard-burned brick used esp. for paving.

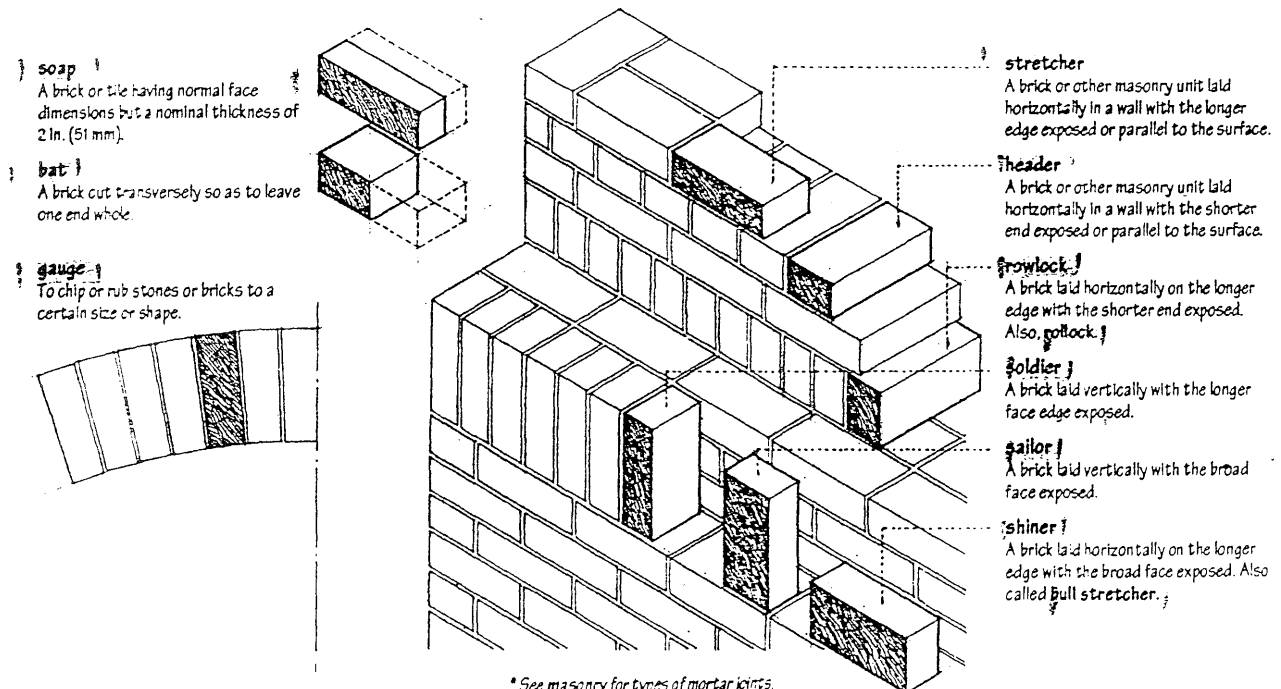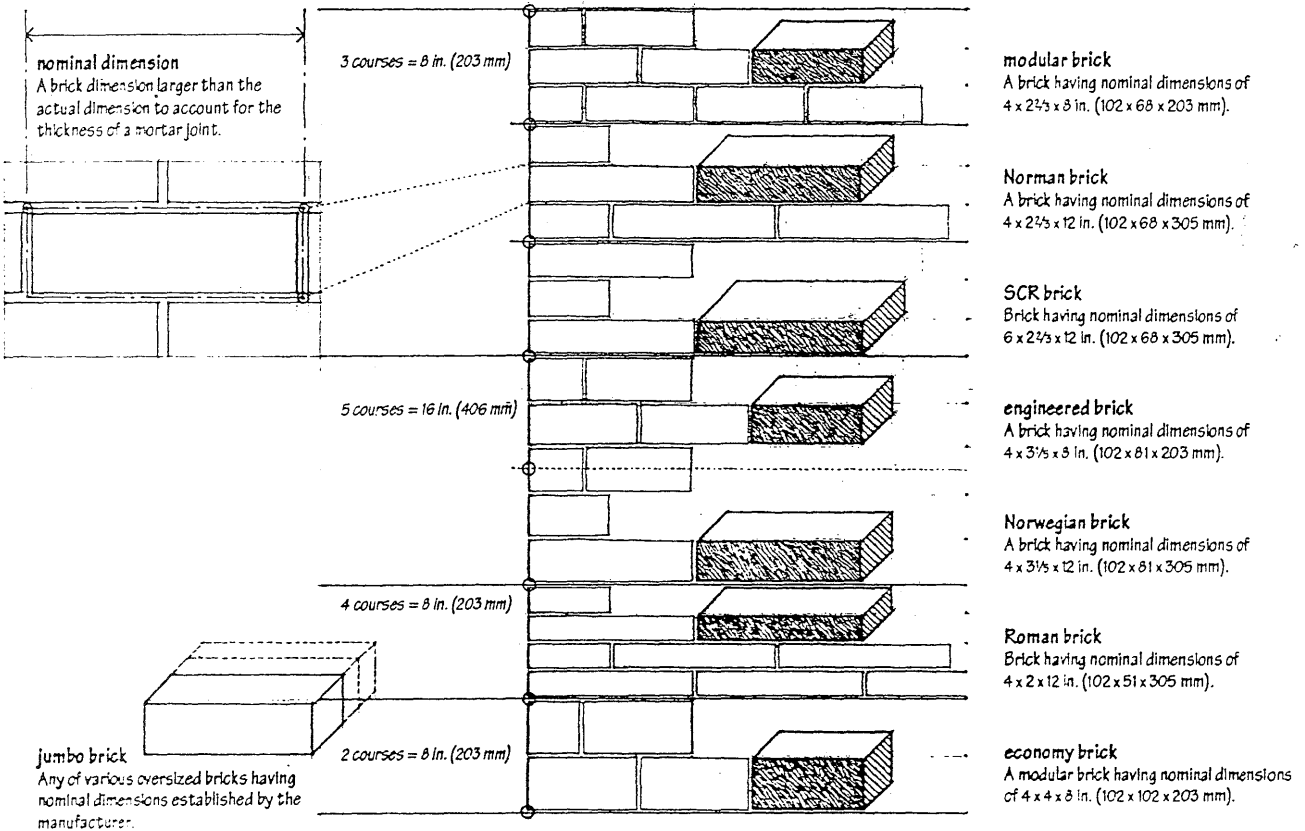

BRICK

brickwork

Brick construction, esp. the art of bonding bricks effectively.



bond

Any of various arrangements of masonry units having a regular, recognizable, usually overlapping pattern to increase the strength and enhance the appearance of the construction.

running bond

A brickwork or masonry bond composed of overlapping stretchers. Also called

stretcher bond.



soldier course


A continuous course of soldiers in brickwork.

stack bond

A brickwork or masonry bond having successive courses of stretchers with all head joints aligned vertically. Also, stacked bond.

common bond

A brickwork bond having a course of headers between every five or six courses of stretchers. Also called American bond.



closer

A masonry unit specially formed or cut to finish a course or complete the bond at the corner of a wall. Also, closure.

stretching course


A continuous course of stretchers in brickwork.

heading course

A continuous course of headers in brickwork.


bond course

A continuous course of headers or bondstones overlapping more than one wythe of masonry.




English bond

A brickwork bond having alternate courses of headers and stretchers in which the headers are centered on stretchers and the joints between stretchers line up vertically in all courses.



queen closer

A brick of half the normal width, used for completing a course or for spacing regular bricks. Also, queen closure.




English cross bond

A modified English bond in which the head joints in the stretching courses are offset by half the length of a stretcher. Also called Dutch bond.


Flemish bond

A brickwork bond having alternating headers and stretchers in each course, each header being centered above and below a stretcher.



king closer

A three-quarter brick for finishing a course or for spacing regular bricks. Also, king closure.



Flemish cross bond



A modified Flemish bond having courses of alternate headers and stretchers alternating with stretching courses.

flare header

A brick having a darker end exposed as a header in patterned brickwork.

Flemish diagonal bond

A form of Flemish cross bond in which the courses are offset to form a diamond pattern.



garden-wall bond

A brickwork bond for tightly loaded boundary walls, having a sequence of a header and three stretchers in each course, with each header being centered over a header in alternate courses.

A relatively permanent enclosed structure constructed over a plot of land for habitable use.

A building is a shelter from rain, sun, and wind. This implies a Roof, and Walls to support it. If the walls entirely enclose the space within, there are Doorways for access, and Windows for light. Roofs and walls, doors and windows are the essential features of buildings.

Roofs may be flat, sloping, or curved. A roof with one slope is called a Lean-to. When two sloping roofs rest upon parallel walls and lean against one another, they meet in a horizontal ridge at the top, and form a Gable at each end. If two walls make a projecting angle, their roofs intersect in an inclined line called a Hip. If the walls meet in a reentering angle, the inclined line of intersection is called a Valley. Circular walls carry conical or domical roofs.

If there is more than one story, the flat roof of the lower story becomes the Floor of the story above. If the roof extends beyond the wall that supports it, the projection is called the Eaves. If the wall also projects to support the extension of the roof, the projection is called a Cornice. The principal member of a cornice, which projects like a shelf and crowns the wall, is called a Corona.

Walls are generally made wider just at the bottom so as to get a better bearing on the ground. This projection is the Base. A similar projection at the top is called a Cap, or, if it projects much, a Cornice, as has been said. A low wall is called a Parapet. A short piece of wall about as long as it is thick is called a Post, and if it supports something, a Pedestal; the part between its cap and base is then the Die. A tall post is called a Pier. If it is square, and a Column if it is round. Caps of piers and columns are called Capitals, and the part between the cap and the base, the shaft. The flat upper member of a capital is called the Abacus.

A beam that spans the space between two piers or columns or between a pier or column and a wall is called an Architrave, or Epistyle. Above it, between the architrave and the cornice, there is generally a little strip of wall called the Frieze. Architrave, frieze, and cornice constitute the Entablature. A series of columns is called a Colonnade. The spaces between piers or columns are sometimes spanned by Arches, a series of which is called an Arcade.

The space between two parallel walls is sometimes covered by a sort of continuous arch called a Vault, instead of by a floor or roof.

The Wall, the Pier, and the Column, with or without the pedestal, constitute the chief supporting members; the Frieze and Cornice, with the roof that rests upon them, constitute the chief part of the load they carry. The Architrave, the Arches, and the Spandrels form part of the load relative to what is below them, but are supporting members relative to what is above them.

Besides being valuable as a shelter, a building may be in itself a noble and delightful object, and architects are builders who, by giving a building good proportions and fine details, and by employing beautiful materials, make it valuable on its own account, independently of its uses.


—William Robert Ware
The American Vignola

superstructure

The vertical extension of a building or other construction above the foundation.

shell


The exterior framework or walls and roof of a building.

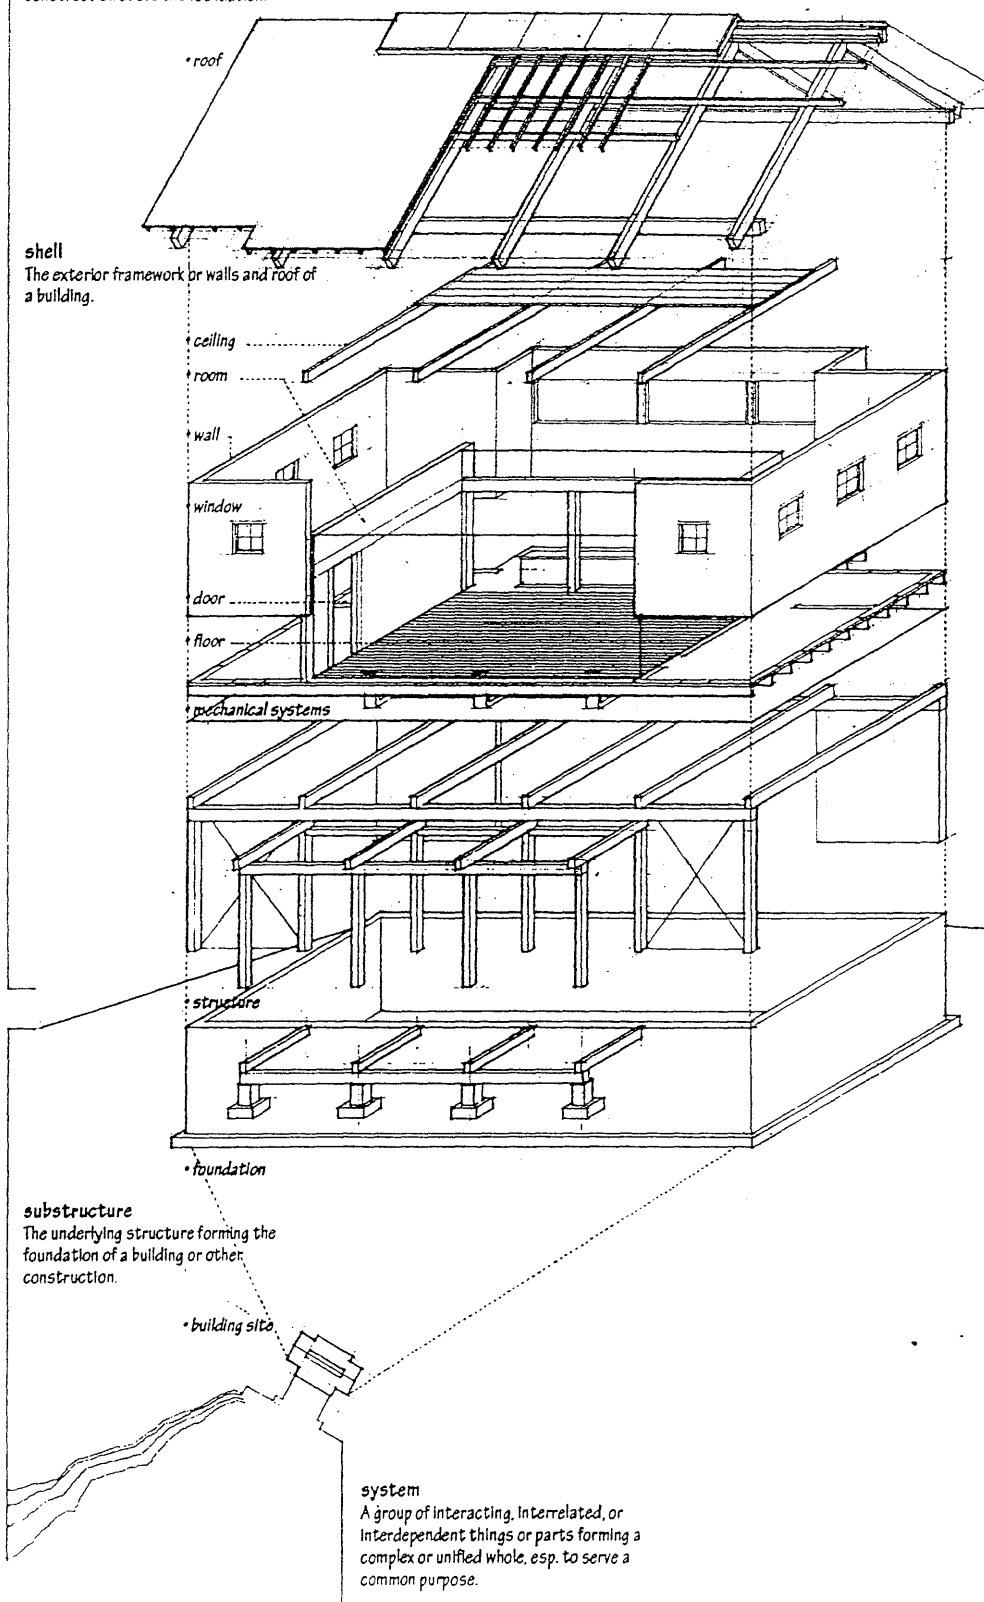

system

A group of interacting, interrelated, or interdependent things or parts forming a complex or unified whole, esp. to serve a common purpose.

BUILDING

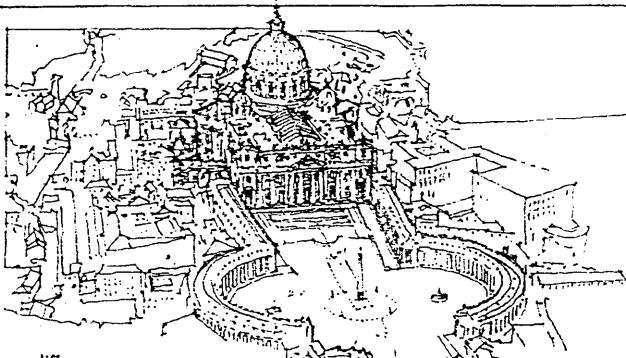


edifice

A building, esp. one of large size, massive structure, or imposing appearance.

skyscraper

A building of exceptional height and many stories, supported by a steel or concrete framework from which the walls are suspended.

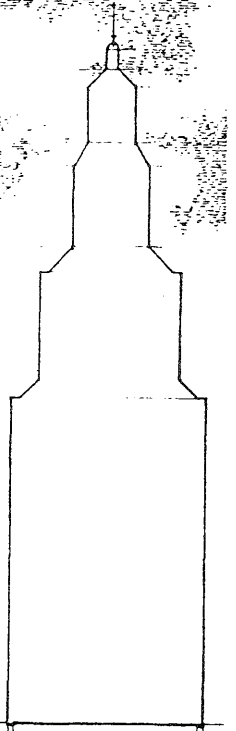


high-rise

Describing a building having a comparatively large number of stories and equipped with elevators.

story

A complete horizontal division of a building, having a continuous or nearly continuous floor and comprising the space between two adjacent levels.

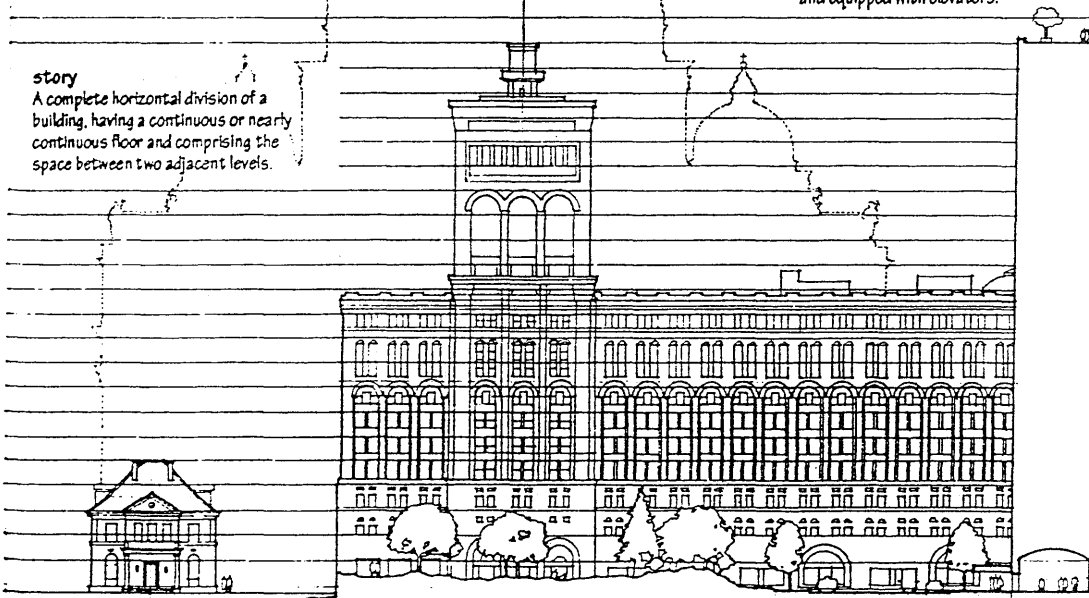

low-rise

Describing a building having one, two, or three stories and usually no elevator.



mid-rise


Describing a building having a moderately large number of stories, usually 5 to 10, and equipped with elevators.


loft


One of the upper floors of a warehouse or factory, typically unpartitioned and sometimes converted or adapted to other uses, as living quarters, artists' studios, or exhibition galleries.

loft building


A building having several floors with large areas of unobstructed space, originally rented out for light industrial purposes and now frequently converted to residential occupancy.

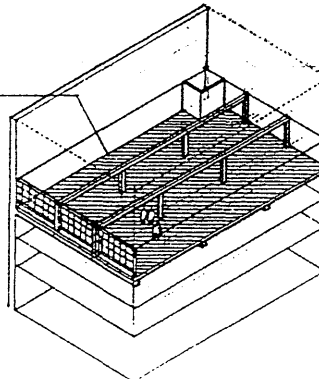

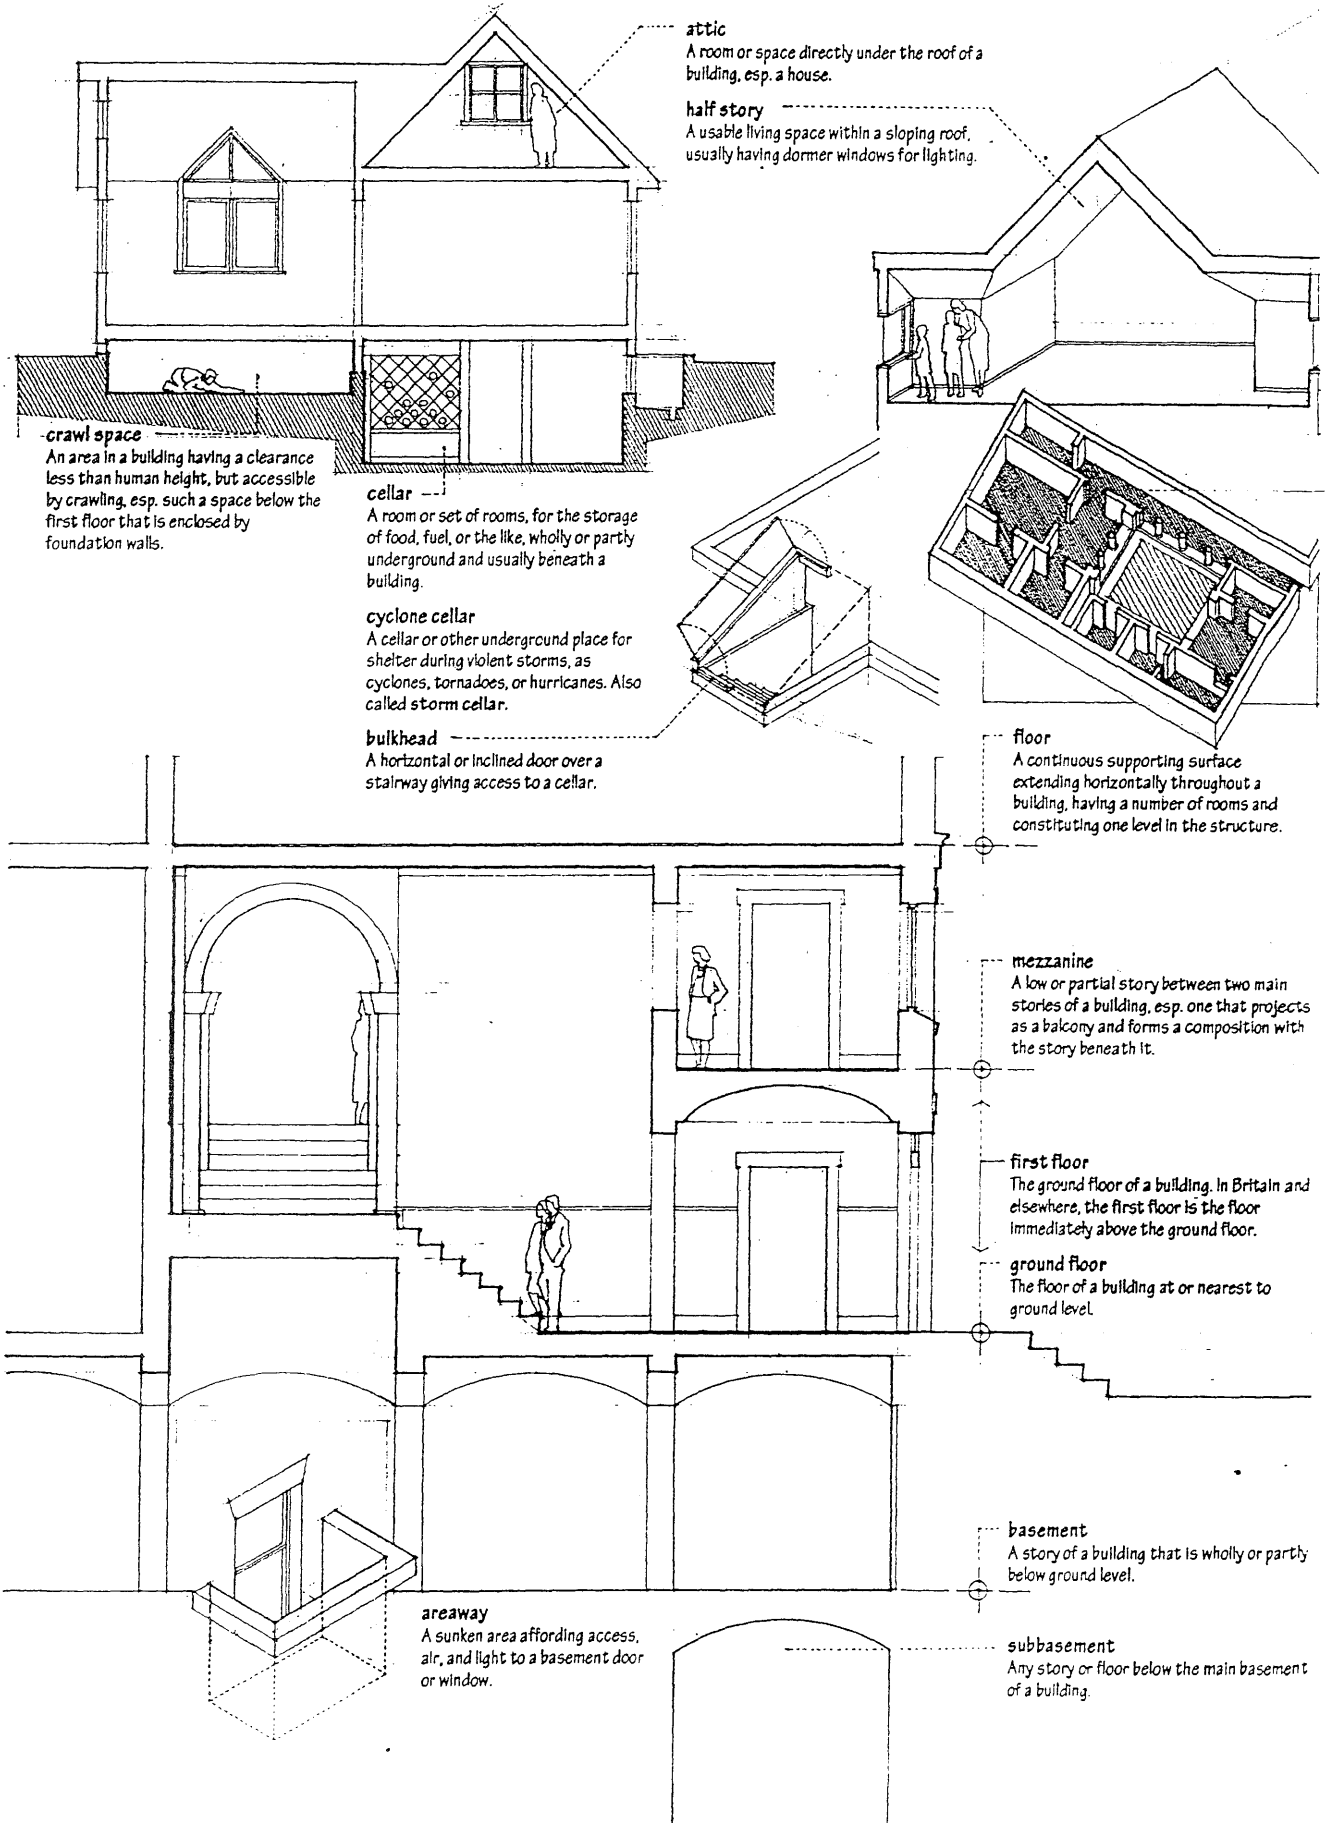


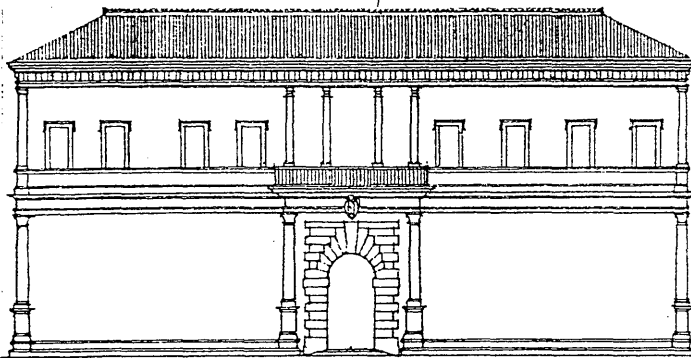


facade
The front of a building or any of its sides facing a public way or space, esp. one distinguished by its architectural treatment.

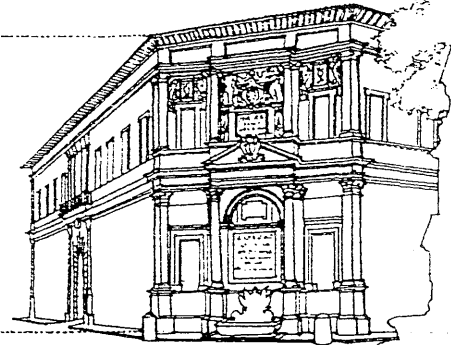


frontispiece
A principal facade, or a part or feature of a facade, often treated as a separate element of the design and highlighted by ornamentation.

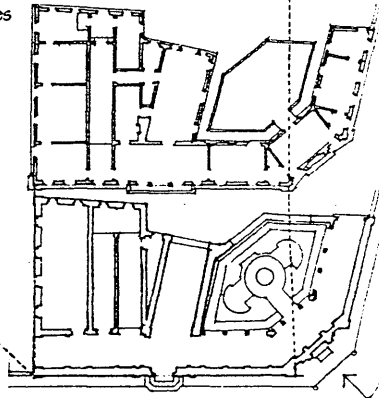

pavilion
A central or flanking projecting subdivision of a facade, usually accented by more elaborate decoration or greater height and distinction of skyline.

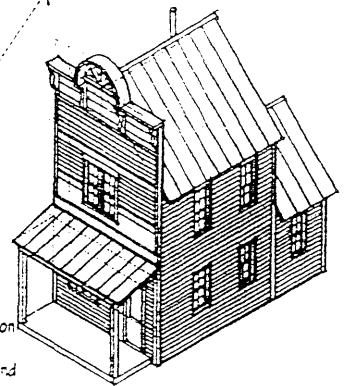

false front
A facade falsifying the size or importance of a building.

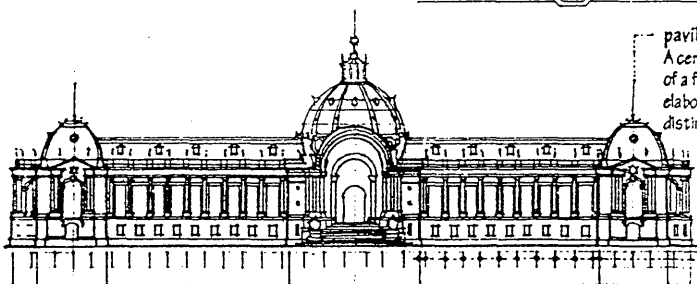


story
A major horizontal architectural division, as of a facade or the wall of a nave.


bay
Any of a number of principal divisions of a wall, roof, or other part of a building marked off by vertical or transverse supports.

blindstory
A major horizontal division of a wall having no exterior windows.




blind
Describing a recess in a wall having the appearance of a window (blind window) or door (blind door). Inserted to complete a series of windows or to provide symmetry of design.




balcony
An elevated platform projecting from the wall of a building and enclosed by a railing or parapet.




fenestration
The design, proportioning, and disposition of windows and other exterior openings of a building.

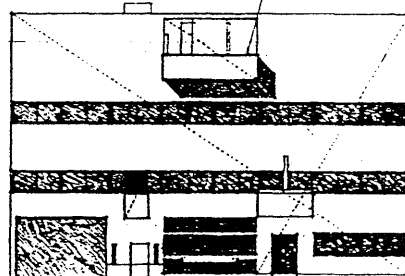




stoop

A raised platform, approached by steps and sometimes having a roof, at the entrance of a house.




porch

An exterior appendage to a building, forming a covered approach or vestibule to a doorway.

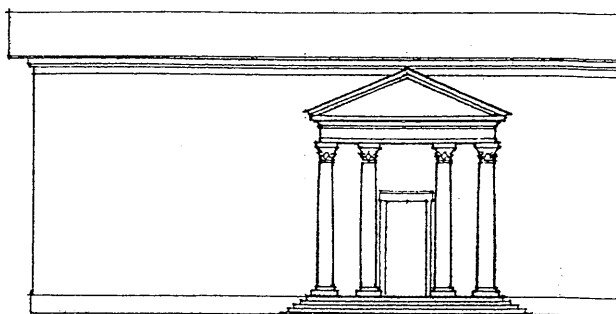


portico

A porch having a roof supported by columns, often leading to the entrance of a building.




colonnade

A series of regularly spaced columns supporting an entablature and usually one side of a roof structure.



forecourt

A courtyard before the entrance to a building or a group of buildings.

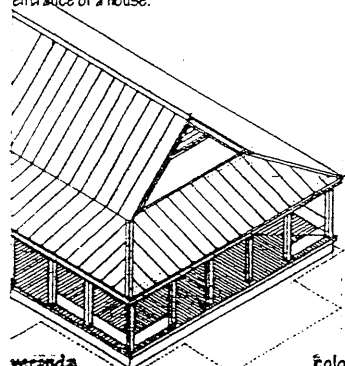


veranda

A large, open porch, usually roofed and partly enclosed, as by a railing, often extending across the front and sides of a house. Also *verandah*.

lanai

A veranda, esp. a fully furnished one used as a living room.



porte-cochère

A vehicular passageway leading through a building or screen wall into an interior courtyard.

postern

A private or side entrance, as one for pedestrians next to a porte-cochère.


porte-cochère

A porch roof projecting over a driveway at the entrance to a building and sheltering those getting in or out of vehicles. Also called *carriage porch*.



terrace

An open, often paved area connected to a house or building and serving as an outdoor living area.

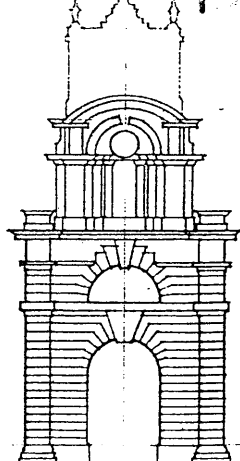



portal

A doorway, gate, or entrance, esp. an imposing one emphasized by size and stately architectural treatment.

deck


An open, unroofed porch or platform extending from a house or other building.

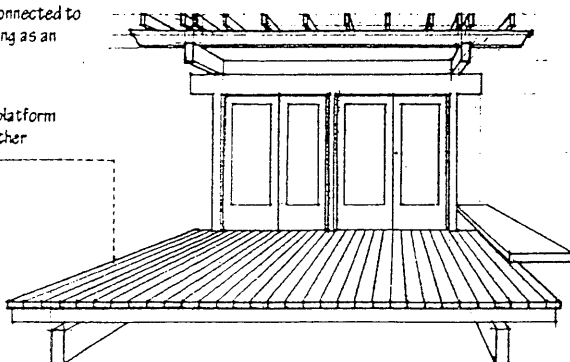



rotunda

A round, domed building, or a large and high circular space in such a building, esp. one surmounted by a dome.

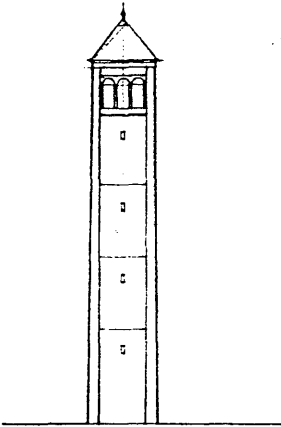

tower

A building or structure high in proportion to its lateral dimensions, either standing alone or forming part of a larger building.

block

A large building divided into a number of separate apartments, offices, or shops.

loggia


A colonnaded or arcaded space within the body of a building but open to the air on one side, often at an upper story overlooking an open court.

piano nobile

The principal story of a large building, as a palace or villa, with formal reception and dining rooms, usually one flight above the ground floor.

cortile

A large or principal courtyard of an Italian palazzo.

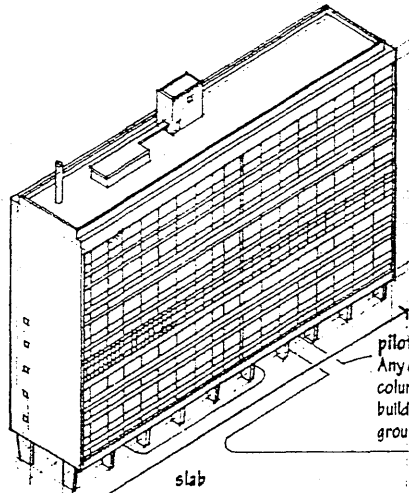


slab

A rectangular building having little width with respect to its length and height.

piloti

Any of a series of columns supporting a building above an open ground level.




ell

A wing at right angles to the length of a building. Also, el.


wing

A part of a building projecting from and subordinate to a central or main part.



court

An area open to the sky and mostly or entirely surrounded by walls or buildings.




courtyard

A court adjacent to or within a building, esp. one enclosed on all four sides.


patio

A courtyard, esp. of a house, enclosed by low buildings, arcades, or walls.





atrium

A skylit, central court in a building, esp. a large interior one having a glass roof and surrounded by several stories of galleries.

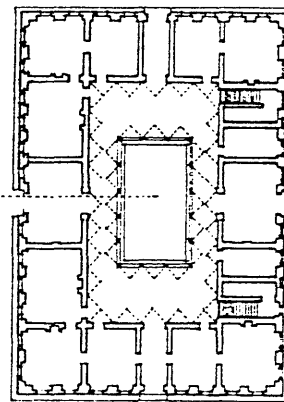


atrium

An open, skylit court around which a house or building is built.



palazzo

A large, imposing public building or private residence, esp. in Italy.




claim
To assert or demand recognition or possession.




merge
To combine, blend, or unite gradually by stages so as to blur identity or distinctions.

plaza
A public square or open space in a city or town.


piazza
An open square or public place in a city or town, esp. in Italy.



front
To face in a specific direction or look out upon.



surround
To enclose or encompass on all sides.




quadrangle
A square or quadrangular space or court surrounded by a building or buildings, as on a college campus. Also called quad.

galleria
A spacious promenade, court, or indoor mall, usually having a vaulted roof and lined with commercial establishments.

promenade
An area used for a stroll or walk, esp. in a public place, as for pleasure or display.


allée
French term for a broad walk planted with trees.

arbor
A shelter of shrubs and branches or of latticework intertwined with climbing vines and flowers.

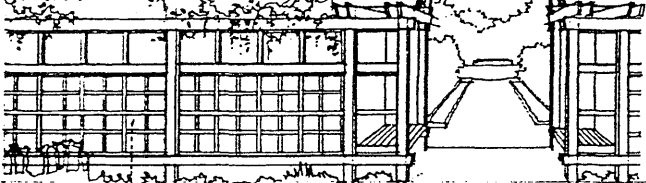

trellis
A frame supporting open latticework, used as a screen or a support for growing vines or plants.

lattice
A structure of crossed strips arranged to form a regular pattern of open spaces.




pergola
A structure of parallel colonnades supporting an open roof of beams and crossing rafters or trelliswork, over which climbing plants are trained to grow.

orientation
The position of a building on a site in relation to true north, to points on the compass, to a specific place or feature, or to local conditions of sunlight, wind, and drainage.




folly
A whimsical or extravagant structure built to serve as a conversation piece, lend interest to a view, or commemorate a person or event.

pavilion
A small, often ornamental building in a garden.




gazebo
A freestanding roofed structure, usually open on the sides, affording shade and rest in a garden or park.




belvedere
A building, or architectural feature of a building, designed and situated to look out upon a pleasing scene.



topiary
Clipped or trimmed into ornamental and fantastic shapes, or the work or art of such clipping.



parterre
An ornamental arrangement of flower beds of different shapes and sizes.

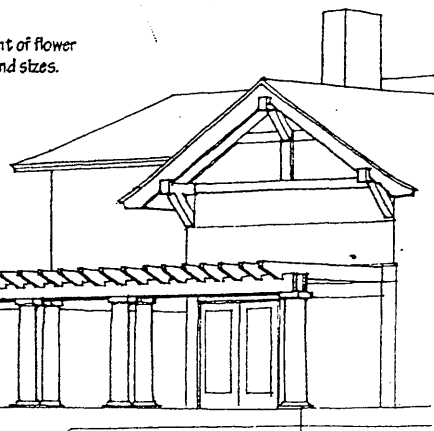

suspension structure


A structure of cables suspended and prestressed between compression members to directly support applied loads.

suspension bridge

A bridge having a deck suspended from cables raised on towers and securely anchored to abutments at the ends.

single-curvature structure

A suspension structure utilizing a parallel series of cables to support surface-forming beams or plates. A single-curvature structure is susceptible to flutter induced by the aerodynamic effects of wind. This liability can be reduced by increasing the dead load on the structure or anchoring the primary cables to the ground with transverse guy cables.

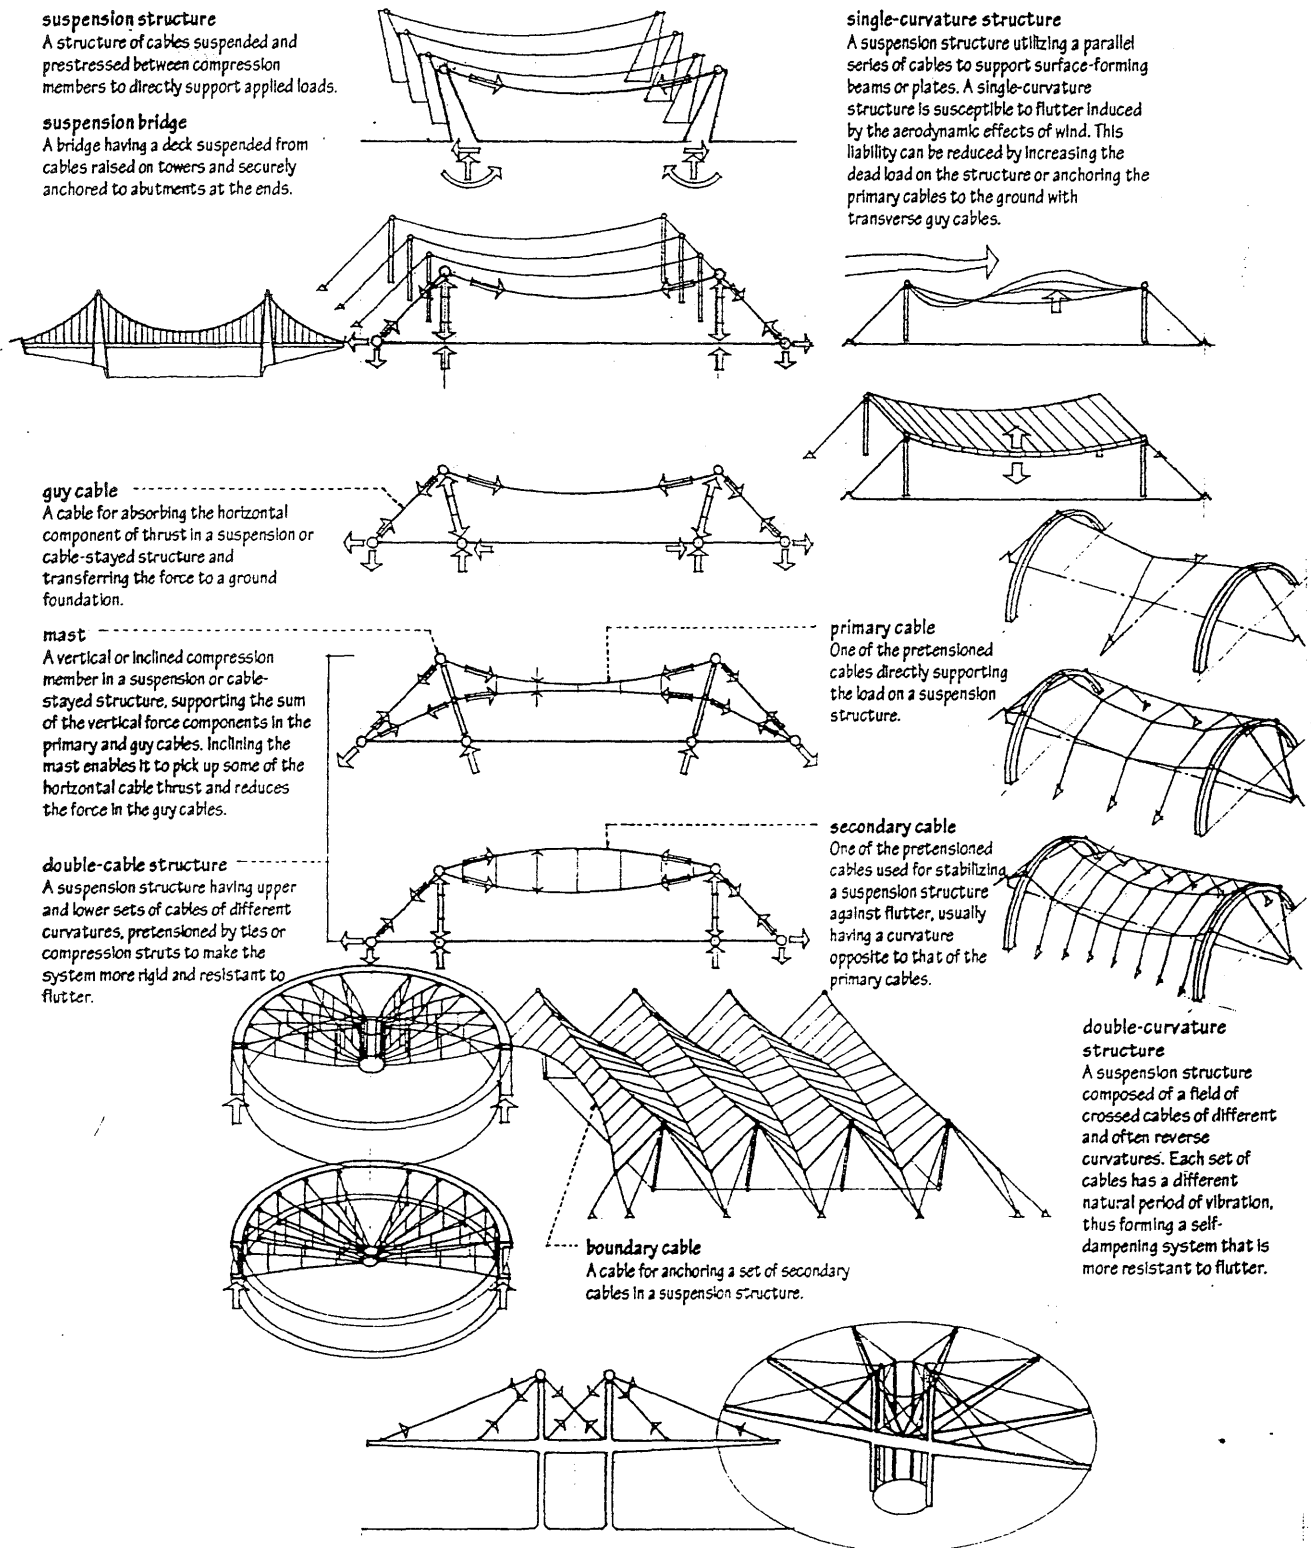

guy cable

A cable for absorbing the horizontal component of thrust in a suspension or cable-stayed structure and transferring the force to a ground foundation.

mast

A vertical or inclined compression member in a suspension or cable-stayed structure, supporting the sum of the vertical force components in the primary and guy cables. Inclining the mast enables it to pick up some of the horizontal cable thrust and reduces the force in the guy cables.

double-cable structure

A suspension structure having upper and lower sets of cables of different curvatures, pretensioned by ties or compression struts to make the system more rigid and resistant to flutter.

primary cable

One of the pretensioned cables directly supporting the load on a suspension structure.

secondary cable

One of the pretensioned cables used for stabilizing a suspension structure against flutter, usually having a curvature opposite to that of the primary cables.

double-curvature structure

A suspension structure composed of a field of crossed cables of different and often reverse curvatures. Each set of cables has a different natural period of vibration, thus forming a self-dampening system that is more resistant to flutter.

boundary cable



A cable for anchoring a set of secondary cables in a suspension structure.

cable-stayed structure

A structure having vertical or inclined masts from which cables extend to support horizontally spanning members arranged in a parallel or radial pattern.

CEILING 1

The overhead interior surface or lining of a room, often concealing the underside of the floor or roof above.

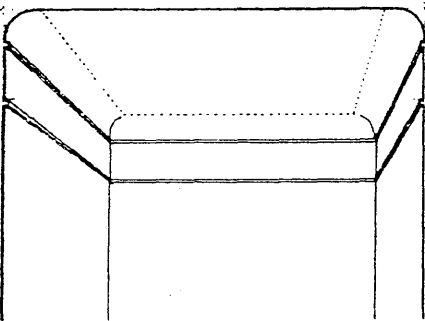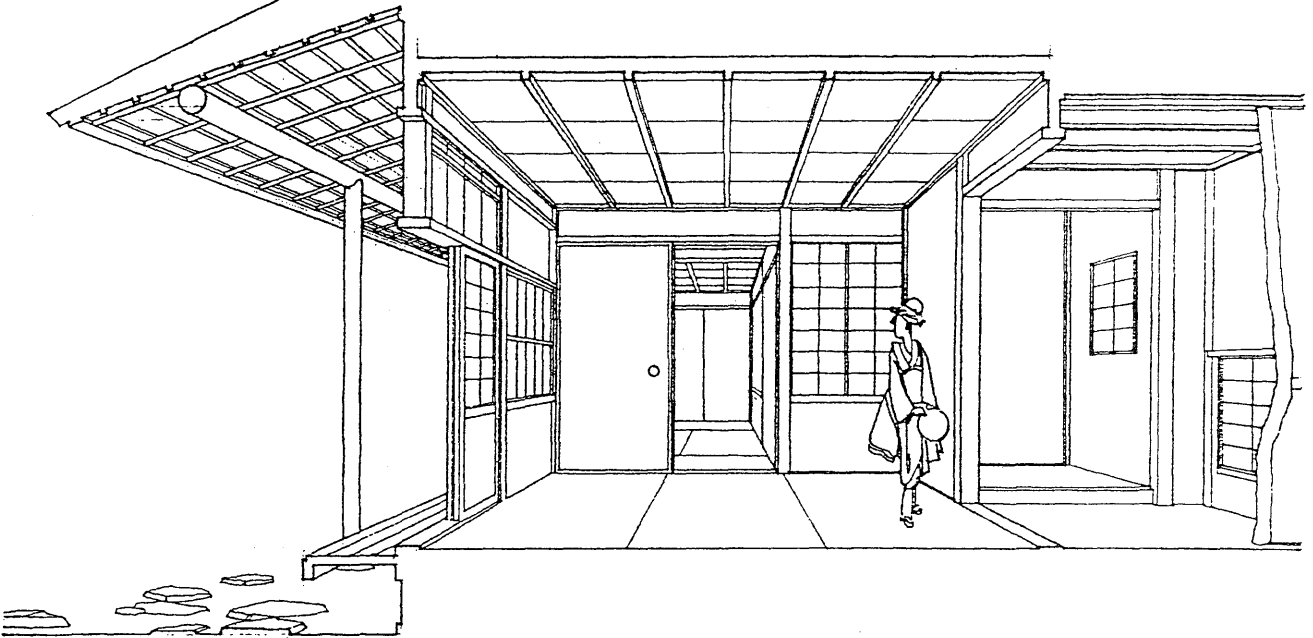

cove ceiling

A ceiling having a cove. Also, coved ceiling.



cove

A concave surface forming part of a ceiling at its edge so as to eliminate the usual interior angle between the wall and the ceiling.




camp ceiling

A ceiling having the form of a truncated pyramid.

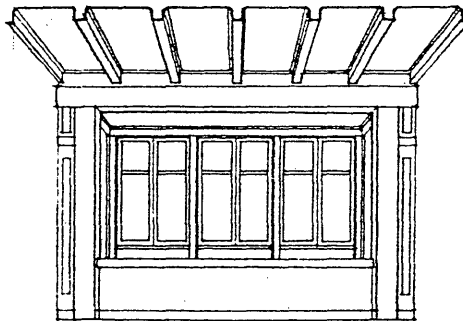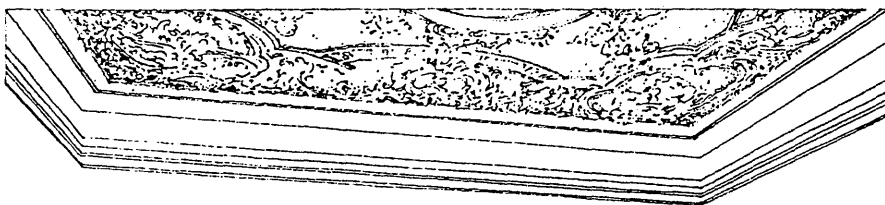

beam ceiling

The underside of a floor showing the supporting beams and finished to form a ceiling.

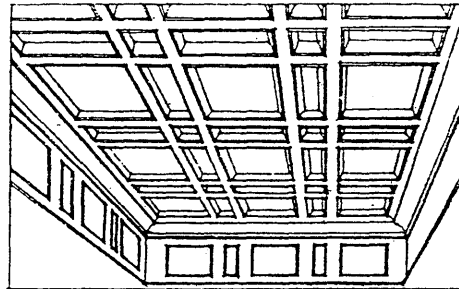


coffer

One of a number of recessed, usually square or octagonal panels in a ceiling, soffit, or vault. Also called caisson, lacunar.

lacunar

A ceiling, soffit, or vault adorned with a pattern of recessed panels.




plafond

A flat or vaulted ceiling of decorative character.


CABLE STRUCTURE

A structural system utilizing the cable as the principal means of support.

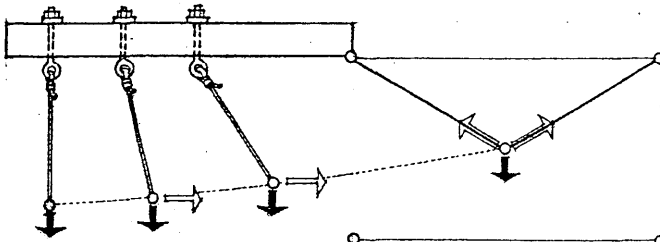

cable

A flexible structural member, as wire rope or metal chain, having high tensile strength but offering no resistance to compression or bending.



funicular shape

The shape assumed by a freely deforming cable in direct response to the magnitude and location of external forces. A cable always adapts its shape so that it is in pure tension under the action of an applied load.

funicular polygon


The shape assumed by a freely deforming cable in direct response to a set of concentrated loads.

funicular curve

The shape assumed by a freely deforming cable in direct response to a uniformly distributed load.

catenary


The curve assumed by a perfectly flexible, uniform cable suspended freely from two points not in the same vertical line. For a load that is uniformly distributed in a horizontal projection, the curve approaches that of a parabola.



sag



The vertical distance from the supports to the lowest point of a cable structure.

As the sag of a cable increases, the internal forces developed in the cable decrease.

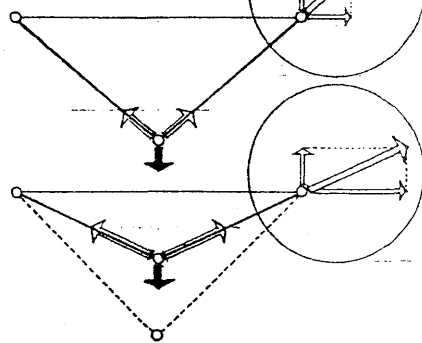


funicular structure

A structure shaped to carry or support a given loading by either axial tension or compression. For any given loading condition, there is only one general funicular shape. If the loading pattern changes, bending is induced in the structure.

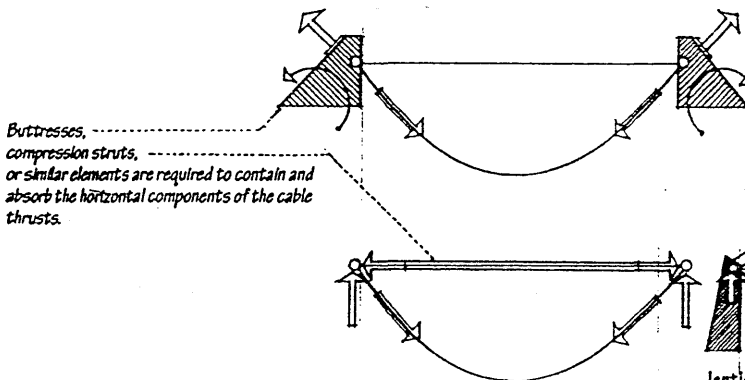

Buttresses, compression struts, or similar elements are required to contain and absorb the horizontal components of the cable thrusts.




lenticular structure

A lens-shaped structure having the outward thrusts of an arch balanced by the inward pulls of a cable, resulting in no net lateral forces at the supports.

drop ceiling

A secondary ceiling formed to provide space for piping or ductwork, or to alter the proportions of a room. Also, dropped ceiling.

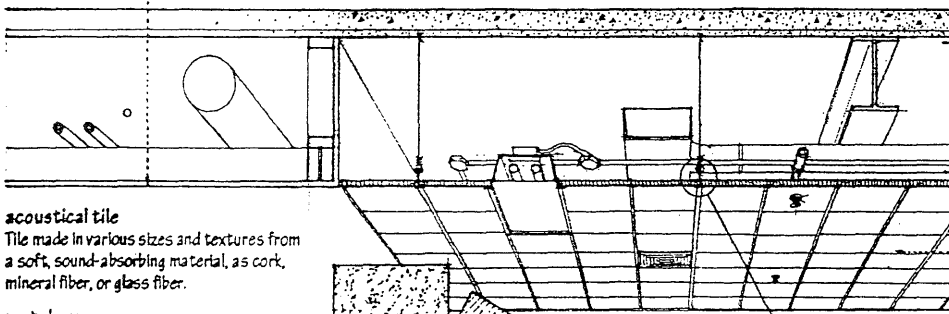


acoustical tile

Tile made in various sizes and textures from a soft, sound-absorbing material, as cork, mineral fiber, or glass fiber.

metal pan

An acoustical tile consisting of a steel or aluminum pan having a perforated face and containing a separate layer of sound-absorbing material.

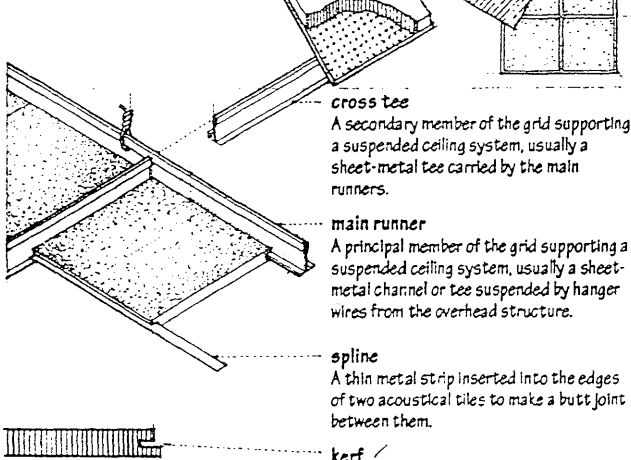

cross tee

A secondary member of the grid supporting a suspended ceiling system, usually a sheet-metal tee carried by the main runners.

main runner


A principal member of the grid supporting a suspended ceiling system, usually a sheet-metal channel or tee suspended by hanger wires from the overhead structure.

spline

A thin metal strip inserted into the edges of two acoustical tiles to make a butt joint between them.


kerf

A groove cut into the edges of an acoustical tile to receive a spline or T-shaped member of a supporting grid.

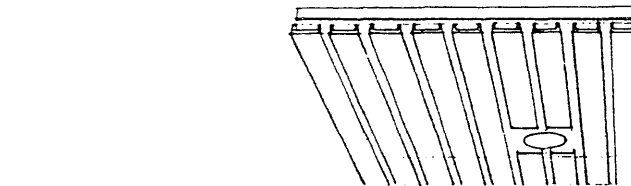

linear metal ceiling

A suspended ceiling system of narrow metal strips, usually incorporating modular lighting and air-handling components.




luminous ceiling

A suspended ceiling of translucent panels for diffusing the light from luminaires mounted above it.

louvered ceiling

A suspended ceiling of multicellular louvers for shielding the light sources mounted above it.



suspended ceiling


A ceiling suspended from an overhead floor or roof structure to provide space for pipes, ductwork, lighting fixtures, or other service equipment.

plenum

The space between a suspended ceiling and the floor structure above, esp. one that serves as a receiving chamber for conditioned air to be distributed to inhabited spaces or for return air to be conveyed back to a central plant for processing.


acoustical ceiling

A ceiling of acoustical tile or other sound-absorbing material.




exposed grid

A metal grid of inverted tees supporting the acoustical tiles of a suspended ceiling.




recessed grid

A metal grid for supporting a suspended ceiling of acoustical tiles having rabbeted joints.




concealed grid

A metal grid supporting the acoustical tiles of a suspended ceiling, hidden within kerfs cut into the edges of the tiles.

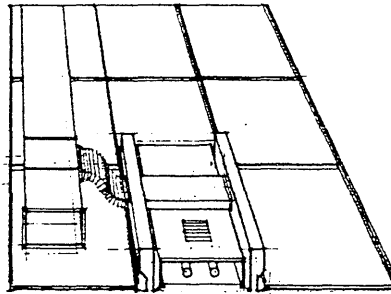

integrated ceiling

A suspended ceiling system incorporating acoustical, lighting, and air-handling components into a unified whole.




linear diffuser

A long, narrow diffuser designed to disperse air through slots between the panels of an integrated ceiling system. Also called slot diffuser.


CERAMIC

Any of various hard, brittle, noncorrosive, and nonconductive materials formed by the ionic bonding of a metal and a nonmetal, as brick, concrete, and natural stone.

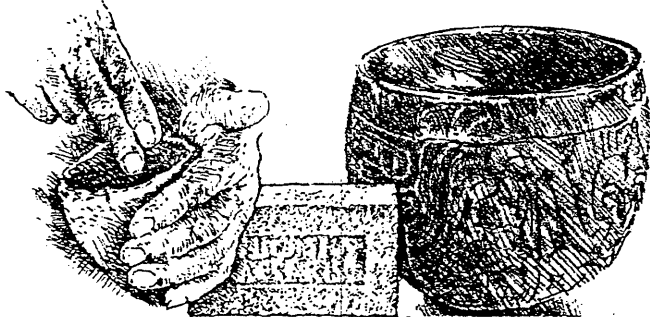

ceramic ware

Any of various products made by firing clay or similar materials in a kiln, as brick, tile, and pottery.



firing

The process of hardening or glazing ceramic ware by heating in a kiln to a specified temperature.

hard-burned

Fired at a high temperature to near vitrification and having relatively low absorption and high compressive strength.

soft-burned

Fired at a low temperature and having relatively high absorption and low compressive strength.

earthenware

Low-fired, opaque, nonvitreous ceramic ware.


stoneware

High-fired, opaque, vitrified ceramic ware.




vitrify

To make a clay body vitreous by firing at a specified temperature.




vitreous

Resembling glass, as in transparency, hardness, brittleness, luster, or having low or no porosity.




semivitreous

Having a moderate water absorption of slightly under 6%.



nonvitreous

Having a water absorption greater than 7%.



porcelain


A hard, vitreous, translucent ceramic material consisting essentially of kaolin, feldspar, and quartz, fired at a very high temperature.

china

A translucent ceramic material, bisque-fired at a high temperature and glaze-fired at a lower temperature.

kaolin

A fine white clay used in the manufacture of porcelain and white portland cement. Also called china clay.




enamel

A vitreous, usually opaque, decorative or protective coating applied by fusion to the surface of metal, glass, or pottery.

porcelain enamel

An opaque, glassy coating bonded to metal by fusing at a high temperature. Also called vitreous enamel.



ceramic bond

A thermochemical bond between materials resulting from exposure to temperatures approaching the fusion point of the mixture.

body

The structural portion of a ceramic article or the clay material or mixture from which it is made.



bisque-fired

Fired to harden a clay body.

bisque

Earthenware or porcelain that has been fired once but not glazed. Also called biscuit.

glaze-fired



Fired to fuse a glaze to a clay body.

glaze

A vitreous layer or coating fused to a clay body to color, decorate, waterproof, or strengthen its surface.



frit

A fused or partially fused material that is ground to introduce a soluble or unstable ingredients into glazes or enamels.

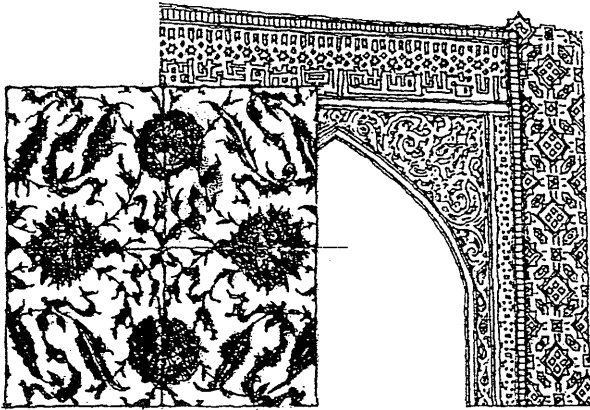

ceramic tile
Any of various fired clay tiles used for surfacing walls, floors, and countertops.

glazed wall tile
Ceramic tile having a nonvitreous body and a bright, matte, or crystalline glaze, used for surfacing interior walls and light-duty floors.






ceramic mosaic tile
Small ceramic tile having a porcelain or natural clay body, glazed for surfacing walls or unglazed for use on both floors and walls, and usually face- or back-mounted on sheets to facilitate handling and speed installation.




quarry tile
Unglazed ceramic floor tile having a natural clay body. Also called promenade tile.

paver tile
Unglazed ceramic floor tile similar in composition to ceramic mosaic tile but thicker and larger in surface area.




trimmer
Any of various specially shaped ceramic tiles for finishing an edge or angle.

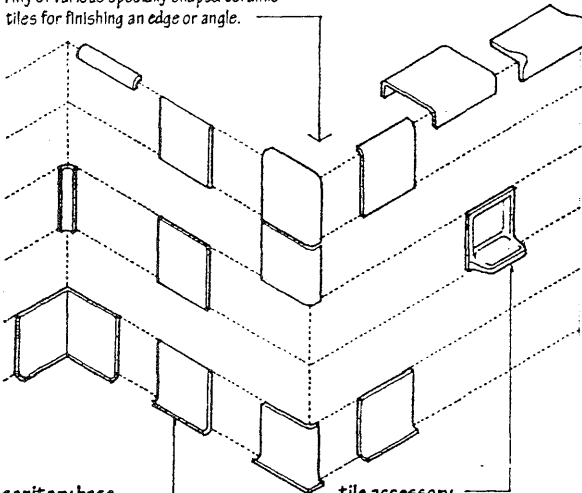

sanitary base
A covered tile set at the meeting of a floor and wall to prevent accumulation of dirt and to facilitate cleaning.

tile accessory
Any of the ceramic or nonceramic articles designed to be affixed to or inserted in tilework, as towel bars, soap holders, and the like.

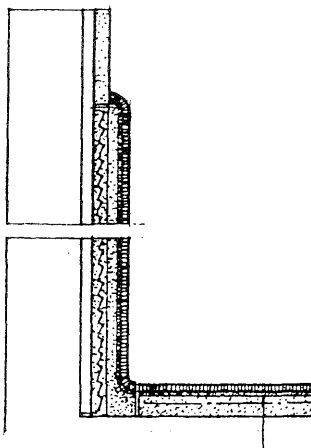


thick-set process
A tilesetting process in which ceramic tile is applied over a portland cement mortar bed $\frac{3}{4}$ to $1\frac{1}{2}$ in. (19 to 38 mm) thick, which allows for accurate slopes and planes in the finished work.

portland cement mortar
A field mix of portland cement, sand, water, and sometimes hydrated lime, used for leveling or setting ceramic tile in the thick-set process.

bond coat
A thin coat of mortar for bonding ceramic tile to a backing.

thin-bed process
A tilesetting process in which ceramic tile is bonded to a continuous, stable backing with a thin coat of dry-set mortar, latex-portland cement mortar, epoxy mortar, or an organic adhesive, $\frac{1}{32}$ to $\frac{1}{8}$ in. (0.8 to 3.2 mm) thick.

tile grout
A cementitious or resinous mix for filling joints in ceramic tilework.

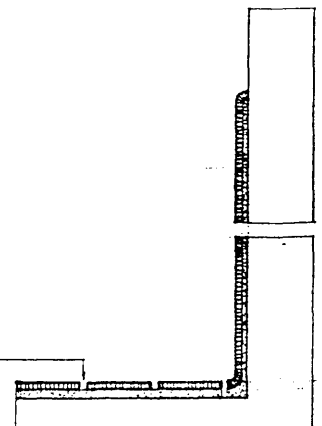

CERAMIC

structural clay tile




A hollow tile of fired clay having parallel cells or cores, used in building walls and partitions.

LB

Load-bearing structural clay tile suitable for masonry walls not exposed to frost action, or in exposed masonry where protected by a facing of 3 in. (76.2 mm) or more of stone, brick, terra cotta, or other masonry.

LBX

Load-bearing structural clay tile suitable for masonry walls exposed to weathering or frost action.

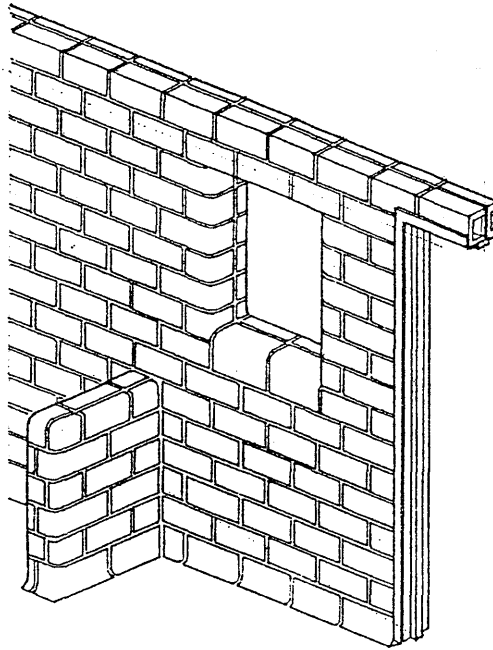

hollow tile

Any of various cellular building units of fired clay, concrete, or gypsum, used for building walls, floors, and roofs, or for fireproofing steelwork.

structural facing tile

Structural clay tile having a glazed surface, used for facing walls and partitions, esp. in areas subject to heavy wear, moisture problems, and strict sanitation requirements.

FTS

Structural facing tile suitable for exposed exterior and interior masonry walls and partitions where moderate absorption, slight variation in face dimensions, minor defects in surface finish, and medium color range are acceptable.

FTX




Smooth structural facing tile suitable for exposed exterior and interior masonry walls and partitions where low absorption and stain resistance are required, and where a high degree of mechanical perfection, minimum variation in face dimensions, and narrow color range are desired.

terra cotta

A hard, fired clay, reddish-brown in color when unglazed, used for architectural facings and ornaments, tile units, and pottery.



architectural terra cotta

Hard-burned, glazed or unglazed terra cotta, hand-molded or machine-extruded to order as a ceramic veneer for walls or for ornamentation.

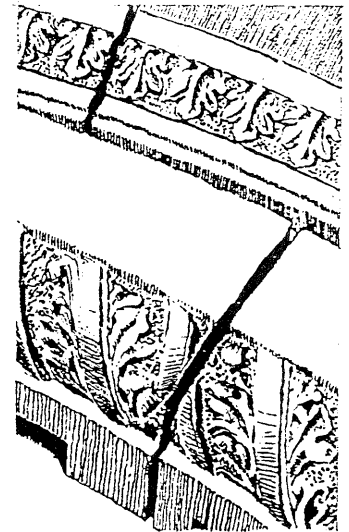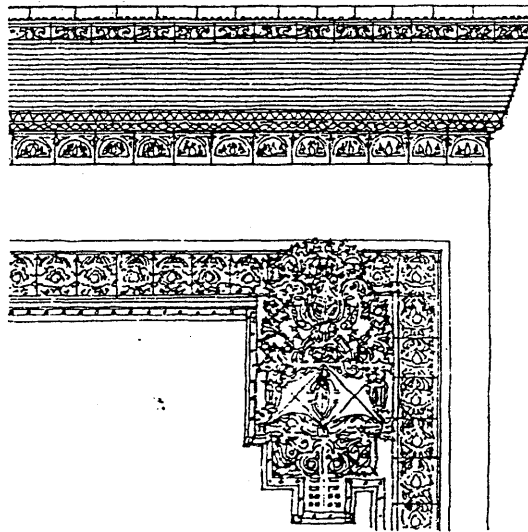

adobe

Sun-dried brick made of clay and straw, commonly used in countries with little rainfall.



rammed earth

A stiff mixture of clay, sand or other aggregate, and water compressed and dried within forms as a wall construction. Also called pisé, pisay, pisé de terre.

A building for public Christian worship.

Christianity

The religion, founded on the teachings of Jesus Christ, including the Catholic, Protestant, and Eastern Orthodox churches.

basilica

An early Christian church, characterized by a long, rectangular plan, a high colonnaded nave lit by a clerestory and covered by a timbered gable roof, two or four lower side aisles, a semicircular apse at the end, a narthex, and often other features, as an atrium, a bema, and small semicircular apses terminating the aisles.

atrium


The forecourt of an early Christian church, flanked or surrounded by porticoes.

ambulatory

The covered walk of an atrium or cloister.

antiarthrus

A basin for a ritual cleansing with water in the atrium of an early Christian basilica.



baptistry


A part of a church or a separate building in which baptism is administered. Also, baptistry.

baptism

A sacrament of initiation into Christianity, symbolic of spiritual regeneration, marked by a ceremonial immersion or application of water.

font

A basin, usually of stone, holding the water used in baptism.

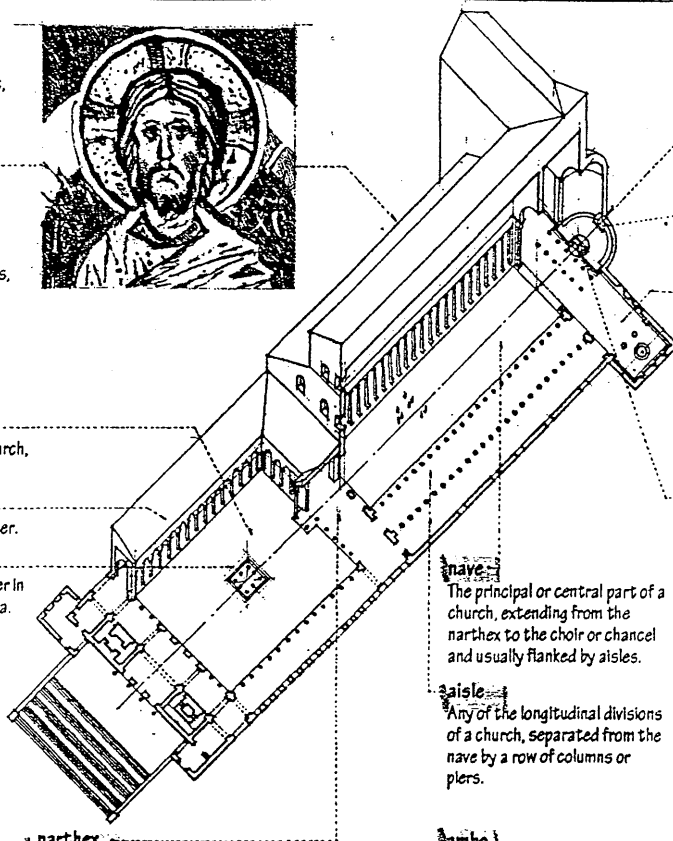

narthex

The portico before the nave of an early Christian or Byzantine church, appropriated to penitents.

esonarthex

An inner narthex when two are present.

exonarthex

A covered walk or outer narthex situated before an inner narthex.

nave

The principal or central part of a church, extending from the narthex to the choir or chancel and usually flanked by aisles.

aisle

Any of the longitudinal divisions of a church, separated from the nave by a row of columns or piers.

ambo

Either of two raised stands from which the Gospels or Epistles were read or chanted in an early Christian church. Also, ambon.

apse

A semicircular or polygonal projection of a building, usually vaulted and used esp. at the sanctuary or east end of a church. Also, apsis.

tribune

The bishop's throne, occupying a recess or apse in an early Christian church.

bema

A transverse open space separating the nave and the apse of an early Christian church, developing into the transept of later cruciform churches.

sanctuary


A sacred or holy place, as that part of a church in which the principal altar is placed.

altar

The table in a Christian church upon which the Eucharist, the sacrament celebrating Christ's Last Supper, is celebrated. Also called communion table.

baldachin

An ornamental canopy of stone or marble permanently placed over the altar in a church. Also, baldachino, baldaquin. Also called ciborium.

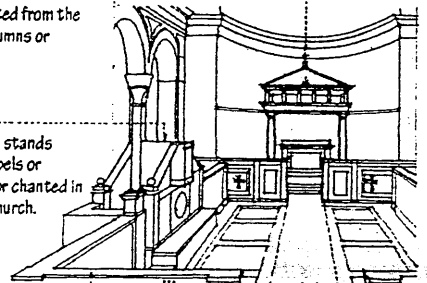

cancell

A low screen in an early Christian basilica, separating the clergy and sometimes the choir from the congregation.

sarcophagus

A stone coffin, esp. one bearing sculpture or inscriptions and displayed as a monument.

bema

The sanctuary space surrounding the altar of an Eastern church.

diaconicon


A sacristy in an early Christian or Eastern church, usually on the south side of the bema.

sacristy

A room in a church where the sacred vessels and vestments are kept. Also called vestry.

prothesis

A chapel in an Eastern Church where the Eucharistic elements are prepared, usually on the north side of the bema.

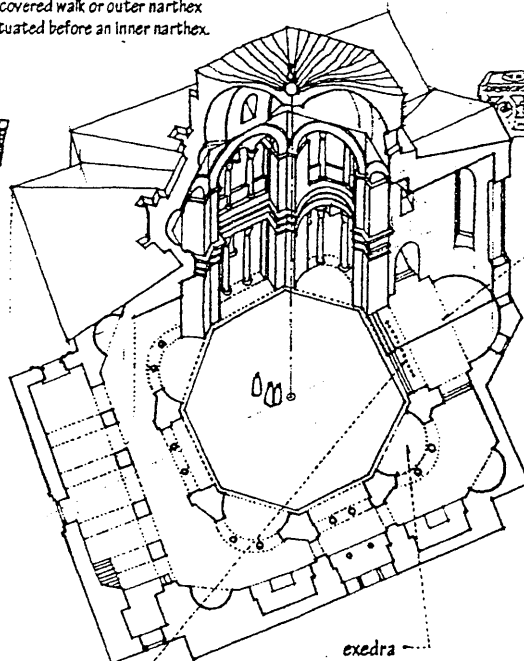

iconostasis

A screen or partition on which icons are placed, separating the bema from the nave of an Eastern church. Also, iconostas.


exedra

A large apsidal extension of the interior volume of a church. Also, exhedra.



icon

A representation of a sacred Christian personage, as Christ or a saint or angel, typically painted on a wood surface and itself venerated as being sacred, esp. in the tradition of the Eastern Church.



westwork

The monumental western front of a Romanesque church, treated as a tower or towers containing a low entrance hall below and a chapel open to the nave above.

wheel window

A rose window having distantly radiating mullions or bars. Also called Catherine wheel, marigold window.

tympanum

The space between an arch and the horizontal head of a door or window below, often decorated with sculpture.


trumeau

A column supporting the tympanum of a doorway at its center.



tabernacle

A canopied recess for a religious image or icon.


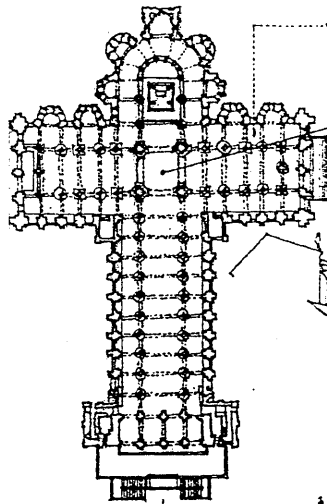


transept

The major transverse part of a cruciform church, crossing the main axis at a right angle between the nave and choir.

crossing

The intersection of the nave and transept in a cruciform church.

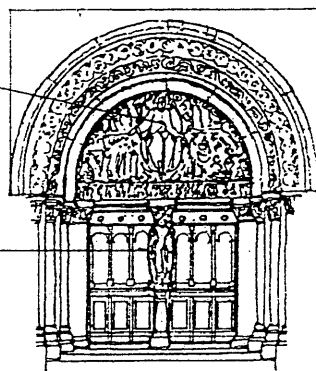


campanile

A bell tower, usually one near but not attached to the body of a church.


onion dome

A bulbous, domelike roof terminating in a sharp point, used esp. in Russian Orthodox church architecture to cover a cupola or tower.

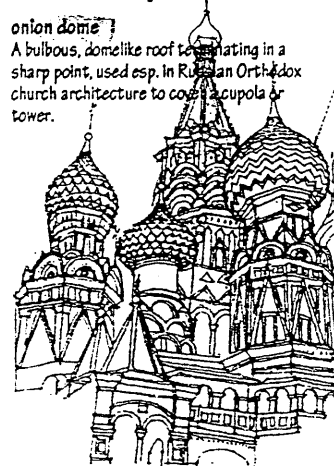

spire

A tall, acutely tapering pyramidal structure surmounting a steeple or tower.



steeple

A tall ornamental structure, usually ending in a spire and surmounting the tower of a church or other public building.




gallery

A roofed promenade, esp. one extending inside or outside along the exterior wall of a building.

loft

A gallery or upper level in a church or hall.

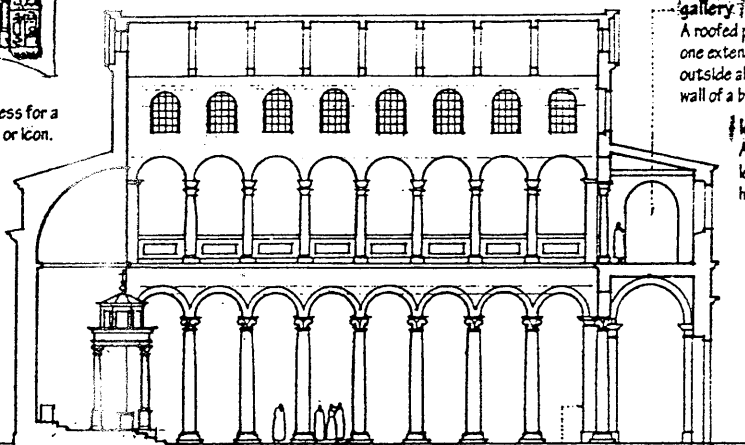

arcade

A series of arches supported on piers or columns.

arcuate


Curved or arched like a bow: a term used in describing the arched or vaulted structure of a Romanesque church or Gothic cathedral, as distinguished from the trabeated architecture of an Egyptian hypostyle hall or Greek Doric temple. Also, arcuated.

respond

A pier or pilaster projecting from a wall as a support for an arch or lintel, esp. at the termination of an arcade or colonnade.

dossieret

A thickened abacus or supplementary capital set above a column capital to receive the thrust of an arch. Also called impost block.



interlacing arcade


An arcade, esp. a blind one, composed of arches resting on alternate supports and overlapping in series where they cross. Also called intersecting arcade.

blind arcade

A series of arches superimposed on a wall for decoration. Also called arcature.

fleche

A slender spire rising from the ridge of a roof, esp. one above the crossing of a Gothic church.



finial


A relatively small, usually foliated ornament terminating the peak of a spire or pinnacle.

crocket

A projecting ornament, usually in the form of curved foliage, used esp. in Gothic architecture to decorate the outer angles of pinnacles, spires, and gables.

gargoyle

A grotesquely carved figure of a human or animal, esp. one with an open mouth that serves as a spout and projects from a gutter to throw rainwater clear of a building.



rose window

A circular window, usually of stained glass and decorated with tracery symmetrical about the center.

stained glass

Glass colored or stained by having pigments baked onto its surface or by having various metallic oxides fused into it while in a molten state.

triforium

An arcaded story in a church, between the nave arches and clerestory and corresponding to the space between the vaulting and the roof of an aisle.

crypt


An underground chamber or vault used as a burial place, esp. one beneath the main floor of a church.

rood

A crucifix symbolizing the cross on which Christ was crucified, esp. a large one set above the entrance to the choir or chancel of a medieval church.

rood screen

A screen, often elaborately adorned and properly surmounted by a rood, separating the chancel or choir from the nave of a medieval church.



chancel


The space about the altar of a church for the clergy and choir, often elevated above the nave and separated from it by a railing or screen.

chantry

A chapel endowed for the saying of Masses and prayers for the souls of the founders or of persons named by them.


labyrinth

A mazelike pattern inlaid in the pavement of a medieval church.

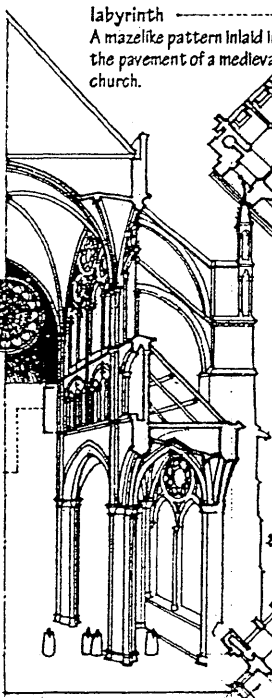

galilee

A small porch used as a chapel for penitents at the west end of some medieval English churches. Also, galilee porch.

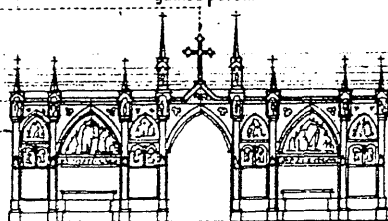

cathedral

The principal church of a diocese, containing the bishop's throne called the cathedra.

chapel

A separately dedicated part of a church for private prayer, meditation, or small religious services.

chevet

The rounded east end of a Gothic cathedral, including the apse and ambulatory.

ambulatory

An aisle encircling the end of the choir or chancel of a church. Also called deambulatory.

choir

The part of a church occupied by the singers of a choir, usually part of the chancel.

retrochoir

A separate division behind the choir or high altar of a large church.

Lady chapel

A chapel dedicated to the Virgin Mary, usually located behind the high altar of a cathedral at the extremity of the apse.

high altar

The main altar of a church.

presbytery

The part of a church reserved for the officiating clergy.

close

An enclosed place, esp. the land surrounding or beside a cathedral.

slupe

A covered passage, esp. one between the transept and chapter house of a cathedral. Also, slip.

chapter house

The place where the chapter of a cathedral or monastery meets, usually a building attached to or a hall forming part of the cathedral or monastery.

chapter

An assembly of the monks in a monastery, or the members of a religious house or order.

paradise

An atrium or cloister beside a church.

cloister

A covered walk having an arcade or colonnade on one side opening onto a courtyard.

garth



A courtyard or quadrangle enclosed by a cloister. Also called cloister garth.

alure

A walk or passage, as along a cloister or behind the parapets of a castle. Also, allure.

COLOR

A phenomenon of light and visual perception that may be described in terms of an individual's perception of hue, saturation, and lightness for objects, and hue, saturation, and brightness for light sources.

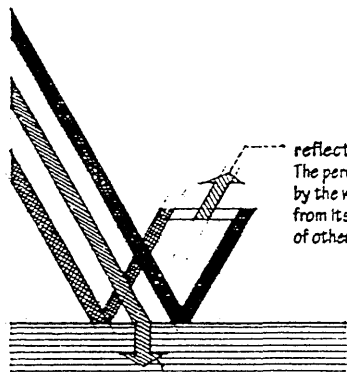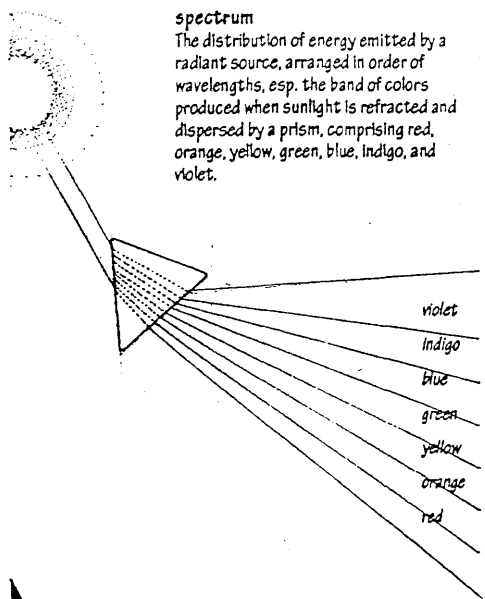


selective absorption
The absorption of certain wavelengths of the light incident on a colored surface, the remaining portion being reflected or transmitted.

subtractive color

A color produced by mixing cyan, yellow, and magenta pigments, each of which absorbs certain wavelengths. A balanced mixture of these colorant or subtractive primaries theoretically yields black since it absorbs all wavelengths of visible light.


additive color

A color produced by combining lights of red, green, and blue wavelengths. These light or additive primaries contain all the wavelengths necessary to produce a colorless or white light.

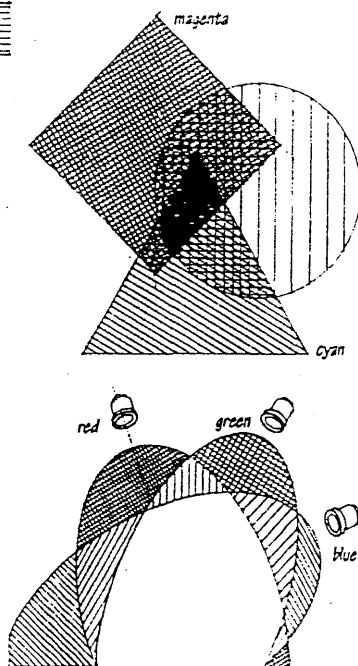

pale
Designating a color having high lightness and low saturation.

brilliant
Designating a color having high lightness and strong saturation.

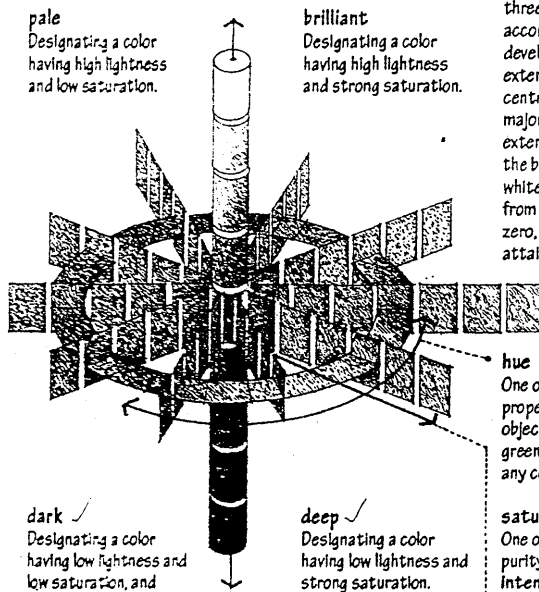

dark
Designating a color having low lightness and low saturation, and reflecting only a small fraction of incident light.

deep
Designating a color having low lightness and strong saturation.

Munsell System

A system for specifying colors arranged in three orderly scales of uniform visual steps according to hue, chroma, and value, developed in 1898 by Albert H. Munsell. Hue extends in a rotary direction about a central axis through a spectrum of five major and five secondary hues. Value extends vertically direction from black at the bottom through a series of grays to white at the top. Chroma extends radially from the central axis at which saturation is zero, out to the strongest saturation attainable for each color's hue and value.

hue

One of the three dimensions of color: the property of light by which the color of an object is classified as being red, yellow, green, or blue, or an intermediate between any contiguous pair of these colors.

saturation

One of the three dimensions of color: the purity or vividness of a hue. Also called intensity.

chroma

The degree by which a color differs from a gray of the same lightness or brightness, corresponding to saturation of the perceived color.

lightness

The dimension of color by which an object appears to reflect more or less of the incident light, varying from black to white for surface colors and from black to colorless for transparent volume colors.


value

The degree by which a color appears to reflect more or less of the incident light, corresponding to lightness of the perceived color.

brightness

The dimension of a color which is correlated with luminance and by which visual stimuli are ordered continuously from very dim to very bright. Pure white has the maximum brightness, and pure black the minimum brightness.


gray scale
A scale of achromatic colors having several, usually ten, equal gradations ranging from white to black.



optical mixing

The merging of juxtaposed dots or strokes of pure colors when seen from a distance to produce a hue often more luminous than that available from a premixed pigment.


warm
Designating a color inclined toward or dominated by red, orange, or yellow.




cool
Designating a color inclined toward or dominated by green, blue, or violet.

advancing color
A warm color that appears to move toward an observer, giving an illusion of space.

receding color
A cool color that appears to move away from an observer, giving an illusion of space.



color scheme
An arrangement or pattern of colors conceived of as forming an integrated whole.

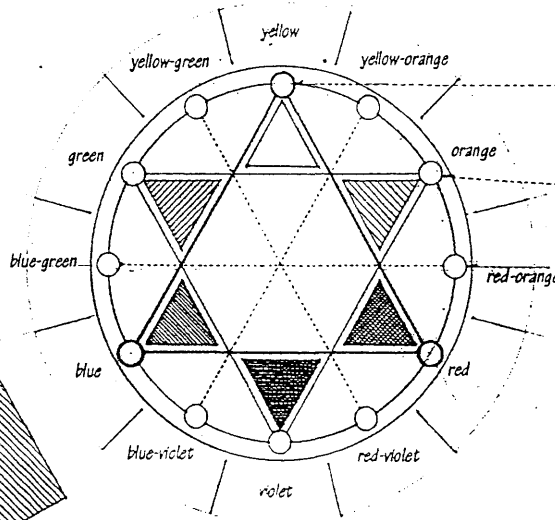

color wheel
A circular scale of the colors of the spectrum, showing complementary colors opposite each other. Also called **color circle**.

primary color
Any of a set of colors, as red, yellow, and blue, regarded as generating all other colors.

secondary color
A color, as orange, green, or violet, produced by mixing two primary colors.

tertiary color
A color, as brown, produced by mixing two secondary colors, or a secondary color with one of its constituent primaries.

complementary color
One of a pair of opposing colors on a color wheel, perceived as completing or enhancing each other.

analogous color
One of two or three closely related colors on a color wheel.

triad
A combination of three colors forming an equilateral triangle on a color wheel.

split complementary
A combination of one color and the pair of colors adjoining its complementary color on a color wheel.


double complementary
A combination of two analogous colors and their complementary colors on a color wheel.

monochromatic
Having only one color or exhibiting varying intensities and values of a single hue.

polychromatic
Having or exhibiting a variety of colors.

tint
A relatively light value of a color, produced by adding white to it.

color triangle
A triangular diagram developed by Faber Birren to describe the relationship between a pure hue, white, and black, which combine to yield secondary tints, tones, shades, and grays. All colors may be subjectively conceived as a mixture of the psychological primaries - red, yellow, green, and blue - plus the achromatic pair of white and black.

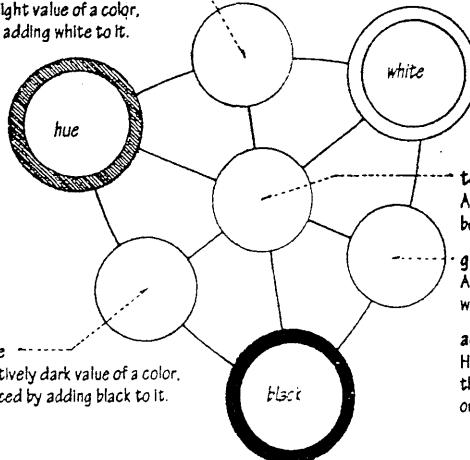


shade
A relatively dark value of a color, produced by adding black to it.

tone
An intermediate value of a color between a tint and a shade.

gray
An achromatic color between white and black.

achromatic
Having no saturation and therefore no hue, as white, black, or gray.



COLUMN


A rigid, relatively slender structural member designed primarily to support axial, compressive loads applied at the member ends.

pillar

An upright, relatively slender shaft or structure, usually of brick or stone, used as a building support or standing alone as a monument.

post

A stiff vertical support, esp. a wooden column in timber framing.

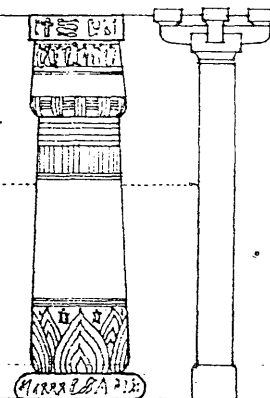

buckling

The sudden lateral or torsional instability of a slender structural member induced by the action of a compressive load. Buckling can occur well before the yield stress of the material is reached.


buckling load

The axial load at which a column begins to deflect laterally and becomes unstable.

Under a buckling load, a column cannot generate the internal forces necessary to restore its original linear condition. Any additional loading would cause the column to deflect further until collapse occurs in bending. Most columns in practice are subject to both compression and bending due to variation in material properties, initial crookedness in fabrication, or some eccentricity in load application. This bending often causes the actual buckling load to be slightly lower than the critical buckling load.

critical buckling load

The maximum axial load that can theoretically be applied to a column without causing it to buckle. The critical buckling load for a column is inversely proportional to the square of its effective length, and directly proportional to the modulus of elasticity of the material and to the moment of inertia of the cross section. Also called Euler buckling load.

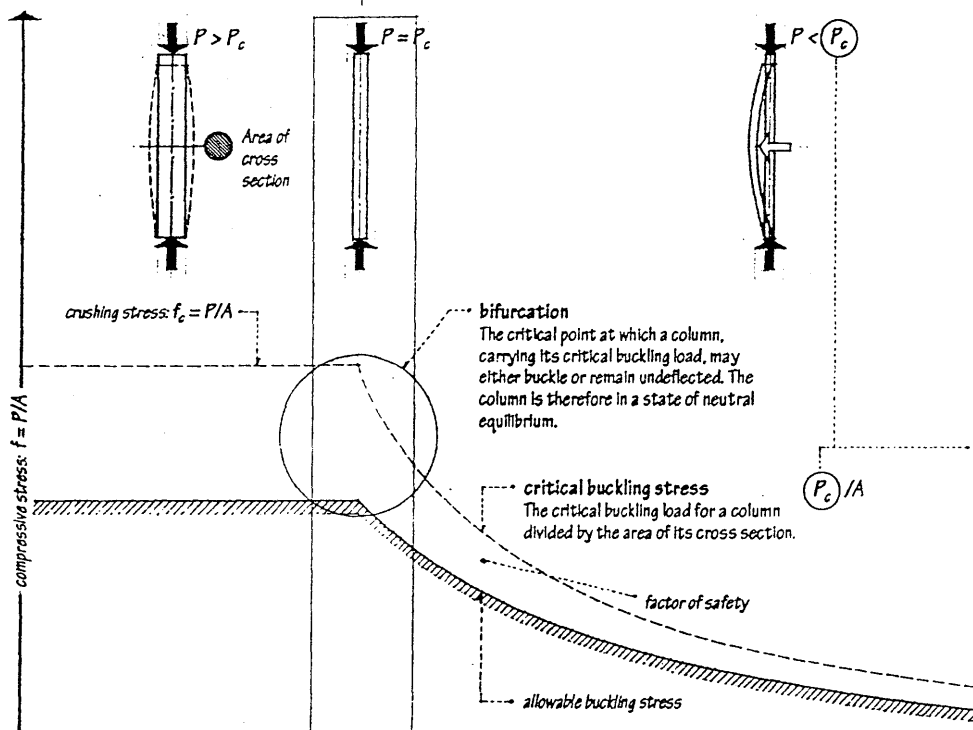

short column

A thick column subject to failure by crushing rather than by buckling. Failure occurs when the direct stress from an axial load exceeds the compressive strength of the material available in the cross section. An eccentric load, however, can produce bending and result in an uneven stress distribution in the section.

intermediate column

A column having a mode of failure between that of a short column and a long column, often partly inelastic by crushing and partly elastic by buckling.

slenderness ratio

The ratio of the effective length of a column to its least radius of gyration.

The higher the slenderness ratio, the lower is the critical stress that will cause buckling. A primary objective in the design of a column is to reduce its slenderness ratio by minimizing its effective length or maximizing the radius of gyration of its cross section.

long column

A slender column subject to failure by buckling rather than by crushing.


$$L_e/r$$




$$r = \sqrt{I/A}$$

radius of gyration

The radial distance from any axis to a point at which the mass of a body could be concentrated without altering the moment of inertia of the body about that axis. For a structural section, the radius of gyration is equal to the square root of the quotient of the moment of inertia and the area.

The higher the radius of gyration of a structural section, the more resistant the section is to buckling. In determining the cross-sectional shape of a column, the objective is to provide the necessary radius of gyration about the different axes. For an asymmetrical cross section, buckling will tend to occur about the weaker axis or in the direction of the least dimension.



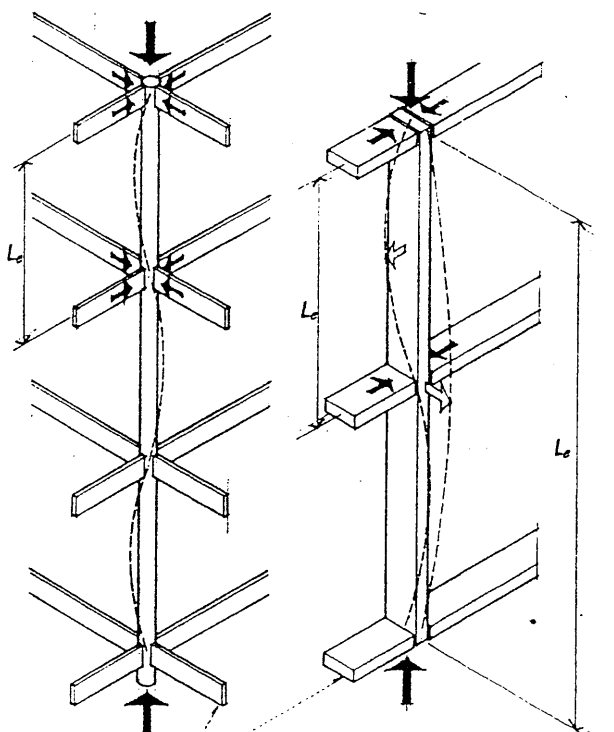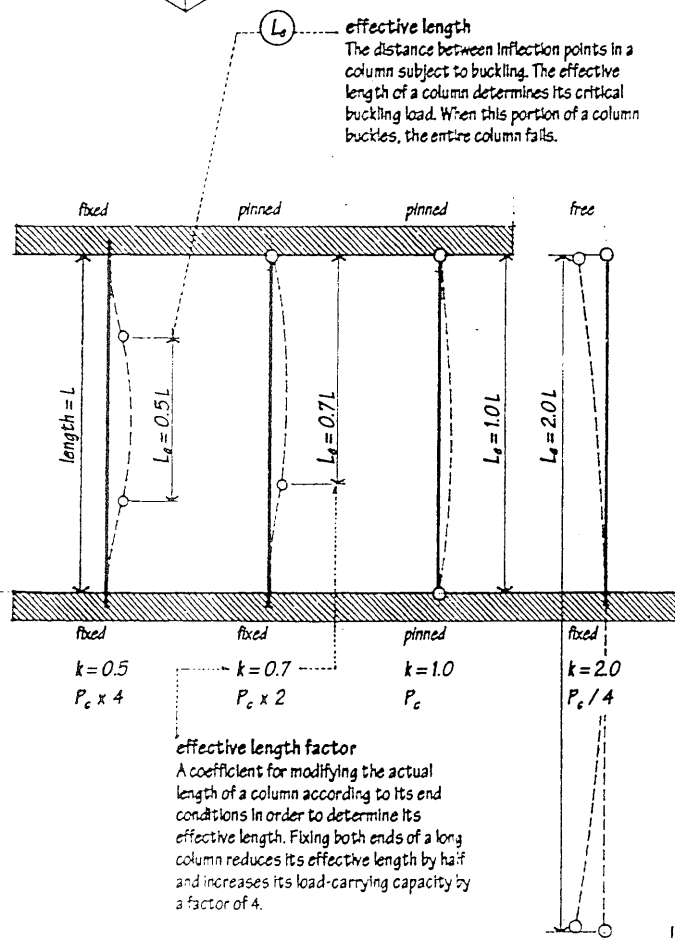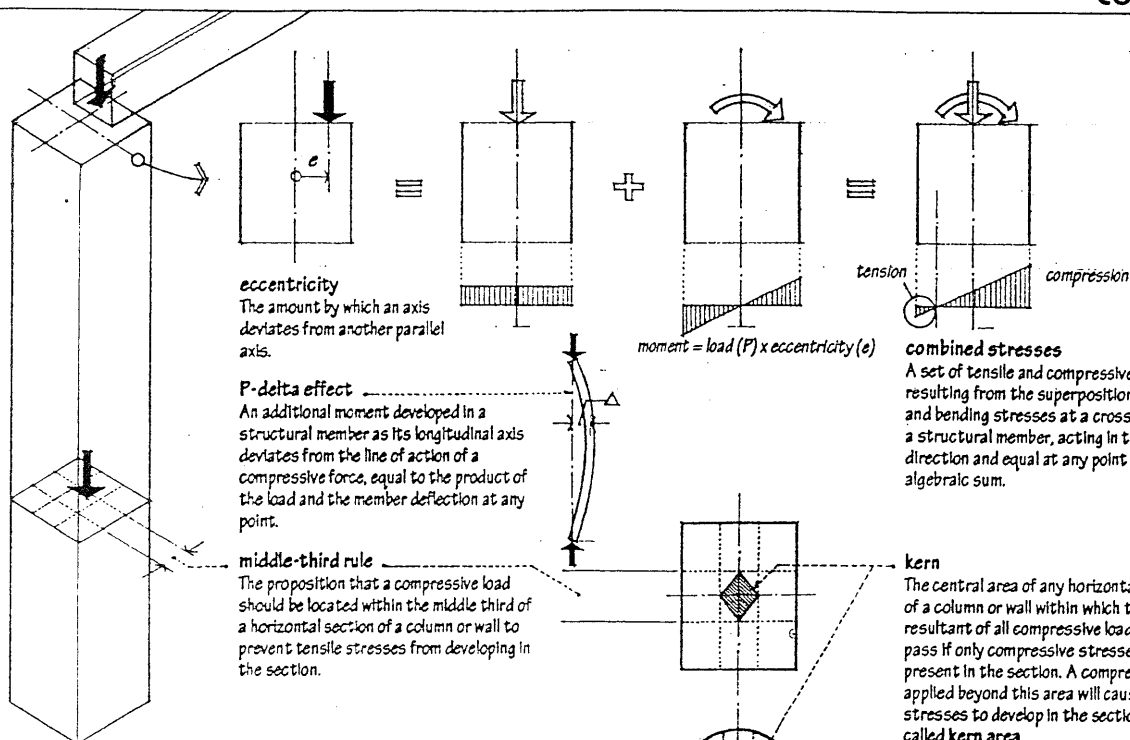

CONCRETE

An artificial, stonelike building material made by mixing cement and various mineral aggregates with sufficient water to cause the cement to set and bind the entire mass.



natural cement

A naturally occurring clayey limestone which, when calcined and finely pulverized, produces a hydraulic cement.

pozzolan

A siliceous material, as fly ash, that reacts chemically with slaked lime in the presence of moisture to form a slow-hardening cement, named after a natural cement from Pozzuoli, an ancient Roman town near Vesuvius. Also, pozzolona, pozzolana.

siliceous

Containing silica or a silicate.

fly ash

Fine particles of ash recovered from the waste gases of a solid-fuel furnace.

cement

A calcined mixture of clay and limestone, finely pulverized and used as an ingredient in concrete and mortar. The term is frequently used incorrectly for concrete.

tricalcium silicate

A compound constituting about half the volume of portland cement and responsible for the hardening or early gain in strength of the cement.

dicalcium silicate

A compound constituting about one-quarter of the volume of portland cement and responsible for the aging or long-term gain in strength of the cement.

tricalcium aluminate

A compound constituting about one-tenth of the volume of portland cement and responsible for the initial setting of the cement.

portland cement

A hydraulic cement made by burning a mixture of clay and limestone in a rotary kiln and pulverizing the resulting clinker into a very fine powder, named for its resemblance to a limestone quarried on the Isle of Portland, England.

hydraulic cement

Cement capable of setting and hardening by a reaction with water.



Type I: normal

A portland cement used for general construction, having none of the distinguishing qualities of the other types.

Type II: moderate

A portland cement having a reduced content of tricalcium aluminate, making it more resistant to sulfates and causing it to generate less heat of hydration; used in general construction where resistance to moderate sulfate action is required or where heat buildup can be damaging, as in the construction of large piers and heavy retaining walls.

Type III: high early strength

A very finely ground portland cement having an increased content of tricalcium silicate, causing it to cure faster and gain strength earlier than normal portland cement; used when the early removal of formwork is desired, or in cold-weather construction to reduce the time required for protection from low temperatures.

Type IV: low heat

A portland cement having a reduced content of tricalcium silicate and an increased content of dicalcium silicate, causing it to generate less heat of hydration than normal portland cement; used in the construction of massive concrete structures, as gravity dams, where a large buildup in heat can be damaging.

Type V: sulfate resisting



A portland cement having a reduced content of tricalcium aluminate, lessening the need for gypsum, a sulfate normally added to cement to retard its setting time; used where resistance to severe sulfate action is required.

air-entraining portland cement

A Type I, Type II, or Type III portland cement to which a small quantity of an air-entraining agent has been interground during manufacture; designated by the suffix A, as Type IA, Type IIA, or Type IIIA.

white portland cement

A portland cement produced from raw materials low in iron oxide and manganese oxide, the substances that give concrete its gray color; used in precast concrete work and in the making of terrazzo, stucco, and tile grout.





sulfate action

An expansive reaction occurring when the cement matrix of concrete or mortar comes in contact with sulfates dissolved in ground water or in soil.

entrained air

Microscopic, spherical air bubbles, typically 0.004 to 0.04 in. (0.1 to 1.0 mm) in diameter, intentionally dispersed in a concrete or mortar mix by an air-entraining agent.

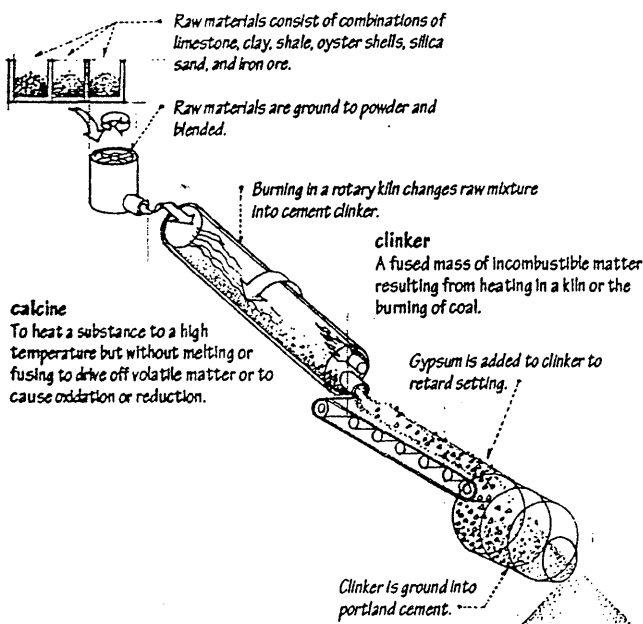




mixing water

The water used in a concrete or mortar mix, exclusive of any absorbed by the aggregate and free of such harmful substances as organic material, clay, and salts. Water fit for drinking is generally acceptable.


cement paste

A mixture of cement and water for coating, setting, and binding the aggregate particles together in a concrete or mortar mix.




aggregate

Any of various hard, inert, mineral materials, as sand and gravel, added to a cement paste to make concrete or mortar. Since aggregate represents from 60% to 80% of the concrete volume, its properties are important to the strength, weight, and fire-resistance of the hardened concrete. Aggregate should be hard, dimensionally stable, and free of clay, silt, and organic matter which can prevent the cementing matrix from binding the particles together.

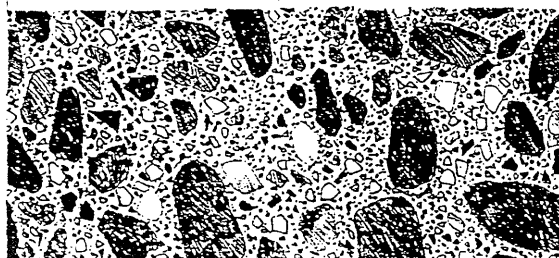

lightweight concrete

Concrete made with aggregate of low specific gravity and weighing less than normal concrete which has a unit weight of about 150 pcf (2,400 kg/m³).



structural lightweight concrete

Concrete made with strong lightweight aggregate, as expanded shale or slate, having a unit weight from 85 to 115 pcf (1,362 to 1,840 kg/m³) and compressive strength comparable to that of normal concrete.

insulating concrete

Lightweight concrete having a unit weight of less than 60 pcf (960 kg/m³) and low thermal conductivity, made with lightweight aggregate, as perlite, or with a foaming agent or gas-forming chemical that infuses the mix with a homogeneous cellular structure.

fine aggregate

Aggregate consisting of sand having a particle size smaller than 1/4 in. (6.4 mm): specif. the portion of aggregate that will pass through a 3/8 in. (9.5 mm) sieve, almost entirely through a No. 4 (4.8 mm) sieve, and be predominantly retained on a No. 200 (74µ) sieve.

coarse aggregate

Aggregate consisting of crushed stone, gravel, or blast-furnace slag having a particle size larger than 1/4 in. (6.4 mm): specif. the portion of aggregate that is retained on a No. 4 (4.8 mm) sieve. The maximum size of coarse aggregate in reinforced concrete is limited by the size of the section and the spacing of the reinforcing bars.

graded aggregate

Aggregate having a particle-size distribution characterized by uniform grading. Graded aggregate requires the least amount of cement paste to fill the voids and surround the particles.

particle-size distribution

The range of particle sizes in a granular material, expressed either as the cumulative percentage by weight of particles smaller or larger than a specified sieve opening, or as the percentage by weight of the particles that range between specified sieve openings.

uniform grading

A particle-size distribution in which aggregate particles vary uniformly from fine to coarse without a preponderance of any one size or group of sizes.

expanded shale

A strong lightweight aggregate obtained by the exfoliation of clay or shale. Also called **expanded clay**.

expanded slate

A strong lightweight aggregate obtained by the exfoliation of slate.

exfoliation

The splitting or swelling of certain minerals into a scaly aggregate when heated.

perlite

A volcanic glass expanded by heat to form lightweight, spherical particles, used as nonstructural lightweight aggregate and as loose-fill thermal insulation. Also, **pearlite**.

vermiculite

Mica expanded by heat into very light, wormlike threads, used as nonstructural lightweight aggregate and as loose-fill thermal insulation.



admixture

Any substance other than cement, water, or aggregate, added to a concrete or mortar mix to alter its properties or those of the hardened product. Also called **additive**.

○ air-entraining agent

An admixture that disperses entrained air in a concrete or mortar mix to increase workability, improve resistance of the cured product to the cracking induced by freeze-thaw cycles or the scaling caused by deicing chemicals, and in larger amounts, to produce lightweight insulating concrete.

○ accelerator

An admixture that hastens the setting and strength development of a concrete, mortar, or plaster mix.

○ retarder

An admixture that slows the setting of a concrete, mortar, or plaster mix in order to allow more time for placing and working the mix.

○ surface-active agent

An admixture for reducing the surface tension of the mixing water in a concrete mix, thereby facilitating the wetting and penetrating action of the water or aiding in the emulsifying and dispersion of other additives in the mix. Also called **surfactant**.

○ water-reducing agent

An admixture for reducing the amount of mixing water required for the desired workability of a concrete or mortar mix. Lowering the water-cement ratio in this manner generally results in increased strength. Also called **superplasticizer**.

○ coloring agent

A pigment or dye added to a concrete mix to alter or control its color.

CONCRETE

mix design



The most economical selection and proportioning of cement, water, and aggregate to produce concrete or mortar having the required properties of workability, strength, durability, and watertightness.

Abram's law

A law postulating that, with given concrete materials, curing, and testing conditions, the compressive strength of concrete is inversely proportional to the ratio of water to cement; developed by D.A. Abrams in 1919 from experiments at Lewis Institute in Chicago.

water-cement ratio

The ratio of mixing water to cement in a unit volume of concrete or mortar mix, preferably expressed by weight as a decimal fraction but often stated in gallons of water per 94-lb. sack of cement. The water-cement ratio controls the strength, durability, and watertightness of hardened concrete.

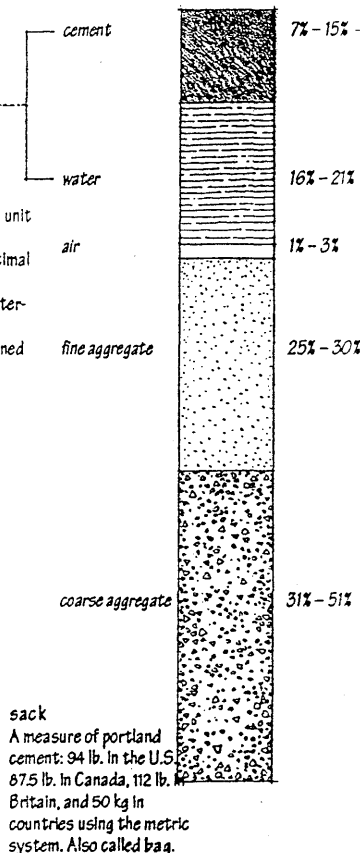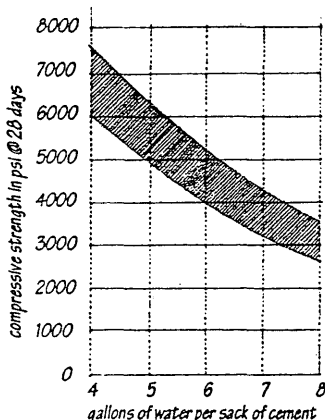

cement content

The quantity of cement per unit volume of concrete or mortar mix, preferably expressed in pounds per cubic yard but often stated in sacks of cement per cubic yard of mix.

water content

The quantity of water per unit volume of concrete or mortar mix, preferably expressed in pounds per cubic yard but often stated in gallons per cubic yard of mix.

consistency

The relative ability of freshly mixed concrete or mortar to flow, usually measured by the slump test for concrete and by the flow test for grout or mortar. Consistency depends largely on the proportion of cement paste to aggregate in a mix.

workability


The relative ease with which freshly mixed concrete or mortar can be handled, placed in formwork, compacted, and finished. Workability depends partly on the water-cement ratio and partly on the grading of the aggregate in a mix.

slump test

A method for determining the consistency and workability of freshly mixed concrete by measuring the slump of a test specimen.

slump

A measure of the consistency and workability of freshly mixed concrete, expressed as the vertical settling, in inches, of a specimen after it has been placed in a slump cone, tamped in a prescribed manner, and the cone is lifted.

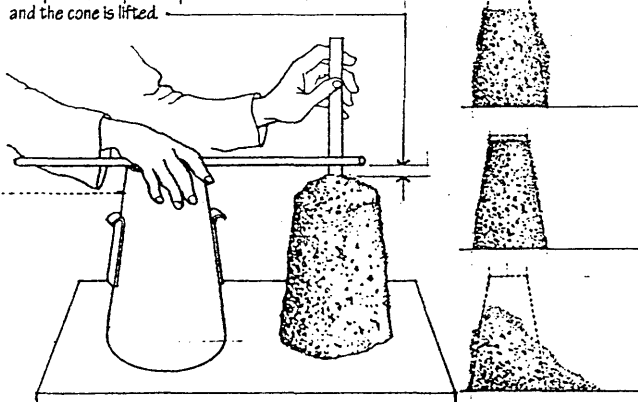

slump cone


An open-ended, truncated cone of sheet metal 12 in. (305 mm) high, with a base diameter of 8 in. (203 mm) and a top diameter of 4 in. (102 mm), used to mold a specimen of freshly mixed concrete for the slump test.

compression test

A test for determining the compressive strength of a concrete batch, using a hydraulic press to measure the maximum load a test cylinder can support in axial compression before fracturing.

test cylinder

A cylinder of concrete 6 in. (152 mm) in diameter and 12 in. (305 mm) high, cast from a representative batch and cured in a laboratory or in the field under controlled conditions.

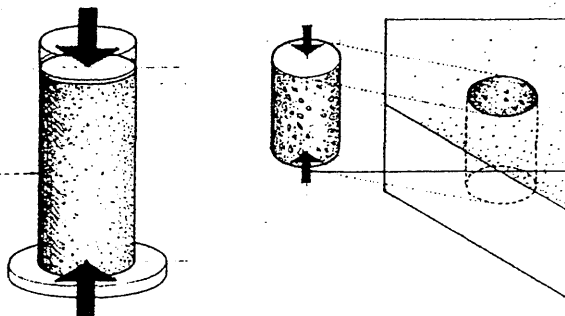

core test

A compression test of a cylinder cut from a hardened concrete structure, usually by means of a core drill.

form liner

Material for lining the inside face of a form, specially selected to impart a smooth or patterned finish to the concrete surface.

release agent

Any of various materials, as oil or silicone, for preventing the bonding of concrete to a surface. Also called parting compound.

bulkhead


A partition closing the end of a form or preventing the passage of newly placed concrete at a construction joint.

keyway

A longitudinal groove or channel formed in a concrete footing or other member that has set, providing a shear-resisting key for newly placed concrete.

yoke

A clamping device for keeping column forms or the tops of wall forms from spreading under the fluid pressure of newly placed concrete.



Sonotube

Trademark for a brand of cylindrical column form made of compressed, resin-impregnated paper.

chair

A device for supporting and holding steel reinforcement in proper position before and during the placing of concrete.

high chair

A tall chair for supporting top bars in a concrete beam or slab.

bolster

A wide chair for supporting and spacing bottom bars in a concrete beam or slab.

climbing form


A form that can be raised vertically for succeeding lifts of concrete during the construction of a multistory building.

lift

The height of a quantity of concrete placed in a form at one time.

slip form

A form that can be moved slowly and continuously as concrete is being placed during the construction of a concrete pavement or building.

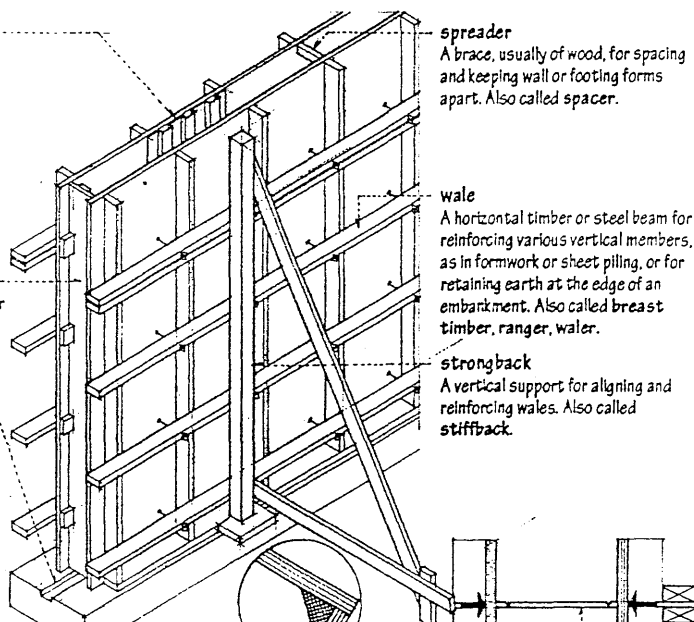

spreader

A brace, usually of wood, for spacing and keeping wall or footing forms apart. Also called spacer.

wale

A horizontal timber or steel beam for reinforcing various vertical members, as in formwork or sheet piling, or for retaining earth at the edge of an embankment. Also called breast timber, ranger, waler.

strongback


A vertical support for aligning and reinforcing wales. Also called stiffback.

formwork

The temporary structure required to support newly placed concrete, including the forms and all necessary supporting members, bracing, and hardware.

form

Boarding or sheeting of wood, metal, plastic, or fiberglass for containing and giving a desired shape to newly placed concrete until it sets and gains sufficient strength to be self-supporting.



form tie

A metal tie for keeping wall forms from spreading under the fluid pressure of newly placed concrete.

snap tie

A form tie having notches or crimps which allow its ends to be snapped off below the concrete surface after stripping of the forms.

cone bolt


A form tie having cones at each end inside the forms which allow it to also serve as a spreader.

cone

A small, truncated cone of wood, steel, or plastic attached to a form tie to space and spread wall forms, leaving a neatly finished depression in the concrete surface to be filled or left exposed.

she bolt

A form tie consisting of waler rods which are inserted through the form and threaded onto the ends of an inner rod. After stripping, the waler rods are removed while the inner rod remains in the concrete.



rustication strip




A strip of wood or other material attached to the inside face of a form to produce a groove in the surface of a concrete member.

grade strip

A wood strip fixed to the inside face of a form to indicate the top of a concrete lift.

wedge

Any of a variety of slotted devices for tightening formwork and transferring the force in a form tie to the wales.

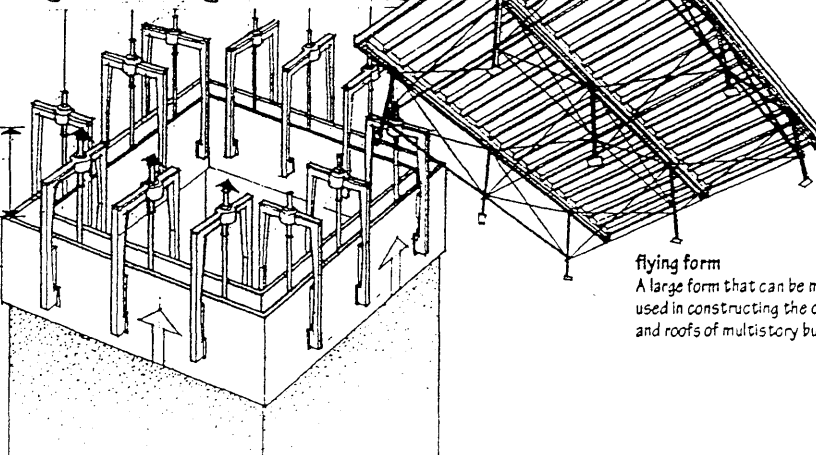

flying form

A large form that can be moved by a crane, used in constructing the concrete floors and roofs of multistory buildings.

CONCRETE

cast-in-place concrete

Concrete deposited, formed, cured, and finished in its final position as part of a structure. Also called cast-in-situ concrete.

time of haul

The period from first contact between mixing water and cement to completion of discharge of the freshly mixed concrete from a truck mixer.

ready-mixed concrete

Concrete mixed at a batch plant for delivery by an agitator truck to a construction site.

shrink-mixed concrete

Concrete partially mixed at a batch plant and then mixed more completely in a truck mixer en route to a construction site.

transit-mixed concrete

Concrete dry batched at a batch plant and mixed in a truck mixer en route to a construction site.

placement

The process of depositing and consolidating freshly mixed concrete in a form or in the final position where it is to harden.

direct placement

The discharging of freshly mixed concrete directly into a form from a concrete mixer, buggy, or crane bucket.

free fall

The descent of freshly mixed concrete into a form without the aid of a drop chute.

drop chute

A chute for containing and directing a falling stream of freshly mixed concrete so as not to cause segregation.

chute

An inclined trough or tube for conveying free-flowing materials to a lower level by gravity.

agitator truck

A truck equipped with a rotating drum to prevent segregation or loss of plasticity of the ready-mixed concrete being delivered to a construction site.

truck mixer

A truck equipped with a rotating drum and a separate water tank for mixing concrete en route to a construction site.

concrete mixer

A machine having a revolving drum, often motor-driven, for mixing cement, aggregate, and water to produce concrete.

buggy

A cart, often motor-driven, for transporting heavy materials, as freshly mixed concrete, for short distances at a construction site.

pneumatic placement

The delivery of concrete, slurry, or plaster by a pipeline or hose to the point of placement on a construction site, either in a plastic state for depositing in place or for spraying, or in a dry state with water added at the nozzle from which it is sprayed.

Gunite

A lightweight concrete construction consisting of a mixture of cement, sand or crushed slag, and water, pumped through a hose and sprayed at high velocity over reinforcement until the desired thickness is reached. Also called shotcrete.

consolidation

The process of eliminating voids other than entrained air within newly placed concrete and ensuring close contact of the concrete with form surfaces and embedded reinforcement.

spading

Consolidation of newly placed concrete by the repeated insertions and withdrawals of a flat, spadelike tool.

rodding

Consolidation of newly placed concrete by the repeated insertions and withdrawals of a rod.

vibration

Consolidation of newly placed concrete by the moderately high-frequency oscillations of a vibrator.

vibrator

An electric or pneumatic oscillating tool for agitating and consolidating newly placed concrete.

segregation

The separation of coarse aggregate from the mortar or of water from the other ingredients of freshly mixed concrete, resulting from excessive horizontal movement or free fall of the mix, or from overvibration after placement.

stratification








The separation of an excessively wet or overvibrated concrete mix into horizontal layers with increasingly lighter material migrating toward the top.

bleeding

The emergence of excess mixing water on the surface of newly placed concrete, caused by settlement of solids within the mass. Also called water gain.

laitance

A milky deposit containing cement and aggregate fines on the surface of new concrete, caused by the bleeding of excess mixing water, overworking of the mix, or improper finishing.

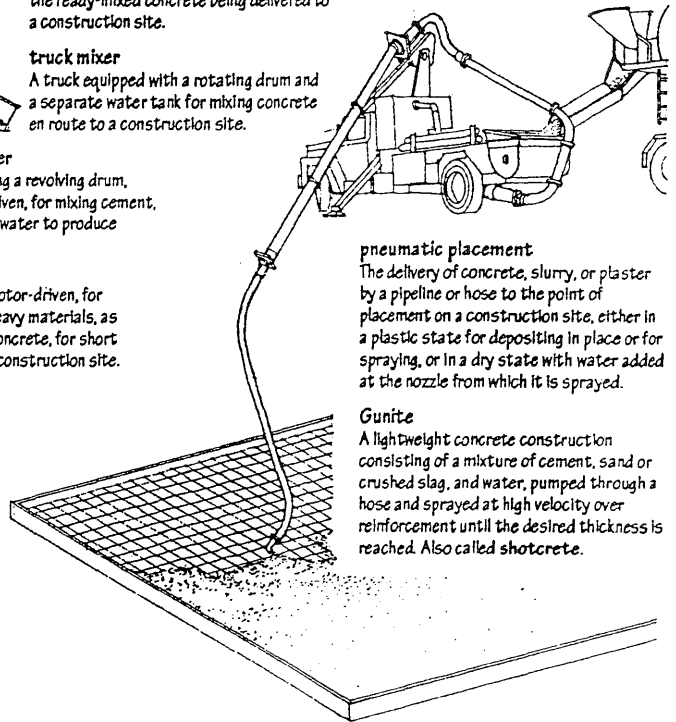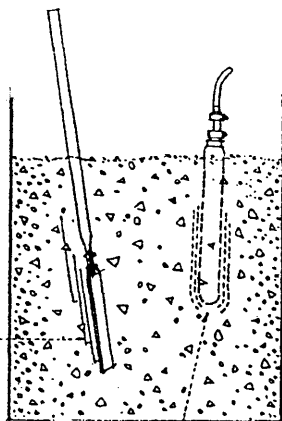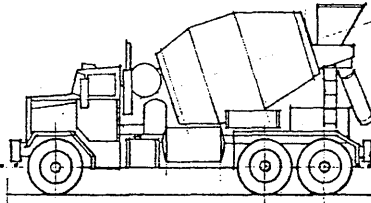

finishing

The process of leveling, smoothing, compacting, and treating a newly placed concrete surface to produce the desired texture and appearance.

screed

A wooden or metal straightedge drawn over a newly placed concrete slab to bring it to proper level.

screed

A firmly established grade strip or edge form serving as a guide for making a true level surface on a newly placed concrete slab.

float

A flat tool for spreading and smoothing a fresh concrete, stucco, or plaster surface.

bull float

A float having a large, flat blade attached to a long handle.

trowel

Any of various flat-bladed hand tools for applying, spreading, working, or smoothing plastic material, as concrete, mortar, and plaster.

power trowel

A portable machine having steel trowels mounted on radial arms that rotate about a vertical shaft to smooth, compact, and finish a fresh concrete surface.

edger

A trowel having a long, curved lip for rounding the edges of a fresh concrete slab as it begins to set.

pavement saw

A wheel-mounted, rotary power saw equipped with a silicon-carbide or diamond blade for cutting a control joint in a hardened concrete slab.

set

The assumption of a rigid or hard state by concrete, mortar, plaster, or glue due to a physical or chemical change.

cure

To maintain newly placed concrete or mortar at the required temperature and humidity for the first seven days following placement, casting, or finishing to ensure satisfactory hydration of the cementitious materials and proper hardening.

heat of hydration

The heat generated by the process of hydration, as during the setting and curing of a concrete mix.

hydration

The process in which a substance combines chemically with water, as that occurring when cement is mixed with water.

darby

A long wooden or metal straightedge for smoothing a fresh concrete surface immediately after screeding.

dry-shake finish

A colored finish produced by sprinkling a dry mixture of cement, sand, and a pigment on a fresh concrete surface following screeding and after any free water has evaporated, and then working the mixture into the surface with a float.

float finish

A fine-textured finish obtained by smoothing a fresh concrete, plaster, or stucco surface with a wood float.

broom finish

A striated finish obtained by stroking a broom or stiff brush over a freshly troweled concrete surface.

trowel finish

A dense, smooth finish obtained by working a fresh concrete or plaster surface with a steel trowel.

swirl finish

A textured finish given to a fresh plaster or concrete surface by troweling with a circular, overlapping motion.

architectural concrete

Exposed concrete work requiring special care in the selection of materials, forming, placing, and finishing to acquire the desired appearance.

béton brut

Concrete left in its natural state after formwork is removed, esp. when the concrete surface reflects the texture, joints, and fasteners of a board form.

exposed aggregate finish

A decorative finish produced by sandblasting, etching with an acid, or scrubbing a concrete surface after the initial set in order to remove the outer layer of cement paste and expose the aggregate.

bushhammered finish

A coarse-textured finish obtained by fracturing a concrete or stone surface with a power-driven hammer having a rectangular head with a corrugated, serrated, or toothed face.

honeycomb

Voids on a formed concrete surface, caused by segregation during placement or by insufficient consolidation.

spalling

The chipping or scaling of a hardened concrete or masonry surface caused by freeze-thaw cycles or the application of deicing salts. Also called scaling.

crazing

Numerous hairline cracks occurring in the surface of a newly hardened concrete slab as a result of rapid drying shrinkage.

drying shrinkage



A reduction in volume of concrete, mortar, or plaster caused by a loss of moisture.

setting shrinkage


A reduction in volume of concrete prior to its final set, caused by hydration of the cement paste.

CONSTRUCTION

The art, science, or business of building.

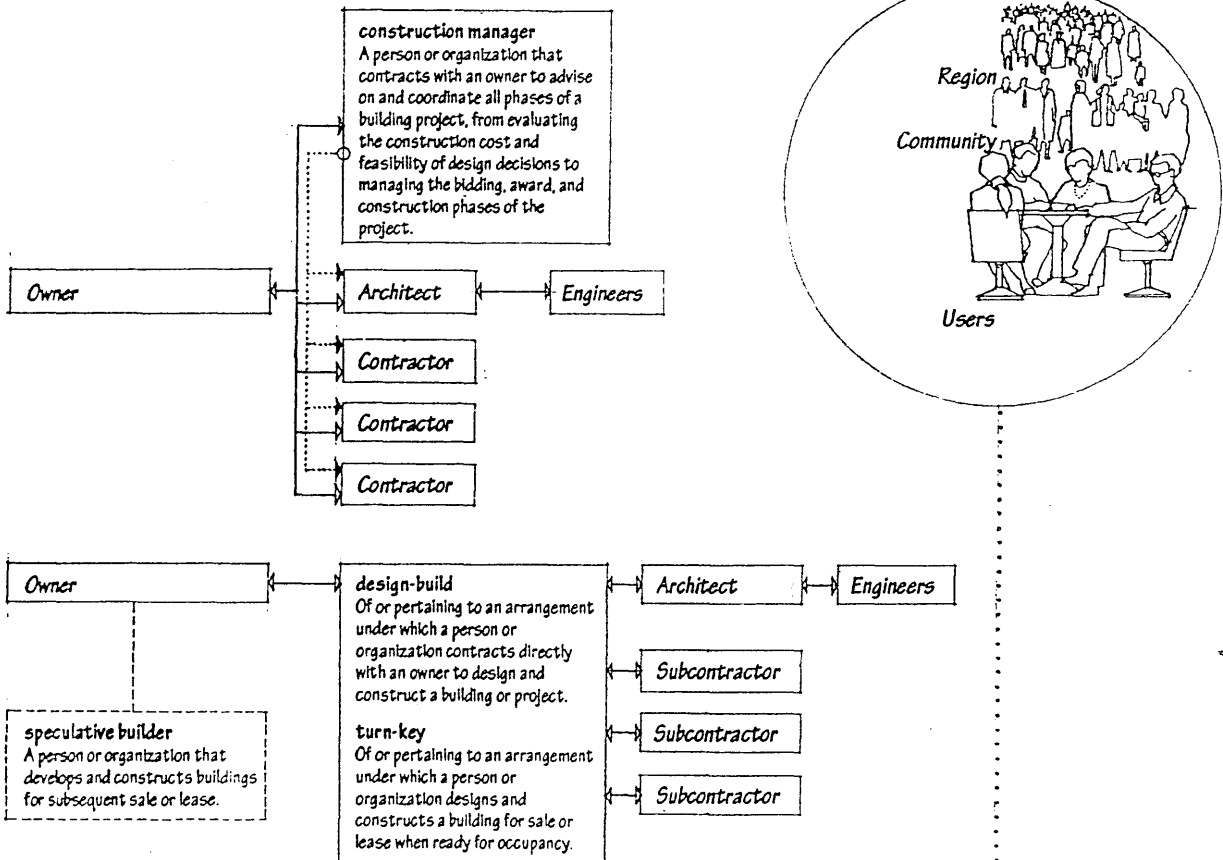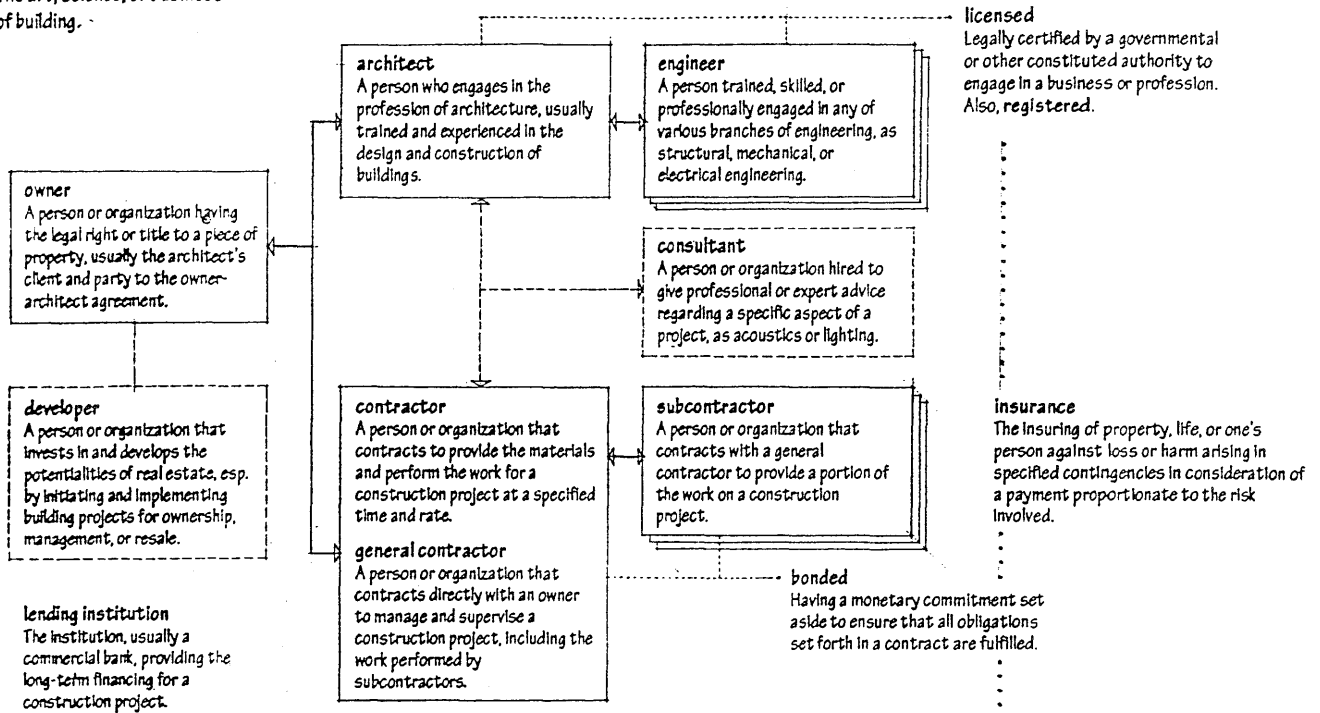

The process of building, from site preparation through erection, assembly, and finishing operations.

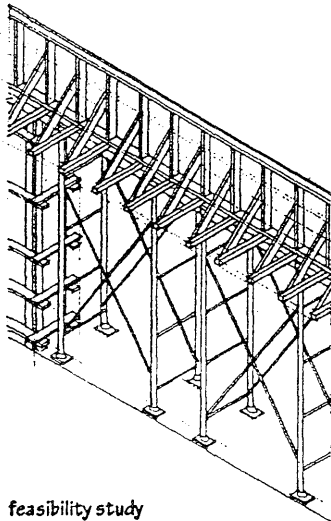


top out
To install the highest structural member in a construction or complete the uppermost course in a masonry wall.

falsework
The temporary framework for supporting a structure under construction that is not yet capable of supporting itself.

scaffold
A temporary structure or platform for supporting workers and materials at a height above the floor or ground during the construction or repair of a building. Also called staging.

feasibility study
A detailed investigation and analysis conducted to determine the financial, technical, or other advisability of a proposed construction project.

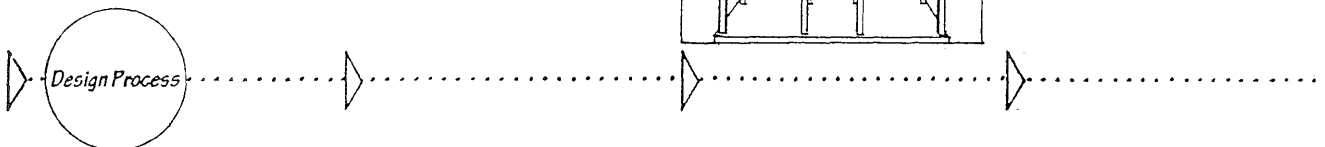

bidding
The competitive process of offering to perform the work described in a contract for a specified sum.

award
A formal acceptance of a bid or a negotiated proposal.


contract
A legally enforceable agreement, usually in written form, between two or more parties to do or not to do something specified.

notice to proceed
A written communication issued by an owner authorizing a contractor to proceed with the work and establishing the date of commencement of the work.

building permit
A written authorization to proceed with construction of a building project in accordance with approved drawings and specifications, issued by the local government agency having jurisdiction after plans have been filed and reviewed.

building official
A person designated by a governmental authority to administer and enforce the provisions of a building code.

erect
To construct by the raising, positioning, fitting together, and fastening of materials or parts.




certificate of occupancy
A document issued by a building official certifying that all or a designated portion of a building complies with the provisions of the building code, and permitting occupancy for its designated use.

postoccupancy evaluation
The process of diagnosing the technical, functional and behavioral aspects of a completed building in order to accumulate information for future programming and design activities.

fast-track
Of or pertaining to project scheduling in which the design and construction phases of a building project overlap to compress the total time required for completion.

CPM
Critical Path Method: a method for planning, scheduling, and managing a project, combining all relevant information into a flow chart, including the optimum sequence and duration of activities, the relative significance of each event, and the coordination required for timely completion of the project.

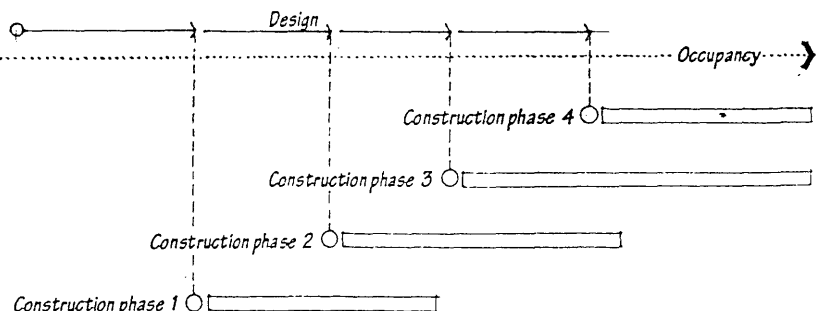

CONSTRUCTION

The manner in which materials are ordered, assembled, and united into a whole, as frame construction.

systems building

A construction process using a high degree of prefabrication in the manufacture of standardized units or components to speed assembly and erection of a building. Also called industrialized building.

panel

A prefabricated section of a floor, wall, ceiling, or roof, handled as a single unit in the assembly and erection of a building.

sandwich panel

A structural panel consisting of a core of relatively light material enclosed between two sheets of a high-strength material, generally resulting in a high stiffness-to-weight ratio.

stressed-skin panel


A structural panel consisting of plywood facings glued to lumber stringers, used as floor, roof, or wall member subject to bending. The plywood facings and stringers act as a series of I-beams with the plywood resisting nearly all of the bending stresses. Cross bracing may be placed to support the edges of the skin and to help distribute concentrated loads.

prefabricate

To fabricate or manufacture beforehand, esp. in standardized units or components for quick assembly and erection.

fabricate

To construct by assembling diverse and usually standardized parts.

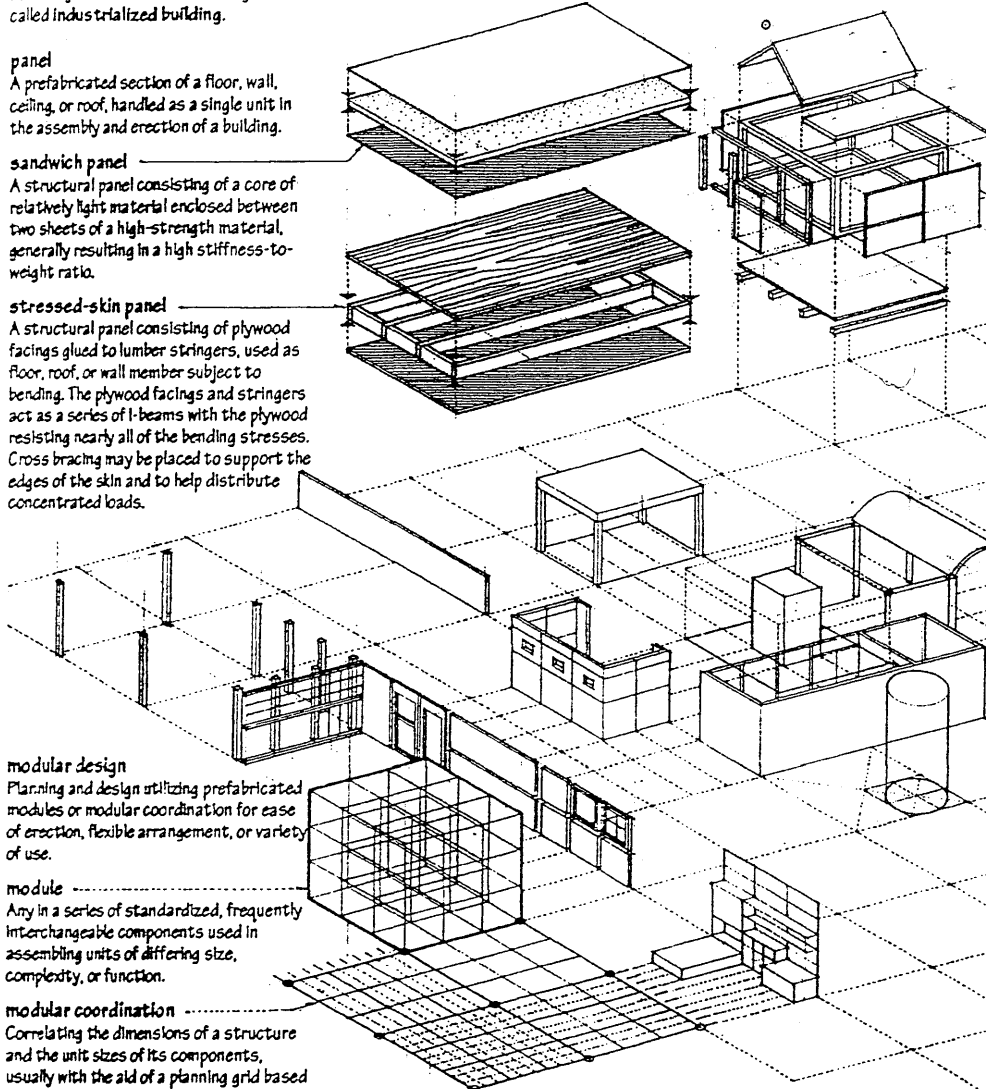

modular design


Planning and design utilizing prefabricated modules or modular coordination for ease of erection, flexible arrangement, or variety of use.

module

Any in a series of standardized, frequently interchangeable components used in assembling units of differing size, complexity, or function.


modular coordination

Correlating the dimensions of a structure and the unit sizes of its components, usually with the aid of a planning grid based on a 4-inch or 100-mm cubical module.



lift-slab construction

A technique of constructing multistory buildings in which all horizontal slabs are cast at ground level and, when cured, are raised into position by hydraulic jacks.

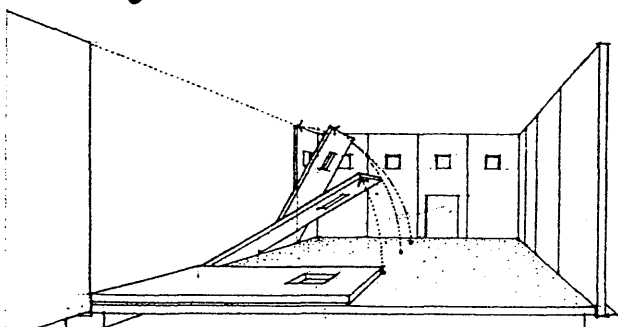

tilt-up construction

A method of casting reinforced concrete wall panels on site in a horizontal position, then tilting them up into their final position.

contract documents

The legal documents comprising a construction contract, including the owner-contractor agreement, conditions of the contract, and the construction drawings and specifications for the project, including all addenda, modifications, and any other items stipulated as being specifically included.

construction documents

The construction drawings and specifications setting forth in detail the requirements for the construction of a project.

specifications

The part of the contract documents consisting of a detailed description of the technical nature of the materials, standards, and quality of execution of the work to be placed under contract.

uniform system

A format developed by the Construction Specifications Institute for coordinating specifications, filling of technical data and product literature, and construction cost accounting, organized into 16 divisions based on an interrelationship of material, trade, or function. Also called Masterformat.

Division 1 General Requirements

Division 2 Sitework

Division 3 Concrete

Division 4 Masonry

Division 5 Metals

Division 6 Wood & Plastics

Division 7 Thermal & Moisture Protection

Division 8 Doors & Windows

Division 9 Finishes

Division 10 Specialties

Division 11 Equipment

Division 12 Furnishings

Division 13 Special Construction

Division 14 Conveying Systems

Division 15 Mechanical

Division 16 Electrical

performance specification

A specification that stipulates how a particular component or system must perform without giving the means to be employed to achieve the results.

descriptive specification

A specification that stipulates the exact quantities and qualities of materials to be furnished and how they are to be assembled in a construction.

reference specification

A specification that refers to a standard specification to indicate the properties desired in a material or component and the methods of testing required to substantiate the performance of products.

proprietary specification

A specification that stipulates the use of specific products, systems, or processes without provision for substitution.

building code

A code regulating the design, construction, alteration, and repair of buildings, adopted and enforced by a local government agency to protect the public safety, health, and welfare.

A building code generally establishes minimum standards for materials and methods of construction, specifications for structural and fire safety, and other requirements based on the type of construction and the occupancy of a building, often using standards established by the American Society for Testing and Materials (ASTM), the American National Standards Institute (ANSI), and various technical societies and trade associations.

model code

A building code developed by an organization of states, professional societies, and trade associations for adoption by local communities.

BOCA National Building Code

A building code developed and published by the Building Officials and Code Administrators International, Inc. (BOCA), and used primarily in the northeastern U.S.

Uniform Building Code

A building code developed and published by the International Conference of Building Officials (ICBO), and used primarily in the central and western U.S.

Standard Building Code

A building code developed and published by the Southern Building Code Conference (SBCC), and used primarily in the southeastern U.S.

energy code

A building code that sets minimum standards for energy conservation and the energy-efficient design of buildings.

Americans with Disabilities Act

An act of Congress that became law in 1992, establishing design standards and requirements for all buildings except single-family residences to ensure their accessibility by the physically disabled.

zoning ordinance

An ordinance regulating the division of land into zones, as to restrict the height, bulk, density, and use of buildings, and the provision of any ancillary facilities, as parking; a principal instrument in the implementation of a master plan. Also called zoning code.

restrictive covenant

A covenant with a clause that restricts the action of any party to it, as an agreement among property owners specifying the use to which a property can be put; racial and religious restrictions are legally unenforceable.

nonconforming


Of or pertaining to a material, type of construction, or occupancy or use not complying with the requirements set forth in a building code.

variance

An official permit to do something normally forbidden by regulations, esp. by building in a way or for a purpose normally forbidden by a building code or zoning ordinance.

noncombustible construction

Construction having a structure of steel, concrete or masonry, and walls, floors and a roof of noncombustible materials.

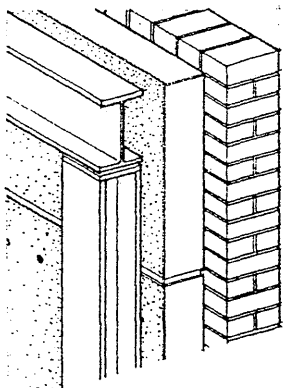


protected noncombustible construction

Noncombustible construction having a structure and major components with fire-resistance ratings at least equal to those specified by the appropriate authorities.

unprotected noncombustible construction

Noncombustible construction having no fire-resistance requirements except for fire walls and enclosures of fire exits and vertical shafts.




construction type

A classification of a building's construction according to the fire resistance of its major components: structural frame, exterior bearing and nonbearing walls, interior bearing walls, floors and ceilings, roofs, and enclosures of fire exits and vertical shafts. While each of the model codes differs in the detailed requirements for each construction type, they all limit the area and height of a building according to construction type and intended occupancy. Also called construction class.

combustible construction

Any construction that does not fulfill the requirements for noncombustible construction.

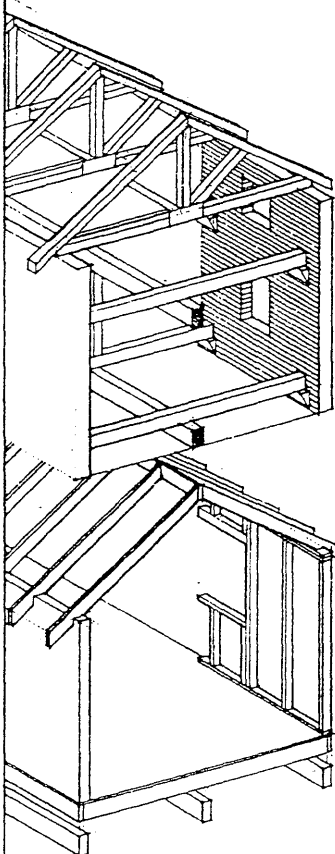

ordinary construction


A construction type having noncombustible exterior walls and an interior structure wholly or partly of light wood framing.

protected ordinary construction

Ordinary construction having a structure and major components with fire-resistance ratings at least equal to those specified by the appropriate authorities.

unprotected ordinary construction

Ordinary construction having no fire-resistance requirements for the interior structure except for fire walls and enclosures of fire exits and vertical shafts.

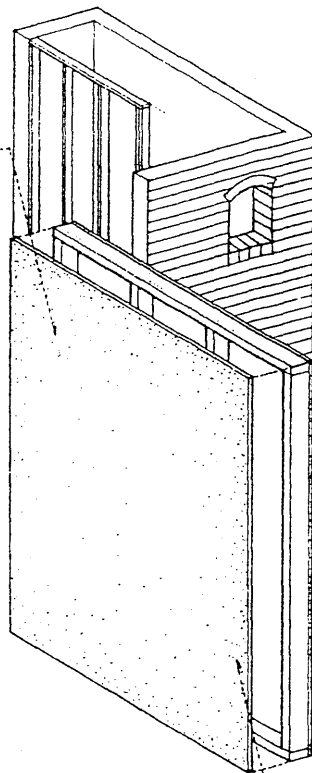

heavy-timber construction

A construction type having noncombustible exterior walls and an interior structure of timbers and decking of specified minimum sizes. Also called mill construction.



light wood frame construction

A construction type having a framework of wood members not meeting the requirements for heavy-timber construction.



protected light wood frame construction

Light wood frame construction having a structure and major components with fire-resistance ratings at least equal to those specified by the appropriate authorities.

unprotected light wood frame construction



Light wood frame construction having no fire-resistance requirements except for fire walls and enclosures of fire exits and vertical shafts.

DESIGN

The creation and organization of formal elements in a work of art.

form



The shape and structure of something as distinguished from its substance or material.

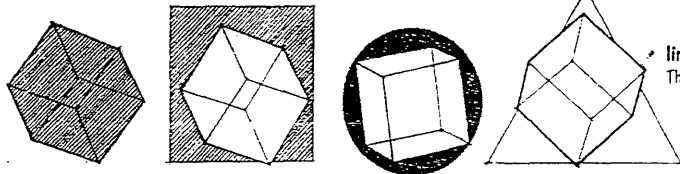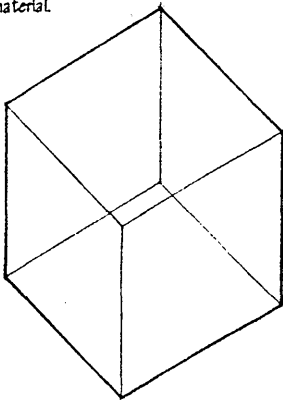

line
The edge or contour of a shape.

shape

The outline or surface configuration of a particular form or figure. While form usually refers to the principle that gives unity to a whole, and often includes a sense of mass or volume, shape suggests an outline with some emphasis on the enclosed area or mass.

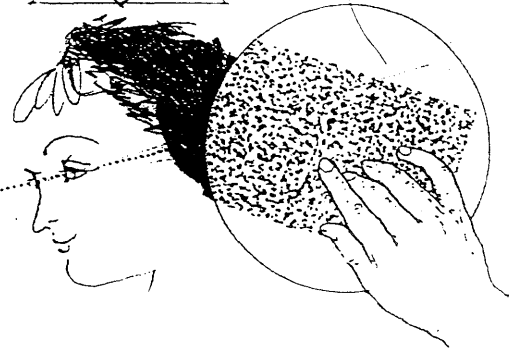

texture

The visual and esp. tactile quality of a surface, apart from its color or form.

visual texture

The apparent texture of a surface resulting from the combination and interrelation of colors and tonal values.

tactile texture

The physical, dimensional structure of a surface, apart from its color or form.

organic

Of or pertaining to shapes and forms having irregular contours which appear to resemble those of living plants or animals.

nonobjective





Of or pertaining to shapes and forms not representing natural or actual objects. Also, **nonrepresentational**.

geometric

Of or pertaining to shapes and forms which resemble or employ the simple rectilinear or curvilinear elements of geometry.

abstract

Of or pertaining to shapes and forms having an intellectual and affective content dependent solely on their intrinsic lines, colors, and relationship to one another.

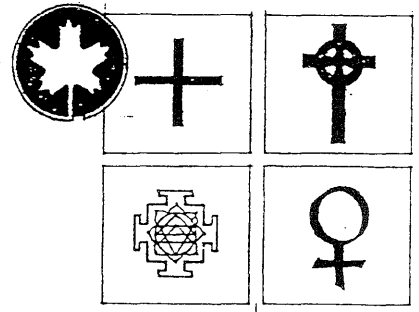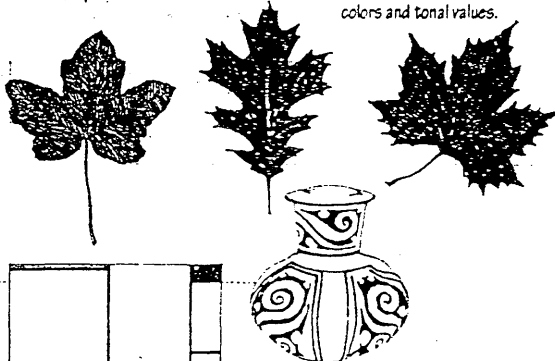

symbol


Something that stands for or represents something else by association, resemblance, or convention, deriving its meaning chiefly from the structure in which it appears.

sign

A mark or figure having a conventional meaning and used in place of a word or phrase to express a complex notion.

massing

A unified composition of two-dimensional shapes or three-dimensional volumes, esp. one that has or gives the impression of weight, density, and bulk.

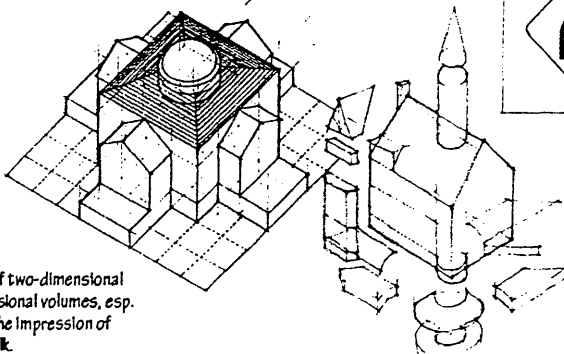


additive

Characterized or produced by addition, accumulation, or uniting, often resulting in a new identity.

subtractive

Characterized or produced by removal of a part or portion without destroying a sense of the whole.

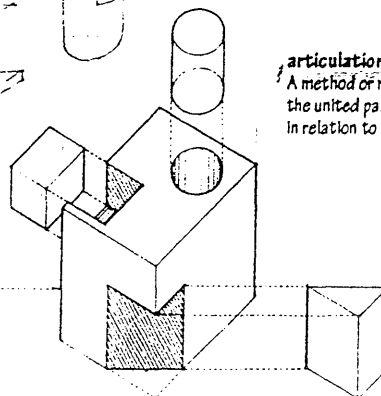

articulation

A method or manner of jointing that makes the united parts clear, distinct, and precise in relation to each other.

content

The significance or meaning of an artistic work, as distinguished from its form.

form

The manner of arranging and coordinating the parts of a composition so as to produce a coherent image.

organization

The systematic arranging of interdependent or coordinated parts into a coherent unity or functioning whole.

detail

An individual, minute, or subordinate part of a whole.

structure


The organization of elements or parts in a complex system as dominated by the general character of the whole.

texture


The characteristic structure given to a surface or substance by the size, shape, arrangement, and proportions of the parts.

fabric

An underlying framework or structure of connected parts.

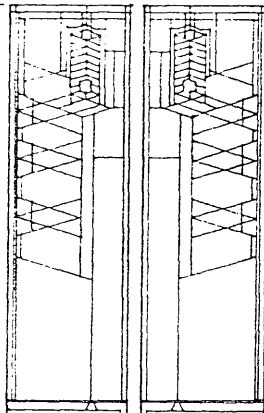**pattern**

An artistic or decorative design, esp. one having a characteristic arrangement and considered as a unit, of which an idea can be given by a fragment.

**parti**


The basic scheme or concept for an architectural design, represented by a diagram.

diagram

A drawing, not necessarily representational, that outlines, explains, or clarifies the arrangement and relations of the parts of a whole.

composition

The arranging of parts or elements into proper proportion or relation so as to form a unified whole.




DESIGN

design principle:

A fundamental and comprehensive concept of visual perception for structuring an aesthetic composition.

unity

The state or quality of being combined into one, as the ordering of elements in an artistic work that constitutes a harmonious whole or promotes a singleness of effect.



uniformity

The state or quality of being identical, homogeneous, or regular.

homogeneous


Uniform in structure throughout or composed of parts that are all of the same nature or kind.

regular

Uniformly or evenly formed or arranged.

monotony

The state or quality of lacking variety.



variety

The state or quality of having varied or diverse forms, types, or characteristics.

emphasis

Stress or prominence given to an element of a composition by means of contrast, anomaly, or counterpoint.

contrast

Opposition or juxtaposition of dissimilar elements in a work of art to intensify each element's properties and produce a more dynamic expressiveness.

anomaly

A deviation from the normal or expected form, order, or arrangement.

point


The major idea, essential part, or salient feature of a narrative or concept.

salient

Prominent or conspicuous.

order

A condition of logical, harmonious, or comprehensible arrangement in which each element of a group is properly disposed with reference to other elements and to its purpose.



harmony

The orderly, pleasing, or congruent arrangement of the elements or parts in an artistic whole.

repose

Harmony in the arrangement of parts or colors that is restful to the eye.

coherent

Logically or aesthetically ordered or integrated to afford comprehension or recognition.

agreement

Correspondence in shape, size, or color among the elements in a work of art.

similarity

The state or quality of being alike in substance, essentials, or characteristics.

proximity


Nearness in place, order, or relation.

continuity

The state or quality of being continuous, as a line, edge, or direction.

alignment

Arrangement in or adjustment according to a straight line.

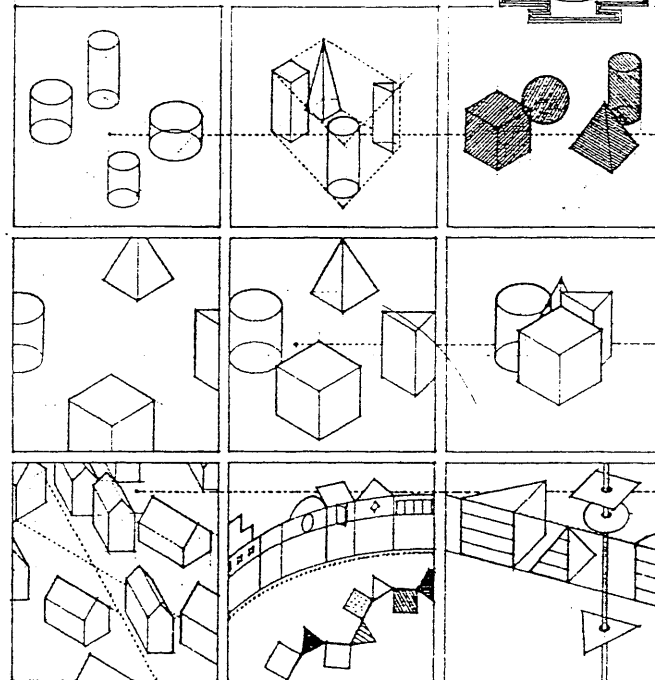


complexity

The state or quality of being a whole composed of complicated, intricate, or interconnected parts.

collage

An artistic composition of often diverse elements in unlikely or unexpected juxtaposition.

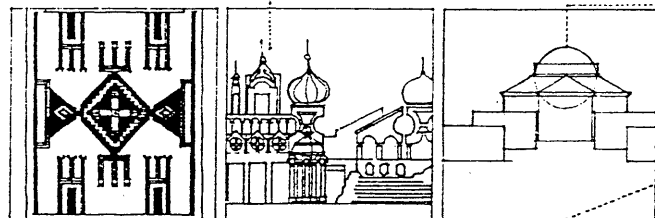

hierarchy


A system of elements ranked, classified, and organized one above another, according to importance or significance.

opposition

The state or position of being placed opposite another, or of lying in corresponding positions from an intervening space or object.


juxtaposition

The state or position of being placed close together or side by side, so as to permit comparison or contrast.

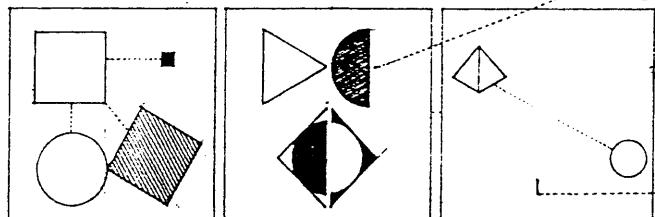

tension

A tenuous balance maintained in an artistic work between opposing forces or elements, often causing anxiety or excitement.

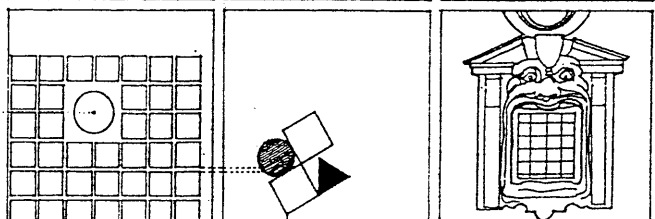


counterpoint

A parallel but contrasting element or theme in a narrative or concept.

chaos

A state of utter disorder or confusion.



equilibrium
A state of rest or balance between contrasting elements or opposing forces.

equipoise
An equal distribution of weight, relationship, or forces.

counterpoise
A counterbalancing weight or force.

balance
The pleasing or harmonious arrangement or proportion of parts or elements in a design or composition.

symmetry
The exact correspondence in size, form, and arrangement of parts on opposite sides of a dividing line or plane, or about a center or axis.

bilateral symmetry
Symmetry resulting from the arrangement of similar parts on opposite sides of a median axis.

radial symmetry
Symmetry resulting from the arrangement of similar, radiating parts about a center point or central axis.

local symmetry
A symmetrical condition occurring in one part of a design, often serving to center an irregular pattern.

axis
A straight line to which elements in a composition are referred for measurement or symmetry.

axis of symmetry
An imaginary line about which a figure, body, or composition is symmetrical.

movement
The rhythmic quality or character of a composition suggesting motion by represented gestures or by the relationship of structural elements.

direction
The line along which something is moving, pointing, or facing, with reference to the point toward which it is directed.












rhythm
Movement characterized by a patterned repetition or alternation of formal elements or motifs in the same or a modified form.

repetition
The act or process of repeating formal elements or motifs in a design.

interval
A space between two objects, points, or states.

gradation
A process or change taking place by degrees or through a series of gradual, successive stages.

concatenation
A series of linked or interconnected things or events.

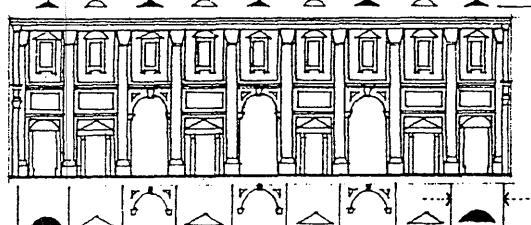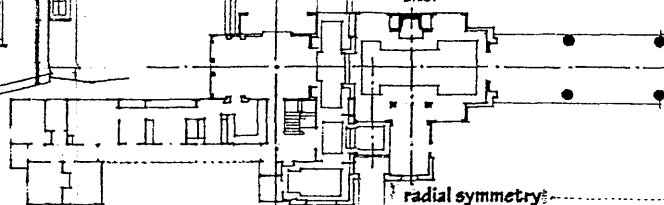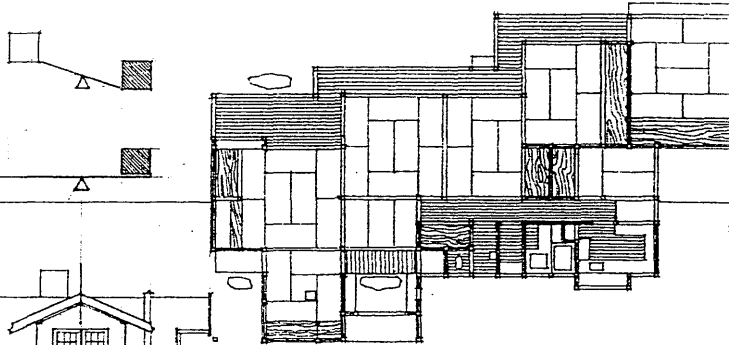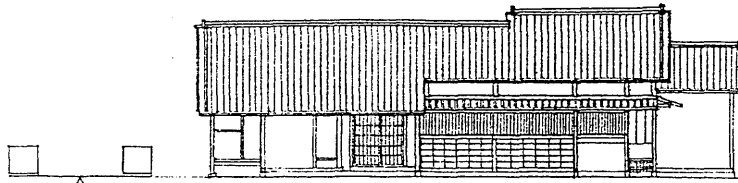

DESIGN

proportion

The comparative, proper, or harmonious relation of one part to another or to the whole with respect to magnitude, quantity, or degree.


$$A/B = B/A+B$$

proportions

The equality between two ratios in which the first of the four terms divided by the second equals the third divided by the fourth.


golden section

A proportion between the two dimensions of a plane figure or the two divisions of a line, in which the ratio of the smaller to the larger is the same as the ratio of the larger to the whole: a ratio of approximately 0.618 to 1.000. Also called **golden mean**.

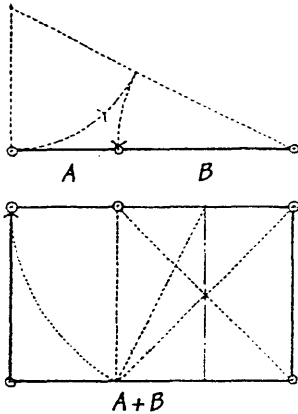


eurythmy

Harmony of proportion or movement.



ratio
Relation in magnitude, quantity, or degree between two or more similar things.

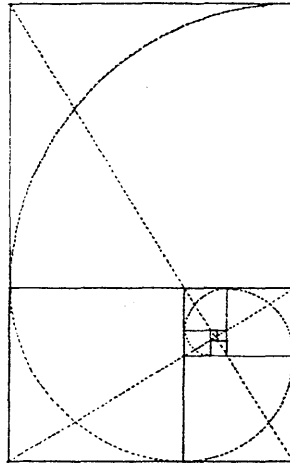

1, 1, 2, 3, 5, 8, 13, 21...

1/1, 1/2, 2/3, 3/5, 5/8, 8/13...

Fibonacci series

The unending sequence of numbers where the first two terms are 1 and 1, and each succeeding term is the sum of the two immediately preceding. Also called **Fibonacci sequence**.


harmonic series

A series in which the terms are in harmonic progression.

1, 1/3, 1/5, 1/7, 1/9

harmonic progression

A sequence of numbers the reciprocals of which form an arithmetic progression.

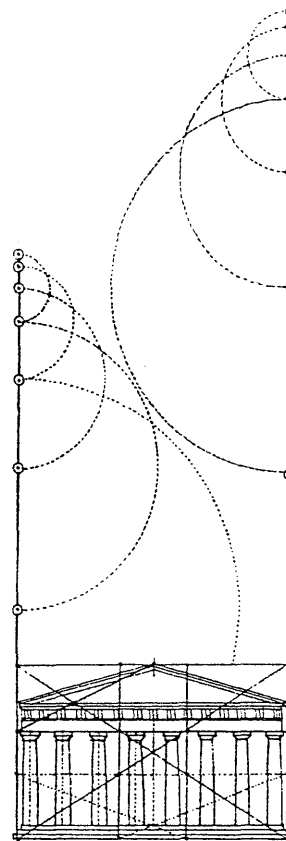


scale

A certain proportionate size, extent, or degree, usually judged in relation to some standard or point of reference.



human scale

The size or proportion of a building element or space, or an article of furniture, relative to the structural or functional dimensions of the human body.



module

A unit of measurement used for standardizing the dimensions of building materials or regulating the proportions of an architectural composition.

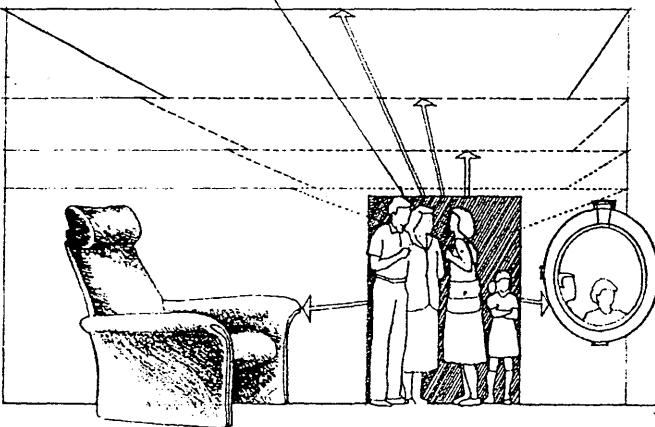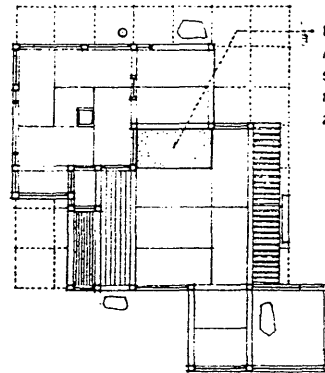


mechanical scale

The size or proportion of something relative to an accepted standard of measurement.

visual scale

The size or proportion a building element appears to have relative to other elements or components of known or assumed size.

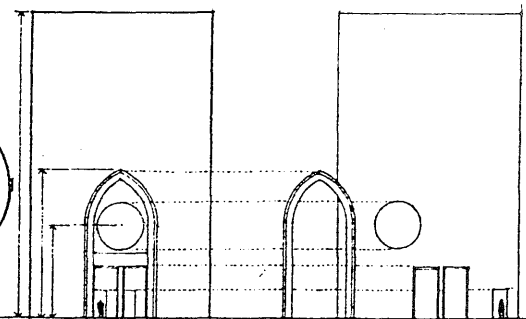


structural dimension


Any of the dimensions of the human body and its parts.

functional dimension



Any of the dimensions determined by bodily position and movement, as reach, stride, or clearance.

**static fit**

The correspondence between the size and posture of a human body and a building element or article of furniture.

**barrier-free**

Of or pertaining to spaces, buildings, and facilities fully accessible and usable by all people, including the physically handicapped.

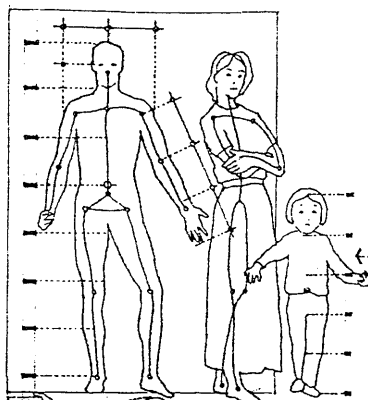**ergonomics**


An applied science concerned with the characteristics of people that need to be considered in the design of devices and systems in order that people and things will interact effectively and safely. Also called **human engineering**.

anthropometry

The measurement and study of the size and proportions of the human body.

anthropomorphize

To ascribe human form or characteristics to nonhuman things or beings.

**dynamic fit**

The correspondence between the sensory experience of bodily presence and movement and the size, shape, and proportion of a space.

**kinesthesia**


The sensory experience of bodily position, presence, or movement derived chiefly from stimulation of nerve endings in muscles, tendons, and joints. Also, **kinaesthesia**, **kinesthesia**.

haptic



Relating to or based on the sense of touch.

**olfactory**


Relating to or based on the sense of smell.



access
The ability, freedom, or permission to approach, enter, or use.

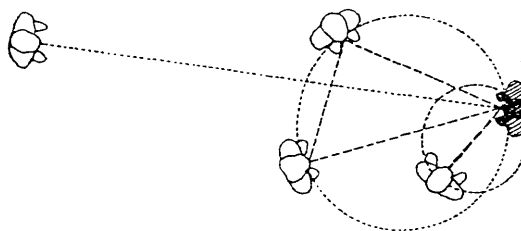**proxemics**

The study of the symbolic and communicative role of the spatial separation individuals maintain in various social and interpersonal situations, and how the nature and degree of this spatial arrangement relates to environmental and cultural factors.

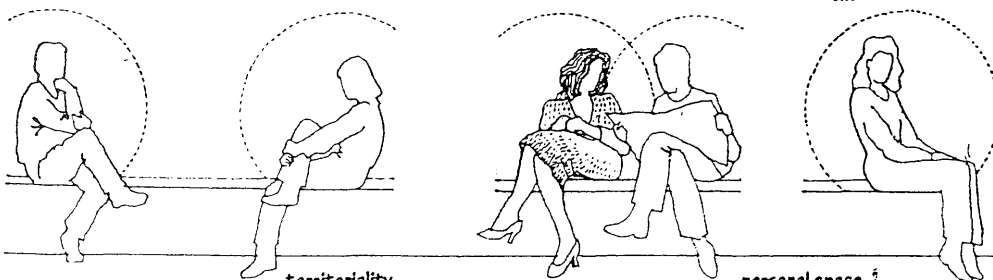**territoriality**

The pattern of behavior associated with defining and defending a territory or domain.

personal space

The variable and subjective distance at which one person feels comfortable talking to another. Also called **personal distance**.



DESIGN

design

To conceive, contrive, or devise the form and structure of a building or other construction.

design process

A purposeful activity aimed at devising a plan for changing an existing situation into a future preferred state, esp. the cyclical, iterative process comprising the following phases.

process

A systematic series of actions or operations leading or directed to a particular end.

phase

A particular stage in a process of change or development.

program

A procedure for solving a problem, as a statement setting forth the context, conditions, requirements, and objectives for a design project.

initiation

Identifying a problem and its social, economic, and physical context.

preparation

Collecting and analyzing relevant information and establishing goals and criteria for an acceptable solution.

synthesis

Discovering constraints and opportunities, and hypothesizing possible alternative solutions.

hypothesis

Formulating a tentative assumption in order to draw out and test its logical or empirical consequences.

alternative

One of the propositions or courses of action to be chosen from a set of two or more mutually exclusive possibilities.

analysis

Separating of a whole into its constituent parts or elements, esp. as a method of studying the nature of the whole and determining its essential features and their relations.

synthesis

Combining of separate, often diverse parts or elements so as to form a single or coherent whole.

develop

To work out, expand, or realize the capabilities or possibilities of so as to bring gradually to a fuller or more advanced or effective state.

modify

To change the form, character, or qualities of in order to give a new orientation to or to serve a new end.

refine

To improve or elaborate in order to make more fine or precise.

inflection

A bend, angle, or similar change in the shape of a configuration, by means of which a change of relationship to some context or condition is indicated.

transformation

The process of changing in form or structure through a series of discrete permutations and manipulations in response to a specific context or set of conditions without a loss of identity or concept.

draft

A preliminary version of a plan or design.

feedback

Evaluative information about an action or process prompting a return to a preceding phase for alteration or correction.

action

Selecting and implementing the most suitable solution.

evaluation

Simulating, testing, and modifying acceptable alternatives according to specified goals and criteria.

implement

To ensure the fulfillment of by means of a definite plan or procedure.

communicate

To express, convey, or interchange ideas, information, or the like by writing, speaking, or through a common system of signs or symbols, esp. in a way that is clearly and readily understood.

proposal

The offering of a plan for consideration, acceptance, or action.

select

To choose from a number of alternatives by fitness or preference.

judgment

The mental ability to perceive distinctions, comprehend relationships, or distinguish alternatives.

function

The natural or proper action for which something is designed, used, or exists.

purpose

The reason for which something exists or is done, made, or used.

amenity

Any feature that provides or increases comfort, convenience, or pleasure.

economy

Careful, thrifty, and efficient use and management of resources.

evaluate

To ascertain or assess the significance, worth, or quality of, usually by careful appraisal and study.

criterion

A standard, rule, or principle on which a judgment or decision may be based.

datum

An assumed, given, or otherwise determined fact or proposition from which conclusions may be drawn or decisions made.

simulate

To create a likeness or model of something anticipated for testing and evaluation.

model







A miniature representation, usually built to scale, to show the appearance or construction of something.


mock-up

A full-sized model of a building or structure, built accurately to scale for study, testing, or teaching.

test


To subject a system or process to such conditions or operations as will lead to a critical evaluation of abilities or performance and subsequent acceptance or rejection.



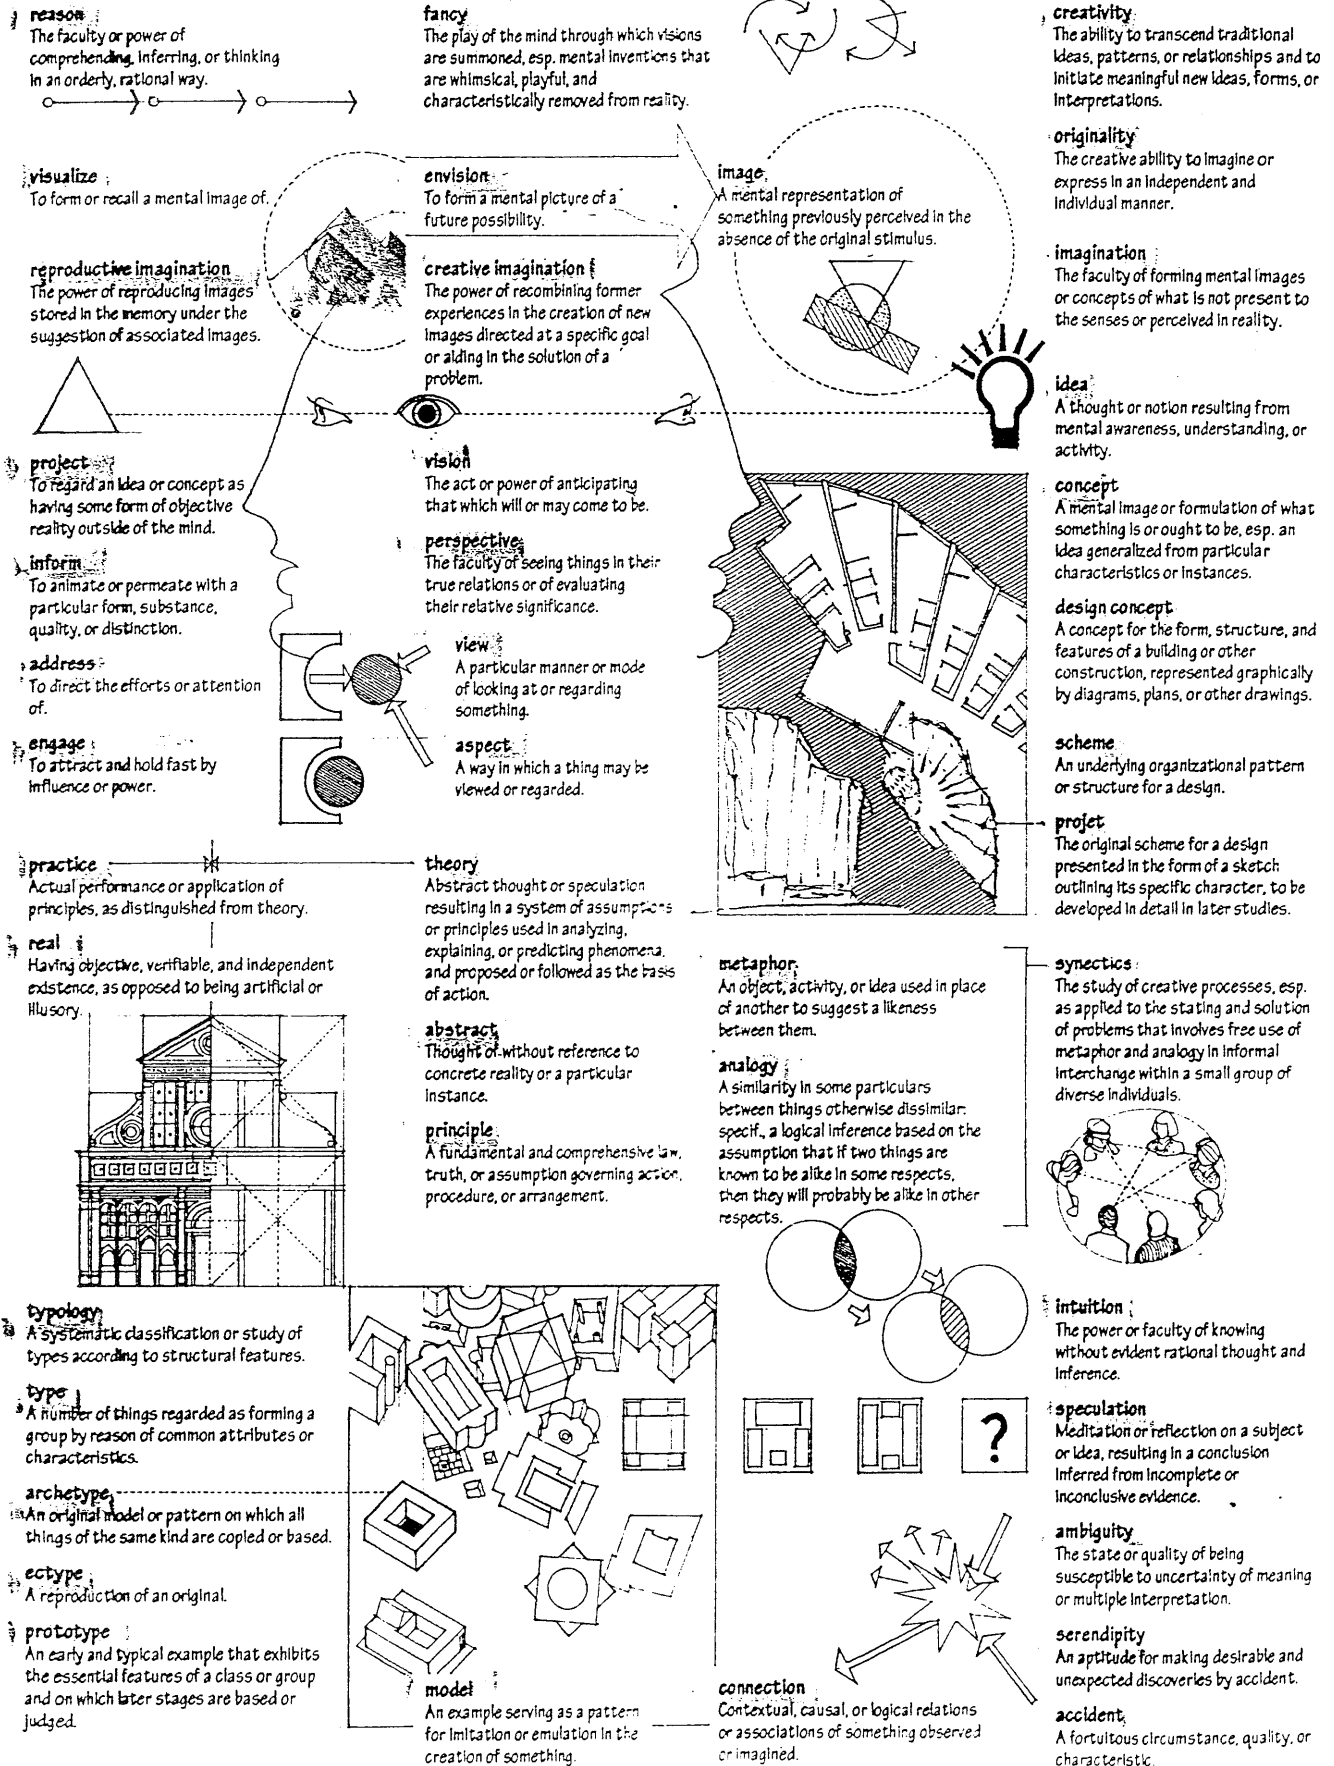


DOME

A vaulted structure having a circular plan and usually the form of a portion of a sphere, so constructed as to exert an equal thrust in all directions.

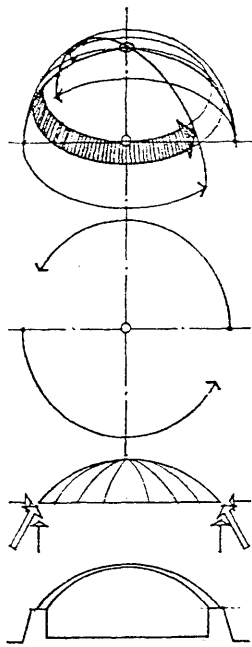

saucer dome

A dome having the form of a segment of a sphere, with its center well below the springing line. A saucer dome is particularly sensitive to buckling under an external load.

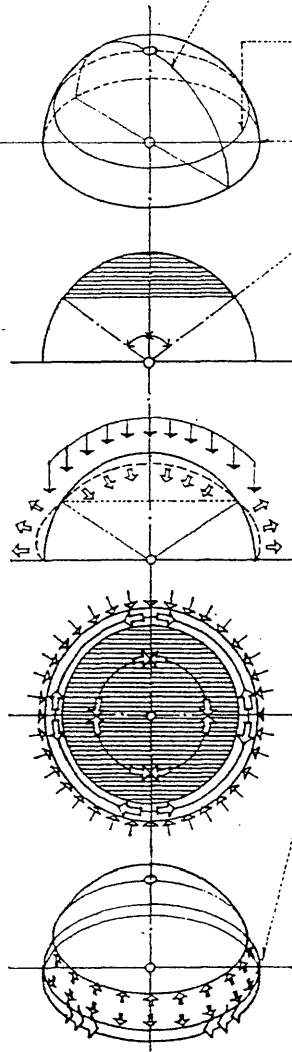

meridional line

A curved line describing a vertical section cut through the axis of a rotational surface.

hoop line

A circular line describing a horizontal section cut perpendicular to the axis of a rotational surface.

semicircular dome

A dome having the form of a hemisphere.

Transition from meridional to hoop forces occurs at an angle of from 45° to 60° from the vertical axis for most load conditions.

hoop force

A force acting along a hoop line of a dome structure, perpendicular to meridional forces. Hoop forces, which restrain the out-of-plane movement of the meridional strips in the shell of a dome, are compressive in the upper zone and tensile in the lower zone.

meridional force


A force acting along a meridional line of a dome structure, always compressive under full vertical loading.

tension ring

A ring encircling the base of a dome to contain the outward components of the meridional forces. In a concrete dome, this ring is thickened and reinforced to handle the bending stresses caused by the differing elastic deformations of the ring and shell.


great circle

The circle of greatest diameter that can be drawn on a sphere.

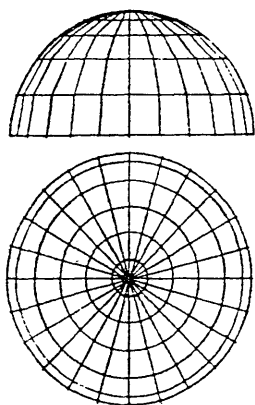


radial dome

A dome built with steel or timber trusses arranged in a radial manner and connected by polygonal rings at various heights.

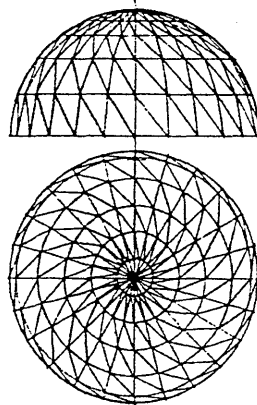


Schwedler dome

A steel dome having members which follow the lines of latitude and longitude, and a third set of diagonals completing the triangulation.

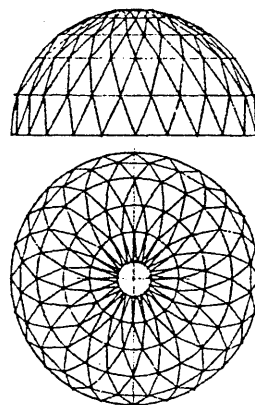


lattice dome

A steel dome structure having members which follow the circles of latitude, and two sets of diagonals replacing the lines of longitude and forming a series of isosceles triangles.

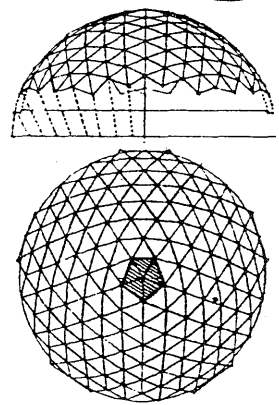



geodesic dome

A steel dome having members which follow three principal sets of great circles intersecting at 60° , subdividing the dome surface into a series of equilateral spherical triangles.

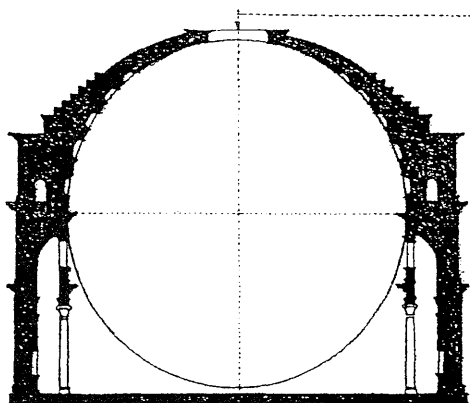

oculus

A circular opening, esp. one at the crown of a dome.




semidome

Half a dome formed by a vertical section, as over a semicircular apse.


cul-de-four

A semidome or quarter-sphere vault, as over an apse or niche.



pendentive

A spherical triangle forming the transition from the circular plan of a dome to the polygonal plan of its supporting structure.




lunette

An area in the plane of a wall framed by an arch or vault, containing a window, painting, or sculpture.


pendentive dome

A spherical dome formed by removing four segments so that it merges with its pendentives and sits on a square plan.



squinch

An arch or corbeling built across the upper inside corner of a square tower to support the side of a superimposed octagonal structure.



lantern

A superstructure crowning a roof or dome having open or windowed walls to let in light and air.

cupola

A light structure on a dome or roof, serving as a belfry, lantern, or belvedere.

tambour

The vertical part of a cupola.

interdome

The space between the inner and outer shells of a dome.


lucarne

A dormer window in a roof or spire.



whispering gallery

A space or gallery beneath a dome or vault in which low sounds produced at any of certain points are clearly audible at certain other distant points.

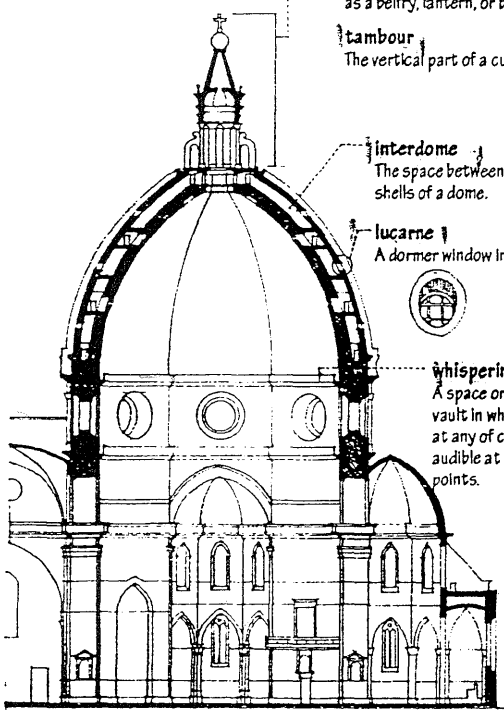


drum

A cylindrical or faceted construction, often pierced with windows, supporting a dome.

tholobate

The substructure supporting a dome or cupola.



bandage




A strap, ring, or chain placed around a structure to secure and hold its parts together, as around the springing of a dome.

DOOR

A hinged, sliding, or folding barrier of wood, metal, or glass for opening and closing an entrance to a building, room, or cabinet.

swinging door

A door that turns on hinges or pivots about a vertical edge when pushed or pulled.

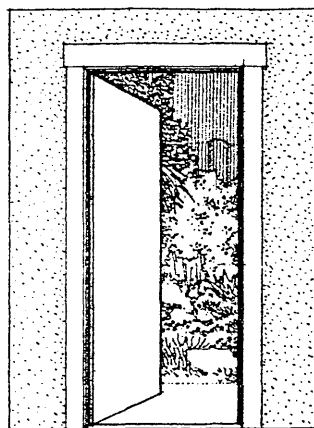

balanced door


A pivoted door that is partially counterbalanced for easier opening and closing.

automatic door

A door that opens automatically at the approach of a person or automobile.



pivoted door

A door carried on and swinging about on a center or offset pivot, as distinguished from one hung on hinges.



folding door

A door with hinged sections that can be folded flat against one another when opened.




sliding door

A door that operates or moves by sliding on a track, usually parallel to a wall.





rolling door

A large door consisting of horizontal, interlocking metal slats guided by a track on either side, opening by coiling about an overhead drum at the head of the door opening.




door opener

A mechanism that automatically opens a door when actuated by a radio transmitter, electric eye, or other device.

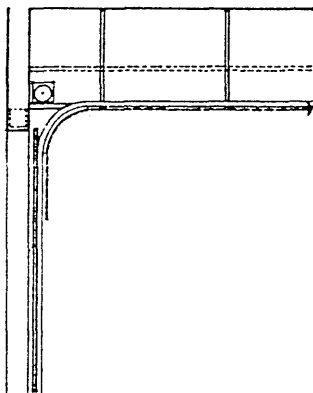


overhead door

A large door constructed of one or several leaves, opening by swinging or rolling up to a horizontal position above the door opening.




single-acting door

A door hung on hinges that permit it to swing in one direction only.



double-acting door

A door hung on hinges that permit it to swing in either direction from a closed position.




double doors

A pair of doors hung in the same doorframe.

leaf

A hinged or sliding section of a door or shutter.




active leaf

The leaf of a pair of double doors to which the latching or locking mechanism is attached. Also called opening leaf.

inactive leaf

The leaf of a pair of double doors to which the strike plate is fastened to receive the latch or bolt of the active leaf, usually fixed in a closed position by bolts at the top and bottom of the door. Also called standing leaf.




astragal

A molding attached to one or both meeting stiles of a pair of double doors to prevent drafts or the passage of light, noise, or smoke.

mullion

A slender vertical member dividing the opening for a pair of double doors, sometimes removable to permit the passage of large objects.



bifold door


A folding door that divides into two parts, the inner leaf of each part being hung from an overhead track and the outer leaf pivoted at the jamb.

accordion door

A multileafed door that is hung from an overhead track and opens by folding back in the manner of an accordion.

pocket door

A door that slides into and out of a recess in a doorway wall.

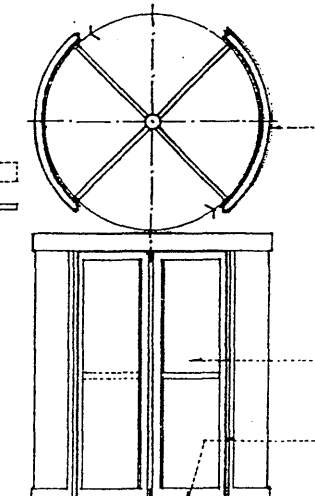

revolving door

An entrance door for excluding drafts from the interior of a building, consisting of four leaves set in the form of a cross and rotating about a central vertical pivot within a cylindrically shaped vestibule. Some revolving doors automatically fold back in the direction of egress when pressure is applied, providing a legal passageway on both sides of the door pivot.

wing


One of the leaves of a double or revolving door.

sweep

The flexible weatherstripping along the edges of a revolving door.

air curtain

A stream of compressed air directed downward across a doorway so as to form a shield to exclude drafts.

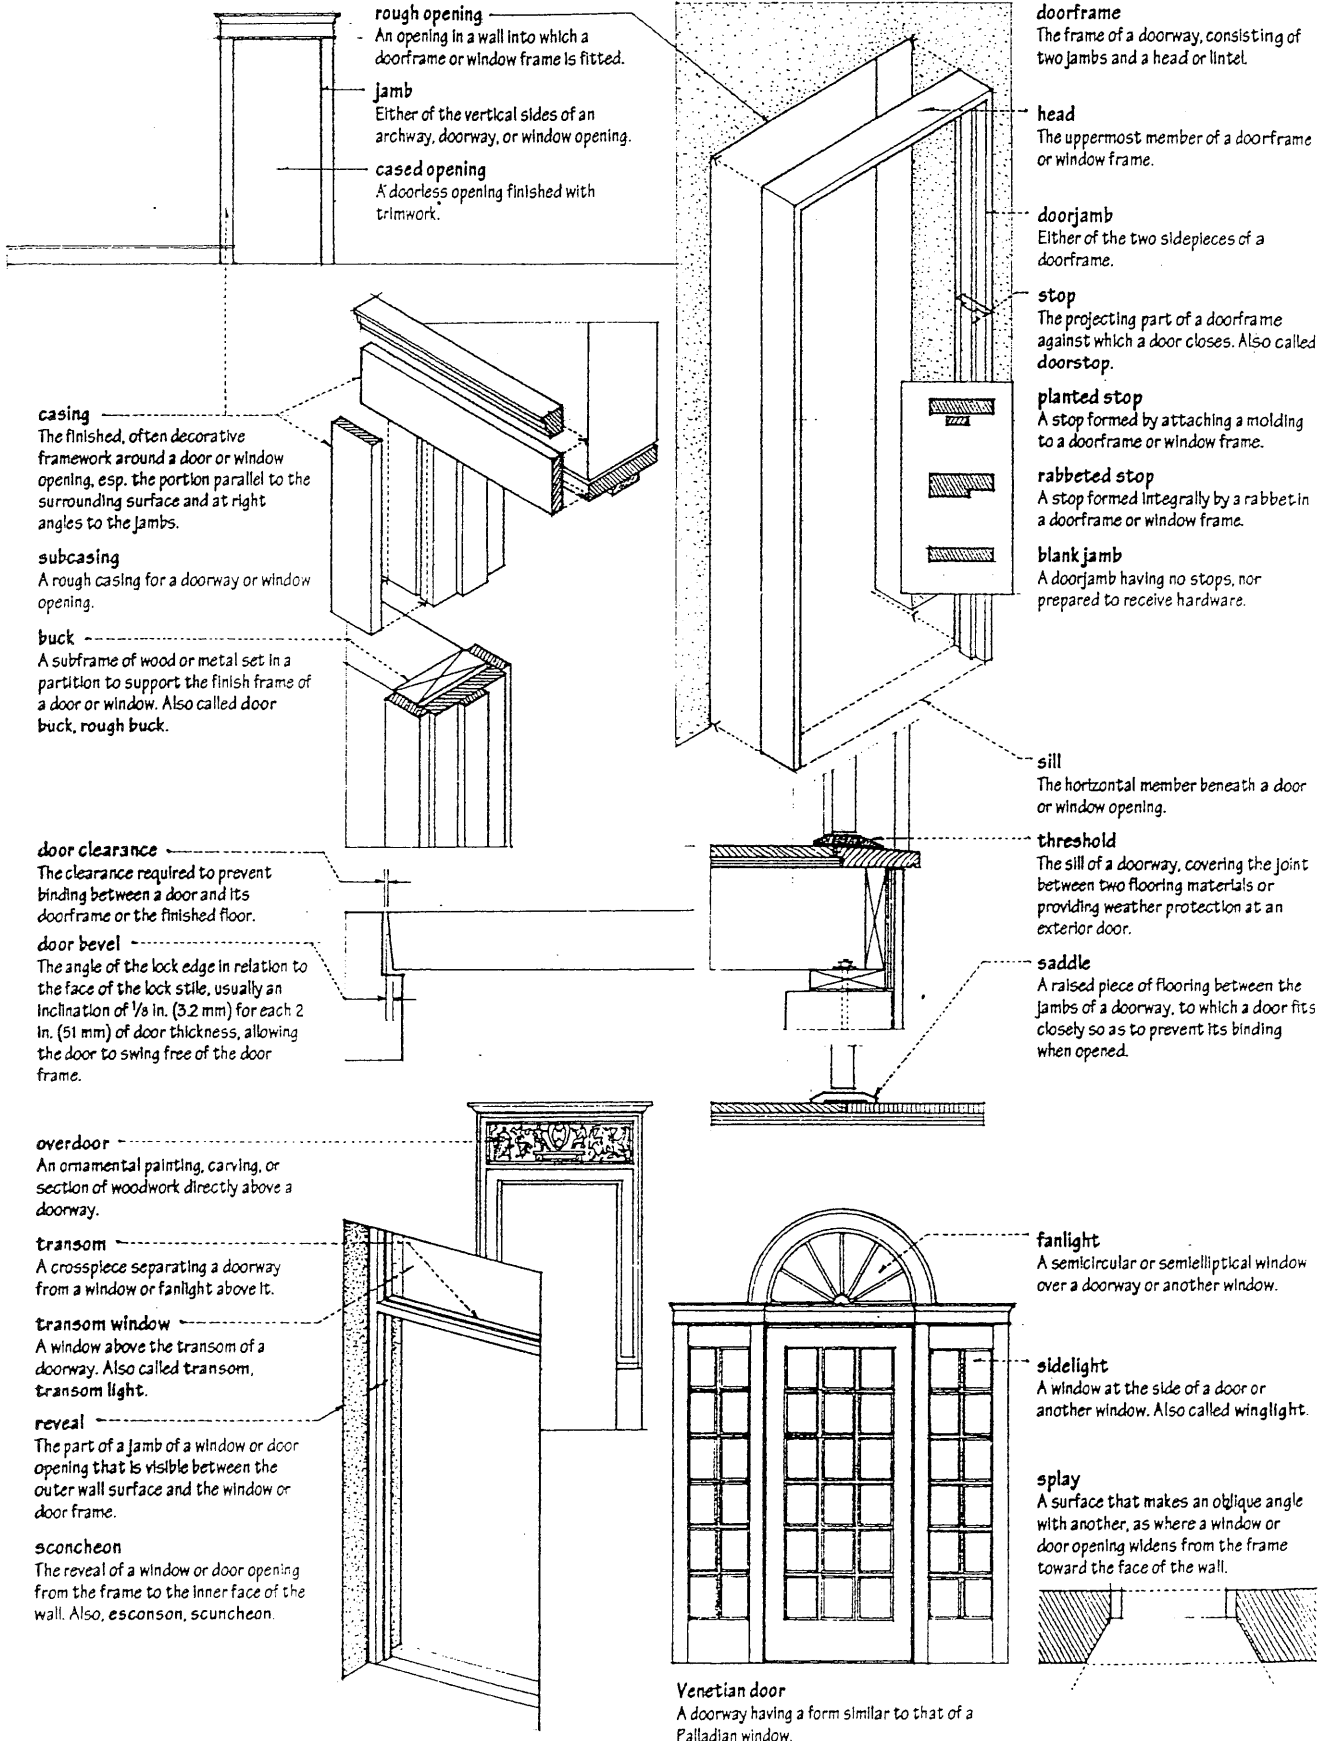

DOOR

paneled door

A door having a framework of stiles, rails, and sometimes muntins, filled with panels of a thinner material.

rail

Any of various horizontal members framing panels, as in a system of paneling, a paneled door, window sash, or chest of drawers.

top rail

The uppermost rail connecting the stiles of a paneled door or window sash.

lock rail

The rail of a door that meets the shutting stile at the level of the lockset.

bottom rail

The lowest rail connecting the stiles of a paneled door or window sash.

panel

A distinct section or division of a wall, ceiling, or door, recessed below or raised above the general level or enclosed by a frame.

stile

Any of various upright members framing panels, as in a system of paneling, a paneled door, window sash, or a chest of drawers.

hinge stile


The stile of a door by which it is hung. Also called hanging stile.

lock stile

The stile of a door that closes against the frame of the opening. Also called shutting stile.


muntin

A stile within the frame of a door.




meeting stile

One of the abutting stiles in a pair of double doors.




French door

A door having rectangular glass panes extending throughout its length, and often hung in pairs. Also called casement door.



louvered door

A door having a louvered opening for the passage or circulation of air. Also called blind door.




vision light

A small light in the upper portion of a door glazed with clear glass for viewing.

louver

An opening fitted with slanting, fixed or movable slats to admit air but exclude rain and snow or to provide privacy. Also, *louvre*.



storm door


An outer or supplementary door, usually glazed, for protecting an entrance door from drafts, driving rain, or severe weather.

screen door

An exterior door having wood or aluminum stiles and rails that hold a wire or plastic mesh to admit air but exclude insects.


combination door

An exterior door having a frame into which different types of panels can be inserted, as a screen for summer or storm sash for winter.

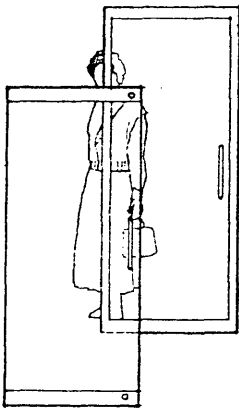


glass door

A door of heat-strengthened or tempered glass, with or without rails or stiles, used primarily as an entrance door.




Dutch door

A door divided horizontally so that the upper or lower part can be opened or closed separately.



batten door

A door constructed of vertical boards held together by horizontal battens and diagonal bracing.

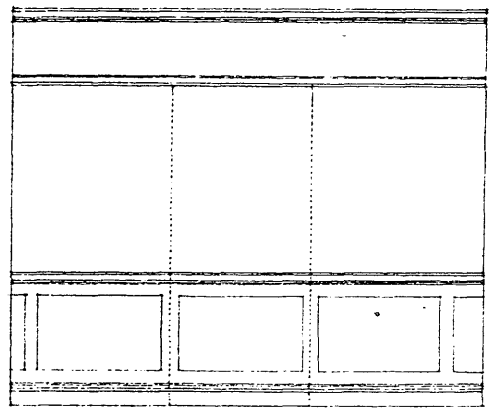


jib door

A door hinged to be flush with the wall on either side and treated so as to be indiscernible when closed. Also, *gib door*.


adjustable doorframe

A doorframe having a split head and jambs for installation in various wall thicknesses.




prehung door

A door hung in a doorframe before installation in a wall, sometimes prefinished and prefitted with all necessary hardware and casing trim.



solid-core door

A wood flush door having a solid core of staved lumber, particle board, or a mineral composition.




hollow-core door

A wood flush door having a framework of stiles and rails encasing an expanded honeycomb core of corrugated fiberboard or a grid of interlocking horizontal and vertical wood strips.

flush door

A door having smooth-surfaced faces.



core

A wooden construction, as in a door, forming a backing for face veneers.

crossbanding



The plywood or hardboard veneer immediately beneath the face veneers of a flush door. Also, crossband.

doorskin

A surface veneer of plywood, hardboard, plastic laminate, or medium density overlay, bonded to the crossbanding or core of a flush door.


acoustical door

A door having a sound-deadening core, gasketed stops along the top and sides, and an automatic drop seal along the bottom. Also called sound-insulating door.

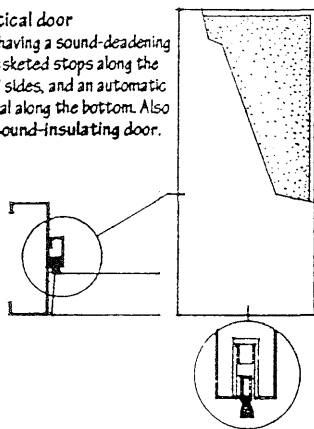

kalamein door

A door having a structural wood core clad with galvanized sheet metal.



hollow metal door

A door having face sheets of light-gauge steel bonded to a steel channel frame, reinforced with channels, a kraft honeycomb structure, or a rigid plastic-foam core.

throat


The opening between the backbends of a metal doorframe.

backbend

The face at the outer edge of a metal doorframe that returns to the wall surface.


hollow metal frame

A doorframe having a head and jambs formed from a single piece of metal.



knockdown frame

A metal doorframe composed of three or more parts for assembly in the field.




welded frame

A metal doorframe that is completely set up and welded at the factory.

cutoff stop

A stop having a closed end that terminates above the floor line at a 45° or 90° angle. Also called hospital stop, sanitary stop.




spat

A protective lining, usually of stainless steel, at the base of a doorframe.

jamb anchor

Any of various metal devices for securing the jamb of a doorframe to a masonry, steel stud, or wood stud wall.



anchor


Any of various metal devices for binding one part of a structure to another.

base anchor

A metal clip or device for securing the base of a doorframe to the floor.


flush frame

A metal doorframe designed to be installed during the construction of a masonry or stud wall.




drywall frame

A knockdown frame having a double-return backbend for installation after a drywall partition is finished.




grouted frame

A metal doorframe completely filled with plaster or mortar for structural rigidity and increased fire resistance.



double egress frame

A metal doorframe prepared to receive a pair of single-acting doors that swing in opposite directions.



DRAWING

The art, process, or technique of representing an object, scene, or idea by means of lines on a surface.

technique

A method or procedure for accomplishing a desired aim or task, as that employed by an artist showing a high degree of skill or command of fundamentals.

contour drawing

The technique of drawing lines to represent the contours of a subject, without shading or modeling of form.

contour

The outline of a two-dimensional shape or bounding edges of a three-dimensional form.

freehand drawing

The art, process, or technique of drawing by hand without the aid of drafting instruments or mechanical devices, esp. for the representation of perceptions or the visualization of ideas.



image

A representation of the form or appearance of something, made visible in a sculpture, photograph, or drawing.

SEEING

PERCEIVING IMAGINING

DRAWING

line


A thin, continuous mark made on a surface with a pencil, pen, or brush, as distinguished from shading or color.

outline

A line describing the outer boundary of a figure or object.

profile

An outline of a form or structure seen or represented from the side.

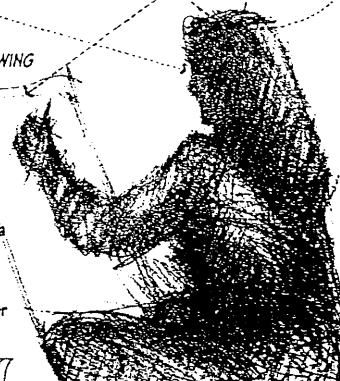


gesture drawing

The technique of drawing a single or multiple lines freely and quickly as a subject is scanned and perceptions of volume, mass, movement, and significant details are projected onto the drawing surface. In contrast to contour drawing, gesture drawing generally proceeds from the whole to the parts.

cross-contour drawing

The technique of drawing lines to represent a series of cuts across the surface of a form rather than its edges.



gesture

A movement of the hand, arm, head, face, or body that expresses an idea, opinion, or emotion.

movement

The effect or illusion of motion conveyed by the relationship of structural elements in a design or composition.

regulating line

A line drawn to measure or express alignment, scale, or proportion.

trace

A line lightly drawn to record alignment or measurement.

analytical drawing

The drawing of lines to represent the three-dimensional structure and geometry of a form, proceeding generally from the whole to the constituent parts.



modeling

The technique of rendering the illusion of volume, depth, or solidity on a two-dimensional surface by shading.

grisaille

Monochromatic painting in shades of gray to produce a three-dimensional effect.

high-key

Having chiefly light tones with little contrast.

low-key

Having chiefly dark tones with little contrast.



shading

The rendering of light and dark values in a drawing to create the illusion of three-dimensionality, represent light and shadow, or give the effect of color.



hatching

Shading composed of fine lines drawn in close proximity.



crosshatching

Shading composed of two or more series of intersecting parallel lines.

scribbling

Shading by means of a network of random, multidirectional lines.

stippling

Shading by means of dots, small spots, or short strokes.

key

The dominant tonal value of a drawing or painting.

sketch

A simply or hastily executed drawing or painting representing the essential features of an object or scene without the details, often made as a preliminary study.

study

A drawing executed as an educational exercise, produced as a preliminary to a final work, or made to record observations. Sometimes referred to as a referential drawing.

conception

A drawing of something that does not yet exist.

draft

A preliminary sketch of a design or plan, esp. one subject to revision.

esquisse

A sketch showing the general features of a design or plan.

épure


A full-scale, detailed drawing done on a wall, floor, or other large surface, from which are traced the patterns for various building elements.

cartoon

A full-scale drawing of a motif or design, to be transferred in preparation for a fresco, mosaic, or tapestry.

rendering

A drawing, esp. a perspective, of a building or interior space, artistically delineating materials, shades and shadows; usually done for the purposes of presentation and persuasion.



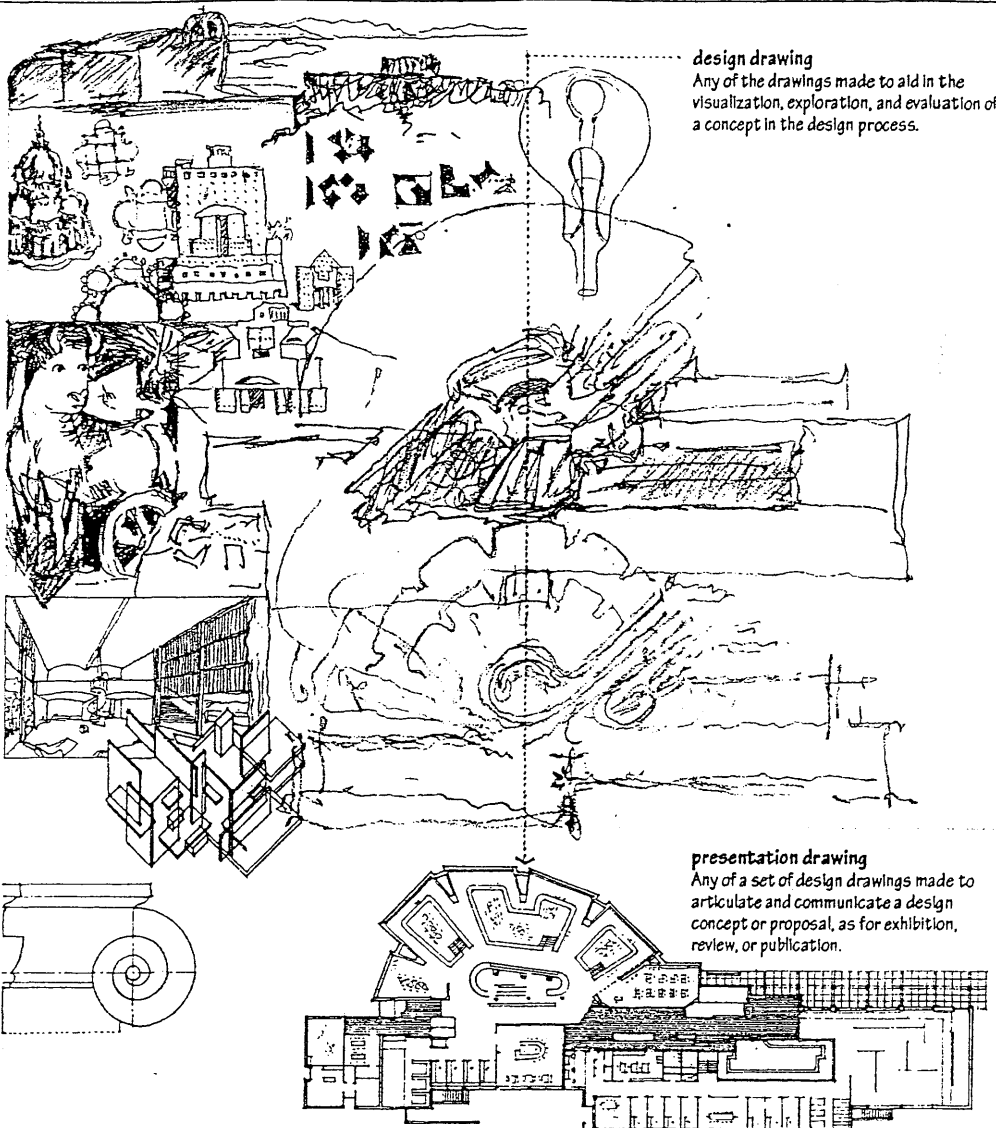


design drawing

Any of the drawings made to aid in the visualization, exploration, and evaluation of a concept in the design process.

presentation drawing

Any of a set of design drawings made to articulate and communicate a design concept or proposal, as for exhibition, review, or publication.

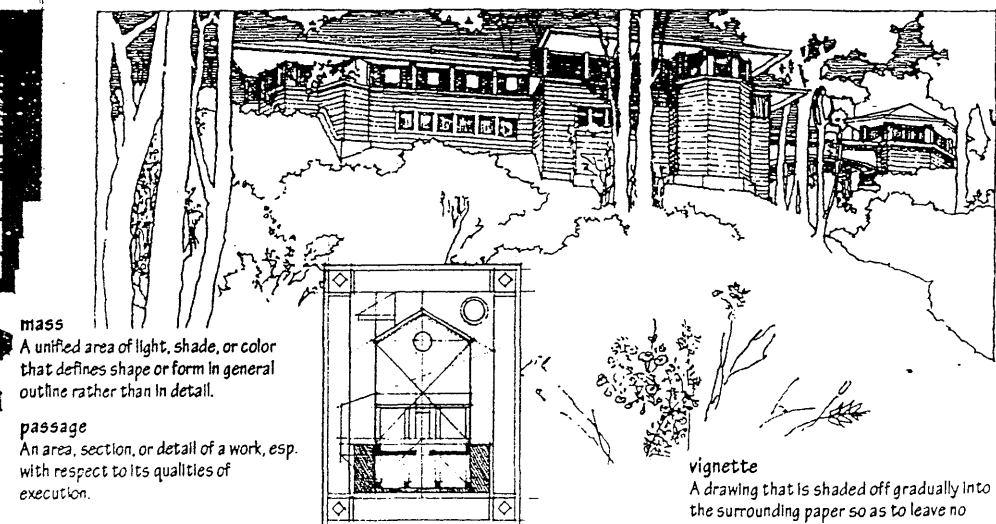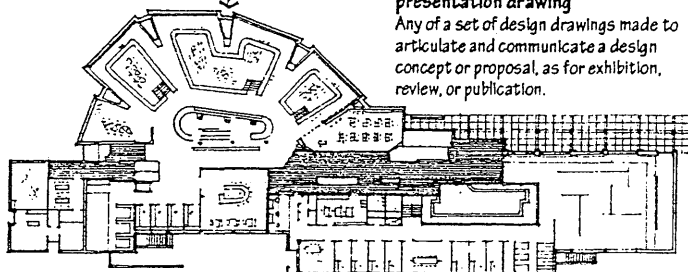


mass

A unified area of light, shade, or color that defines shape or form in general outline rather than in detail.

passage

An area, section, or detail of a work, esp. with respect to its qualities of execution.



vignette

A drawing that is shaded off gradually into the surrounding paper so as to leave no definite line at the border.

trompe l'œil

A drawing or painting in which objects are rendered in extremely fine detail to emphasize the illusion of tactile and spatial qualities.

analytique

An elevation drawing of a facade, surrounded by a decorative arrangement of drawings of important details and sometimes a plan or section of the facade.

DRAWING

drafting

Drawing done with the aid of such instruments as T-squares, triangles, compasses, and scales, esp. for the systematic representation and dimensional specification of architectural and engineering structures. Also called mechanical drawing.

object line

A solid line representing a contour of an object.

dashed line

A broken line consisting of short, closely spaced strokes, used esp. to represent object lines that are hidden or removed from view.

dotted line

A broken line consisting of a series of closely spaced dots, sometimes used in place of a dashed line.

centerline

A broken line consisting of relatively long segments separated by single dashes or dots, used to represent the axis of a symmetrical element or composition.

grid


A rectangular system of lines and coordinates serving as a reference for locating and regulating the elements of a plan.

construction drawings

The portion of the contract documents showing in accurate graphic or pictorial form the design, location, dimensions, and relationships of the elements of a project. Also called contract drawings, working drawings.

seal

An embossing stamp used by a licensed architect, engineer, or other design professional on contract drawings and specifications to show evidence of registration in the state where the work is to be performed.



extension line

A line extending from an edge or feature of an object, to which a dimension line is drawn.

dimension line

A line terminated by arrows, short slashes, or dots, indicating the extent or magnitude of a part or the whole, and along which measurements are scaled and indicated.

break line


A broken line consisting of relatively long segments joined by short zigzag strokes, used to cut off a portion of a drawing.

crowfoot

A V-shaped mark the apex of which is a reference point.



leader

A short line leading the eye from a note or dimension to a reference point, line, or area.

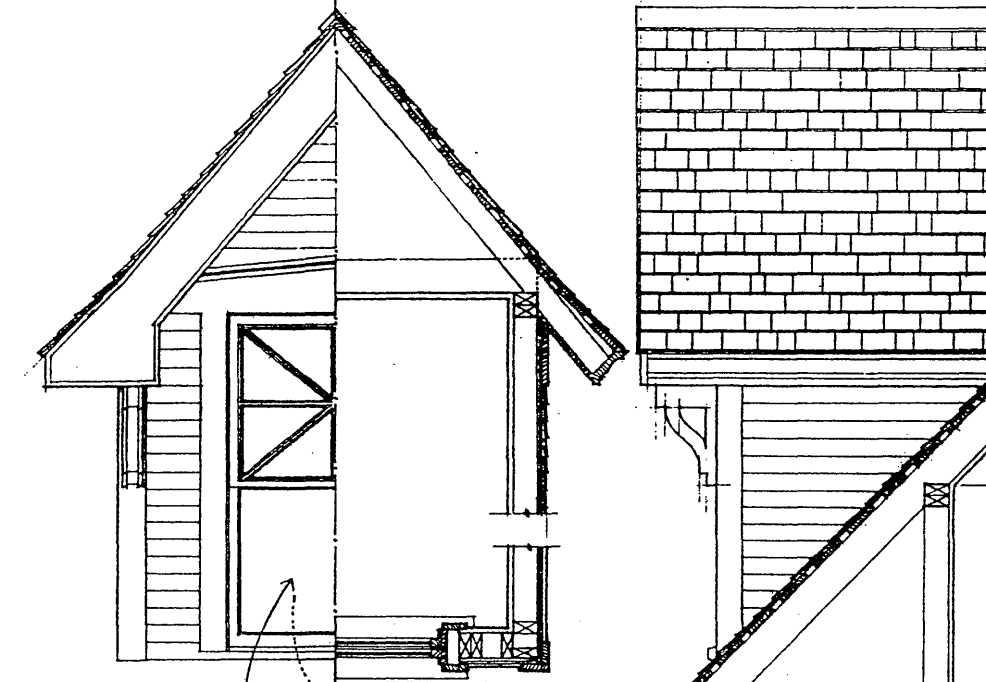

descriptive geometry


The theory of making projections of three-dimensional objects on a plane surface in order to deduce their geometric properties and relationships.

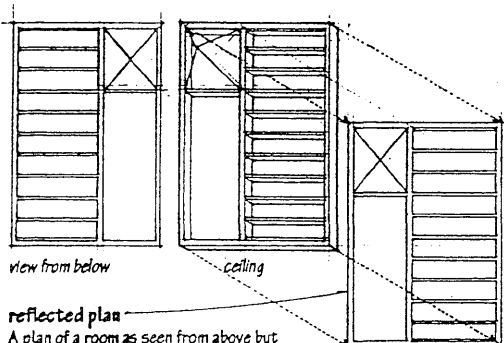**reflected plan**

A plan of a room as seen from above but having its ceiling surfaces and elements projected downward upon it so that what would appear to the right when seen from below appears on the plan to the left. Also called reflected ceiling plan.

framing plan

A plan showing the pattern, elements, and connections of the structural frame for a floor or roof of a building, using a system of symbols and drafting linework.

**contour line**

An imaginary line joining points of equal elevation on a surface, or its representation on a topographic plan or map.

contour interval

The difference in elevation represented by each contour line on a topographic plan or map.

grading plan

A plan showing the proposed finish contours and elevations of the ground surface of a construction site.

north arrow


A graphic symbol used on plans and maps to indicate the direction of north.

scale

A proportion determining the relationship of a representation to that which it represents.

graphic scale

A graduated line or bar indicating the proportion between a representation and that which it represents.

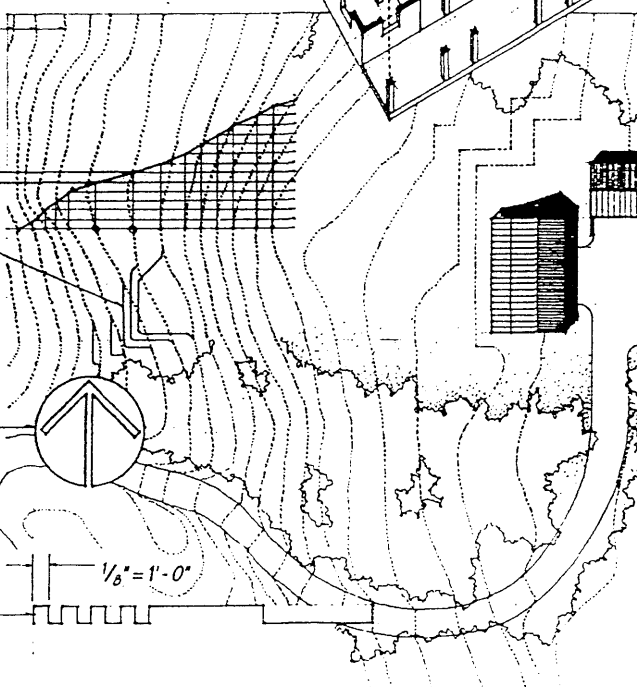**projection**

The process or technique of representing a three-dimensional object by projecting all its points by straight lines, either parallel or converging, to a picture plane.

orthographic projection

A method of projection in which a three-dimensional object is represented by projecting lines perpendicular to a picture plane. Also called orthogonal projection.

plan

An orthographic projection of the top or section of an object or structure on a horizontal plane, usually drawn to scale. Also called plan view.

floor plan

A plan of a room, suite, or entire floor of a building as seen from above after a horizontal section is cut and the upper portion removed, typically showing the form and arrangement of interior spaces and their enclosing walls, windows, and doors.

poché

The walls, columns, and other solids of a building that are cut in a floor plan or section drawing. Indicated usually in black or by hatching.

roof plan

A plan showing the top view of a building, esp. the form of its roof.

site plan

A plan showing the form, location, and orientation of a building or group of buildings on a site, usually including the dimensions, contours, landscaping and other significant features of the plot. Also called plot plan.

area plan

A plan showing the principal elements of a design project in the wider context of its surrounding environment.

section

An orthographic projection of an object or structure as it would appear if cut through by an intersecting plane to show its internal configuration, usually drawn to scale.

cross section

An orthographic projection of a section made by cutting transversely, esp. at right angles to the long axis of an object. Also called transverse section.

longitudinal section




An orthographic projection of a section made by cutting through the longest axis of an object.

section line

A centerline terminating in a perpendicular segment with an arrow, used to indicate where a section is cut in a plan or elevation view and the direction in which the section is to be viewed.

oblique section

An orthographic projection of a section made by cutting with a plane that is neither parallel nor perpendicular to the long axis of an object.

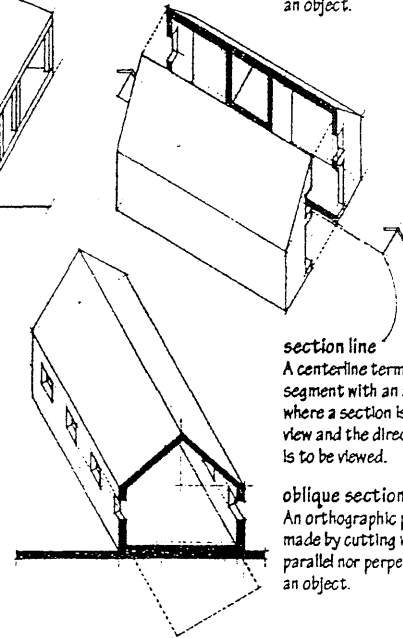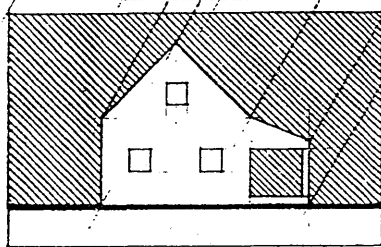

elevation


An orthographic projection of an object or structure on a vertical picture plane parallel to one of its sides, usually drawn to scale.

shades and shadows

The casting and rendering of shades and shadows, esp. in orthographic views, to convey light, surface, form, and depth.

relief

An apparent projection from a flat background due to contrast, creating the illusion of three dimensions.

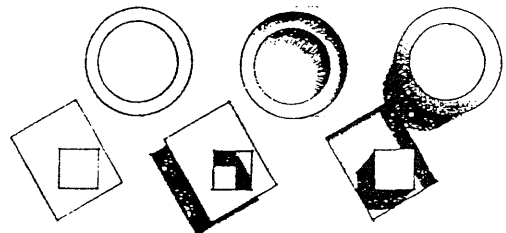

shade



The parts of a solid that receive no light because they are tangent to or turned away from a theoretical light source.

shadow

A dark figure cast upon a surface by an opaque body intercepting the rays from a theoretical light source.



local color

The natural color of a particular object as it would appear in white light.

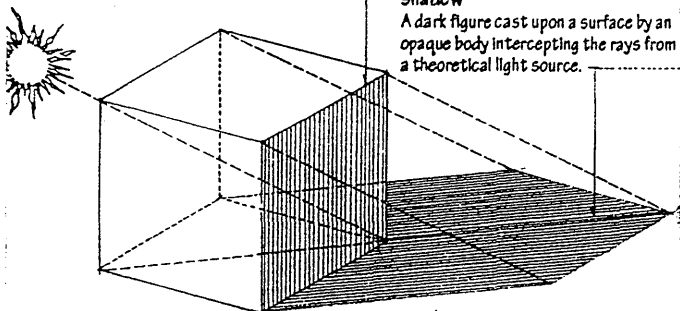


highlight

A brilliantly lighted area of a modeled drawing appearing as a luminous spot.

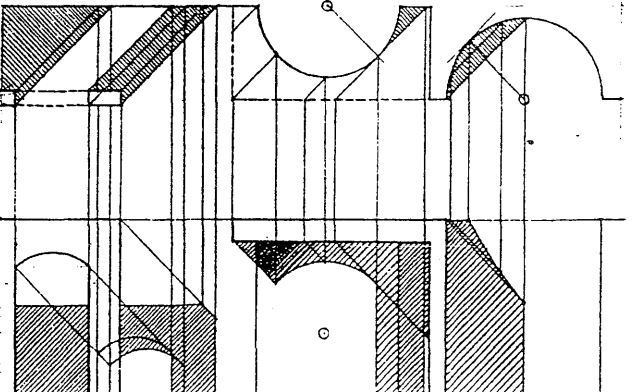


parallel drawing


Any of various single-view drawings characterized by parallel lines remaining parallel to each other rather than converging as in linear perspective.

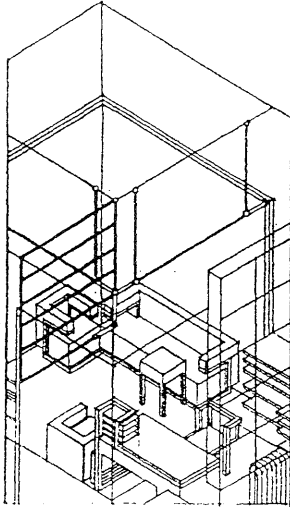**phantom**

A part of a drawing that is made transparent to permit representation of details otherwise hidden from view.

**cutaway**




A drawing or model having an outer section removed to display the interior.

**exploded view**

A drawing that shows the individual parts of a structure or construction separately but indicates their proper relationships to each other and to the whole. Also called expanded view.

phantom line



A broken line consisting of relatively long segments separated by two short dashes or dots, used to represent a property line, an alternative position of a part of an object, or the relative position of an absent part.

**dimetric projection**


An axonometric projection of a three-dimensional object inclined to the picture plane in such a way that two of its principal axes are equally foreshortened and the third appears longer or shorter than the other two.

trimetric projection

An axonometric projection of a three-dimensional object inclined to the picture plane in such a way that all three principal axes are foreshortened at a different rate.

**cavalier drawing**



A parallel drawing of an oblique projection, having the receding lines perpendicular to the picture plane drawn to the same scale as the lines parallel to the picture plane.

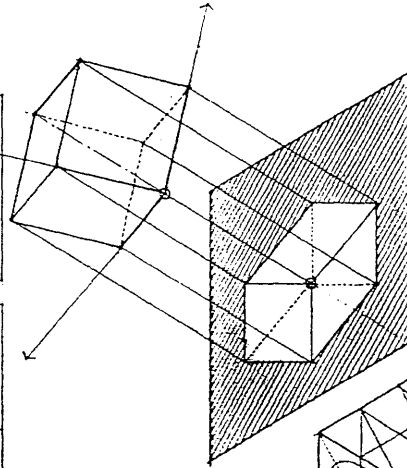**axonometric projection**

The orthographic projection of a three-dimensional object inclined to the picture plane in such a way that its three principal axes are foreshortened.

axonometric


A parallel drawing of an axonometric projection, having all lines parallel to the three principal axes drawn to scale but diagonal and curved lines distorted.

**isometric**

A parallel drawing of an isometric projection, having all lines parallel to the principal axes drawn to true length at the same scale.

isometric projection

An axonometric projection of a three-dimensional object having its principal faces equally inclined to the picture plane so that its three principal axes are equally foreshortened.

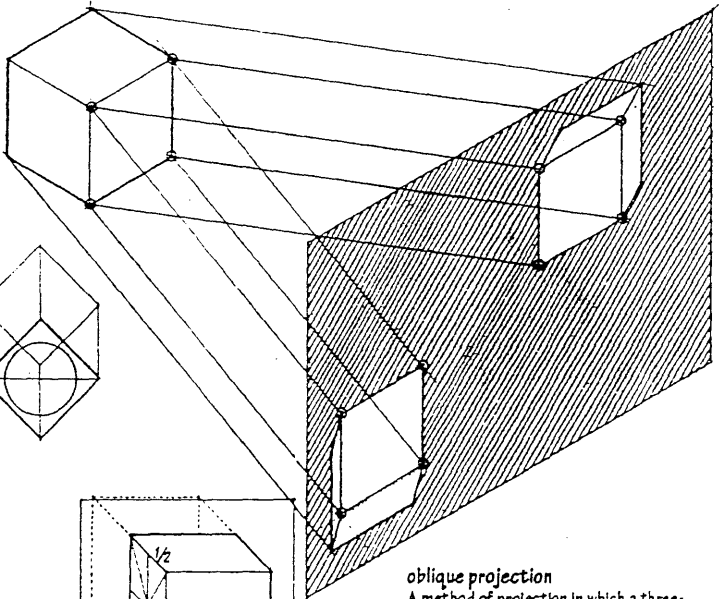**oblique projection**

A method of projection in which a three-dimensional object, having one principal face parallel to the picture plane, is represented by projecting parallel lines at some angle other than 90° to the picture plane.


oblique

A parallel drawing of an oblique projection, having all lines and faces parallel to the picture plane drawn to exact scale, and all receding lines perpendicular to the picture plane shown at any convenient angle other than 90°, sometimes at a reduced scale to offset the appearance of distortion.

DRAWING

perspective

Any of various techniques for representing three-dimensional objects and spatial relationships on a two-dimensional surface as they might appear to the eye.




aerial perspective

A technique for rendering depth or distance by muting the hue, tone, and distinctness of objects perceived as receding from the picture plane. Also called atmospheric perspective.


pictorial space

The illusion of space or depth depicted on a two-dimensional surface by various graphic means, as aerial perspective, continuity of outline, or vertical location.




vertical location

A technique for representing depth or distance by placing distant objects higher in the picture plane than objects perceived as being closer.



size perspective

A technique for representing depth or distance by reducing the size of objects perceived as receding from the picture plane.




continuity of outline

A technique for representing depth or distance by emphasizing the continuity of the contour of a shape perceived as being in front and concealing a part of another behind it.

spatial edge

An edge of an object or surface separated from its background by an interval of space, delineated by a thicker line or by a sharp contrast in value or texture.



texture perspective

A technique for representing depth or distance by gradually increasing the density of the texture of a surface perceived as receding from the picture plane.

linear perspective

A mathematical system for representing three-dimensional objects and spatial relationships on a two-dimensional surface by means of perspective projection.

perspective projection


A method of projection in which a three-dimensional object is represented by projecting all its points to a picture plane by straight lines converging at an arbitrarily fixed point representing the eye of the viewer.

center of vision

A point representing the intersection of the central axis of vision and the picture plane in linear perspective.

station point

A fixed point in space representing a single eye of the viewer in linear perspective.

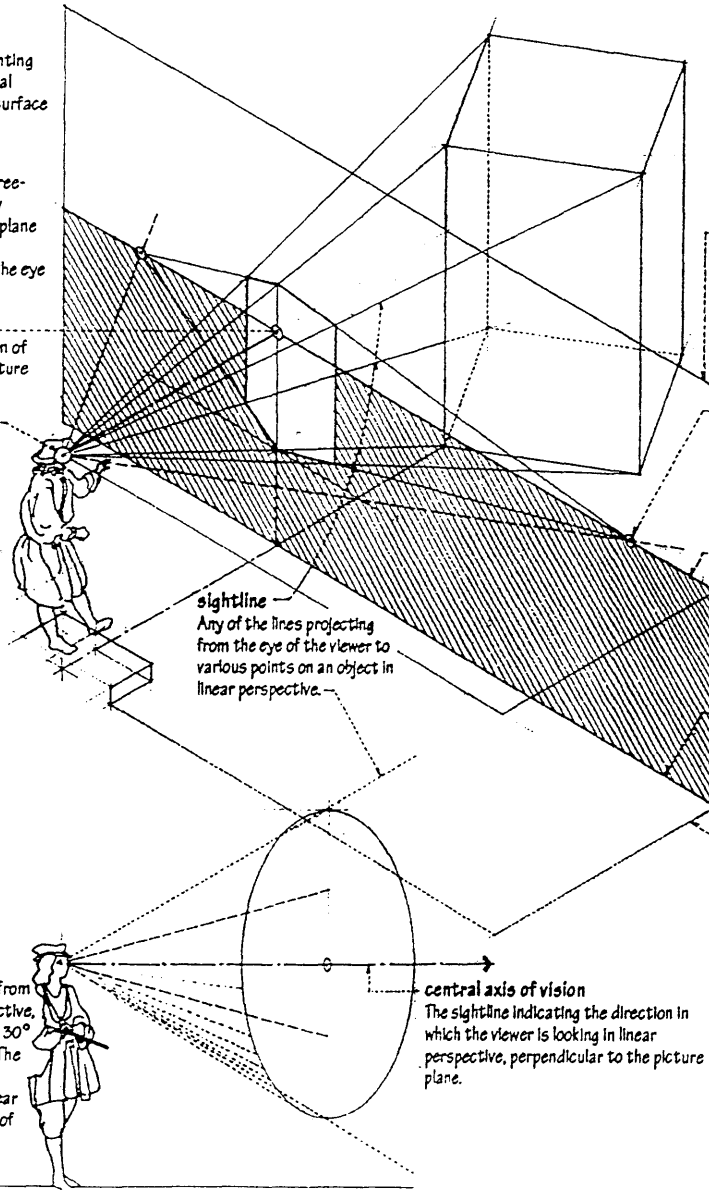

picture plane

An imaginary transparent plane, coexistent with the drawing surface, on which the image of a three-dimensional object is projected. In linear perspective, any line or plane coincident with the picture plane can be drawn to exact scale.

vanishing point

A point toward which receding parallel lines appear to converge in linear perspective, located at the point where a sightline parallel to the set of lines intersects the picture plane.

horizon line

A line representing the intersection of the picture plane and a horizontal plane through the eye of the viewer in linear perspective.

ground line

A horizontal line representing the intersection of the ground plane and the picture plane in linear perspective. Also called base line.

ground plane

A horizontal plane of reference from which vertical measurements can be taken in linear perspective, usually the plane supporting the object depicted or on which the viewer stands.

cone of vision

The field of vision radiating outward from the eye of the viewer in linear perspective, defined by sightlines forming a 15° to 30° angle with the central axis of vision. The cone of vision serves as a guide in determining what can be drawn in linear perspective without the appearance of distortion.

central axis of vision

The sightline indicating the direction in which the viewer is looking in linear perspective, perpendicular to the picture plane.

convergence

The apparent movement of parallel lines toward a common vanishing point as they recede, used in linear perspective to convey an illusion of space and depth.

Parallel lines perpendicular to the picture plane will appear to converge at the center of vision.

Parallel lines parallel to the picture plane retain their orientation and will not appear to converge.

perspective

A drawing of the perspective projection of an object or scene, characterized chiefly by convergence and foreshortening.

foreshortening

The apparent contraction or distortion of a represented line or shape that is not parallel to the picture plane, conveying an illusion of extension or projection in space.

diagonal vanishing point

A vanishing point for a set of horizontal lines receding at a 45° angle to the picture plane in linear perspective. Also called diagonal point, distance point.

one-point perspective

A linear perspective of a rectangular object or volume having a principal face parallel with the picture plane, so that vertical lines parallel to the picture plane remain vertical, horizontal lines parallel to the picture plane remain horizontal, and horizontal lines perpendicular to the picture plane appear to converge at the center of vision.

Parallel lines rising upward as they recede will appear to converge somewhere above the horizon line.

vanishing trace

A line along which all sets of receding parallel lines lying in the same or parallel planes will appear to converge in linear perspective.

measuring point

A vanishing point for a set of parallel lines used in transferring scaled measurements in the picture plane to lines receding in linear perspective.

Parallel lines which are horizontal but not perpendicular to the picture plane will appear to converge somewhere on the horizon line.

isocephalic

Having the heads of all figures at approximately the same level. Also, *isocephalous*.

two-point perspective

A linear perspective of a rectangular object or volume having two principal faces oblique to the picture plane, so that vertical lines parallel to the picture plane remain vertical and two horizontal sets of parallel lines oblique to the picture plane appear to converge at two vanishing points, one to the left and the other to the right.

measuring line

Any line coincident with or parallel to the picture plane, as the ground line, which can be used to take measurements in linear perspective.

diagonal

A straight line connecting two nonadjacent angles of a rectangle, used in subdividing a whole into proportionate parts or multiplying a basic unit of measurement or space.

Parallel lines sloping downward as they recede will appear to converge somewhere below the horizon line.


anamorphosis

A distorted image that appears in natural form only when viewed at a special angle or reflected from a curved mirror.

graphic

Of or relating to pictorial representation, esp. that which depicts in a clear and effective manner.

View at a shallow angle from this point.

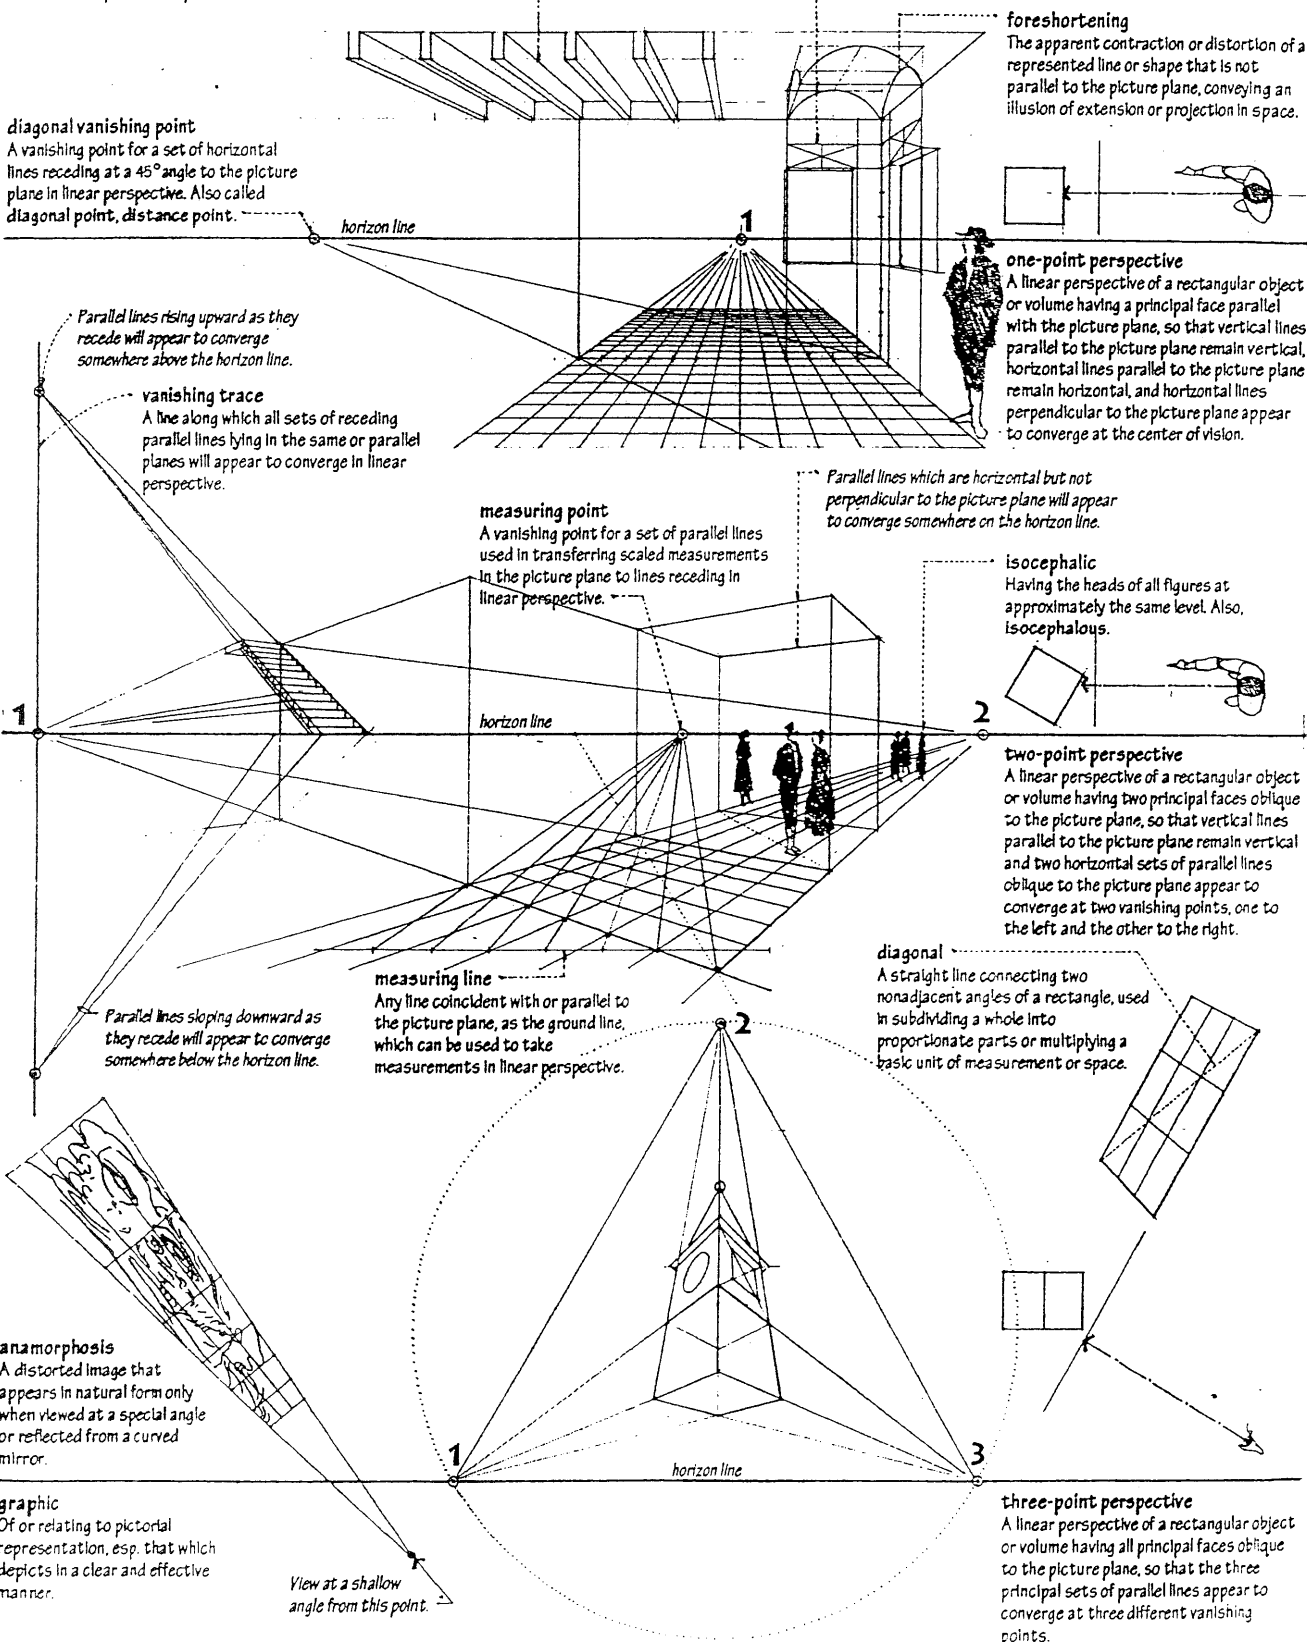

ELECTRICITY


The science dealing with the physical phenomena arising from the existence and interaction of electric charges.

electric charge

The intrinsic property of matter giving rise to all electric phenomena, occurring in two forms arbitrarily given positive and negative algebraic signs and measured in coulombs. Opposite charges attract while like charges repel each other.

coulomb

The SI unit of electric charge, equal to the quantity of electricity transferred across a conductor by a current of one ampere in one second. Abbr.: C



electromotive force

The energy per unit charge available for conversion from a chemical, mechanical, or other form of energy into electrical energy, or vice versa, in a conversion device as a battery, generator, or motor. Abbr.: emf

potential difference

The voltage difference between two points that represents the work involved in the transfer of a unit charge from one point to the other.

potential

The work required to move a unit charge from a reference point to a designated point.

voltage

Potential difference or electromotive force expressed in volts; analogous to pressure in water flow.

volt

The SI unit of potential difference and electromotive force, defined as the difference of electric potential between two points of a conductor carrying a constant current of one ampere, when the power dissipated between the points is equal to one watt. Abbr.: V

current

The rate of flow of electric charge in a circuit per unit time, measured in amperes.

Before the nature of electricity was fully understood, it was assumed that a direct current flowed from a positive point to a negative one. This convention is still used even though electrons flow in the opposite direction, from negative to positive.

ampere

The basic SI unit of electric current, equivalent to a flow of one coulomb per second or to the steady current produced by one volt applied across a resistance of one ohm. Abbr.: A

amperage

The strength of an electric current measured or expressed in amperes; analogous to the rate of water flow.

circuit

The complete path of an electric current, including the source of electric energy.

series

An arrangement of components in an electric circuit in which the same current flows through each component in turn without branching.

parallel

An arrangement of components in an electric circuit in which all positive terminals are connected to one conductor and all negative terminals are connected to a second conductor, the same voltage being applied to each component.

resistance

The opposition of a conductor to the flow of current, causing some of the electric energy to be transformed into heat and usually measured in ohms. Abbr.: R

ohm

The SI unit of electrical resistance, equal to the resistance of a conductor in which a potential difference of one volt produces a current of one ampere. Symbol: Ω

Ohm's law

The law that for any circuit the electric current is directly proportional to the voltage and inversely proportional to the resistance.

Joule's law

The principle that the rate of production of heat by a direct current is directly proportional to the resistance of the circuit and to the square of the current.

battery

A group of two or more cells connected together to produce electric current.

cell

A device for converting chemical into electric energy, usually consisting of a receptacle with electrodes in an electrolyte. Also called **electric cell**, **galvanic cell**, **voltaic cell**.

electrolyte

A nonmetallic conducting medium in which current is carried by the movement of ions.

electrode



A conductor through which a current enters or leaves a nonmetallic medium.

anode

The negative terminal of a primary cell or storage battery.

cathode

The positive terminal of a primary cell or storage battery.




resistivity

The resistance per unit length of a substance with a unit cross-sectional area. Also called **specific resistance**.

conductivity

A measure of the ability of a substance to conduct electric current, equal to the reciprocal of the resistivity of the substance. Also called **specific conductance**.

$$I = V/R$$

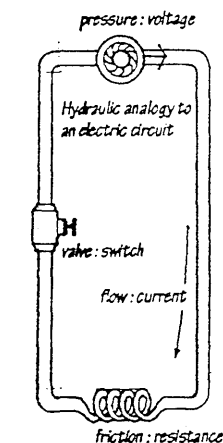

$$W = V \times A$$

power

The product of potential difference and current in a direct-current circuit. In an alternating current circuit, power is equal to the product of the effective voltage, the effective current, and the cosine of the phase angle between current and voltage.

watt

The SI unit of power, equal to one joule per second or to the power represented by a current of one ampere flowing across a potential difference of one volt. Abbr.: W

wattage

An amount of power, esp. the power required to operate an electrical device or appliance, expressed in watts.

kilowatt

A unit of power, equal to 1,000 watts. Abbr.: kW

kilowatt-hour

A unit of energy, equal to the energy transferred or expended by one kilowatt in one hour; a common unit of electric power consumption. Abbr.: kWh

generator

A machine that converts mechanical energy into electrical energy.

alternator

A generator for producing alternating current.

electric motor

A machine that converts electric power into mechanical energy.

armature

The main current-carrying winding of a motor or generator in which electromotive force is induced.

brush


A copper or carbon conductor serving to maintain electric contact between fixed and moving elements in a motor or generator.

core


A mass of iron or other ferrous material in an electromagnet, induction coil, or transformer, serving to concentrate and intensify the magnetic field resulting from a current in a surrounding coil.

coil

A conductor wound in a spiral form to introduce inductance into a circuit.

**direct current**

An electric current flowing in one direction only and having a magnitude that does not vary or varies only slightly. Abbr.: DC

**alternating current**

An electric current that reverses direction at regularly recurring intervals, having a magnitude that varies in a sinusoidal manner. Abbr.: AC

volt-ampere

A unit of electric measurement, equal to the product of one volt and one ampere, equivalent to one watt for direct-current systems and a unit of apparent power for alternating-current systems. Abbr.: VA

transformer

An electric device consisting of two or more windings wound on the same core, which employs the principle of mutual induction to convert variations of alternating current in a primary circuit into variations of voltage and current in a secondary circuit.

step-up transformer

A transformer having fewer turns in the primary winding than in the secondary, serving to transform low voltage to high voltage.

step-down transformer


A transformer having a greater number of turns in the primary winding than in the secondary, serving to transform high voltage to low voltage.

line voltage

The voltage supplied by a power line, measured at the point of use.

service conductor

Any of several conductors extending from a main power line or transformer to the service equipment of a building.

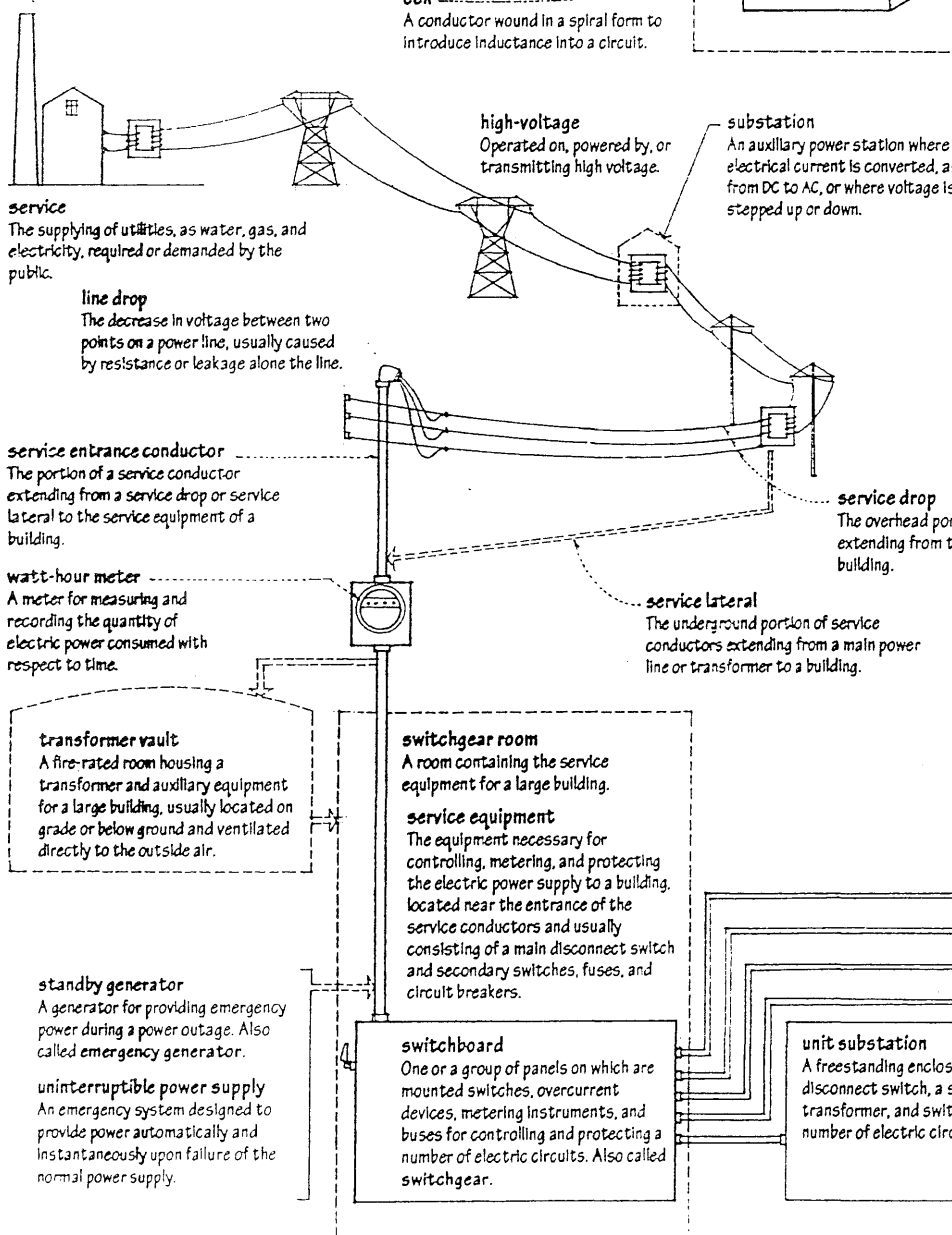


ELECTRICITY

phase

The fractional part of a period or cycle through which time has advanced, measured from a specified reference point and often expressed as an angle.

ground

A conducting connection between an electric circuit or device and the earth or other point of zero potential.



single-phase

Of or pertaining to a circuit energized by an alternating current with one phase or with phases differing by 180°.

two-phase

Of or pertaining to a circuit energized by two alternating currents or voltages differing in phase by one quarter of a cycle or 90°.

three-phase

Of or pertaining to a combination of three circuits energized by alternating currents or voltages differing in phase by one third of a cycle or 120°.

live

Electrically connected to a source of voltage, or electrically charged so as to have a potential different from that of earth. Also, hot.

dead

Not electrically connected to a source of voltage.

neutral

Not electrically charged.

fault

A local failure in the insulation or continuity of a conductor, or in the functioning of an electrical system.

short circuit

An abnormal, usually accidental condition of low resistance between two points in an electric circuit, resulting in a flow of excess current. Also called short.

shock

The muscular spasms caused by an electric current passing through the body.

service switch

The main disconnect for the entire electrical system of a building, except for any emergency power systems.

panel

A board on which are mounted the switches, fuses, and circuit breakers for controlling and protecting a number of similar branch circuits, installed in a cabinet and accessible from the front only. Also called panelboard.

bus

A heavy conductor, usually in the form of a solid copper bar, used for collecting, carrying, and distributing large electric currents. Also called busbar.

grounded conductor

Any conductor of an electrical system intentionally connected to a ground connection.

grounding electrode

A conductor, as a metal ground rod, ground plate, or cold-water pipe, firmly embedded in the earth to establish a ground connection.

fuse

A device containing a strip or wire of fusible metal that melts under the heat produced by excess current, thereby interrupting the circuit.

fusible metal

Any of various metal alloys having a melting point below 300°F (150°C), used as solder and in various safety devices. Also called fusible alloy.

circuit breaker

A switch that automatically interrupts an electric circuit to prevent excess current from damaging apparatus in the circuit or from causing a fire. A circuit breaker may be reset and reused without replacement of any components. Also called breaker.

ground wire

A conductor connecting electric equipment or a circuit to a ground connection. Also called grounding conductor.

plug fuse

A fuse housing a fusible link in a porcelain cup fitted with a threaded metal base.

cartridge fuse

A fuse having a one-time or renewable fusible link enclosed in an insulating fiber tube.

knife-blade fuse

A cartridge fuse having a metal blade at each end for making contact with the fusible link within.

time-delay fuse


A fuse that delays opening to allow a short-term overload to pass, as when starting a motor.

ground fault

A momentary, usually accidental, grounding of a conducting wire.

ground-fault interrupter

A circuit breaker that senses currents caused by ground faults and instantaneously shuts off power before damage or injury can occur. Abbr.: gfi

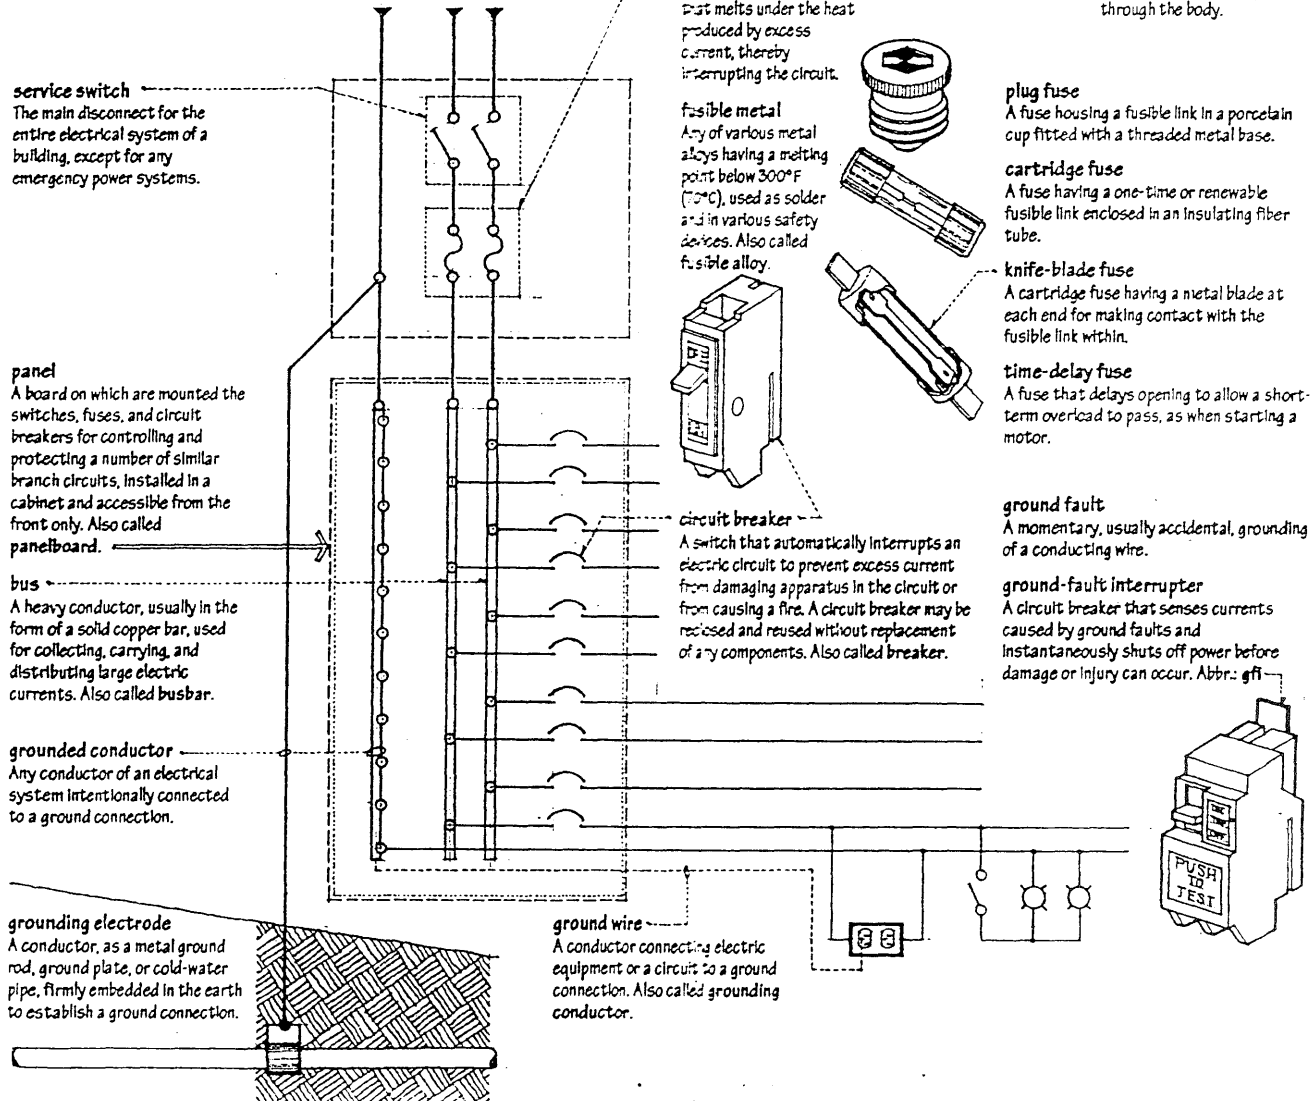

lightning rod


Any of several conducting rods installed at the top of a structure and grounded to divert lightning away from the structure. Also called **air terminal**.

lightning arrester


A device for protecting electric equipment from damage by lightning or other high-voltage currents, using spark gaps to carry the current to the ground without passing through the device.

spark gap

A space between two terminals or electrodes, across which a discharge of electricity may pass at a prescribed voltage.

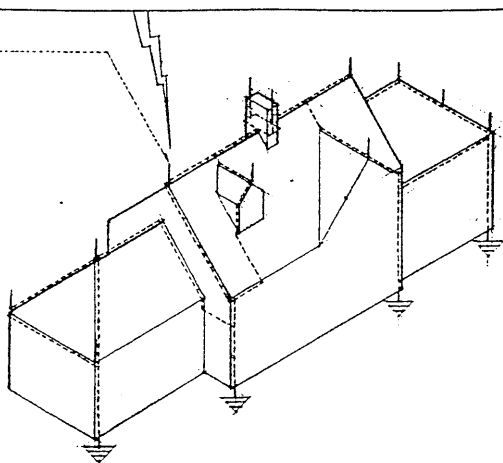**branch circuit**

The portion of an electrical system extending from the final overcurrent device protecting a circuit to the outlets served by the circuit.

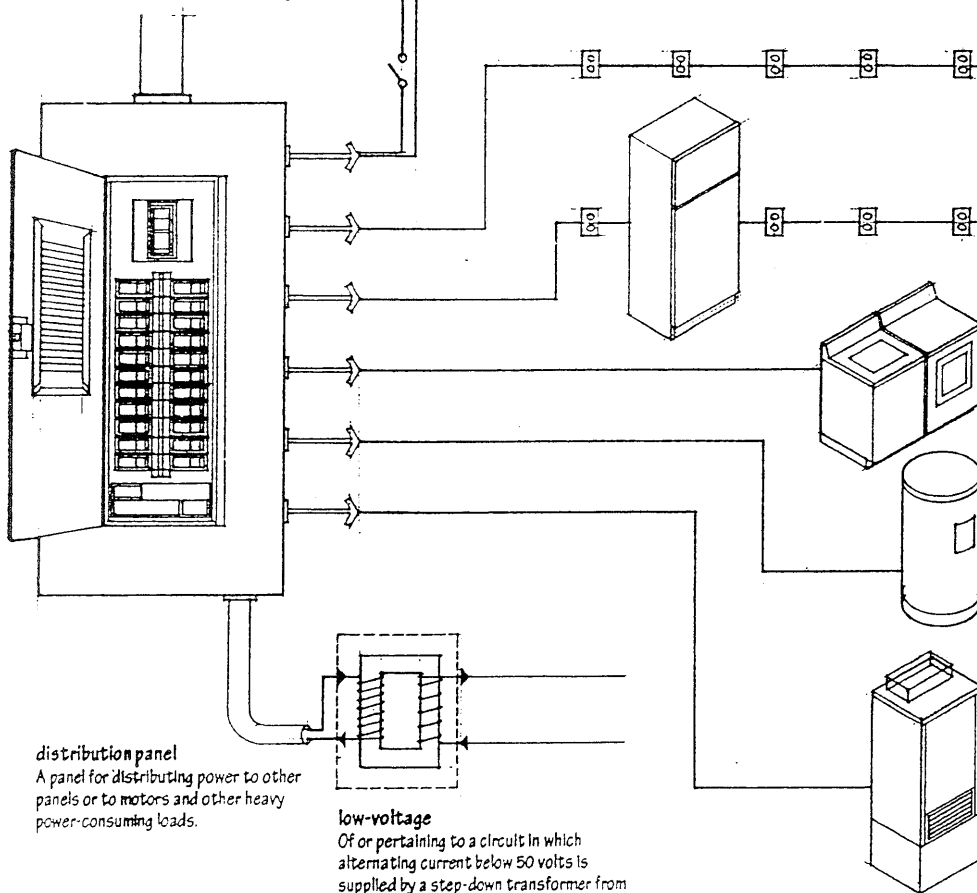**distribution panel**

A panel for distributing power to other panels or to motors and other heavy power-consuming loads.

low-voltage

Of or pertaining to a circuit in which alternating current below 50 volts is supplied by a step-down transformer from the normal line voltage, used in residential systems to control doorbells, intercoms, heating and cooling systems, and remote lighting fixtures. Low-voltage circuits do not require a protective raceway.

load

The power delivered by a generator or transformer, or the power consumed by an appliance or device.

connected load

The total load on an electrical system or circuit if all connected apparatus and equipment are energized simultaneously.

maximum demand

The greatest load delivered to an electrical system or circuit over a specified interval of time.

demand factor

The ratio of the maximum demand to the connected load of an electrical system, used in estimating the required capacity of the system to account for the probability that only a portion of the connected load may be applied at any time.

diversity factor

The ratio of the sum of the maximum demands on the various parts of an electrical system to the maximum demand on the whole.

load factor

The ratio of the average load on an electrical system over a specific period of time to the peak load occurring in that period.

general purpose circuit

A branch circuit that supplies current to a number of outlets for lighting and appliances.

appliance circuit

A branch circuit that supplies current to one or more outlets specifically intended for appliances.

individual circuit

A branch circuit that supplies current only to a single piece of electrical equipment.

ELECTRICITY

cable

A single insulated conductor or a bound or sheathed combination of conductors insulated from one another.

armored cable

Electric cable consisting of two or more insulated conductors protected by a flexible, helically wound metal wrapping. Also called BX cable.

mineral-insulated cable

Electric cable consisting of a tubular copper sheath containing one or more conductors embedded in a highly compressed, insulating refractory mineral.

nonmetallic sheathed cable

Electric cable consisting of two or more insulated conductors enclosed in a nonmetallic, moisture-resistant, flame-retardant sheath. Also called Romex cable.

coaxial cable

A cable for transmitting high-frequency telephone, digital, or television signals, consisting of an insulated conducting tube enclosing an insulated conducting core.

shielded cable

An electric cable enclosed within a metallic sheath in order to reduce the effects of external electric or magnetic fields.

conduit

A tube, pipe, or duct for enclosing and protecting electric wires or cable.

rigid metal conduit

Heavy-walled, tubular steel conduit joined by screwing directly into a threaded hub with locknuts and bushings.

electrical metallic tubing

Thin-walled, tubular steel conduit joined by compression or setscrew couplings. Abbr.: EMT

flexible metal conduit

A flexible, helically wound metal conduit, used for connections to motors or other vibrating equipment. Also called Greenfield conduit.

raceway


A channel expressly designed to hold and protect electric wires and cables.

surface raceway

A raceway designed for exposed installation in dry, nonhazardous, noncorrosive locations.

multi-outlet assembly

A surface-mounted raceway designed to house the electrical wires for a circuit and a series of receptacles.

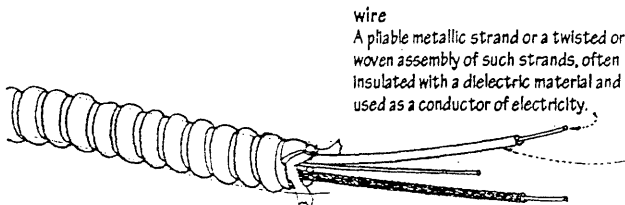

wire

A pliable metallic strand or a twisted or woven assembly of such strands, often insulated with a dielectric material and used as a conductor of electricity.

conductor

A substance, body, or device that conducts heat, sound, or electricity.

insulator

A material that is a poor conductor of electricity, used for separating or supporting conductors to prevent the undesired flow of current.

breakdown voltage

The minimum applied voltage at which a given insulator breaks down and permits current to pass.

dielectric strength

The maximum voltage that can be applied to a given material without causing it to break down, usually expressed in volts or kilovolts per unit of thickness.

dielectric

A nonconducting substance.

junction box

An enclosure for housing and protecting electric wires or cables that are joined together in connecting or branching electric circuits.

knockout

A panel in a casing or box that can readily be removed, as by punching, hammering, or cutting, to provide an opening into the interior.

grommet

A rubber or plastic washer inserted in a hole in a metal part to prevent grounding of a wire passing through the hole.

bushing






An insulating and protective lining for one or more conductors passing through a hole.

duct

An enclosed runway for housing conductors or cables.

bus duct

A rigid metal housing for a group of buses insulated from each other and the enclosure. Also called busway.

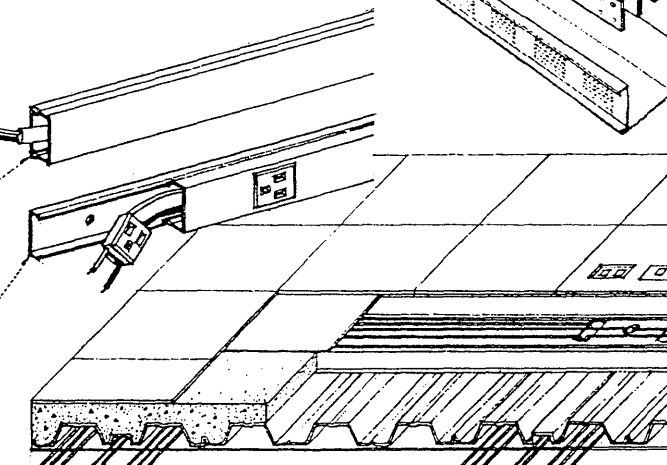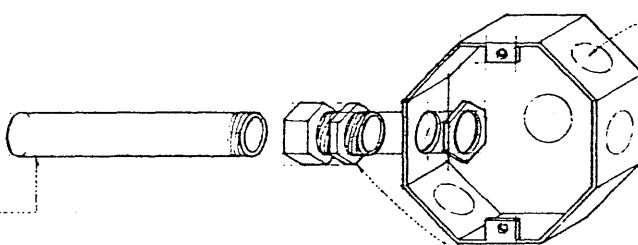

underfloor raceway

A raceway suitable for installation under a floor, often used in office buildings to allow for the flexible placement of power, signal, and telephone outlets.

cable tray

An open metal framework for supporting insulated electrical conductors.

air switch

A switch in which the interruption of a circuit occurs in air.

knife switch

A form of air switch in which a hinged copper blade is placed between two contact clips.

float switch

A switch controlled by a conductor floating in a liquid.

mercury switch

An especially quiet switch that opens and closes an electric circuit by shifting a sealed glass tube of mercury so as to uncover or cover the contacts.

key switch

A switch operated only by inserting a key.

dimmer

A rheostat or similar device for regulating the intensity of an electric light without appreciably affecting spatial distribution. Also called dimmer switch.

rheostat

A resistor for regulating a current by means of variable resistances.

knob-and-tube wiring

An obsolete wiring system consisting of single, insulated conductors secured to and supported on porcelain knobs and tubes.

loom

A flexible, nonmetallic, fire-resistant tubing for conductors in knob-and-tube wiring.

lead

A flexible, insulated conductor for electrically connecting an apparatus to another or to a circuit.

pigtail

A short, flexible conductor used in connecting a stationary terminal with a terminal having a limited range of motion.

terminal

A conductive element or device for establishing an electric connection to an apparatus.

faceplate

A protective plate surrounding an electric outlet or light switch.

switch

A device for making, breaking, or directing an electric current.

toggle switch

A switch in which a lever or knob, moving through a small arc, causes the contacts to open or close an electric circuit.

three-way switch

A single-pole, double-throw switch used in conjunction with another to control lights from two locations.

four-way switch

A switch used in conjunction with two three-way switches to control lights from three locations.

outlet

A point on a wiring system at which current is taken to supply an electric device or apparatus.

outlet box

A junction box designed to facilitate connecting an electric device or receptacle to a wiring system.

convenience outlet

An outlet usually mounted on a wall and housing one or more receptacles for portable lamps or appliances.

receptacle

A female fitting connected to a power supply and equipped to receive a plug. Also called socket.

grounding outlet

An outlet having an additional contact for a ground connection.

plug

A male fitting for making an electrical connection to a circuit by insertion in a receptacle.

grounding plug

A plug having a blade for a ground connection.

polarized

Designed so that a plug and receptacle can fit together in only one way.

cord

A small, flexible, insulated cable fitted with a plug to connect a portable lamp or appliance to a receptacle.

wire nut

A plastic connector containing a threaded metal fitting for screwing onto the intertwined ends of two or more conductors.

connector

Any of various devices for joining two or more conductors without a permanent splice

ELEVATOR

A moving platform or cage for carrying passengers or freight from one level of a building to another.


lift
British term for elevator.

passenger elevator
An elevator exclusively for the use of passengers.

freight elevator
An elevator for carrying heavy cargo, on which the operator and the persons necessary for unloading and loading the freight are permitted to ride.

dumbwaiter
A small elevator for conveying food, dishes, or other materials between the floors of a building.

bank
A row of elevators in a high-rise building, controlled by a common operating system and responding to a single call button.



rise
The vertical distance traversed by an elevator car from the lowest to the highest landings of the hoistway. Also called travel.

electric elevator
An elevator system consisting of a car that is mounted on guide rails, supported by hoisting cables, and driven by electric hoisting machinery. Also called traction elevator.

penthouse
A structure housing elevator machinery on the roof of a building.

top car clearance
The vertical distance from the top of an elevator car to the nearest overhead obstruction when the car platform is level with the top landing.

hoistway
A vertical enclosed space for the travel of one or more elevators. Also called elevator shaft.

landing
The portion of a floor adjacent to an elevator hoistway, used for the receiving and discharge of passengers or freight.

elevator car safety
A mechanical device for slowing down and stopping an elevator car in the event of excessive speed or free fall, actuated by a governor and clamping the guide rails by a wedging action.

hoistway door
A door between a hoistway and an elevator landing, normally closed except when an elevator car is stopped at the landing.

elevator pit
The portion of a hoistway extending from the level of the lowest landing to the floor of the hoistway.

bottom car clearance
The vertical distance from the floor of an elevator pit to the lowest part of an elevator car platform when the car rests on fully compressed buffers.

bulkhead
A boxlike structure on a roof providing access to a stairwell or an elevator shaft.

control panel
A panel containing switches, buttons, and other equipment for regulating electrical devices.

hoisting machinery
The machinery for raising and lowering an elevator car, consisting of a motor-generator set, traction machine, speed governor, brake, drive shaft, driving sheave, and gears, if used.

driving sheave
A wheel or disk with a grooved rim, used as a pulley for hoisting.

idle sheave
A pulley for tightening and guiding the hoisting cables of an elevator system. Also called deflector sheave.

machine beam
One of the heavy steel beams supporting the hoisting machinery for an elevator.

hoisting cable
One of the wire cables or ropes used for raising and lowering an elevator car.


guide rail
One of the vertical steel tracks controlling the travel of an elevator car or counterweight.


traveling cable
One of the electric cables connecting an elevator car to a fixed electrical outlet in the hoistway.

counterweight
A weight balancing another weight, as the rectangular cast-iron blocks mounted in a steel frame to counterbalance the load placed on the hoisting machine by an elevator car.

limit switch
A switch that automatically cuts off current to an electric motor when an object moved by it, as an elevator car, has passed a given point.


buffer
A piston or spring device for absorbing the impact of a descending elevator car or counterweight at the extreme lower limit of travel.

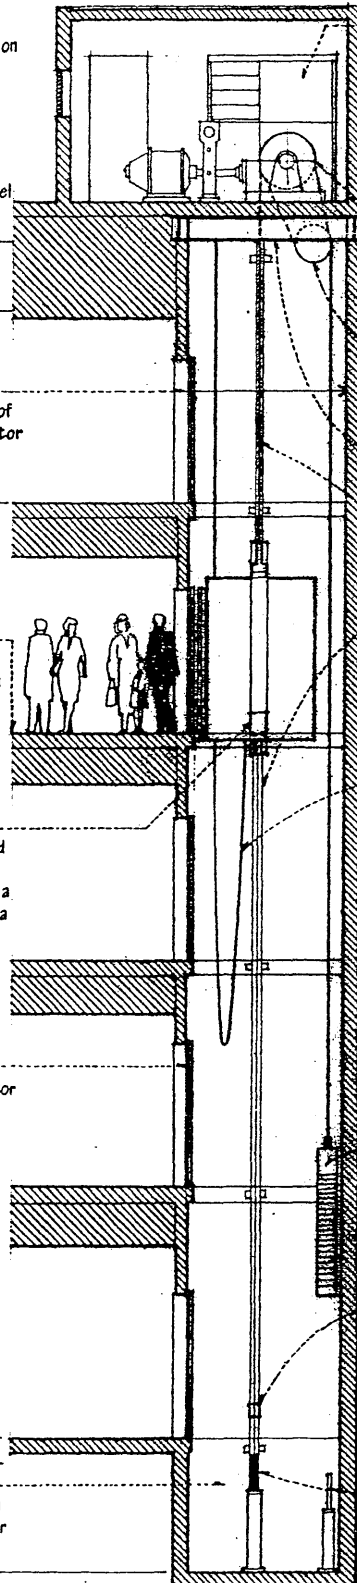

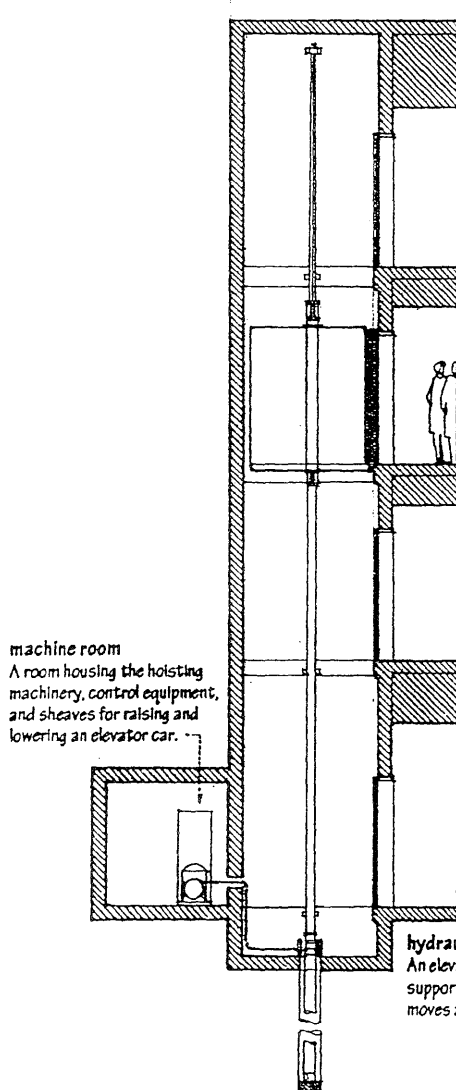


machine room
A room housing the hoisting machinery, control equipment, and sheaves for raising and lowering an elevator car.

hydraulic elevator
An elevator system consisting of a car supported by a piston that is moved by or moves against a fluid under pressure.

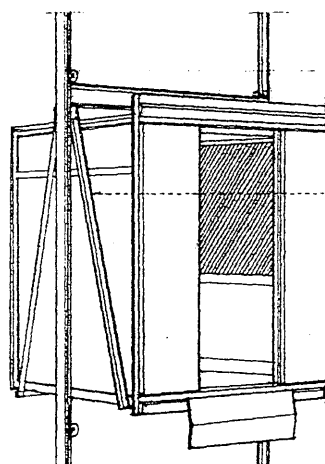

elevator car
The load-carrying unit of an elevator, consisting of a car frame, platform, light, metal enclosure, and door or gate.

car frame
The structural steel frame of an elevator car to which are attached the platform, guide shoes, elevator car safety, hoisting cables, and control equipment.

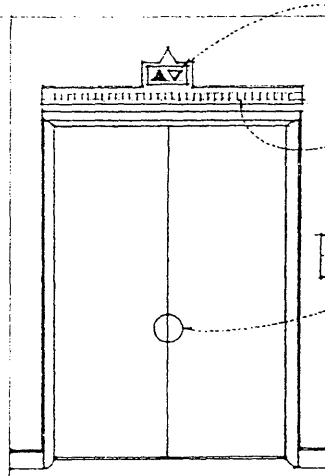


lantern
A light, usually over the entrance to an elevator on each floor of a multistory building, that signals the approach of the elevator.

annunciator
A signaling apparatus in an elevator car or at a landing that displays a visual indication of floor landings.


call button
A push button for requesting an elevator.

door interlock
A safety device for preventing the operation of an elevator car unless the hoistway door is locked in the closed position.

door contact
A safety device for preventing the operation of an elevator car unless its door or gate is fully closed. Also called gate contact.

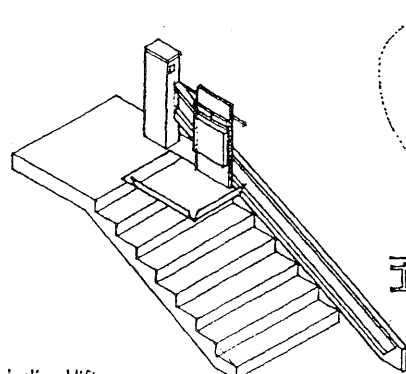

complate
The toothed portion of the threshold plate at both ends of an escalator or moving walk, designed to mesh with the grooved surface of the moving steps or treadway.

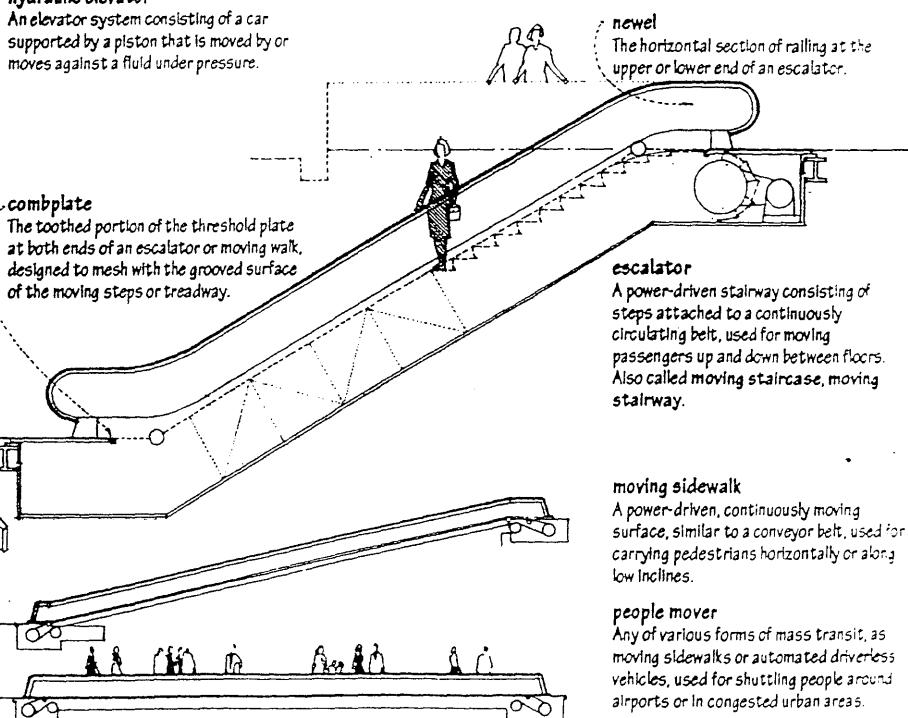

newel
The horizontal section of railing at the upper or lower end of an escalator.

escalator
A power-driven stairway consisting of steps attached to a continuously circulating belt, used for moving passengers up and down between floors. Also called moving staircase, moving stairway.

moving sidewalk
A power-driven, continuously moving surface, similar to a conveyor belt, used for carrying pedestrians horizontally or along low inclines.

people mover
Any of various forms of mass transit, as moving sidewalks or automated driverless vehicles, used for shuttling people around airports or in congested urban areas.

inclined lift
A chair or platform mounted on a steel guide rail and driven by an electric motor, used for raising or lowering a person or goods along a stairway. Also called stair lift.

FASTENING

Holding together or uniting two or more parts or members, as by clamping with a mechanical fastener, by bonding with an adhesive, or by welding or soldering.

nail

A straight, slender piece of metal having one end pointed and the other enlarged and flattened for hammering into wood or other building materials as a fastener.

4d	6d	8d	10d	12d	16d	20d	penny
1½"	2"	2½"	3"	3¼"	3½"	4"	The designated length of a nail, from twopenny to sixty penny. Symbol: d
38 mm	51 mm	64 mm	76 mm	83 mm	89 mm	102 mm	



shank

The straight, narrow part of a nail or bolt, between the head and the point.

eightpenny nail


A nail 2½ inches (64 mm) long.

sixteenpenny nail

A nail 3½ inches (89 mm) long.


cut nail

A nail having a tapering rectangular shank with a blunt point, made by cutting from a rolled sheet of iron or steel.




wire nail

A nail made by cutting and shaping a piece of round or elliptical wire.




common nail

A nail having a slender shank, a flat head, and a diamond point.




box nail

A nail having a flat head and a shank more slender than a common nail of the same length.




casing nail

A nail having a small conical head and a shank more slender than a common nail of the same length, used in finish work in which the head may remain visible.




finishing nail

A nail having a slender shank and a small, barrel-shaped head that is driven slightly below the surface and covered with putty or the like.




brad

A small finishing nail.



double-headed nail

A nail used in building temporary structures, as scaffolding and formwork, having a flange on its shank to prevent it from being driven in all the way and to leave the head free for pulling. Also called form nail, scaffold nail.




concrete nail

A hardened-steel nail having a fluted or threaded shank and a diamond point for hammering into concrete or masonry. Also called masonry nail.



flooring nail

A nail for fastening floor boards, having a small conical head, a mechanically deformed shank, and a blunt diamond point.




ring-shank nail

A nail having a series of concentric grooves on its shank for increased holding power.





roofing nail

A nail having a barbed, threaded, or cement-coated shank and a broad, flat head for fastening shingles or the like.



drive screw

A metal fastener having a helically threaded shank that can be driven with a hammer and removed with a screw driver. Also called screw nail.



spike


A heavy nail for fastening together heavy timbers, 4 to 14 in. (102 to 356 mm) long and proportionally thicker than a common nail.

driftbolt

A spike having a round shank, driven into predrilled holes to fasten heavy timbers together. Also called drift pin.


staple

A U-shaped piece of metal or heavy wire with pointed ends, driven into a surface to secure sheet material or to hold a hasp, pin, or bolt.




corrugated fastener

A fastener consisting of a piece of corrugated sheet steel with one wavy edge sharpened, for uniting two pieces of wood, as in a miter joint. Also called wiggle nail.




round point

An acute, conical point on a nail or spike.




diamond point

An acute, pyramidal point on a nail or spike.



chisel point

A point on a nail or spike formed by two flat inclined sides meeting at a sharp angle.



face-nail

To fasten by nailing perpendicular to the face of the work.

toenail

To secure by nailing obliquely to the surfaces being joined. Alternate nails may be driven at opposite angles to provide increased holding power.

end-nail

To fasten by nailing into the end of a board, parallel to the grain of the wood. End-nailing provides poor resistance to withdrawal.

blind-nail


To secure by nailing in such a way that nailheads are not visible on the face of the work.

set

To sink a nailhead slightly below the surface with a nail set.

clinch

To secure a nail or screw in position by hammering down the protruding point.



nailing strip

A strip of wood or other partly yielding material attached to a hard surface, as of steel or concrete, so that objects may be fastened to the surface.

thread

The helical or spiral ridge of a screw, nut, or bolt.

pitch

The distance between two corresponding points on adjacent threads of a screw, nut, or bolt.

countersink

To enlarge the upper part of a drilled hole so that the head of screw or bolt will lie flush with or below the surface.

pilot hole


A guiding hole for a nail or screw, or for drilling a larger-size hole.

tap

To cut screw threads into an opening.

strip

To tear or damage the threads on a bolt or screw by applying too much force.

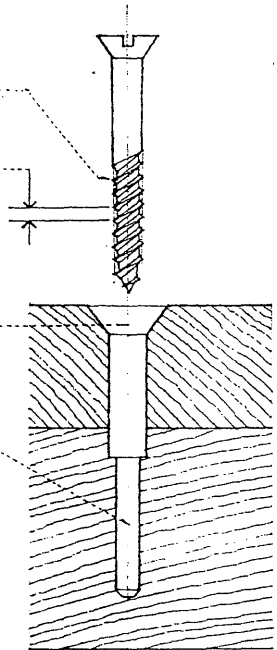

flat head

A screw head having a flat upper surface and a conical bearing surface.

oval head

A screw head having a shallow, spherical shape with a conical bearing surface.

round head

A screw or bolt head having a spherical shape with a flat bearing surface. Also called **buttonhead**.

truss head

A screw or bolt head having a shallow, spherical shape with a flat bearing surface.

panhead


A screw or rivet head having a cylindrical shape with a rounded shoulder.

fillister head

A cylindrical screw head having a slightly domed upper surface and a flat bearing surface.

bugle head

A screw head having a flat upper surface and an underside shaped like the bell of a bugle.

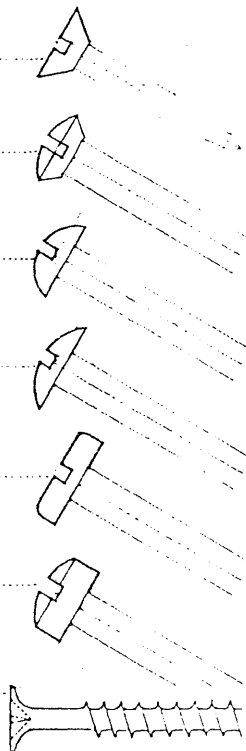

screw

A metal fastener having a tapered, helically threaded shank and a slotted head, designed to be driven into wood or the like by turning, as with a screwdriver.

wood screw

A screw having a slotted head and a threaded point that permits it to form its own mating threads when driven into wood with a screwdriver.

self-tapping screw

A coarse-threaded screw designed to tap its corresponding female thread as it is driven. Also called **tapping screw**.

lag screw

A heavy, coarse-threaded screw having a square or hexagonal head driven by a wrench, used in areas inaccessible to the placement of a nut or where an exceptionally long bolt would be needed to penetrate a joint fully. Also called **coach screw**, **lag bolt**.

machine screw

A metal fastener used with a nut or driven into a tapped hole, having a straight, threaded shank and a slotted or Phillips head for turning with a screwdriver.

cap screw

A metal fastener for machine parts, having a straight, threaded shank held by threads tapped in the hole into which it is screwed.

sheet-metal screw

A coarse-threaded screw for fastening sheet metal and other thin material.

setscrew


A screw, often without a head, threaded through a hole in one part tightly upon or into another part to prevent relative movement.

thumbscrew

A screw having a flattened, knurled head designed to be turned by the thumb and forefinger.

screw eye

A screw having a ring-shaped head.

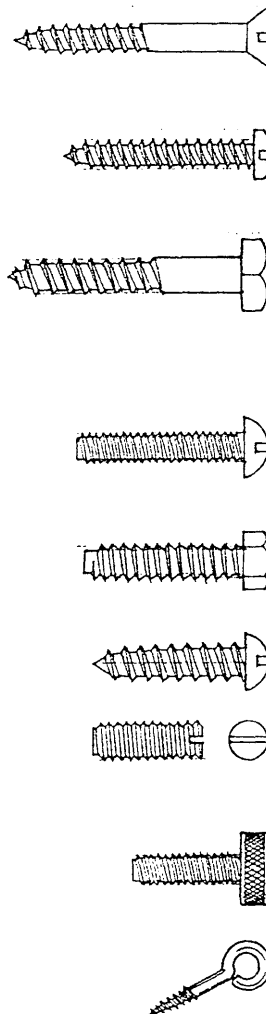

slotted head

A screw head having a single slot, driven by a flat-tipped screwdriver.

Phillips head


A screw head having two partial slots crossing at right angles, driven by a Phillips screwdriver.

Allen head

A screw head having an axial hexagonal recess, driven by an Allen wrench.

security head

A screw head designed to resist removal with a flat-tipped or Phillips screwdriver.



FASTENING*

bolt

A threaded metal pin or rod, usually having a head at one end, designed to be inserted through holes in assembled parts and secured by a mating nut.

carriage bolt

A bolt having a rounded head, a flat bearing surface, and a square shoulder for preventing rotation, used where the head may be inaccessible during tightening.

machine bolt

A bolt having a flat bearing surface and a square or hexagonal head for turning with a wrench.



square head

A bolt or screw head having a square shape designed to be turned with a wrench.




neck

The part on the shank of a bolt next to the head, esp. when it has a special form.



hex head

A bolt or screw head having a hexagonal shape designed to be turned with a wrench.



nut

A square or hexagonal metal block perforated with a threaded hole to fit around and secure a bolt or screw.



lock nut

A nut specially constructed to provide extra friction between itself and a screw or bolt.



castellated nut

A nut having radial slits on its outer face to allow a locking pin or wire to be inserted in both the nut and a hole in its bolt. Also called castle nut.



cap nut

A nut having a hexagonal base and a domed top to cover the threaded end of a screw. Also called a con nut.



wing nut

A nut having two flat projecting pieces that provide a grip for tightening with the thumb and forefinger. Also called thumbnut.



washer

A perforated disk of metal, rubber, or plastic, used under the head of a nut or bolt or at a joint to distribute pressure, prevent leakage, or relieve friction.




lock washer

A washer specially constructed to prevent a nut from shaking loose.



load-indicating washer

A washer having small projections which are progressively flattened as a bolt is tightened, the gap between the head or nut and the washer indicating the tension in the bolt.



counterbore

To increase the diameter of a portion of the length of a drilled hole to receive the head or nut of a bolt or screw.

stove bolt

A small, coarse-threaded machine screw.

J-bolt

A J-shaped metal rod threaded at one end to receive a nut.

U-bolt

A metal rod bent in the shape of a U and threaded at each end.

eyebolt






A bolt having a ring-shaped head to receive a hook or rope.

clevis

A U-shaped fastener secured by a bolt or pin through holes in the end of the two arms.

turnbuckle

A metal link or sleeve internally threaded at each end, used for coupling and tightening two parts, as the threaded ends of two rods or stays.



expansion bolt

An anchor bolt having a split casing that expands mechanically to engage the sides of a hole drilled in masonry or concrete.

Molly




Trademark for a brand of expansion bolt having a split, sleeve-like sheath threaded so that turning the bolt draws the ends of the sheath together and spreads the sides to engage a hole drilled in masonry or the inner surface of a hollow wall.

expansion shield

A lead or plastic sleeve inserted into a predrilled hole and expanded by driving a bolt or screw into it. Also called expansion sleeve.

toggle bolt

An anchor bolt having two hinged wings that close against a spring when passing through a predrilled hole and open as they emerge to engage the inner surface of a hollow wall.



row spacing
The center-to-center distance between two or more rows of bolts.

end distance

The distance between the end of a timber and the center of the nearest bolt hole.


edge distance

The distance from the edge of a timber and the center of the nearest bolt hole.



Lewis bolt

An anchor bolt having a wedge-shaped end around which concrete or lead is poured to hold it.



fox bolt

An anchor bolt having a split end to receive a foxtail wedge as it is screwed into a blind hole.

hanger

Any of various U-shaped metal brackets for supporting the end of a beam, joist, purlin, or truss at a girder or wall. The supported member transfers its reaction to the hanger through bearing, but load transfer to the supporting member is through shear in the special nails securing the hanger.

beam seat

A U-shaped metal bracket for anchoring a timber beam to a concrete support.

post cap

A U-shaped metal bracket for securing a timber beam to a supporting post. Also called column cap.

post base

A U-shaped metal bracket for supporting and anchoring a timber post to its base or foundation. Also called column base.

dowel

A cylindrical pin fitting snugly into holes in two adjacent pieces to prevent their slipping or to align them. Also called dowel pin.

toothed plate

A sheet-metal plate punched to produce a closely spaced grid of protruding teeth, used as a splice plate in the manufacture of light wood trusses.

spike grid

A flat or singly curved grid of spikes for joining heavy timbers, held in place by a single bolt. The resulting joint is resistant to loosening due to vibration, impact, and reversible lateral loads.

framing anchor

Any of various sheet-metal connectors for joining light wood framing members, using special nails which are loaded laterally rather than in withdrawal.

hurricane anchor

A framing anchor for tying a rafter or truss to a wall plate and securing it against lateral and uplifting wind and seismic forces. Also called hurricane tie.

joist anchor

A metal tie strap for securing the joists of a floor or roof diaphragm to a concrete or masonry wall in order to transmit lateral wind or seismic forces.

floor anchor

A metal tie strap for restraining a floor of a light wood frame structure against uplifting wind or seismic forces.

sill anchor


A framing anchor for securing a sill plate to a concrete slab or foundation wall.

holddown

A frame device for restraining a wood frame structure against uplifting wind or seismic forces, consisting of a stiffened steel angle bolted to a wall stud and secured by a threaded rod to a concrete foundation.

timber connector

A metal ring, plate, or grid for transferring shear between the faces of two timber members, used with a single bolt that serves to restrain and clamp the assembly together. Timber connectors are more efficient than bolts or lag screws used alone since they enlarge the area of wood over which a load is distributed.

**shear plate**

A timber connector consisting of a round plate of malleable iron inserted into a corresponding groove, flush with the face of a timber, and held in place by a single bolt. Shear plates are used in back-to-back pairs to develop shear resistance in demountable wood-to-wood connections, or singly in a wood-to-metal connection.

split-ring

A timber connector consisting of a metal ring inserted into corresponding grooves cut into the faces of the joining members and held in place by a single bolt. The tongue-and-groove split in the ring permits it to deform slightly under loading and maintain bearing at all surfaces, while the beveled cross section eases insertion and ensures a tight-fitting joint after the ring is fully seated in the grooves.

FASTENING

solder

To unite two pieces of metal by applying any of various nonferrous solders, usually a tin-lead alloy, at a temperature below 800°F (427°C).

solder

Any of various fusible alloys applied in a molten state to the joint between two metal parts to unite them without heating the parts to the melting point. The molten solder flows into a joint by capillary attraction.

braz

To unite two pieces of metal by applying any of various nonferrous solders, usually a copper-zinc alloy, at a temperature above 800°F (427°C).

filler metal

The metal that is added during a welding, brazing, or soldering process, having a melting point either approximately the same as or below that of the metals being welded.

weld

To unite or fuse two pieces of metal by heating and allowing the metals to flow together, sometimes with pressure and the addition of an intermediate or filler metal.

gas welding

Any of a group of welding processes utilizing the heat produced by the combustion of a oxygen and a fuel gas, as acetylene.

arc welding

Any of a group of welding processes utilizing the heat of an arc between an electrode and the base metal.

arc

A sustained luminous discharge of electricity across a gap in a circuit or between two electrodes. Also called electric arc.

shielded metal arc welding

A method of arc welding using a consumable metal electrode that releases an inert gas to form a shield around the arc. This shield protects the weld area from oxygen and nitrogen in the air that would cause rapid oxidation of the liquid metal.

inert-gas shielded arc welding

A method of arc welding in which the weld area is shielded by the continuous flow of an inert gas from an external source, the filler metal being supplied by a consumable metal electrode or by a separate welding rod.

flux-cored arc welding

A method of arc welding using a tubular steel electrode containing a core of vaporizing flux that forms a gaseous shield around the weld area.

submerged arc welding

A method of arc welding in which the weld area is shielded by a blanket of fusible, granular metal that melts to form a layer of protective slag. The filler metal may be supplied by a consumable electrode or by a separate welding rod.

resistance welding

Any of a group of welding processes utilizing the heat generated by resistance to the passage of a electric current.

fillet weld

A weld with a triangular cross section joining two surfaces that meet in an interior right angle.

base metal

The principal metal to be welded, brazed, soldered, or cut, as distinguished from filler metal.

bead

A continuous deposit of fused metal. Also called weld bead.

welding rod

A wire or rod of filler metal used in gas-welding and brazing processes, and in those arc-welding processes in which the electrode does not furnish the filler metal.

flux

A substance, as rosin, applied to remove oxides from and prevent further oxidation of metal surfaces to be joined by welding, brazing, or soldering.

lap weld

A weld made along the seams of two overlapping pieces of metal.

butt weld

A weld between two pieces of metal butted together.

partial-penetration weld

A butt weld having a depth less than the thickness of the smaller of the two members being joined.

full-penetration weld

A butt weld having a depth equal to the thickness of the smaller of the two members being joined.

puddle weld

A weld made by burning a hole in a piece of sheet metal and filling with a small pool of molten metal.

single-bevel weld

A groove weld in which the edge of one abutting member is beveled from one side.

double-bevel weld

A groove weld in which the edge of one abutting member is beveled from both sides.

single-vee weld

A groove weld in which the edge of each abutting member is beveled from the same side.

double-vee weld

A groove weld in which the edge of each abutting member is beveled from both sides.

groove weld

A weld made in a preformed indentation between two abutting pieces of metal.

rivet

A metal pin having a head at one end, used for uniting two or more plates by passing the shank through a hole in each piece and hammering down the plain end to form a second head.

pneumatic riveter

A pneumatic hammer used with a rivet set to form the second head of a rivet.

rivet set

A tool for shaping the second head of a rivet.

drift

A round, tapering piece of metal for enlarging or aligning holes to receive rivets or bolts. Also called driftpin.

aligning punch









A drift for bringing holes in line to receive a rivet or bolt.

dolly

A tool for receiving and holding the head of a rivet while the other end is being headed.

explosive rivet

A rivet for a joint accessible from one side only, having an explosive-filled shank that is detonated by striking the head with a hammer to expand the shank on the far side of the hole.

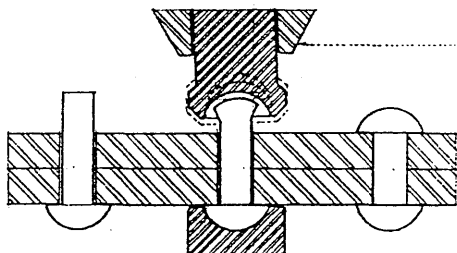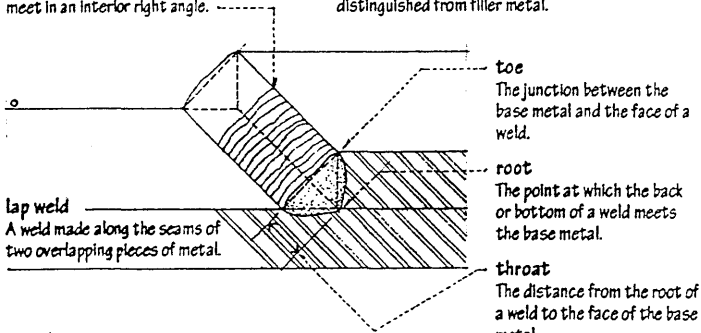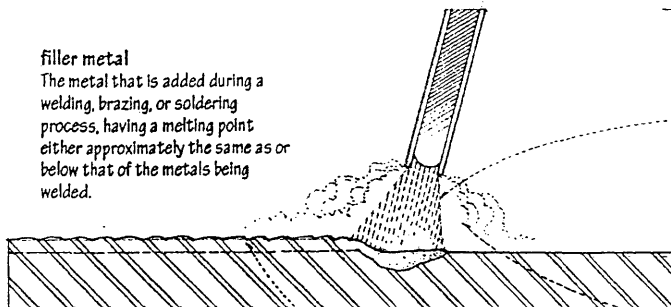

bonnet

A cover for an open fireplace, or a cowl, hood, or wind cap to increase the draft of a chimney.

cowl

A hoodlike covering for increasing the draft of a chimney or ventilator.

spark arrester

A device, consisting of wire netting or the like, used to stop or deflect sparks or embers thrown from an open fireplace or chimney.

prefabricated flue


A metal vent for fuel-fired equipment, assembled from factory-made parts.

smoke dome

The smoke chamber covering of a prefabricated metal fireplace unit.

hood

A metal cover or canopy for a stove, fireplace, chimney, or ventilator.

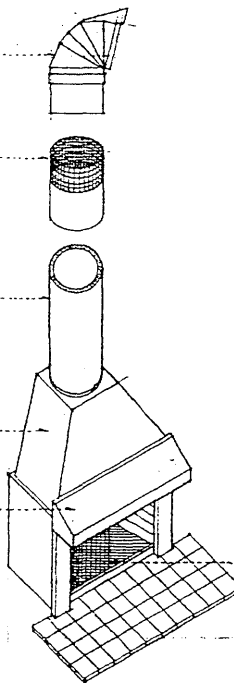

chimney

A vertical, incombustible structure containing a flue through which the smoke and gases of a fire or furnace are carried off to the outside and by means of which a draft is created, esp. the part of such a structure that rises above a roof.

smokestack

A pipe for the escape of the smoke or gases of combustion.

draft

A current of air in any enclosed space, as in a room, chimney, or stove, caused by the difference in temperature or pressure.

downdraft

A downward current of air in a chimney or flue, often carrying smoke with it.

fire screen

A screen placed in front of a fireplace to prevent sparks or embers from entering the room.

chimney breast

A part of a chimney or fireplace that projects out from a wall, usually inside a building.

chimney arch

An arch over a fireplace opening, supporting the breast.

chimney bar

A steel lintel for carrying the masonry above the fireplace opening. Also called **camber bar**, **turning bar**.

chimney cheek

The sides of a fireplace opening supporting the mantel.

hearth

The floor of a fireplace, usually of brick, tile, or stone, often extending a short distance into a room.

back hearth

The part of the hearth that is contained within the fireplace itself. Also called **inner hearth**.

front hearth

The part of the hearth that projects into the room. Also called **outer hearth**.

A framed opening made in a chimney to hold an open fire.

chimney cap

A raised cover for a chimney, usually in the form of a slab or cornice.

chimney pot

A cylindrical pipe of earthenware or metal, fitted on top of a chimney to increase draft and disperse smoke.

flue lining

A smooth-surfaced unit of heat-resistant fire clay or lightweight concrete, having a square, rectangular, or oval section, used for lining the flue of a chimney.

targeting

A smooth lining of mortar or plaster for a chimney flue. Also, **parget**.

flue

An incombustible passage or duct for smoke in a chimney.

draft

A device for regulating the current of air in a stove or fireplace.

damper

A movable plate for regulating the draft in a fireplace, stove, or furnace.

smoke chamber

An enlarged area between the throat of a fireplace and the flue of a chimney.

smoke shelf

A ledge at the bottom of a smoke chamber, so made as to deflect or break the downdrafts from the chimney.

throat

The narrow opening between a fireplace and its flue or smoke chamber, often closed with a damper.

firebox

The chamber containing the fire of a fireplace.

trimmer arch

An arch, usually of brick and in the form of half of a segmental arch, between a chimney and a header in a floor structure to support a hearth.

ashpit

A receptacle in the bottom of a fireplace or firebox for the collection and removal of ashes.

ashpit door



A cast-iron door providing access to an ashpit for removing ashes, or to a chimney for removing soot.

mantel

A construction framing the opening of a fireplace and usually covering part of the chimney breast in a decorative manner. Also called **mantelpiece**.

manteltree

A stone or wooden lintel over a fireplace opening, or a masonry arch used in place of such a lintel.

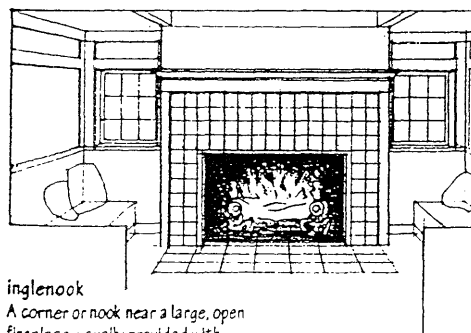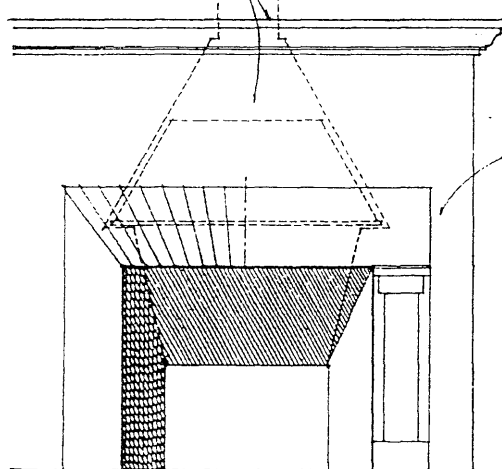

inglenook

A corner or nook near a large, open fireplace, usually provided with seating. Also called **chimney corner**.

FIRE SAFETY

The measures taken to prevent fire or minimize the loss of life or property resulting from a fire, including limiting fire loads and hazards, confining the spread of fire with fire-resistant construction, the use of fire detection and extinguishing systems, the establishment of adequate firefighting services, and the training of building occupants in fire safety and evacuation procedures.

fire hazard


Any condition that increases the likelihood of a fire, obstructs access to firefighting equipment, or delays the egress of occupants in the event of fire.

fire load

The amount of combustible material in a building, measured in pounds per square foot of floor area.

combustible

Of or pertaining to a material capable of igniting and burning.

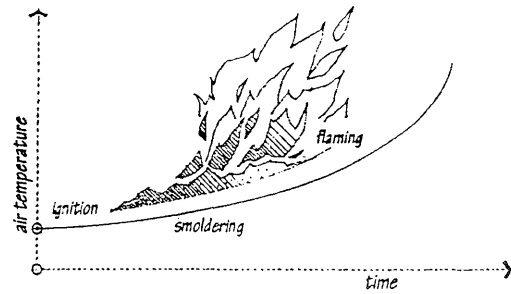

ignition point

The lowest temperature at which a substance will undergo spontaneous combustion and continue to burn without additional application of external heat.

flash point


The lowest temperature at which a combustible liquid will give off sufficient vapor to ignite momentarily when exposed to flame.

fire-rated

Noting or pertaining to a material, assembly, or construction having a fire-resistance rating required by its use. Also, fire-resistive.

fire-resistance rating

The time in hours a material or assembly can be expected to withstand exposure to fire without collapsing, developing any openings which permit the passage of flame or hot gases, or exceeding a specified temperature on the side away from the fire, determined by subjecting a full-size specimen to temperatures according to a standard time-temperature curve.

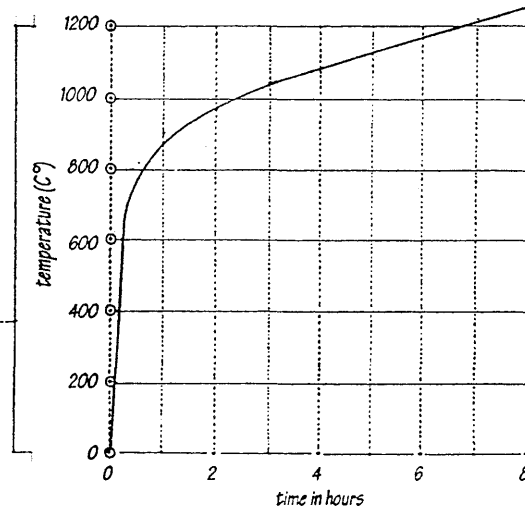

tunnel test

A test measuring the time it takes for a controlled flame to spread across the face of a test specimen, the amount of fuel the material contributes to the fire, and the density of the smoke developed by the fire. Also called Steiner tunnel test.

flame-spread rating



A rating of how quickly a fire can spread along the surface of an interior finish material. Red oak flooring has a flame-spread rating of 100 while a cement-asbestos board has a rating of 0.

fuel-contribution rating


A rating of the amount of combustible substances an interior finish material can contribute to a fire.

smoke-developed rating


A rating of the amount of smoke an interior finish material can produce when it burns. Materials having a smoke-developed rating above 450 are not permitted to be used inside buildings.

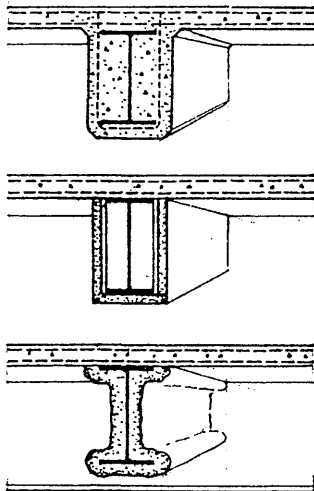

concrete



metal lath and plaster



spray-on fireproofing


A mixture of mineral fibers and an inorganic binder, applied by air pressure with a spray gun to provide a thermal barrier to the heat of a fire.

fireproofing

Any of various materials, as concrete, gypsum, or mineral fiber, used in making a structural member or system resistant to damage or destruction by fire.

intumescent paint

A coating that, when exposed to the heat of a fire, swells to form a thick insulating layer of inert gas bubbles that retards flame spread and combustion.

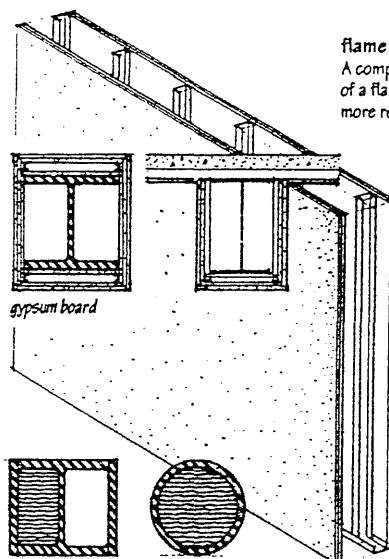


liquid-filled column

A hollow structural-steel column filled with water to increase its fire resistance. If exposed to flame, the water absorbs heat, rises by convection to remove the heat, and is replaced with cooler water from a storage tank or a city water main.

flame retardant

A compound used to raise the ignition point of a flammable material, thus making it more resistant to fire.

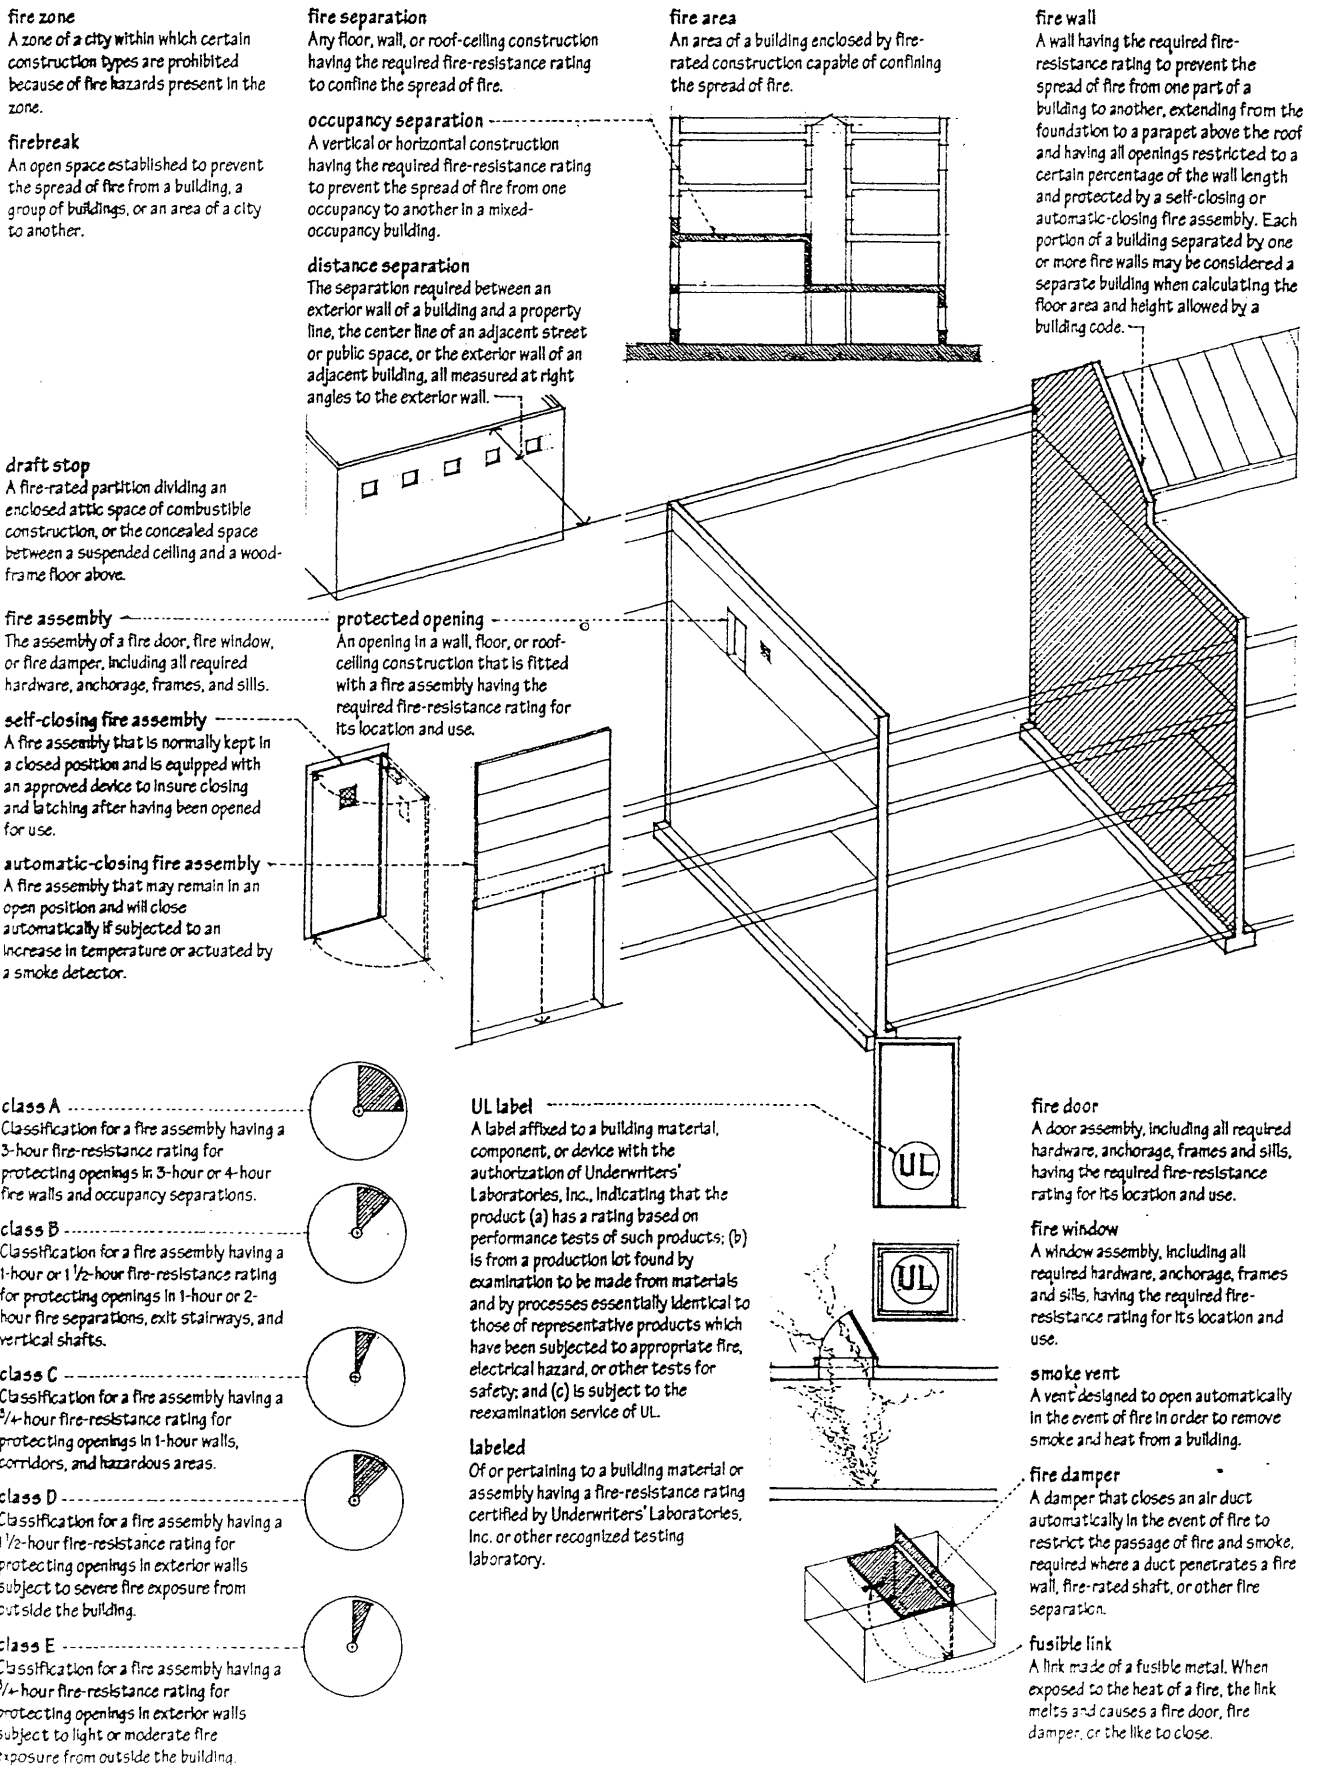

FIRE SAFETY

fire-alarm system


An electrical system installed in a building to automatically sound an alarm when actuated by a fire-detection system.

fire-detection system

A system of thermostats or other approved sensors for detecting the presence of fire and automatically signaling an alarm.

smoke detector

An electronic fire alarm that is activated by the presence of smoke.



sprinkler system

Apparatus for automatically extinguishing fires in a building, consisting of a system of pipes in or below the ceilings, connected to a suitable water supply, and supplied with valves or sprinkler heads made to open automatically at a certain temperature.

sprinklered

Of or pertaining to a building or building area that has or is protected by a properly maintained sprinkler system.

sprinkler head

A nozzle in a sprinkler system for dispersing a stream or spray of water, usually controlled by a fusible link that melts at a predetermined temperature.

automatic fire-extinguishing system

A system of devices and equipment which automatically detects a fire and discharges an approved fire-extinguishing agent onto or in the area of a fire.

wet-pipe system

A sprinkler system containing water at sufficient pressure to provide an immediate, continuous discharge through sprinkler heads that open automatically in the event of fire.

dry-pipe system

A sprinkler system containing pressurized air that is released when a sprinkler head opens in the event of fire, allowing water to flow through the piping and out the opened nozzle. Dry-pipe systems are used where the piping is subject to freezing.

preaction system

A dry-pipe sprinkler system through which water flow is controlled by a valve operated by fire-detection devices more sensitive than those in the sprinkler heads. Preaction systems are used when an accidental discharge would damage valuable materials.

deluge system

A sprinkler system having sprinkler heads open at all times, through which water flow is controlled by a valve operated by a heat-, smoke-, or flame-sensing device.

standpipe

A water pipe extending vertically through a building to supply fire hoses at every floor.

wet standpipe


A standpipe containing water under pressure and fitted with fire hoses for emergency use by building occupants.

dry standpipe

A standpipe containing no water and used by the fire department to connect fire hoses to a fire hydrant or pumper truck.


fire hose

A heavy-duty hose for use in fighting a fire.



hydrant


An upright pipe with one or more nozzles or spouts for drawing water from a main, esp. for fighting fires. Also called fire hydrant, fireplug.



siamese


A pipe fitting installed close to the ground on the exterior of a building, providing two or more connections through which the fire department can pump water to a standpipe or sprinkler system.

water main



fire extinguisher

A portable apparatus for putting out a small fire by ejecting pressurized water or special chemicals, classified according to the type of fire it is able to extinguish.

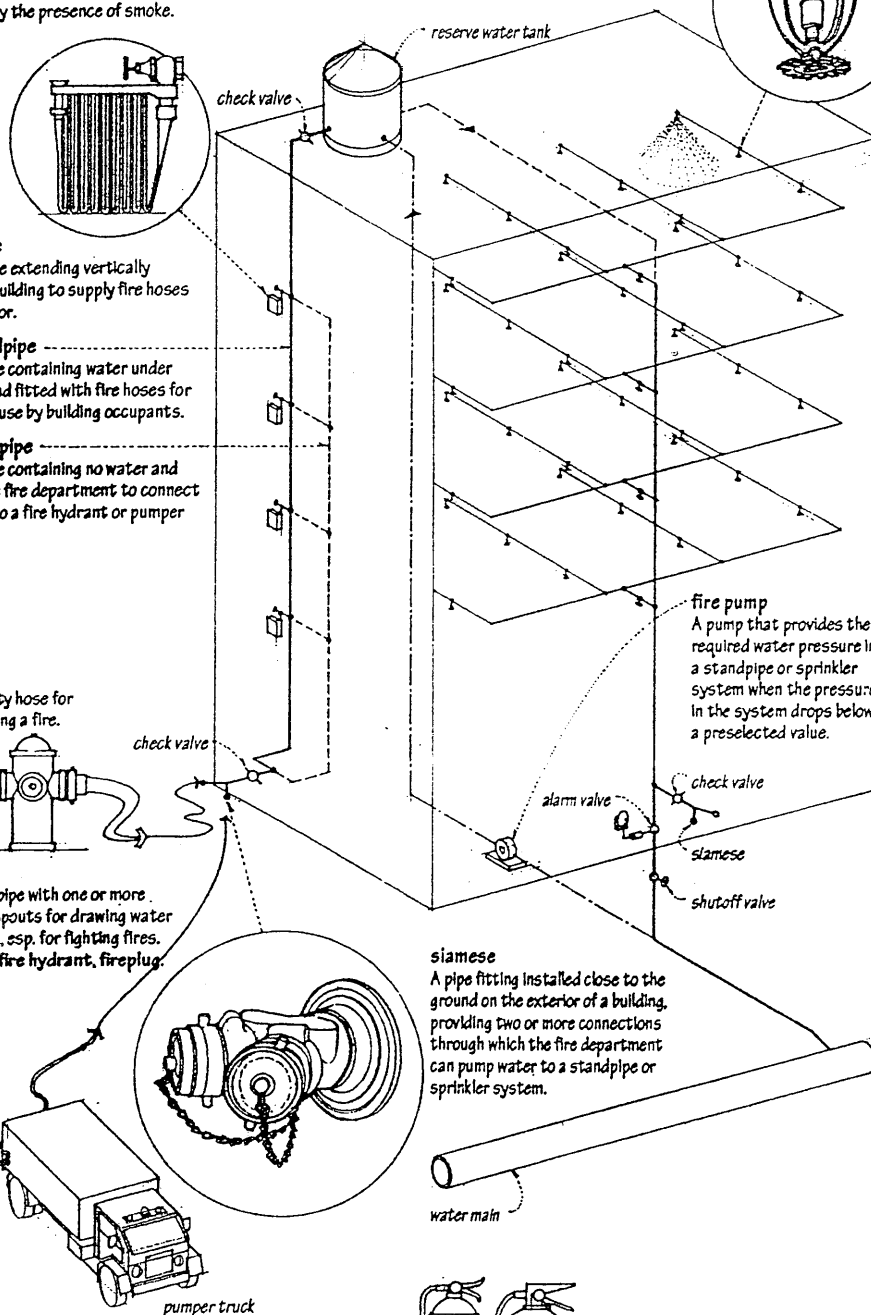

class A fire

A fire involving ordinary combustible materials, as wood, paper and cloth, on which the quenching or cooling effect of water is of primary importance.

class B fire

A fire involving flammable liquids, as gasoline, oil and grease, which must be extinguished by excluding air and inhibiting the release of combustible vapors.

class C fire

A fire involving live electrical equipment, which requires a nonconducting extinguishing medium.

class D fire

A fire involving certain combustible metals, as magnesium or sodium, which requires a nonreactive, heat-absorbing extinguishing medium.

exit access

That portion of a means of egress that leads to an exit. Building codes specify the maximum distance of travel to an exit and the minimum distance between exits when two or more are required.

well

A shaft for air, light, stairs, or an elevator, extending vertically through the floors of a building.





exit light

An illuminated sign identifying a required exit.

emergency lighting

A lighting system designed to supply the illumination required for safe egress from a building in the event of a power failure.



occupant load

The total number of persons that may occupy a building or portion thereof at any one time, determined by dividing the floor area assigned to a particular use by the square feet per occupant permitted in that use. Building codes use occupant load to establish the required number and width of exits for a building.

horizontal exit

A passage through or around a wall constructed as required for an occupancy separation, protected by an automatic-closing fire door, and leading to an area of refuge in the same building or on approximately the same level in an adjacent building.

area of refuge

An area affording safety from fire or smoke coming from the area from which escape is made.

exit corridor

A passageway serving as a required exit, enclosed by walls of fire-resistive construction. Building codes limit the length of dead-end corridors.

exit door

A door providing access to a means of egress, swinging in the direction of exit travel, and usually equipped with a panic bar.

exit passageway

A means of egress connecting a required exit or exit court with a public way, having no openings other than required exits and enclosed by fire-resistive construction as required for the walls, floors, and ceiling of the building served.

exit discharge

That portion of a means of egress that leads from an exit to an exit court or public way.

means of egress

A continuous path of travel from any point in a building to the outside at ground level.

exit

An enclosed and protected path of escape for the occupants of a building in the event of fire, leading from an exit access to an exit discharge.

smokeproof enclosure

The enclosing of an exit stairway by walls of fire-resistive construction, accessible by a vestibule or by an open exterior balcony, and ventilated by natural or mechanical means to limit the penetration of smoke and heat. Building codes usually require one or more of the exit stairways for a high-rise building be protected by a smokeproof enclosure.

exit stairway

A stairway leading to an exit passageway, an exit court, or public way, enclosed by fire-resistive construction with self-closing fire doors that swing in the direction of exit travel.

exterior exit balcony

A landing or porch projecting from the wall of a building and serving as a required means of egress.

fire escape

An exit stairway down an outside wall of a building, constructed to the same standards as an interior exit stairway.

exterior exit

An exit door opening directly to an exit court or public way.

exit court


A yard or court providing egress to a public way for one or more required exits.

public way

A street, alley, or similar parcel of land open to the sky and deeded, dedicated, or otherwise permanently appropriated for the free passage and use of the general public.

FLOOR

The level, base surface of a room or hall upon which one stands or walks.

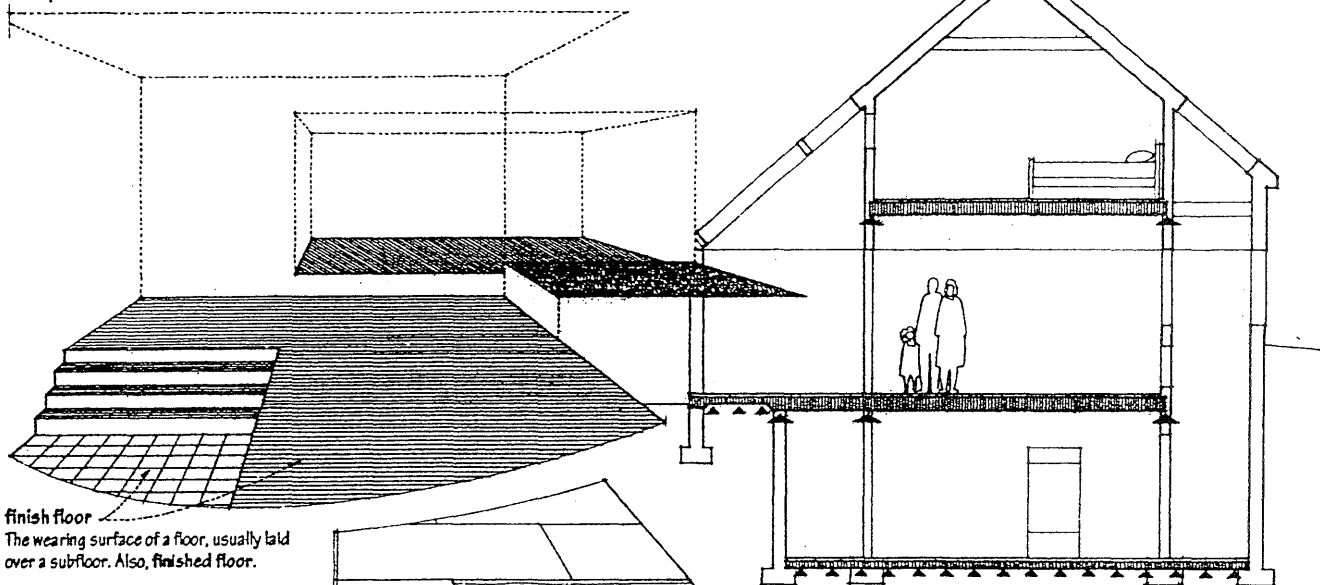

finish floor

The wearing surface of a floor, usually laid over a subfloor. Also, finished floor.

subfloor

A base for a finish floor, consisting of boards, plywood, or other structural sheathing laid over and fixed to the floor joists. A subfloor is often used as a working platform during construction and may also act as a structural diaphragm to transfer lateral loads to shear walls. Also called blind floor, rough floor.

floor framing

The act, process, or manner of constructing the structural frame of a floor.

joist

Any of a series of small, parallel beams for supporting floors, ceilings, or flat roofs.

header

A framing member crossing and supporting the ends of joists, studs, or rafters, so as to transfer the weight to parallel joists, studs, or rafters.

trimmer

A beam, joist, or rafter supporting one end of a header at the edge of an opening in a floor or roof frame.

tailpiece

A relatively short beam, joist, or rafter supported by a wall at one end and by a header at the other. Also called stringer.

rim joist

A joist set on top of the sill and forming the perimeter of a wood-framed floor. Also called header.

bridging


An arrangement of braces or blocking between joists or rafters to prevent their rotation or lateral displacement, esp. when their depth-to-width ratio exceeds 6. Bridging may not be required when the ends of the members are fixed against rotation and their edges are held in line by subflooring or sheathing.

solid bridging

Bridging consisting of short boards fixed vertically between floor or roof joists.

crossbridging

Bridging composed of diagonal braces set in pairs between floor or roof joists.




beam fill

Material, as masonry or concrete, for filling the spaces between joists or beams in or on top of a masonry wall, stiffening the members, and providing increased fire resistance. Also, beam filling.


beam pocket

An opening in the vertical face of a structural member to receive a beam.




firecut

An angular cut at the end of a joist or beam where it enters a masonry wall, allowing the member to fail without damaging the wall if it burns through somewhere along its length.

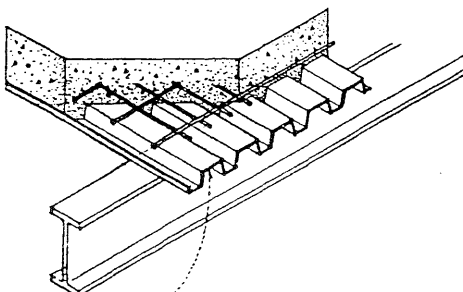


form decking

Metal decking serving as permanent formwork for a reinforced concrete slab until the slab can support itself.



acoustic decking

Metal decking containing glass fiber between the perforated webs of ribbed decking or in the perforated cells of cellular decking, used as a sound-absorbing ceiling.

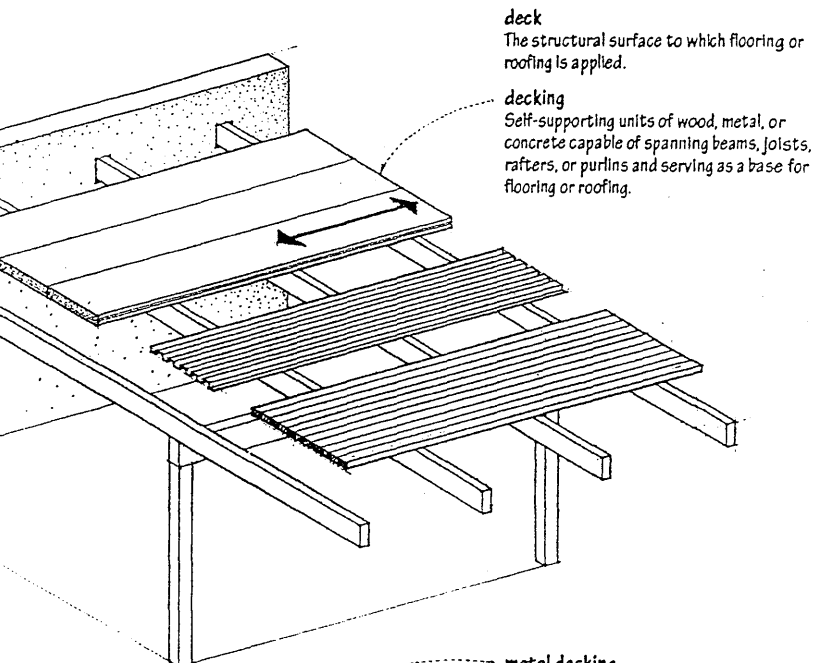

deck


The structural surface to which flooring or roofing is applied.

decking

Self-supporting units of wood, metal, or concrete capable of spanning beams, joists, rafters, or purlins and serving as a base for flooring or roofing.

metal decking

Sheet steel strengthened for use as floor or roof decking by cold-rolling a series of ribs or flutes into it, and usually galvanized for corrosion resistance. The spanning capability of metal decking depends on the thickness of the steel sheet and the depth of the corrugations.

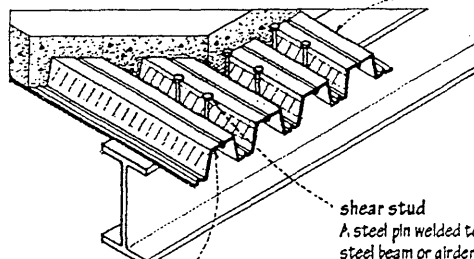


shear stud

A steel pin welded to the top flange of a steel beam or girder and embedded in a concrete slab so as to cause the beam and the concrete to act as a structural unit.


composite decking

Metal decking serving as permanent formwork and tensile reinforcement for a concrete slab bonded to it by a deformed or dovetail rib pattern.

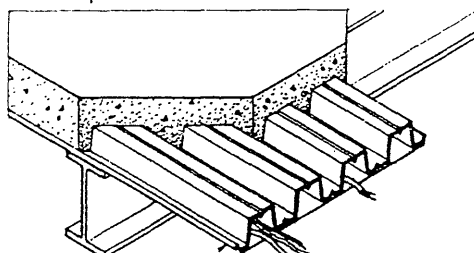

cellular decking

Metal decking manufactured by welding a corrugated steel sheet to a flat steel sheet, forming a series of raceways for electrical wires and cables.

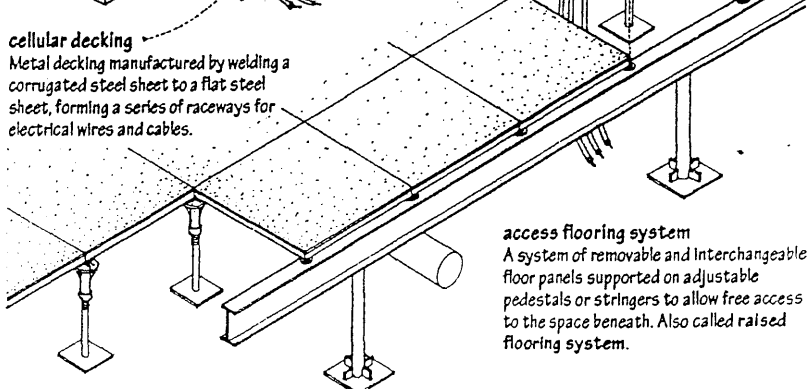

access flooring system

A system of removable and interchangeable floor panels supported on adjustable pedestals or stringers to allow free access to the space beneath. Also called raised flooring system.

FLOOR

finish flooring

Material used for the wearing surface of a floor, as hardwood, terrazzo, or floor tile.

wood flooring



Finish flooring in the form of wood strips, planks, or blocks.

strip flooring

Flooring composed of long, narrow wood strips, usually side- and end-matched.

plank flooring

Flooring composed of boards wider than strip flooring, usually side- and end-matched.









parquet

A floor composed of short strips or blocks of wood forming a pattern, sometimes with inlays of other woods or other materials.

parquetry

Mosaic work of wood used for floors and wainscoting.



block flooring

Flooring composed of square units preassembled at the mill and usually installed with mastic over a wood subfloor or concrete slab.

unit block

A flooring block made by joining short lengths of strip flooring edgewise, usually tongued on two adjoining sides and grooved on the other two to ensure proper alignment in setting.

laminated block

A flooring block made by bonding three or more wood veneers with a moisture-resistant adhesive, usually tongued on two opposing sides and grooved on the other two to ensure proper alignment in setting.

slat block

A flooring block made by assembling narrow slats or fingers of hardwood into larger units.

terrazzo

A mosaic floor or paving composed of marble or other stone chips, set in a cementitious or resinous matrix and ground when dry.



standard terrazzo

A ground and polished terrazzo finish consisting mainly of relatively small stone chips.

Venetian terrazzo

A ground and polished terrazzo finish consisting mainly of large stone chips, with smaller chips filling the spaces between.



rustic terrazzo

A uniformly textured terrazzo finish produced by washing the matrix prior to setting so as to expose the chips, which are not ground.

Palladiana

A mosaic terrazzo finish consisting of cut or fractured marble slabs set by hand in the desired pattern, with smaller chips filling the spaces between.

topping

The mixture of stone chips and cementitious or resinous matrix that produces a terrazzo surface.




bonding agent

A chemical substance applied to a substrate to create a bond between it and a succeeding layer, as between a terrazzo topping and a subfloor.




underbed

The mortar base on which a terrazzo topping is applied.



resinous matrix

A latex, polyester, or epoxy binder combined with stone chips to form a terrazzo topping especially resistant to chemicals and abrasion.



thin-set terrazzo

A thin resinous terrazzo topping directly over a sound wood, metal, or concrete subfloor.

monolithic terrazzo

A terrazzo topping installed directly over a rough-finished concrete slab. A chemical bonding agent is used if the concrete surface is too smooth for a mechanical bond.

bonded terrazzo

A terrazzo topping installed over a mortar underbed that is bonded to a rough-finished concrete slab.

sand-cushion terrazzo

A terrazzo system for controlling cracking when structural movement is expected, consisting of a terrazzo topping installed over a reinforced mortar underbed that is separated from the subfloor by an isolation membrane and a thin layer of sand.

linoleum

A resilient floor covering formed by coating burlap or canvas with heated linseed oil, powdered cork, and rosin, and adding pigments to achieve the desired colors and patterns. Linoleum should be used only on a subfloor suspended above grade.

vinyl sheet

A resilient floor covering composed principally of polyvinyl chloride in combination with mineral fillers, pigments, and a fiber, felt, or foam backing.

vinyl tile

A resilient floor tile composed principally of polyvinyl chloride in combination with mineral fillers and pigments.

cork tile

A resilient floor tile composed of granulated cork and synthetic resin binders, finished with a protective coat of wax or a film of clear polyvinyl chloride. Cork tile should be used only on a subfloor suspended above grade.

rubber tile


A resilient floor tile composed of natural or synthetic rubber with mineral fillers.

resilient flooring

Any of various floor coverings capable of springing back to the original form after being bent or compressed, available in either tile or sheet form and set in mastic over a suitable underlayment.

floor covering

Material, esp. a nonfabric material, as vinyl or ceramic tile, used to cover a floor.

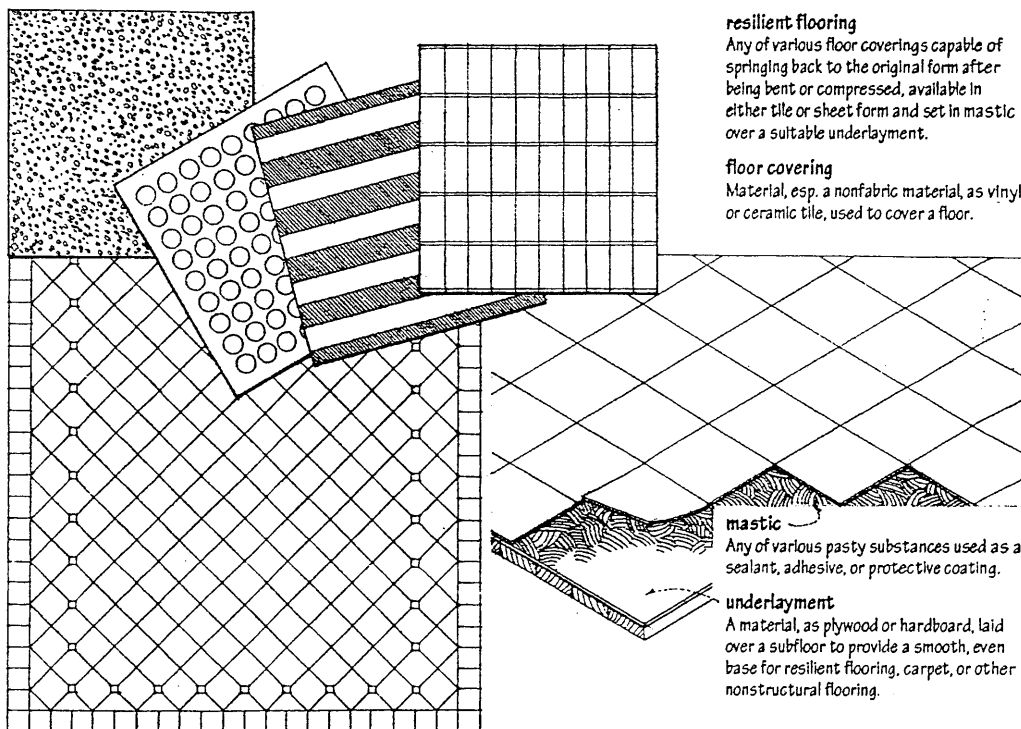

mastic

Any of various pasty substances used as a sealant, adhesive, or protective coating.

underlayment

A material, as plywood or hardboard, laid over a subfloor to provide a smooth, even base for resilient flooring, carpet, or other nonstructural flooring.

carpet

A heavy woven, knitted, needle-tufted, or felted fabric for covering a floor.

pile weight

The average weight of pile yarn in a carpet, stated in ounces per square yard.

pile density


The weight of pile yarn per unit volume of carpet, stated in ounces per cubic yard.

pitch

The crosswise number of tuft-forming pile yarns in a 27-inch (686 mm) width of woven carpet.

gauge

The spacing of tufts across the width of a tufted or knitted carpet, expressed in fractions of an inch.



woven carpet

Carpet made by simultaneously interweaving the backing and pile yarns on a loom.

tufted carpet

Carpet made by mechanically stitching pile yarn through a primary fabric backing and bonded with latex to a secondary backing.

knitted carpet

Carpet made by looping the backing, stitching, and pile yarns with three sets of needles.



pile

The upright tufts of yarn forming the surface of a carpet or fabric.

loop pile

A carpet texture created by weaving, tufting, or knitting the pile yarn into loops.

cut pile

A carpet texture created by cutting each loop of pile yarn, producing a range of textures from informal shags to short, dense velvets.

fusion-bonded carpet

Carpet made by heat-fusing face yarns to a vinyl backing supported by other materials.

flocked carpet


Carpet made by propelling short strands of pile fiber electrostatically against an adhesive-coated backing.

needlepunched carpet

Carpet made by punching carpet fibers back and forth through a woven polypropylene sheet with barbed needles to form a felted fiber mat.

carpet tile

A flooring tile made of carpeting material.




backing

The foundation material securing the pile yarns of a carpet and providing it with stiffness, strength, and dimensional stability.

carpet pad

A pad of cellular rubber or felted animal hair, over which carpet is installed to increase resilience, improve durability, and reduce impact sound transmission. Also called carpet cushion.



FORCE

An influence on a body producing or tending to produce a change in shape or movement.

vector

A quantity possessing both magnitude and direction, represented by an arrow whose length is proportional to the magnitude and whose orientation in space represents the direction.

line of action

A line of indefinite length of which a force vector is a segment. A force acting on a rigid body may be regarded as acting anywhere along its line of action without altering the external effect of the force.

components of a force

Two or more concurrent forces into which a single force may be resolved and having a net effect on a rigid body equivalent to that of the initial force. For convenience in structural analysis, these are usually the rectangular or Cartesian components of the initial force.

moment

The tendency of a force to produce rotation of a body about a point or line, equal in magnitude to the product of the force and the moment arm and acting in a clockwise or counterclockwise direction.

moment center

The point at which the axis of a moment intersects the plane of the forces causing the moment.

moment arm

The perpendicular distance from the line of action of a force to the point or line about which a moment occurs. Also called force arm.

couple

A force system of two equal, parallel forces acting in opposite directions and tending to produce rotation but not translation. The moment of a couple is equal in magnitude to the product of one of the forces and the perpendicular distance between the two forces.

parallel forces

Nonconcurrent forces having parallel lines of action.

nonconcurrent forces

Forces having lines of action that do not intersect at a common point, the vector sum of which is a single force that would cause the same translation and rotation of a body as the set of original forces.

collinear forces

Concurrent forces having the same line of action, the vector sum of which is the algebraic sum of the magnitudes of the forces, acting along the same line of action.

coplanar forces

Forces that operate in a single plane.

concurrent forces

Forces having lines of action intersecting at a common point, the vector sum of which can be found by applying the parallelogram law.

parallelogram law

The proposition that the vector sum of two concurrent forces can be described by the diagonal of a parallelogram having adjacent sides which represent the two force vectors being added.

vector sum

A single vector equivalent to and producing the same effect on a body as the application of two or more given vectors. Also called resultant.

triangle method

A graphic technique for finding the vector sum of two concurrent forces by displacing one force vector parallel to itself until its tail coincides with the head of the other and completing the triangle with a vector that represents the resultant force.

polygon method

A graphic technique for finding the vector sum of a coplanar system of several concurrent forces by drawing to scale each force vector in succession, with the tail of each at the head of the one preceding it, and completing the polygon with a vector that represents the resultant force, extending from the tail of the first to the head of the last vector.

center of gravity





The point at which the entire weight of a body may be considered concentrated so that, if supported at this point, the body would remain in equilibrium in any position; coincident with the center of mass in a uniform gravitational field. A force whose line of action passes through the center of gravity of a body affects only its translational equilibrium; the body remains in rotational equilibrium.

center of mass

The point at which the entire mass of a body may be considered concentrated such that the moment about any line through the point is zero.


centroid

The center of a one- or two-dimensional figure, about which the sum of the displacements of all points in the figure is zero.

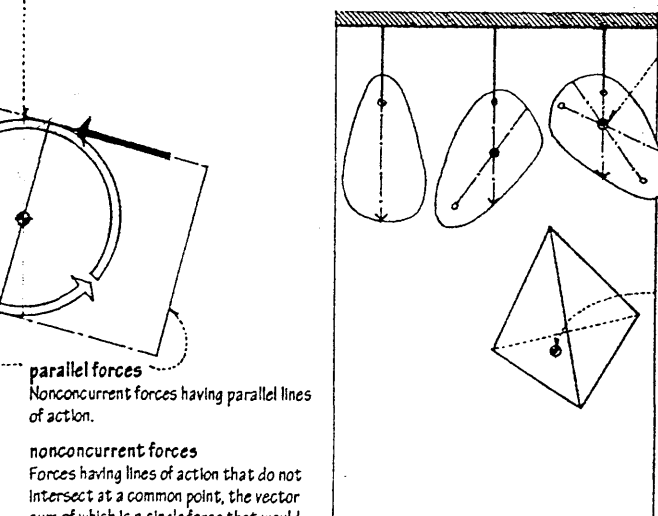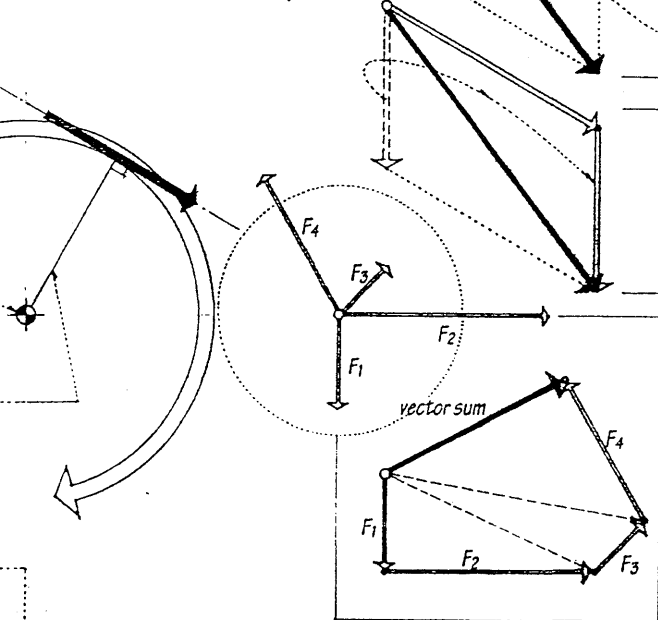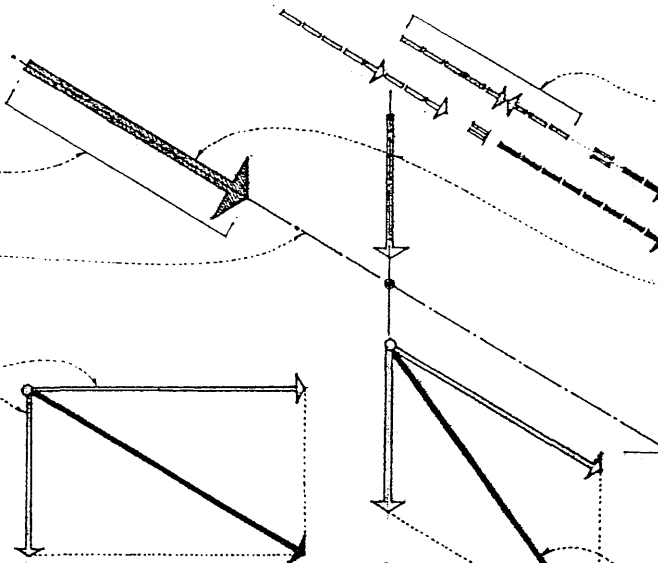



translation
The uniform motion of a body in a straight line, without rotation or angular displacement.



rotation
The circular motion of a body about an axis.

lever
A rigid element that pivots about a fulcrum to exert a pressure or sustain a weight at a second point by a force applied at a third.

fulcrum
The point or support about which a lever turns.

mechanical advantage
The ratio of output force to the input force applied to a mechanism.

free-body diagram
A graphic representation of the complete system of applied and reactive forces acting on a body or an isolated part of a structure. Every elementary part of a structural system has reactions that are necessary for the equilibrium of the part, just as the larger system has reactions at its supports that serve to maintain the equilibrium of the whole. Also called **equilibrium diagram**.

mechanics
The branch of physics that deals with the effects of forces on bodies or material systems, comprised of statics and dynamics.

statics
The branch of mechanics that deals with the relations of forces producing equilibrium among bodies or material systems.

dynamics
The branch of mechanics that deals with the motion and equilibrium of bodies or material systems under the action of forces.

statically equivalent
Having the same translational and rotational effect on a body.

1 Newton's first law of motion
The physical law that a body remains at rest or in motion with a constant velocity unless an external force acts on the body. Also called **law of inertia**.

inertia
The tendency of a body at rest to remain at rest or of a body in motion to retain its velocity along a straight line unless acted upon by an external force.

equilibrant
The force required to bring a set of concurrent forces into equilibrium, equal in magnitude but opposite in direction to the resultant of the concurrent force system and acting along the same line of action.

equilibrium
A state of balance or rest resulting from the equal action of opposing forces. For a rigid body to be in equilibrium, two conditions are necessary. First, the vector sum of all forces acting on it must equal zero, ensuring translational equilibrium: $\Sigma F_x = 0; \Sigma F_y = 0; \Sigma F_z = 0$. Second, the algebraic sum of all moments of the forces about any point or line must equal zero, ensuring rotational equilibrium: $\Sigma M = 0$.

2 Newton's second law of motion
The physical law that the sum of the forces acting on a body is equal to the product of the mass of the body and the acceleration produced by the force, with motion in the direction of the resultant of the forces.


$$\text{force (F)} = \text{mass (m)} \times \text{acceleration (a)}$$

$$\text{mass (m)} = F/a = \text{weight (w)} / \text{gravitational force (g)}$$

3 Newton's third law of motion
The physical law that for every force acting on a body, the body exerts a force having equal magnitude and the opposite direction along the same line of action as the original force. Also called the **law of action and reaction**.


applied force
An external force acting directly on a body.


reactive force
An external force generated by the action of one body on another.

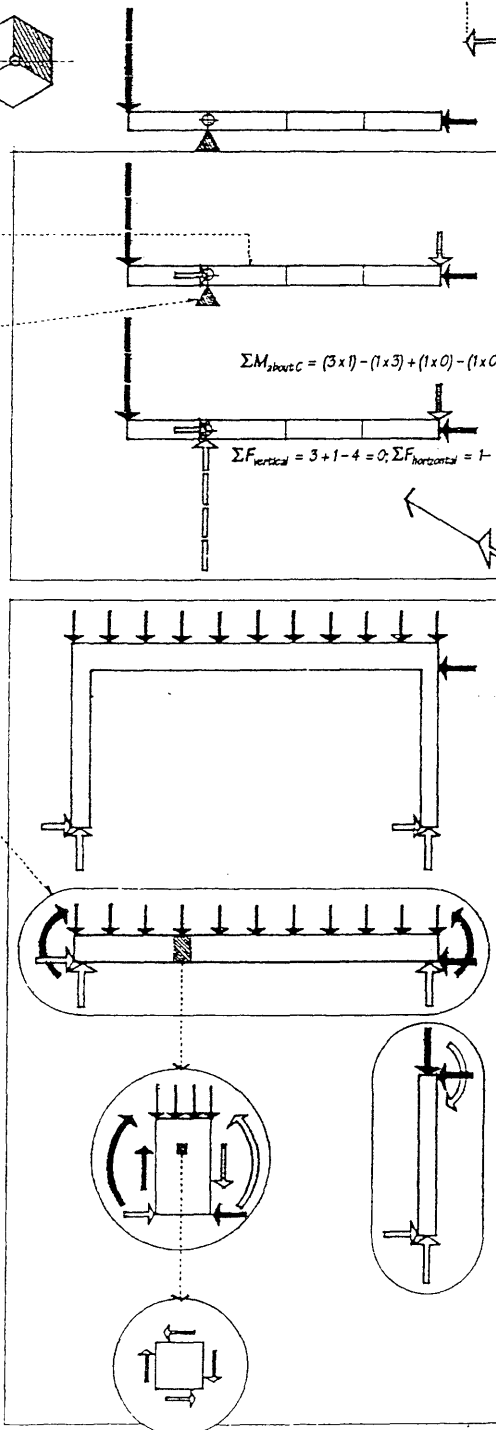

FORTIFICATION

A defensive military work constructed for the purpose of strengthening a position.

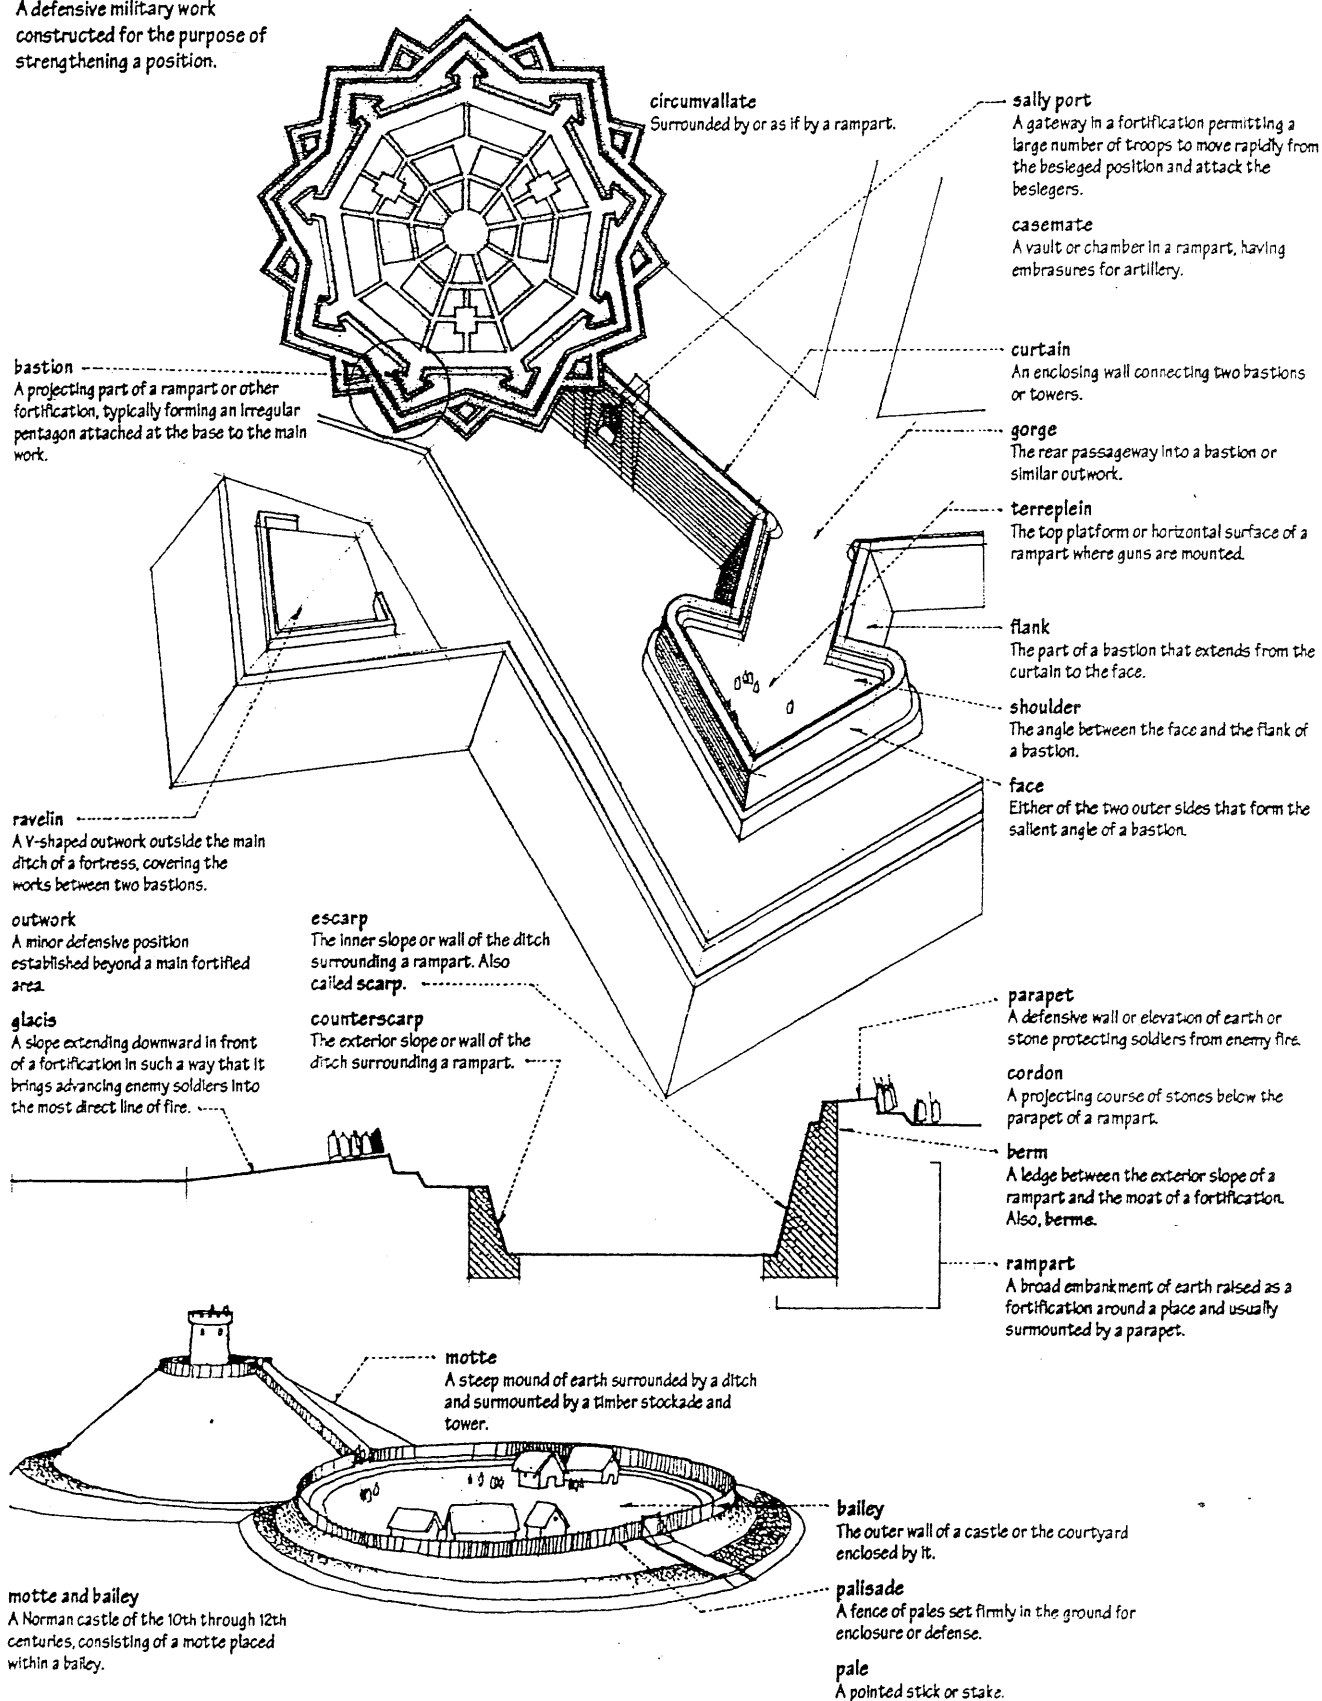

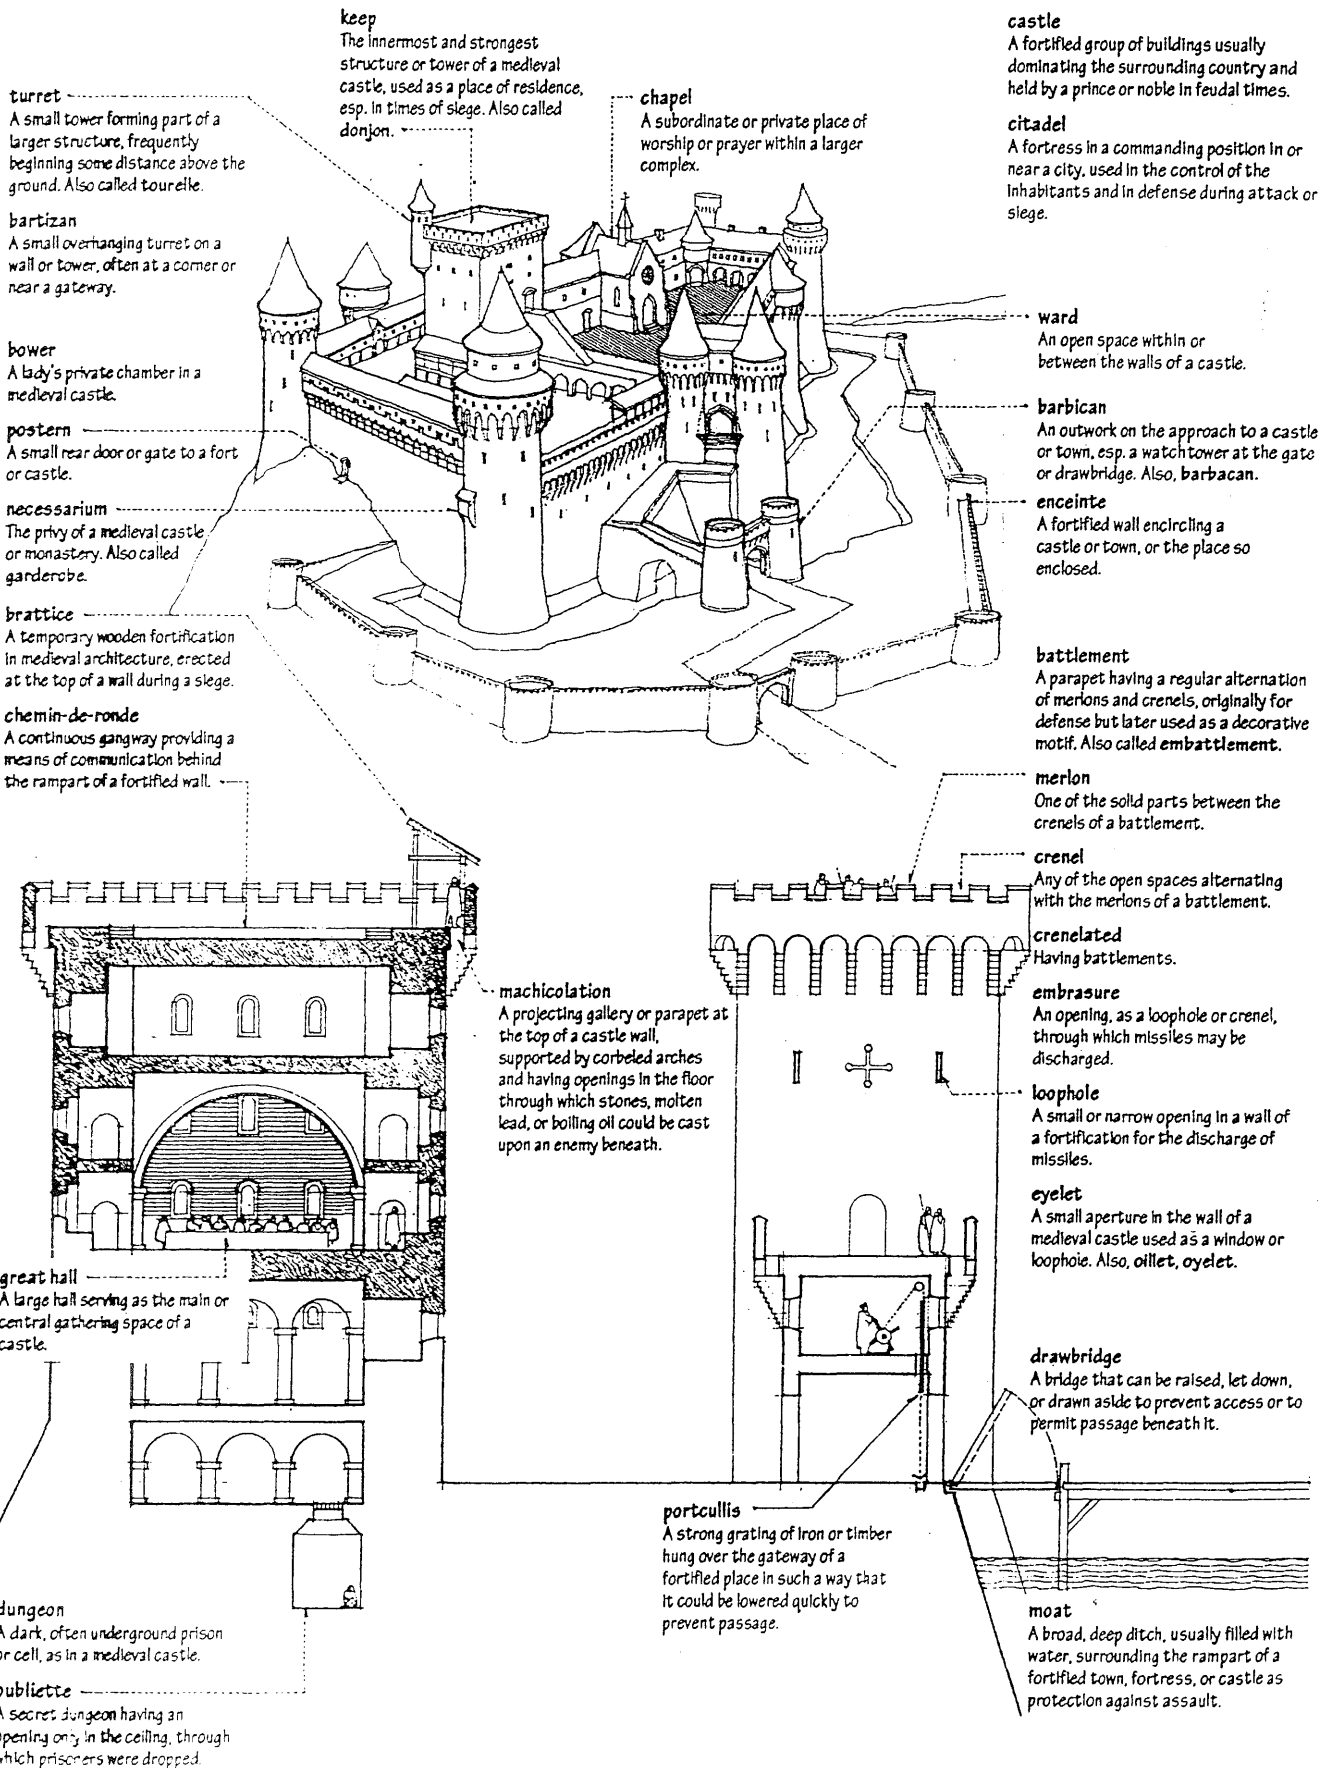

FOUNDATION

The lowest division of a building or other construction, partly or wholly below the surface of the ground, designed to support and anchor the superstructure and transmit its loads directly to the earth.

shallow foundation

A foundation system placed directly below the lowest part of a substructure and transferring building loads directly to the supporting soil by vertical pressure.

footing

The part of a foundation bearing directly upon the supporting soil, set below the frostline and enlarged to distribute its load over a greater area.

settlement

The gradual subsiding of a structure as the soil beneath its foundation consolidates under loading.

consolidation

The gradual reduction in the volume of a soil mass resulting from the application of a sustained load and an increase in compressive stress.

primary consolidation

A reduction in volume of a soil mass under the action of a sustained load, due chiefly to a squeezing out of water from the voids within the mass and a transfer of the load from the soil water to the soil solids. Also called primary compression.




secondary consolidation

A reduction in volume of a soil mass under the action of a sustained load, due chiefly to adjustment of the internal structure of the soil mass after most of the load has been transferred from the soil water to the soil solids.

differential settlement


The relative movement of different parts of a structure caused by uneven settlement or failure of its foundation.

Overlapping soil stresses may be caused by closely spaced footings or by adjacent footings located at different levels.

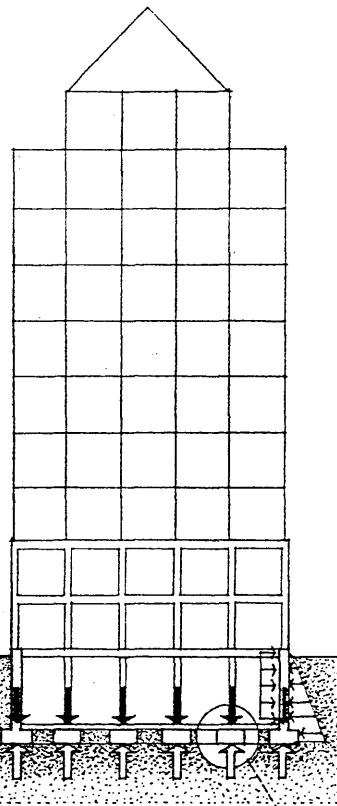

arching

The transfer of stress from a yielding part of a soil mass to adjoining, less yielding or restrained parts of the mass.

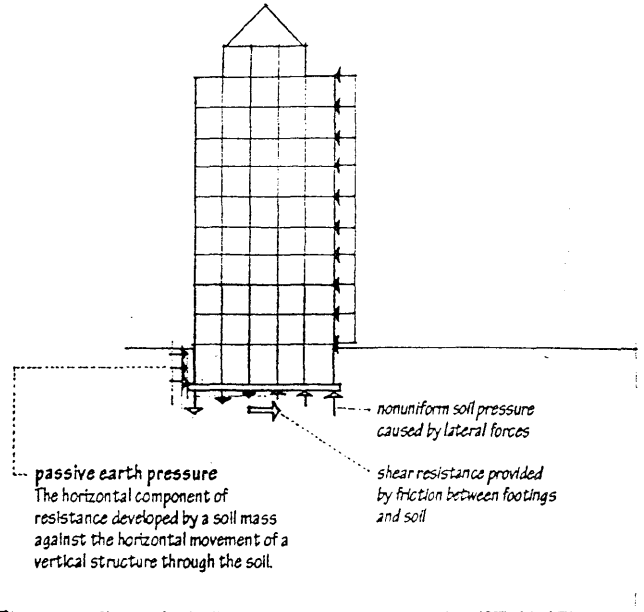

passive earth pressure


The horizontal component of resistance developed by a soil mass against the horizontal movement of a vertical structure through the soil.

active earth pressure

The horizontal component of pressure that a soil mass exerts on a vertical retaining structure.


soil pressure

The actual pressure developed between a footing and the supporting soil mass, equal to the quotient of the magnitude of the forces transmitted and the area of contact. Also called contact pressure.

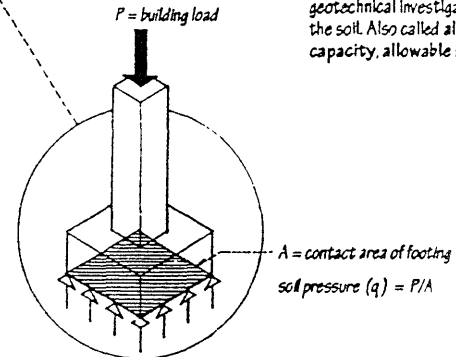

allowable bearing pressure

The maximum unit pressure a foundation is permitted to impose vertically or laterally on a supporting soil mass. Allowable bearing pressures for various soil classifications are conservative values permitted by building codes in the absence of geotechnical investigation and testing of the soil. Also called allowable bearing capacity, allowable soil pressure.

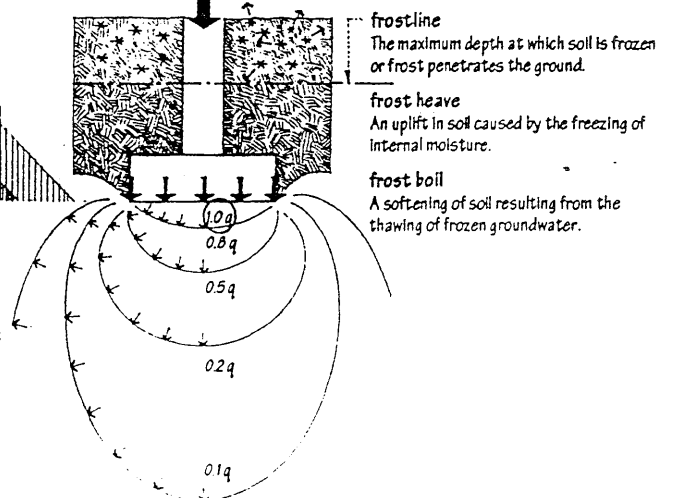

foundation wall

A wall occurring below the floor nearest grade, designed to support and anchor the superstructure.

ground slab


A concrete slab placed over a dense or compacted base and supported directly by the ground, usually reinforced with welded wire fabric or a grid of reinforcing bars to control any cracking caused by drying shrinkage or thermal stresses. Separate or integral footings are required for heavy or concentrated loads. Over problem soils, the slab must be designed as a mat or raft foundation. Also called slab on grade.

base course

A layer of coarse granular materials placed and compacted on undisturbed soil or prepared fill to prevent the capillary rise of moisture to a concrete ground slab.


substratum

Something that underlies or serves as a base or foundation. Also called substrate.





stepped footing

A continuous or strip footing that changes levels in stages to accommodate a sloping site or bearing stratum.

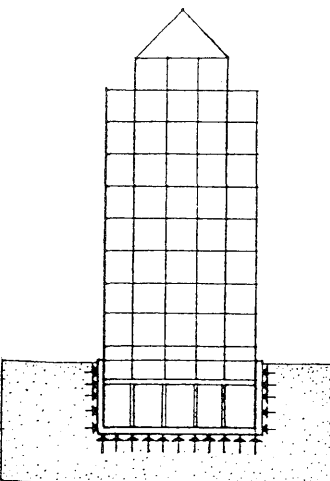

floating foundation

A foundation used in yielding soil, having for its footing a raft placed deep enough that the weight of the excavated soil is equal to or greater than the weight of the construction supported.

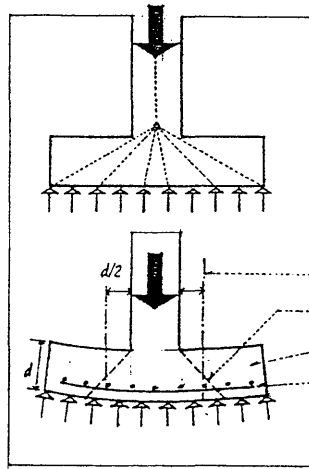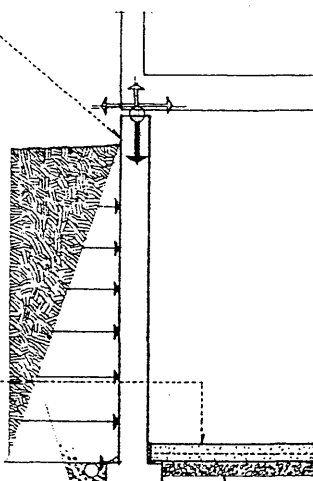

spread footing


A concrete footing extended laterally to distribute the foundation load over a wide enough area that the allowable bearing capacity of the supporting soil is not exceeded.

critical section assumed for shear

actual punching shear


compression

tension

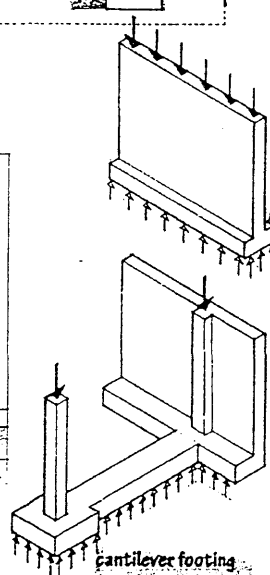

cantilever footing

A reinforced concrete footing connected by a tie beam to another footing in order to balance an asymmetrically imposed load, as at the perimeter of a building site. Also called strap footing.



strip footing


The continuous spread footing of a foundation wall.

isolated footing

A single spread footing supporting a freestanding column or pier.


continuous footing

A reinforced concrete footing extended to support a row of columns.



grade beam

A reinforced concrete beam supporting a superstructure at or near ground level and transferring the load to isolated footings, piers, or piles. Also called ground beam.




combined footing

A reinforced concrete footing for a perimeter column or foundation wall extended to support an interior column load.

To avoid rotation or differential settlement, continuous and cantilever footings are proportioned to generate uniform soil pressure.


raft

A mat providing a footing on yielding soil, usually for an entire building, placed so that the weight of the displaced soil exceeds the weight of the construction.



grillage

A framework of crossing beams for spreading heavy loads over large areas. Also called grid.

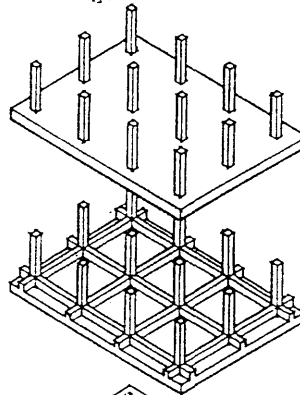


mat

A thick, slablike footing of reinforced concrete supporting a number of columns or an entire building.

ribbed mat

A mat foundation reinforced by a grid of ribs above or below the slab.



cellular mat

A composite structure of reinforced concrete slabs and basement walls serving as a mat foundation.

FOUNDATION

deep foundation

A foundation system that extends down through unsuitable soil to transfer building loads to a more appropriate bearing stratum well below the superstructure.

pile foundation

A system of piles, pile caps, and tie beams for transferring building loads down to a suitable bearing stratum, used esp. when the soil mass directly below the construction is not suitable for the direct bearing of footings.

bearing stratum

A stratum of soil or rock on which a footing bears, or to which a building load is transferred by a pile or caisson.

pile

A long slender column of wood, steel, or reinforced concrete, driven or hammered vertically into the earth to form part of a foundation system.

end-bearing pile

A pile depending principally on the bearing resistance of soil or rock beneath its foot for support. The surrounding soil mass provides a degree of lateral stability for the long compression member. Also called point-bearing pile.

allowable pile load

The maximum axial and lateral loads permitted on a pile, as determined by a dynamic pile formula, a static load test, or a geotechnical investigation of the foundation soil.

pile eccentricity

The deviation of a pile from its plan location or from the vertical, resulting in a reduction of its allowable load.

pile tolerance

The permitted deviation of a pile from the vertical, for which a reduction in allowable load is not required.

friction pile


A pile depending principally on the frictional resistance of surrounding earth for support.

skin friction

The friction developed between the sides of a pile and the soil into which the pile is driven, limited by the adhesion of soil to the pile sides and the shear strength of the surrounding soil mass.

negative friction

An additional load on a pile resulting from settling of fill, which tends to drag the pile downward into the soil.

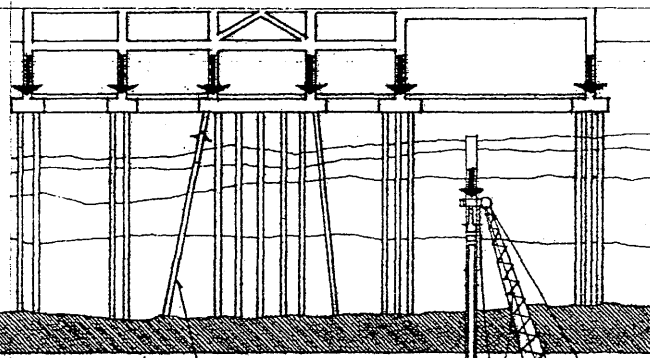


batter pile

A pile driven at a specified angle to the vertical in order to provide resistance against lateral forces.

drive band

A steel band encircling the head of a timber pile to prevent it from splitting when driven. Also called pile ring.

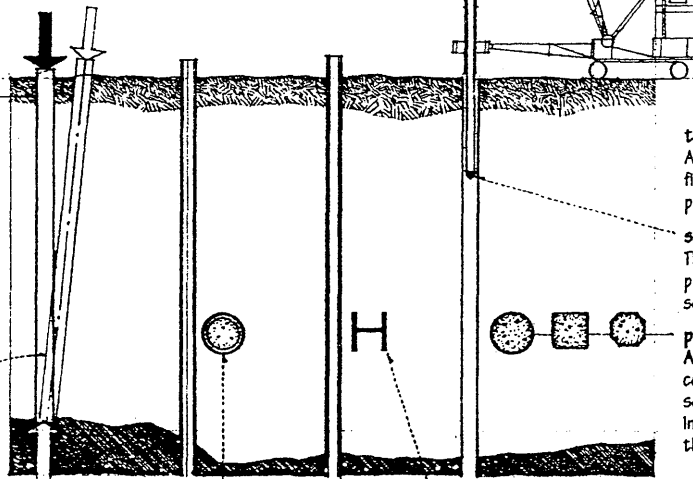

pipe pile

A heavy steel pipe driven with the lower end either open or closed by a heavy steel plate or point and filled with concrete. An open-ended pipe pile requires inspection and excavation before being filled with concrete.

H-pile

A steel H-section driven as a pile, sometimes encased in concrete to a point below the water table to prevent corrosion. H-sections can be welded together in the driving process to form any length of pile.

anvil

The component of a pile hammer, located just below the ram, that transfers the driving force to the pile head.

cushion

A cap for protecting a pile head as well as the pile hammer during a driving operation. Also called cushion block, cushion head.

pile driver

A machine for driving piles, usually composed of a tall framework supporting machinery for lifting a pile in position before driving, a driving hammer, and vertical rails or leads for guiding the hammer.

timber pile

A log driven usually as a friction pile, often fitted with a steel shoe and a drive band to prevent it from splitting or shattering.

shoe


The hard, pointed or rounded foot of a pile or caisson for piercing underlying soil. Also called drive shoe.

precaster concrete pile

A precast, often prestressed concrete column, having a round, square, or polygonal section and sometimes an open core, driven into the earth by a pile driver until it meets the required resistance.

composite pile

A pile constructed of two materials, as a timber pile having a concrete upper section to prevent the portion of the pile above the water table from deteriorating.

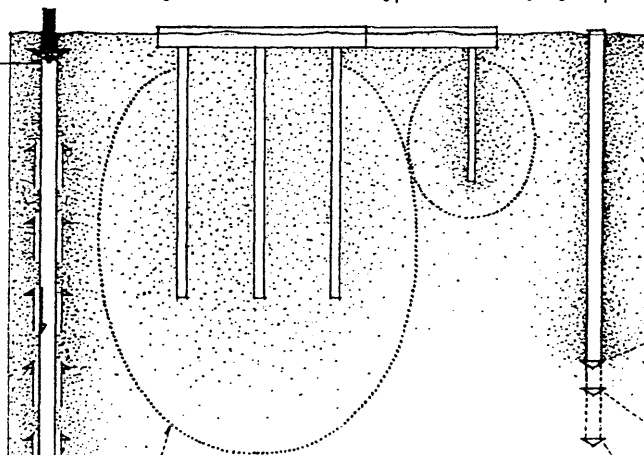

pressure bulb

A zone in a loaded soil mass bounded by an arbitrarily selected isobar of stress, as from a single or number of friction piles.

isobar

A line connecting points of equal pressure.

dynamic pile formula

Any of several formulas by which the allowable axial load on a pile can be calculated from the energy required for a pile hammer to advance the pile foot a specified distance into the subsoil.

static load test

A test for determining the allowable axial load on a single pile, usually a fraction of the load required to reach a yield point, a point of resistance, or a point of refusal.

point of resistance


The point at which a pile load causes a specified net settlement after being applied continuously for a specified period of time.

point of refusal



The point at which no additional settlement takes place after a pile has been loaded continuously for a specified period of time.

yield point




The point at which an increase in pile load produces a disproportionate increase in settlement.



pile cap
A reinforced concrete slab or mat joining the heads of a cluster of piles to distribute the load from a column or grade beam equally among the piles.

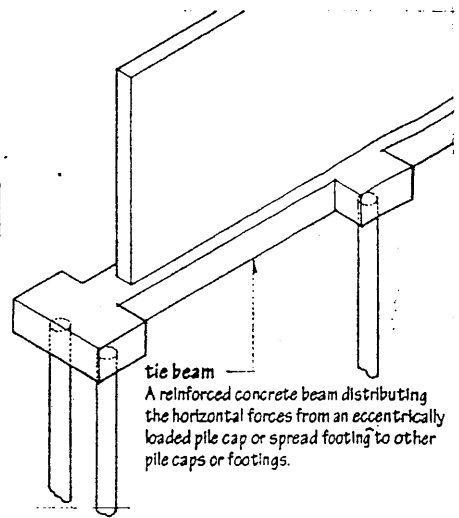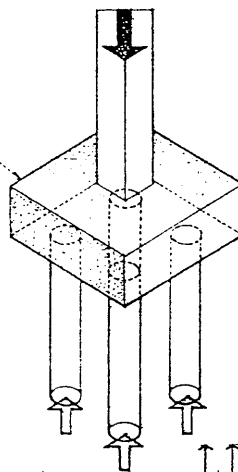

tie beam
A reinforced concrete beam distributing the horizontal forces from an eccentrically loaded pile cap or spread footing to other pile caps or footings.




examples of pile layouts

cast-in-place concrete pile
A pile constructed by placing concrete into a shaft in the ground.

cased pile
A concrete pile constructed by driving a steel pipe or casing into the ground until it meets the required resistance and then filling it with concrete.

casing
A cylindrical steel section, sometimes corrugated or tapered for increased stiffness, driven or dropped in place to serve as a form for a cast-in-place concrete pile.

mandrel
A heavy steel tube or core that is inserted into a thin-walled casing to prevent it from collapsing in the driving process, and then withdrawn before concrete is placed in the casing.

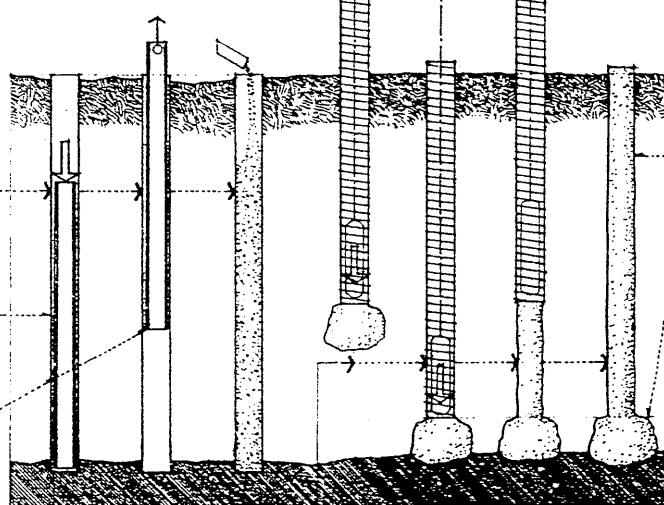

pedestal pile
A cast-in-place concrete pile having an enlarged foot to increase its bearing area and strengthen the bearing stratum by compression, formed by forcing concrete out at the bottom of the casing into the surrounding soil.

bulb
A bulge cast or formed at the bottom of a cast-in-place concrete pile to enlarge its bearing area and strengthen the bearing stratum by compression.


uncased pile
A concrete pile constructed by driving a concrete plug into the ground along with a steel casing until it meets the required resistance, and then ramming concrete into place as the casing is withdrawn.

pier
A cast-in-place concrete foundation formed by boring with a large auger or excavating by hand a shaft in the earth to a suitable bearing stratum and filling the shaft with concrete.

caisson
A pier, esp. when the boring is 2 ft. (610 mm) or larger in diameter to permit inspection of the bottom.

bell
The base of a caisson enlarged to increase its bearing area.

bell bucket
An attachment to an earth auger having expanding blades for excavating a bell at the bottom of a caisson shaft.

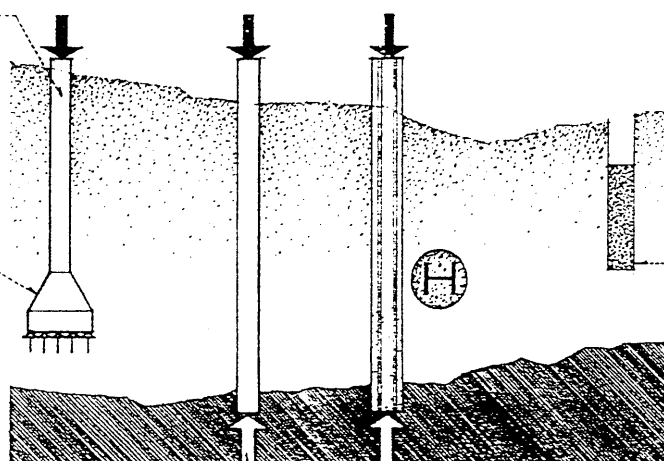


socketed caisson
A caisson that is drilled into a stratum of solid rock rather than belled.

rock caisson
A socketed caisson having a steel H-section core within a concrete-filled pipe casing.

sand pile
A base for a footing in soft soil, made by compacting sand in a cavity left by a timber pile.



FRAME

A skeletal structure of relatively slender members designed to give shape and support to a building or other construction.





braced frame

A structural frame whose resistance to lateral forces is provided by diagonal or other type of bracing.





plastic hinge

A virtual hinge that develops when all fibers are fully yielded at a cross section of a structural member.



rigid frame



A structural frame of linear members rigidly connected at their joints. Applied loads produce axial, bending, and shear forces in all members of the frame since the rigid joints restrain the ends of the members from rotating freely. In addition, vertical loads cause a rigid frame to develop horizontal thrusts at its base. A rigid frame is statically indeterminate and rigid only in its plane. Also called moment-resisting frame.



fixed frame





A rigid frame connected to its supports with fixed joints. A fixed frame is more resistant to deflection than a hinged frame but also more sensitive to support settlements and thermal expansion and contraction.

sideway
The lateral displacement produced in a rigid frame by lateral loads or asymmetrical vertical loading.






hinged frame

A rigid frame connected to its supports with pin joints. The pin joints prevent high bending stresses from developing by allowing the frame to rotate as a unit when strained by support settlements, and to flex slightly when stressed by changes in temperature.



three-hinged frame

A structural assembly of two rigid sections connected to each other and to its supports with pin joints. While more sensitive to deflection than either the fixed or hinged frame, the three-hinged frame is least affected by support settlements and thermal stresses. The three pin joints also permit the frame to be analyzed as a statically determinate structure.




A-frame


A building constructed with a steep triangular frame resting directly on a foundation.

knee
The junction of the top and either of the uprights of a bent.

bent
A braced or rigid frame designed to carry vertical and lateral loads transverse to the length of a framed structure.



portal
A rigid frame of two columns and a beam defining a single bay. Also called single-bay frame.




multibay frame
A rigid frame having a continuous beam supported by and rigidly connected to three or more columns.

Vierendeel truss

A framed beam structure having vertical web members rigidly connected to parallel top and bottom chords. A Vierendeel truss is not a true truss since its members are subject to nonaxial bending forces. Also called Vierendeel girder.


portal method

A method for analyzing a multistory frame as a cantilever dominated by shear racking. The portal method assumes that a point of inflection occurs at the midlength of all members in the frame, and that the frame acts as a series of independent portals to which the total lateral shear at each level is distributed in proportion to the floor area each column supports. Imaginary pin joints can be inserted at each point of inflection, making the frame a statically determinate structure.




cantilever method

A method for analyzing a multistory frame as a cantilever subject to bending. The cantilever method assumes that a point of inflection occurs at the midlength of all members in the frame, and that the axial force in each column of a story is proportional to its horizontal distance from the centroid of all the columns on that level. Imaginary pin joints can be inserted at each point of inflection, making the frame a statically determinate structure.



moment distribution method

A method for analyzing an indeterminate structure through an iterative process of fixing a rigid joint in space, determining the fixed-end moments at the joint, then releasing the joint to allow it to rotate, and studying the transference of moments and rotations to other joints.



indeterminate

Of or pertaining to a structure having more than the minimum number of members, connections, or supports needed for stability, resulting in more unknown forces than there are static equations for solution.

degree of indeterminacy

The difference between the number of unknown forces in an indeterminate structure and the number of static equations available for solution.

determinate

Of or pertaining to a structure able to be analyzed completely by means of the principles of statics.

redundancy

A structural member, connection, or support not required for a statically determinate structure.

degree of redundancy


The number of members beyond that required for the stability of a statically determinate structure.

multistory frame

A vertical series of superimposed rigid frames.


transfer column

A discontinuous column in a multistory frame, supported at some intermediate level where its load is transferred to adjacent columns.



transfer girder

A girder supporting a transfer column.



degree of freedom

The number of members required to stabilize a collapse mechanism.

FRAME

framing

The act, process, or manner of fitting and joining together relatively slender members to give shape and support to a structure.

framework

A skeletal structure of parts fitted and joined together in order to support, define, or enclose.

skeleton construction

A system of construction utilizing a framework of columns and beams to transmit building loads down to the foundation.

plank-and-beam construction

Floor or roof construction utilizing a framework of timber beams to support wood planks or decking.

post-and-beam construction

Wall construction utilizing a framework of vertical posts and horizontal beams to carry floor and roof loads. Also called post-and-lintel construction.

pole construction

A system of construction employing a vertical structure of pressure-treated wood poles which are firmly embedded in the ground as a pier foundation.

light frame construction


A system of construction utilizing closely spaced and sheathed members of dimension lumber or light-gauge metal to form the structural elements of a building.

*See balloon frame

floor framing

platform frame

roof framing

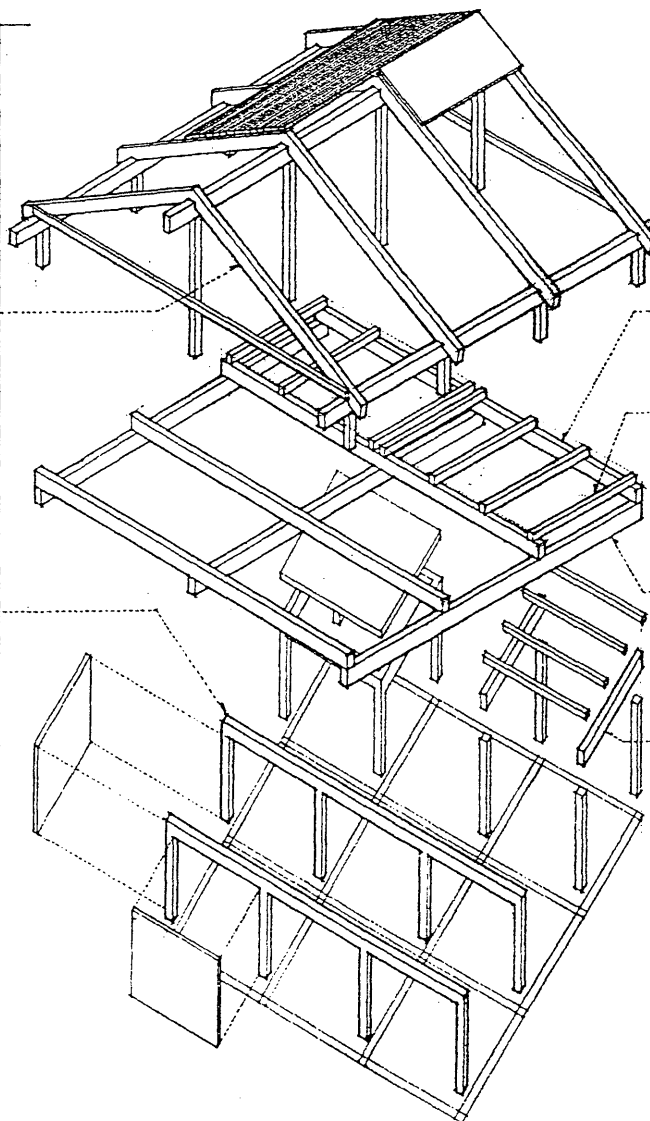

principal beam

Any large beam in a structural frame that supports secondary beams or joists. Also called primary beam.

secondary beam

Any beam that transmits its load to a principal beam.

tertiary beam

Any beam that transmits its load to a secondary beam.

girder



A large principal beam designed to support concentrated loads at isolated points along its length.

trabeate

Of or pertaining to a system of construction employing beams or lintels. Also, trabeated.

arcuate

Of or pertaining to a system of construction employing arches or arched forms. Also, arcuated.

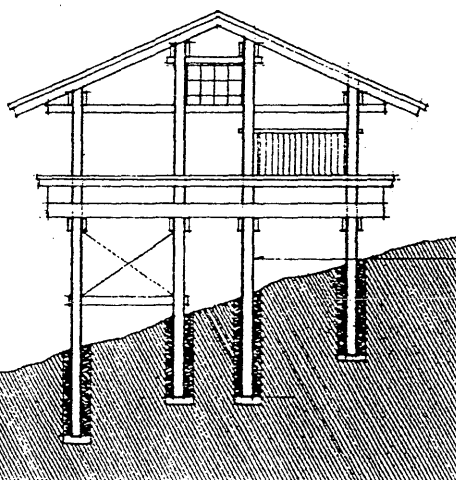

pole house


A house of pole construction.

pole

A long, cylindrical, often slender piece of wood or metal.

still


One of several piles or posts for supporting a structure above the surface of land or water.

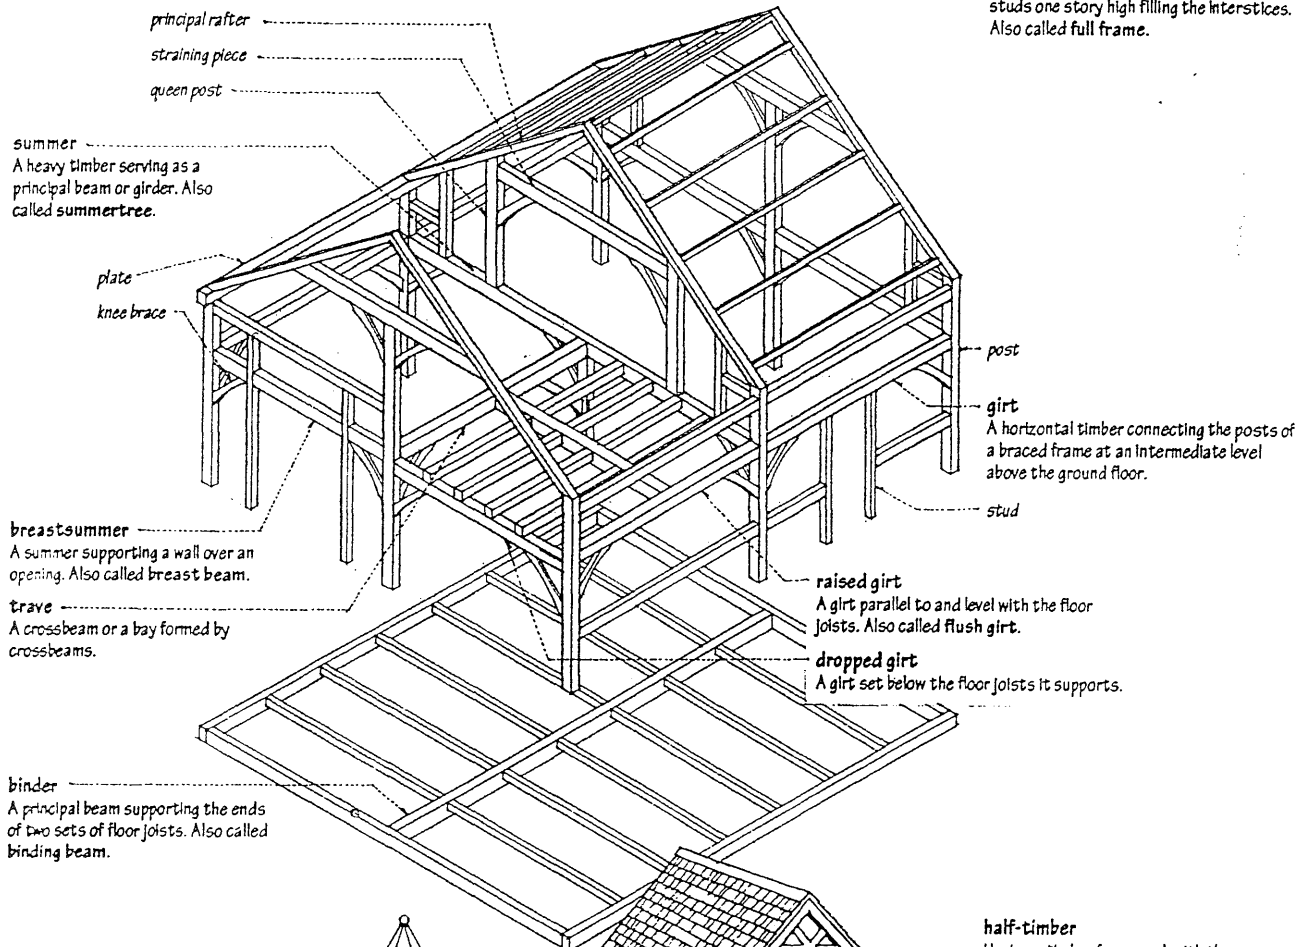


braced frame

A building frame employing a heavy, braced framework of solid girts mortised into solid posts the full height of the frame, with studs one story high filling the interstices. Also called full frame.

louver
A lantern or turret on the roof of a medieval building having slatted apertures for the escape of smoke and admission of air.



thatch
A material for covering a roof, as straw, rushes, or palm leaves, fastened together so as to shed water and sometimes to provide thermal insulation. Also, thatching.



half-timber

Having a timber framework with the spaces filled with masonry or plaster. Also, half-timbered.

open-timbered

Constructed so that a framework of timbers is exposed.



solar


A room or apartment on an upper floor of a medieval English house. Also, solar, sollar.

jetty

An upper story of a building projecting beyond the one below. Also, jutting.

pan

A major vertical division of a wall, esp. a nogged panel of half-timber construction.



wattle and daub

A form of wall construction, consisting of wattles covered and plastered with clay or mud. Also, wattle and dab.

wattle


A framework of rods or poles interwoven with thin branches, twigs, and reeds, used in the construction of walls and fences.

nog

One of a number of short wooden pieces inserted between the principal members of a half-timbered wall to strengthen the frame and retain the brick infill. Also, noggling.

nogging

Brick masonry used to fill the spaces between the members of a timber frame.



GEOMETRY

A branch of mathematics that deals with the properties, measurement, and relationships of points, lines, angles, and solids, deduced from their defining conditions by means of certain assumed properties of space.

point
A dimensionless geometric element that has no property but location, as the intersection of two lines.

y-axis
The axis along which ordinates or y-values are measured in a Cartesian coordinate system. Also called axis of ordinates.

z-coordinate
A coordinate determined by measuring parallel to the z-axis.

z-axis
The axis along which z-values are measured in a three-dimensional Cartesian coordinate system.

rectangular coordinate system
A Cartesian coordinate system in which the axes or coordinate planes are perpendicular.

x-axis
The axis along which abscissas or x-values are measured in a Cartesian coordinate system. Also called axis of abscissas.

abscissa
A coordinate determined by measuring parallel to the x-axis. Also called x-coordinate.

coordinate
Any of a set of numbers that serve to specify the location of a point on a line, surface, or in space by reference to a fixed figure or system of lines.

Cartesian coordinate
Any of the coordinates for locating a point on a plane by its distance from each of two intersecting lines, or in space by its distance from each of three planes intersecting at a point.

ordinate
A coordinate determined by measuring parallel to the y-axis. Also called y-coordinate.

Euclidean geometry
Geometry based upon the postulates of Euclid, esp. the postulate that only one line may be drawn through a given point parallel to a given line.

radius vector
A straight line segment that joins a variable point to the fixed origin of a polar coordinate system.

polar angle
The angle formed by the polar axis and a radius vector in a polar coordinate system.

polar axis
The reference axis from which the polar angle is measured in a polar coordinate system.

polar coordinate system
A system for locating a point on a plane by its radius vector and polar angle.

line
A geometric element generated by a moving point and having extension without breadth or thickness.

vertical
Perpendicular to the plane of the horizon.

oblique
Neither parallel nor perpendicular to a given line or surface.

horizontal
Parallel to or operating in a plane parallel to the horizon.

parallel
Extending in the same direction, equidistant at all points, and never converging or diverging.

skew lines
Any lines in space that are neither parallel nor intersecting.

angle
The space between two lines diverging from a common point, or within two planes diverging from a common line; the figure so formed.

vertex
The point at which the sides of an angle intersect.

angle
The amount of rotation needed to bring one line or plane into coincidence with another, measured in radians or in degrees, minutes, and seconds.

radian
A unit of angular measure equal to the central angle subtending an arc equal in length to the radius: $360/2\pi$ or approx. 57.3° .

degree
A unit of angular measure, equal to $1/360$ th of a complete angle or turn, or of the circumference of a circle.

minute
The 60th part of a degree of angular measure.

second
The 60th part of a minute of angular measure.

right angle
An angle of 90° formed by the perpendicular intersection of two straight lines.

acute angle
An angle less than 90° .

obtuse angle
An angle greater than 90° , but less than 180° .

height
Extent or distance upward from a given level to a fixed point.

vertex
The point opposite to and farthest from the base of a plane figure.

altitude
The perpendicular distance from the base of a geometric figure to the opposite vertex, parallel side, or parallel surface.

base
The line or surface forming the part of a geometric figure that is most nearly horizontal or on which it is supposed to stand, from which an altitude can be constructed.

triangle
A polygon having three sides and three angles.

isosceles
Having two sides of equal length.

acute
Composed only of acute angles.

obtuse
Having an obtuse angle.

scalene
Having three unequal sides.

coincident
Occupying the same place in space or time.

congruent
Coinciding at all points when superimposed.

similar
Having corresponding sides proportional and corresponding angles equal.

reentrant
Reentering or pointing inward, as an interior angle of a polygon that is greater than 180° .

salient
An outward projecting angle or part.

exterior angle
The angle formed between any side of a polygon and an extended adjacent side.

interior angle
The angle formed inside a polygon between any two adjacent sides.

cant
An oblique line or surface, as one formed by cutting off the corner of a square or cube.

quadrilateral
A polygon having four sides and four angles.

rectangle
A parallelogram having four right angles, esp. one with sides of unequal lengths.

plane geometry
The branch of geometry that deals with plane figures.

plane
A surface generated by a straight line moving at a constant velocity with respect to a fixed point, such that a straight line joining any two of its points lies wholly in the surface.

figure
A combination of geometric elements disposed in a particular form or shape.

polygon
A closed plane figure having three or more straight sides.

rectilinear
Forming, formed by, or characterized by straight lines.

rectangular
Having edges, surfaces, or faces that meet at right angles.

aspect ratio
In any rectangular configuration, the ratio of the longer dimension to the shorter.

diagonal
A line connecting two nonadjacent angles or vertices of a polygon or polyhedron.

square
A regular polygon having four equal sides and four right angles.

parallelogram
A quadrilateral having both pairs of opposite sides parallel to each other.

trapezoid
A quadrilateral having only two sides parallel.

trapezium
A quadrilateral having no two sides parallel.

pentagon
A polygon having five sides and five angles.

hexagon
A polygon having six sides and six angles.

octagon
A polygon having eight sides and eight angles.

apothem
A perpendicular from the center of a regular polygon to one of its sides.

Pythagorean theorem
The theorem that the square of the length of the hypotenuse of a right triangle equals the sum of the squares of the lengths of the other two sides.
$$c^2 = a^2 + b^2$$

regular
Having all sides equal (equilateral) and all angles equal (equiangular).

trigonometry
The branch of mathematics that deals with the properties of triangles and trigonometric functions, and of their applications.

trigonometric function
A function of an angle, as sine or cosine, expressed as the ratio of the sides of a right triangle.

sine
The trigonometric function defined as the ratio of the side opposite a given angle to the hypotenuse.

cosine
The trigonometric function defined as the ratio of the side adjacent to a given angle to the hypotenuse.

tangent
The trigonometric function defined as the ratio of the side opposite a given angle to the side adjacent to the angle.

secant
The trigonometric function defined as ratio of the hypotenuse to the side adjacent to a given angle.


cosecant
The trigonometric function defined as the ratio of the hypotenuse to the side opposite a given angle.

cotangent
The trigonometric function defined as the ratio of the side opposite a given angle to the side adjacent to the angle.

GEOMETRY

circle

A closed plane curve every point of which is equidistant from a fixed point within the curve.

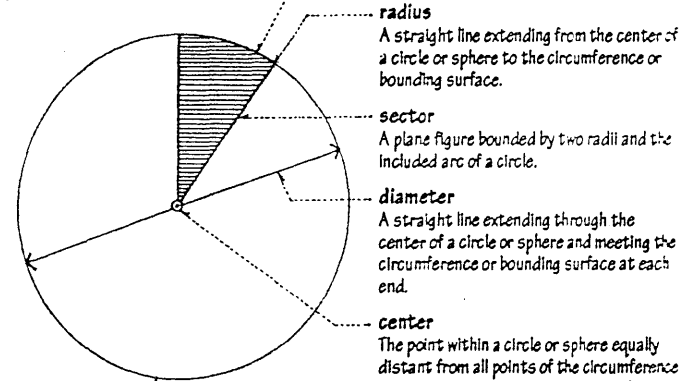


circumference

The boundary line of a closed curvilinear figure, esp. the perimeter of a circle.


pi

The symbol π denoting the ratio between the circumference of a circle and its diameter, a constant equal to 3.14159+.




ellipse

A closed plane curve generated by a point moving in such a way that the sums of its distances from two fixed points, the foci, is a constant.







parabola

A plane curve generated by a point so moving that it remains equidistant from a fixed line and a fixed point not on the line.

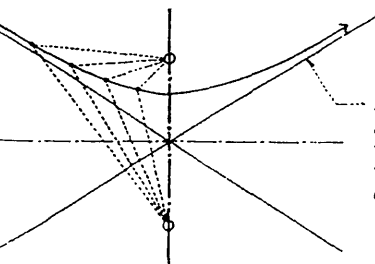


hyperbola

A plane curve generated by a point so moving that the difference of the distances from two fixed points in the plane remains constant.

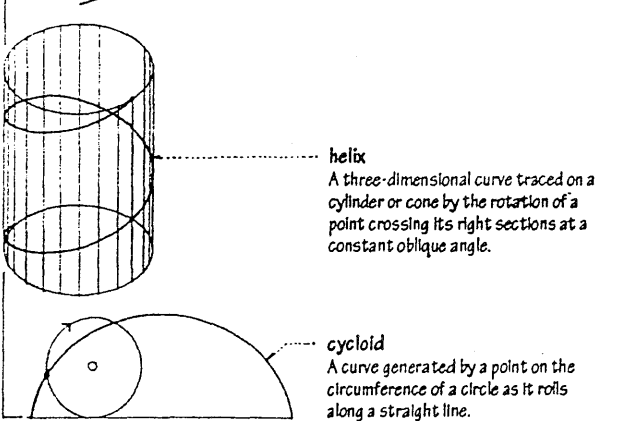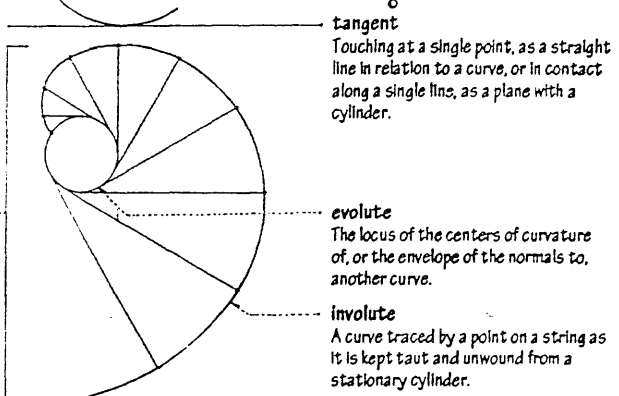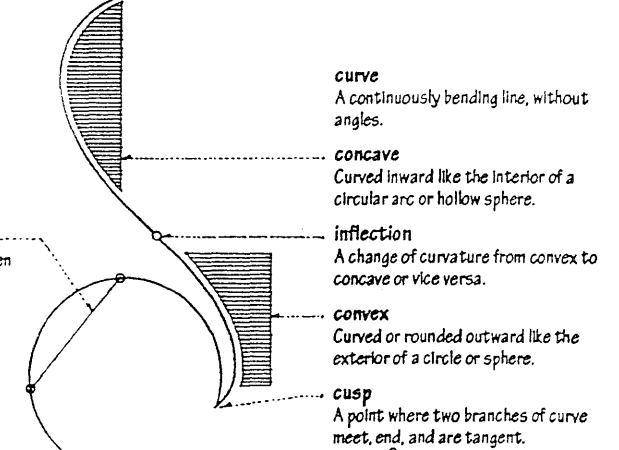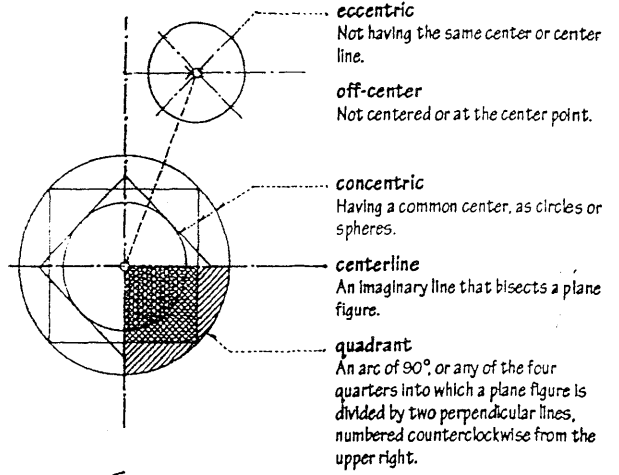


spheroid

A solid geometrical figure similar in shape to a sphere, as an ellipsoid.



ellipsoid

A solid figure all plane sections of which are ellipses.




prolate spheroid

A spheroid generated by rotating an ellipse about its major axis.

prolate

Elongated along the polar diameter.




oblate spheroid

A spheroid generated by rotating an ellipse about its minor axis.

oblate

Flattened at the poles.



solid geometry


The branch of geometry that deals with solid figures and three-dimensional space.

sphere

A solid generated by the revolution of a semicircle about its diameter, whose surface is at all points equidistant from the center.


cylinder

A solid bounded by two parallel planes and a surface generated by a straight line moving parallel to a fixed straight line and intersecting a closed plane curve in one of the planes.



right circular cylinder

A cylinder generated by a rectangle about one of its sides.



solid

A geometric figure having the three dimensions of length, breadth, and thickness. Also called body.

volume

The extent of a three-dimensional object or the amount of space that it occupies, measured in cubic units.

surface

Any figure having only two dimensions, as a plane or curved two-dimensional locus of points defining the boundary of a solid.

generator

An element that generates a geometric figure, esp. a straight line that generates a surface by moving in a specified fashion. Also called generatrix.

directrix

A fixed line used in the description of a curve or surface.

center

The point within a regular polygon equally distant from the vertices.

edge


A line at which a surface terminates or at which two surfaces of a solid meet.

vertex

A point in a geometric solid common to three or more sides.


cone

A solid whose surface is generated by a straight line, the generator, passing through a fixed point, the vertex, and moving along the intersection with a closed plane curve, the directrix.




right circular cone

A cone generated by rotating a right triangle about one of its legs.




truncated

Having the apex, vertex, or end cut off by a plane, esp. by one parallel to the base.




frustum

The portion of a conical solid left after cutting off the top with a plane parallel to the base.



conic section

A plane curve formed by the intersection of a right circular cone with a plane.



ellipse

A conic section formed by the intersection of a right circular cone with a plane that cuts through both the axis and the surface of the cone.

parabola

A conic section formed by the intersection of a right circular cone with a plane parallel to a generator of the cone.

hyperbola

A conic section formed by the intersection of a right circular cone with a plane that makes a greater angle with the base than does the generator of the cone.

polyhedron

A solid geometric figure bounded by plane faces.

regular


Having all faces congruent regular polygons and all solid angles congruent.

pyramid

A polyhedron having a polygonal base and triangular faces meeting at a common point or vertex.


tetrahedron

A regular polyhedron bounded by four plane faces.



cube

A solid bounded by six equal square sides, the angle between any two adjacent faces being a right angle.



hexahedron

A regular polyhedron having six faces.


prism

A polyhedron having ends that are parallel, congruent polygons and sides that are parallelograms.




Platonic solid

One of the five regular polyhedrons: tetrahedron, hexahedron, octahedron, dodecahedron, or icosahedron.




octahedron

A regular polyhedron having eight faces.



dodecahedron

A regular polyhedron having 12 faces.



icosahedron

A regular polyhedron having 20 faces.

GLASS

A hard, brittle, usually transparent or translucent substance, produced by fusing silica together with a flux and a stabilizer into a mass that cools to a rigid condition without crystallization.

crown glass

An old form of window glass formed by blowing and whirling a hollow sphere of glass into a flat, circular disk with a center lump left by the worker's rod.

sheet glass

A flat, soda-lime-silica glass fabricated by drawing the molten glass from a furnace (drawn glass), or by forming a cylinder, dividing it lengthwise, and flattening it (cylinder glass). The fire-polished surfaces are not perfectly parallel, resulting in some distortion of vision.

plate glass

A flat, soda-lime-silica glass formed by rolling molten glass into a plate (rolled glass) that is subsequently ground and polished after cooling.

float glass

A flat, soda-lime-silica glass that is extremely smooth and nearly distortion-free, manufactured by pouring molten glass onto a surface of molten tin and allowing it to cool slowly. Float glass is the successor to plate glass and accounts for the majority of flat-glass production.

insulating glass

A glass unit consisting of two or more sheets of glass separated by hermetically-sealed airspaces.

hermetic

Made airtight by fusing or sealing.

tinted glass

Glass having a chemical admixture to absorb a portion of the radiant heat and visible light that strike it. Iron oxide gives the glass a pale blue-green tint; cobalt oxide and nickel imparts a grayish tint; selenium infuses a bronze tint. Also called heat-absorbing glass.

reflective glass

Glass having a thin, translucent metallic coating bonded to the exterior or interior surface to reflect a portion of the light and radiant heat that strike it.

low-emissivity glass



Glass that transmits visible light while selectively reflecting the longer wavelengths of radiant heat, produced by depositing a low-emissivity coating either on the glass itself or over a transparent plastic film suspended in the sealed air space of insulating glass. Also called low-e glass.

emissivity

The relative ability of a surface to emit radiant heat, measured against a black body at the same temperature.

shading coefficient

The ratio of solar heat transmission through a particular glass to the solar heat transmission through double-strength clear glass.




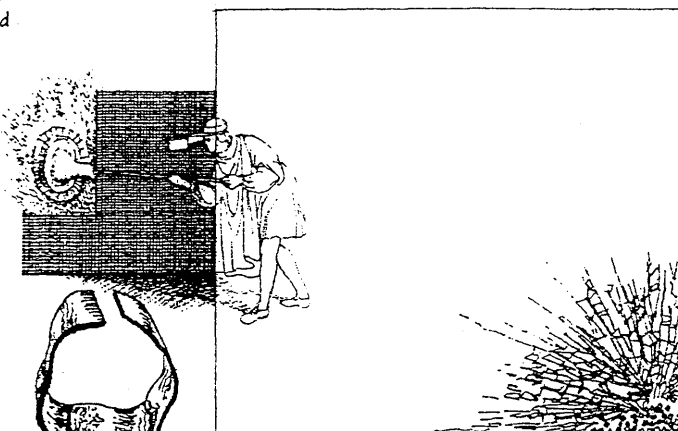


single-strength glass

Sheet glass having a thickness of 3/32 in. (2.4 mm).

double-strength glass

Sheet glass having a thickness of 1/8 in. (3.2 mm).

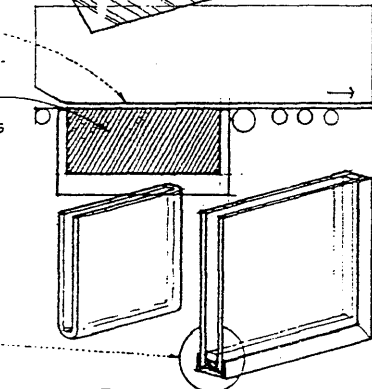

annealed glass

Glass that is cooled slowly to relieve internal stresses.

heat-strengthened glass

Annealed glass that is partially tempered by a process of reheating and sudden cooling. Heat-strengthened glass has about twice the strength of annealed glass of the same thickness.

tempered glass

Annealed glass that is reheated to just below the softening point and then rapidly cooled to induce compressive stresses in the surfaces and edges of the glass and tensile stresses in the interior. Tempered glass has three to five times the resistance of annealed glass to impact and thermal stresses but cannot be altered after fabrication. When fractured, it breaks into relatively harmless particles.

laminated glass

Two or more plies of flat glass bonded under heat and pressure to interlayers of polyvinyl butyral resin that retains the fragments if the glass is broken. Also called safety glass.

security glass

Laminated glass having exceptional tensile and impact strength, consisting of multiple plies of glass bonded under heat and pressure to interlayers of polyvinyl butyral resin.

acoustical glass

Laminated or insulating glass used for sound control.

wire glass

Flat or patterned glass having a square or diamond wire mesh embedded within it to prevent shattering in the event of breakage or excessive heat. Wire glass is considered a safety glazing material.

patterned glass

Glass having an irregular surface pattern formed in the rolling process to obscure vision or to diffuse light. Also called figured glass.

obscure glass

Glass having one or both sides acid-etched or sandblasted to obscure vision.

spandrel glass

An opaque glass for concealing the structural elements in curtain wall construction, produced by fusing a ceramic frit to the interior surface of tempered or heat-strengthened glass.

glass block

A translucent, hollow block of glass with clear, textured, or patterned faces, made by fusing two halves together with a partial vacuum inside and used for glazing openings.

glass brick

A solid, impact-resistant glass block unit, sometimes having an insert or coated to reduce solar heat transmission.

face glazing

The setting of a glass pane in a rabbeted frame, holding it in place with glazier's points, and sealing it with a beveled bead of putty or glazing compound.

face putty

The putty or glazing compound formed on the exterior side of a glass pane.

bedding

A thin layer of putty or glazing compound laid in the rabbet of a window sash to give a pane of glass an even backing.

glazier's point

A small, pointed piece of sheet metal for holding a glass pane in a wood sash until the face putty has hardened. Also called glazing brad, sprig.

putty

A compound of whiting and linseed oil, of doughlike consistency when fresh, used in securing windowpanes or patching woodwork defects.

glazing compound

An adhesive compound used as putty, formulated so as not to become brittle with age.

glass size

The size of a glass pane or unit required for glazing an opening, allowing for adequate edge clearances. Also called glazing size.

united inches

The sum of one length and one width of a rectangular glass pane or unit, measured in inches.

edge block

One of the small blocks of synthetic rubber placed between the side edges of a glass pane or unit and a frame to center it, maintain a uniform width of sealant, and limit lateral movement caused by building vibrations or thermal expansion or contraction. Also called centering shim, spacer.

face clearance

The distance between the face of a glass pane or unit and the nearest face of its frame or stop, measured normal to the plane of the glass.

bite

The amount of overlap between the edge of a glass pane or unit and a window frame, stop, or lock-strip gasket.

edge clearance

The distance between the edge of a glass pane or unit and a window frame, measured in the plane of the glass.

glass mullion system

A glazing system in which sheets of tempered glass are suspended from special clamps, stabilized by perpendicular stiffeners of tempered glass, and joined by a structural silicone sealant and sometimes by metal patch plates.

double glazing

The installation of two parallel panes of glass with a sealed air space between to reduce the transmission of heat and sound.

glazing

The panes or sheets of glass or other transparent material made to be set in frames, as in windows, doors, or mirrors.

wet glazing

The setting of glass in a window frame with glazing tape or a liquid sealant.

glazing tape

A preformed ribbon of synthetic rubber having adhesive properties and used in glazing to form a watertight seal between glass and frame.

cap sealant

An adhesive liquid of synthetic rubber injected into the joint between a glass pane or unit and a window frame, curing to form a watertight seal. Also called cap bead.

glazing bead

A wood molding or metal section secured against the edge of a glass pane or unit to hold it in place. Also called glazing stop.

heel bead

An adhesive liquid of synthetic rubber injected between a glass pane or unit and a glazing bead, curing to form an airtight seal.

dry glazing

The setting of glass in a window frame with a compression gasket instead of glazing tape or a liquid sealant.

compression gasket

A preformed strip of synthetic rubber or plastic compressed between a glass pane or unit and a window frame to form a watertight seal and cushion for the glass.

lockstrip gasket

A preformed gasket of synthetic rubber for securing a glass pane or unit in a window frame or opening, held in compression by forcing a keyed locking strip into a groove in the gasket.

flush glazing









A glazing system in which the framing members are set entirely behind the glass panes or units to form a flush exterior surface, the glass adhering to the framing with a structural silicone sealant.

structural sealant

A high-strength silicone sealant capable of adhering glass to a supporting frame.

butt-joint glazing

A glazing system in which the glass panes or units are supported at the head and sill in a conventional manner, with their vertical edges being joined with a structural silicone sealant without mullions.

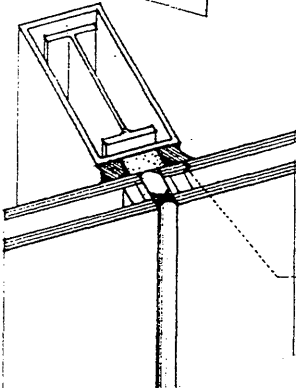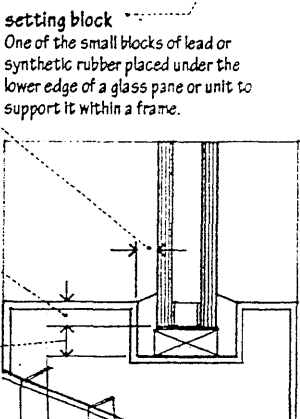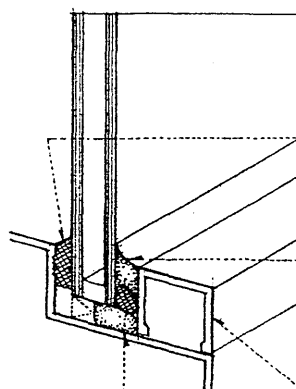

HARDWARE

The metal tools, fastenings, and fittings used in construction.

rough hardware

Bolts, screws, nails, and other metal fittings that are concealed in a finished construction.

finish hardware

Exposed hardware serving a decorative as well as a utilitarian purpose, as the locks, hinges, and other accessories for doors, windows, and cabinetwork. Also called architectural hardware.

door hardware

The finish hardware required for hanging and operating a door.

door closer

A hydraulic or pneumatic device for controlling the closing of a door and preventing it from slamming. Also called door check.

overhead concealed closer


A door closer concealed in the head of a doorframe.

backcheck

A device in a hydraulic door closer for slowing the speed with which a door may be opened.

knocker

A hinged ring, bar, or knob on a door for use in knocking.



doorplate

A small identifying plate on the outside door of a house or room, bearing the occupant's name, the house or apartment number, or the like.

push plate

A protective plate of metal or plastic mounted vertically on the lock stile of a door.

door pull


A handle for opening a door.

pull bar

A bar fixed across a glazed door, used for opening or closing the door and providing protection for the glass.

kick plate

A protective metal plate fastened to the bottom of a door to resist blows and scratches.




floor closer

A door closer installed in a recess in the floor.


automatic door bottom

A horizontal bar at the bottom of a door that drops automatically when the door is closed in order to seal the threshold and reduce noise transmission.




left-hand

Having the hinges on the left of an inward opening door when seen from the exterior of the building or room to which the doorway leads.



left-hand reverse

Having the hinges on the left of an outward opening door when seen from the exterior of the building or room to which the doorway leads.

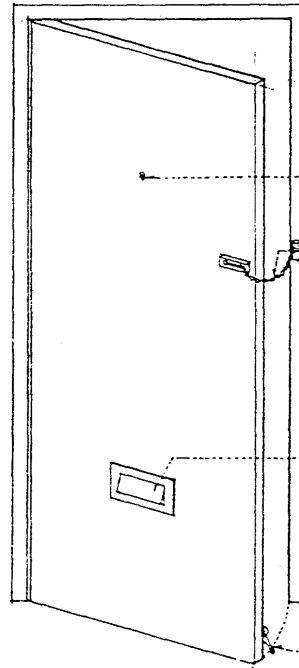

judas

A peephole, as in an entrance door or the door of a prison cell. Also called judas hole.

door chain

A short chain with a removable slide fitting that can be attached between the inside of a door and the doorjamb to prevent the door from being opened more than a few inches without the chain being removed.

mail slot




A small opening in an exterior door or wall, often with a hinged closer, through which mail is delivered. Also called letter slot.

doorstop

A device for holding a door open, as a wedge or small weight.


bumper

A projecting rim, guard, pad, or disk for absorbing shock or preventing damage from bumping.



right-hand

Having the hinges on the right of an inward opening door when seen from the exterior of the building or room to which the doorway leads.



right-hand reverse

Having the hinges on the right of an outward opening door when seen from the exterior of the building or room to which the doorway leads.

hand

The position of the hinges of a door, in terms of right and left, when seen from the exterior of the building or room to which the doorway leads.

mortise hinge

A butt hinge mortised into the abutting surfaces of a door and doorjamb.

half-mortise hinge

A hinge having one leaf mortised into the edge of the door and the other surface-mounted on the doorframe.

half-surface hinge

A hinge having one leaf mortised into the doorframe and the other surface-mounted on the face of the door.

flap hinge

A hinge having two leaves surface-mounted to the adjacent faces of a door and doorframe. Also called **backflap hinge**, **full-surface hinge**.

template hinge

A mortise hinge manufactured to fit the recess and match the arrangement of holes of hollow metal doors and frames.

ball-bearing hinge

A hinge equipped with ball bearings between the knuckles to reduce friction and ensure ease of operation.

fast-pin hinge

A hinge having a nonremovable pin.

loose-pin hinge

A hinge having a removable pin so that a door can be unhung by separating the two leaves.

loose-joint hinge

A hinge having a knuckle formed from half of each leaf, with the upper half removable from the pin. Also called **lift-off hinge**.

pin

A pin or bolt on which something turns, as the gudgeon of a hinge.

gudgeon

A socket for the pin of a hinge.

spring hinge







A hinge containing a coiled spring in its barrel for closing a door automatically.

double-acting hinge

A hinge permitting a door to swing in either direction, usually fitted with springs to bring the door to a closed position after opening.

piano hinge

A long, narrow hinge that runs the full length of the two surfaces to which its leaves are joined. Also called **continuous hinge**.

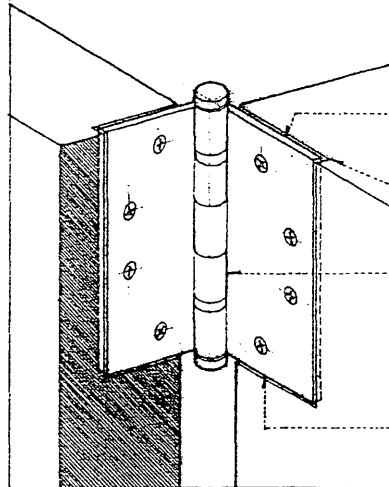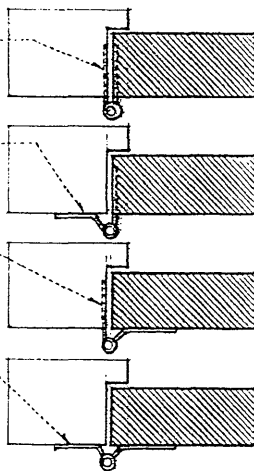**hinge**

A jointed device, usually consisting of two leaves joined together by a pin, on which a door, gate, or shutter swings, turns, or moves.

leaf

A hinged, sliding, or otherwise movable part of a door, hinge, or tabletop.

gain

A notch cut into a surface to receive a leaf of a hinge. Also called **sinking**.

knuckle

The cylindrical, projecting joint of a hinge through which the pin passes.

butt hinge

A hinge composed of two plates secured to the abutting surfaces of a door and doorjamb. Also called **butt**.

strap hinge

A hinge having two long leaves for securing to the adjacent faces of a door and doorjamb.

cross-garnet

A T-shaped strap hinge with the crosspiece as the stationary member and the long stem being the movable leaf. Also called **T-hinge**.

dovetail hinge

A strap hinge having leaves which are narrower at their junction than at their other extremities.

parliament hinge

An H-shaped hinge having a protruding knuckle so that a door can stand away from the wall when fully opened.

paumelle

A hinge having a single, pivoting joint.

olive knuckle hinge







A paumelle having an oval-shaped knuckle. Also called **olive hinge**.

gravity hinge

A hinge that closes automatically by means of gravity.

rising hinge

A gravity hinge causing a door to rise slightly when opened.

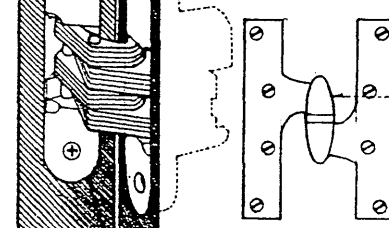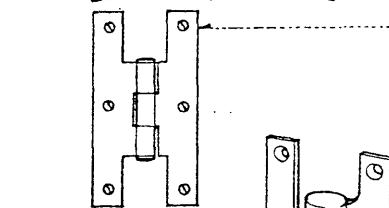**invisible hinge**

A hinge consisting of a number of flat plates rotating about a central pin, with shoulders mortised into the door edge and doorframe so as to be concealed when closed. Also called **concealed hinge**.

HARDWARE

lock


A device for securing a door, drawer, or lid in position when closed, consisting of a bolt or combination of bolts propelled and withdrawn by a key- or combination-operated mechanism.

rim lock

A lock fastened to the face of a door, as opposed to one built into its edge.


cylinder lock

A lock housed within two holes bored at right angles to each other, one through the face of a door and the other in the door edge.





unit lock

A lock housed within a rectangular notch cut into the edge of a door.



mortise lock

A lock housed within a mortise cut into a door edge so that the lock mechanism is covered on both sides.




panic bar

A horizontal bar that spans the interior of an emergency exit door at waist height and that opens the latch when pressure is applied. Also called panic bolt, panic hardware.

lockset

An assembly of parts making up a complete locking system, including knobs, plates and a locking mechanism.



doorknob

The knob-shaped handle by which a door is opened or closed.

keyhole

A hole in a lock case or escutcheon for inserting a key.

escutcheon

A protective or ornamental plate, as around a keyhole, doorknob, drawer pull, or light switch. Also, scutcheon.

backset

The horizontal distance from the face of a lock through which the bolt passes to the centerline of the knob stem, keyhole, or lock cylinder.

spindle

The bar or shaft that carries the knobs and actuates the latch or bolt of a lock.

lever handle

A horizontal handle for operating the bolt of a lock.

strike

A metal plate on a doorjamb having a hole for receiving the end of a lock bolt when the door is closed. Also called strike plate.

lip

The projecting edge or rim of a strike.

box strike

A metal box recessed into a doorjamb to receive the end of a lock bolt when the door is closed.

latch


A device for holding a door closed, consisting essentially of a bar that falls or slides into a groove or hole.

key

A small metal instrument specially cut to fit into a lock and move its bolt.

bit

One of the projecting blades cut to engage with and actuate either or both the bolt and the tumblers of a lock.



rose

An ornamental plate surrounding the shaft of a doorknob at the face of a door.

faceplate

The edge plate or surface through which the bolt of a lock passes. Also called selvage.

bolt

A metal bar or rod in the mechanism of a lock that is propelled or withdrawn, as by turning a knob or key.

deadbolt

A lock bolt having a square head that is moved into position by the turning of a knob or key rather than by spring action. Also called deadlock.

bevel

The oblique end of a latchbolt that hits a strike plate.

latchbolt

A lock bolt having a beveled head that is moved into position by a spring except when retracted by a doorknob, or when pushed against the lip of the strike plate as the door is closed.

flush bolt

A bolt set flush with the face or edge of a door.

extension bolt

A flush bolt fitted into a mortise in a door, sliding into a socket in the head or the sill.

coordinator

A device for ensuring that the inactive leaf of a pair of doors is permitted to close before the active leaf.

cylinder

A cylindrical device for retaining the bolt of a lock until the tumblers have been pushed out of its way.

tumbler

An obstructing part in a lock that prevents a bolt from being propelled or withdrawn until it is moved by the action of a key.

lever tumbler

A flat metal tumbler having a pivoting motion actuated by the turning of a key.

cam

A disk or cylinder having an irregular form that rotates or slides to impart motion to a roller moving against its edge or to a pin free to move in a groove on its face.

keyway

A slot in a lock for receiving and guiding a key.

ward

A projecting ridge of metal in a lock or keyhole that prevents the insertion of any key that does not have a corresponding notch.

reversible lock

A lock having a latchbolt that can be reversed for installation in either a right-hand or left-hand door.

bevel


The side of a lock facing in the same direction as the bevel at the end of the latchbolt.

regular bevel

The bevel of a bolt or lock on a door opening into the building or room to which the doorway leads.

reverse bevel

The bevel of a bolt or lock on a door opening outward from the building or room to which the doorway leads.

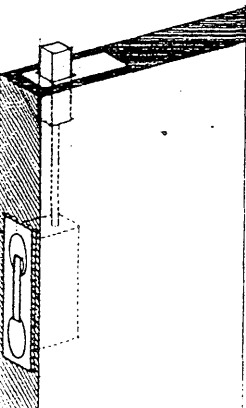

temperature

A measure of the warmth or coldness of a substance, object, or environment with reference to some standard value.

thermometer

An instrument for measuring temperature, consisting typically of a glass tube with a numbered scale and a bulb containing a liquid, as mercury, that rises and falls with changes in temperature.

British thermal unit

The quantity of heat required to raise the temperature of one pound (0.4 kg) of water 1°F. Abbr.: Btu

therm

A unit of heat equal to 100,000 British thermal units.

calorie

A unit of heat equal to the quantity of heat required to raise the temperature of one gram of water 1°C at a pressure of one atmosphere, equivalent to 4.186 joules. Abbr.: cal. Also called gram calorie, small calorie.

kilocalorie


A unit of heat equal to the quantity of heat required to raise the temperature of one kilogram of water 1°C at a pressure of one atmosphere, equivalent to 1000 small calories. Abbr.: Cal. Also called kilogram calorie, large calorie.

heat capacity

The quantity of heat required to raise the temperature of a substance by one degree.

specific heat

Heat capacity per unit mass of a substance; the number of Btu required to raise the temperature of one pound of a substance 1°F, or the number of calories per gram per degree centigrade.

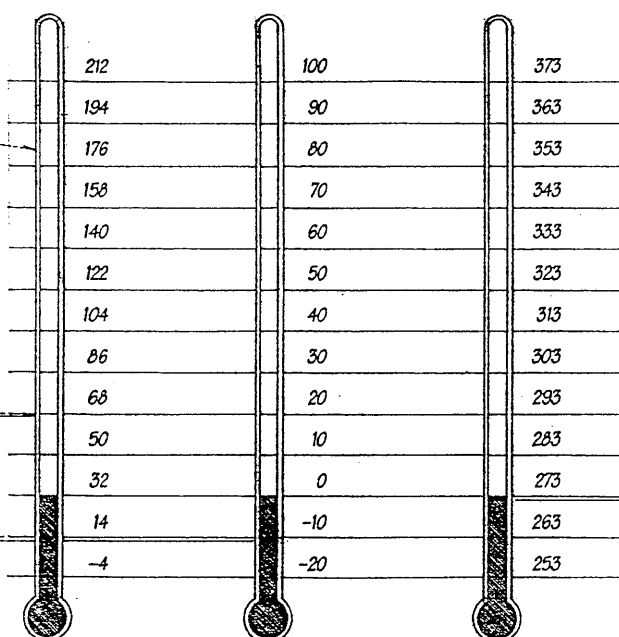

Fahrenheit scale

A temperature scale in which 32°F represents the freezing point and 212°F the boiling point of water under standard atmospheric pressure.

When you know degrees Fahrenheit, first subtract 32 and then multiply by $\frac{5}{9}$ to find degrees Celsius.

Celsius scale

A temperature scale divided into 100 degrees, in which 0°C represents the freezing point and 100°C the boiling point of water under standard atmospheric pressure. Also called Centigrade scale.

When you know degrees Celsius, first multiply by $\frac{9}{5}$ and then add 32 to find degrees Fahrenheit.

Kelvin scale

An absolute scale of temperature having a zero point of -273.16°C.

absolute scale

A temperature scale based on absolute zero with scale units equal in magnitude to centigrade degrees.

absolute zero

The hypothetical lowest limit of physical temperature characterized by complete absence of heat, equal to -273.16°C or -459.67°F.

absolute temperature

Temperature as measured on a absolute scale.


A form of energy associated with the random motion of atoms or molecules, capable of being transmitted by convection, conduction, or radiation and causing substances to rise in temperature, fuse, expand, or evaporate.

kelvin

The base SI unit of temperature equal to $\frac{1}{273.16}$ of the triple point of water. Symbol: K


triple point

The particular temperature and pressure at which the liquid, gaseous, and solid phases of a substance can exist in equilibrium.

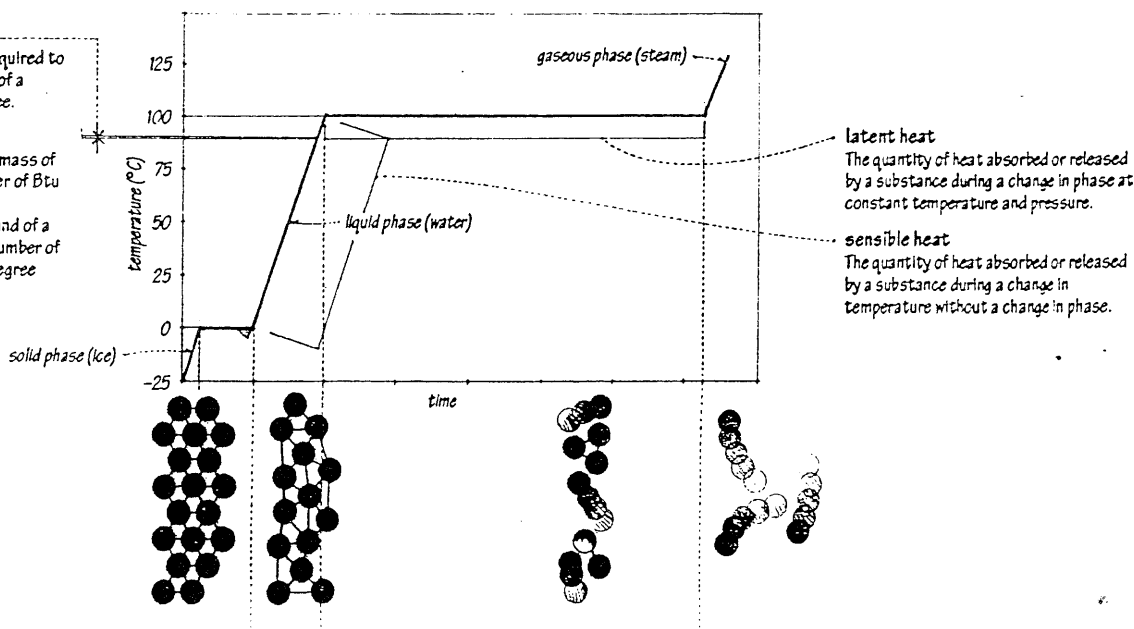



conduction

The transfer of heat from the warmer to the cooler particles of a medium or of two bodies in direct contact, occurring without perceptible displacement of the particles themselves.




convection

The transfer of heat by the circulatory motion of the heated parts of a liquid or gas owing to a variation in density and the action of gravity.

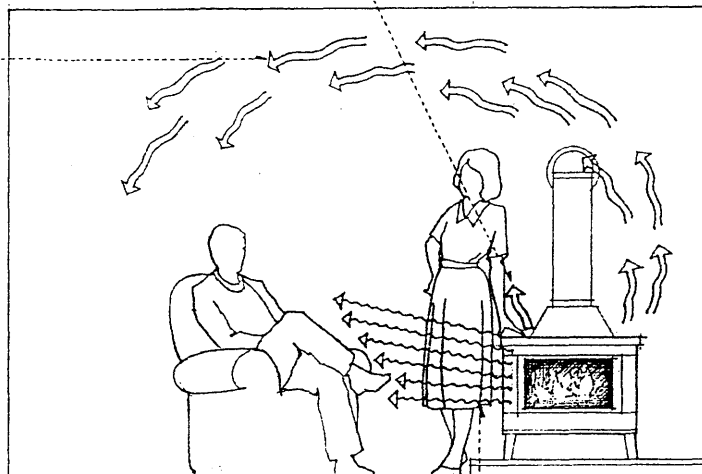

radiation

The process in which energy in the form of waves or particles is emitted by one body, passed through an intervening medium or space, and absorbed by another body.




thermal conductivity

The time rate of heat flow through a unit area of a given material of unit thickness when the temperature difference across the thickness is one unit of temperature.

thermal conductance

The time rate of heat flow through a unit area of a given material when the temperature difference across a specified thickness of the material is one unit of temperature.

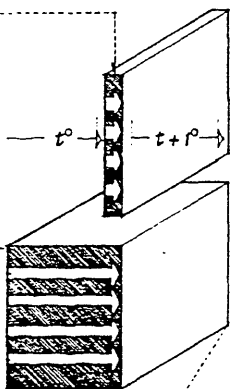

$$C = 1/R$$

thermal resistance

The reciprocal of thermal conductance, expressed as the temperature difference required to cause heat to flow through a unit area of a material of given thickness at the rate of one heat unit per unit time.

R-value

A measure of thermal resistance of a given material, used esp. to specify the performance of thermal insulation. The total R-value for a building component or assembly is the sum of the R-values for each layer in the component or assembly.

thermal transmittance

The time rate of heat flow through a unit area of a building component or assembly when the difference between the air temperatures on the two sides of the component or assembly is one unit of temperature. Also called coefficient of heat transfer.


U-value

A measure of the thermal transmittance of a building component or assembly, equal to the reciprocal of the total R-value of the component or assembly.

$$1/R(\text{total}) = U$$



thermal break

An element of low thermal conductivity placed in an assembly to reduce the flow of heat between highly conductive materials. Also called thermal barrier.

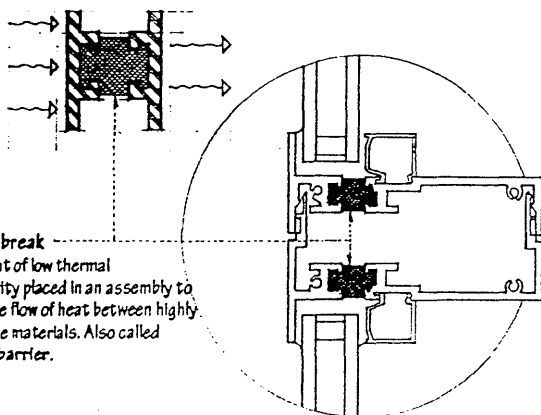

infiltration

The flow of outside air into an interior space through cracks around windows and doors or other openings in the envelope of a building.



weather strip

A strip of metal, felt, vinyl, or foam rubber, placed between a door or window sash and its frame to provide a seal against windblown rain and air infiltration. Also, weather stripping.

mineral wool

Any of various lightweight, inorganic, fibrous materials used esp. for thermal and sound insulation, as glass wool and rock wool.

glass wool

Spun glass fibers resembling wool and used for thermal insulation and air filters.

fiberglass

A material consisting of extremely fine filaments of glass, woven into fabric, massed for use as a thermal and acoustical insulator, or embedded to reinforce various materials.

Fiberglas

Trademark for a brand of fiberglass.

rock wool

Mineral wool made by blowing steam or air through molten slag or rock.

foamed plastic

Plastic, as polyurethane or polystyrene, made light and cellular by the introduction of pockets of gas or air and used as thermal insulation. Also called expanded plastic, plastic foam.

polyurethane foam

A rigid expanded polyurethane having a closed-cell structure and used as thermal insulation.

molded polystyrene

A rigid polystyrene foam having an open-cell structure and used as thermal insulation.

extruded polystyrene

A rigid polystyrene foam having a closed-cell structure and used as thermal insulation.

Styrofoam


Trademark for a brand of foamed plastic made from polystyrene.

foam glass

Cellular glass made by foaming softened glass and molding it into boards or blocks for use as thermal insulation.

wood wool

Fine wood shavings, usually of pine or chemically treated wood fibers, used as an insulating material, as a binder in plaster, and for packing. Also called excelsior.

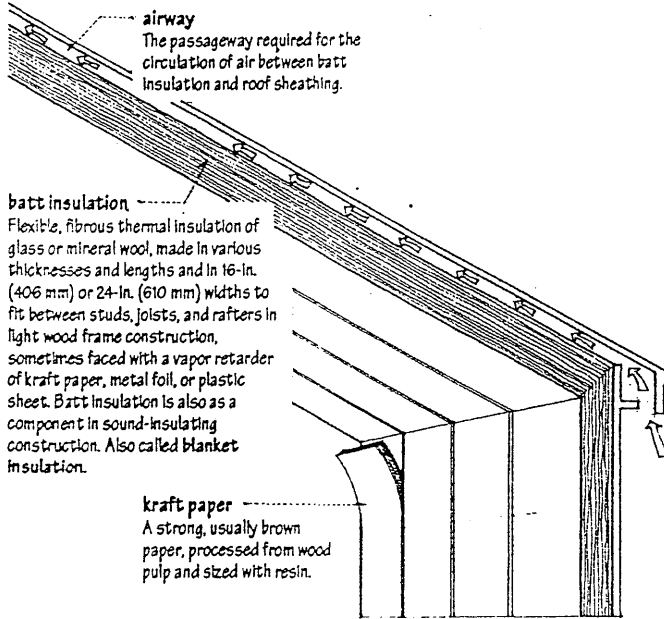

thermal insulation


A material providing high resistance to heat flow, as mineral wool, vermiculite, or foamed plastic, fabricated in the form of batts, blankets, boards, or loose fill.

weatherize

To make a house or building secure against cold or stormy weather, as by adding thermal insulation or storm windows, or by sealing joints.

rigid board insulation

A preformed, nonstructural insulating board of foamed plastic or cellular glass. Cellular glass insulation is fire-resistant, impervious to moisture, and dimensionally stable, but has a lower thermal-resistance value than foamed plastic insulations, which are flammable and must be protected by a thermal barrier when used on the interior surfaces of a building. Rigid insulation having closed-cell structures, as extruded polystyrene and cellular glass, are moisture-resistant and may be used in contact with the earth.



fiberboard


An insulating board made of wood or cane fibers compressed and cemented into rigid sheets, used as an inexpensive wall finish or as ceiling tiles.

fiberboard sheathing

Insulating fiberboard treated or impregnated with asphalt for water resistance and used primarily for sheathing light wood frame walls.


foamed-in-place insulation

Thermal insulation in the form of a foamed plastic, as polyurethane, that is sprayed or injected into a cavity where it adheres to the surrounding surfaces.




loose-fill insulation

Thermal insulation in the form of mineral wool fibers, granular vermiculite or perlite, or treated cellulosic fibers, poured by hand or blown through a nozzle into a cavity or over a supporting membrane.



reflective insulation

Thermal insulation in the form of a material of high reflectivity and low emissivity, as paper-backed aluminum foil or foil-backed gypsum board, used in conjunction with a dead-air space to reduce the transfer of heat by radiation.

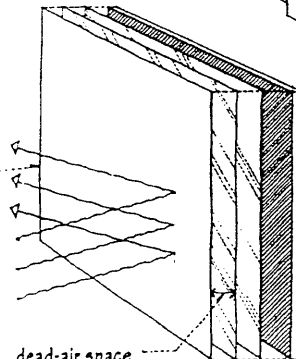

dead-air space

An unventilated air space in which the air does not circulate.

emissivity

The ability of a surface to emit heat by radiation, equal to the ratio of the radiant energy emitted to that emitted by a black body at the same temperature.

HEAT

thermal comfort

Human comfort as determined by the ability of the body to dissipate the heat and moisture it produces by metabolic action.

effective temperature

A temperature representing the combined effect of ambient temperature, relative humidity, and air movement on the sensation of warmth or cold felt by the human body, equivalent to the dry-bulb temperature of still air at 50% relative humidity which induces an identical sensation.

wet-bulb temperature

The temperature recorded by the wet-bulb thermometer in a psychrometer.

dew point

The temperature at which air becomes saturated with water vapor. Also called dew-point temperature.

comfort zone

The range of dry-bulb temperature, relative humidity, mean radiant temperature, and air movement judged to be comfortable by a majority of Americans and Canadians tested. This comfort zone varies with climate, the season of the year, the type of clothing worn, and the activity level of the individual. Also called comfort envelope.

psychrometric chart

A chart relating the wet-bulb and dry-bulb readings from a psychrometer to relative humidity, absolute humidity, and dew point.

dry-bulb temperature

The temperature recorded by the dry-bulb thermometer in a psychrometer.

psychrometer

An instrument for measuring atmospheric humidity, consisting of two thermometers, the bulb of one being dry and the bulb of the other being kept moist and ventilated so that the cooling that results from evaporation makes it register a lower temperature than the dry one, with the difference between the readings being a measure of atmospheric humidity.

relative humidity

The ratio of the amount of water vapor actually present in the air to the maximum amount that the air could hold at the same temperature, expressed as a percentage. Abbr.: rh

absolute humidity

The mass of water vapor present in a unit volume of air.

specific humidity

The ratio of the mass of water vapor in air to the total mass of the mixture of air and water vapor.

hygrometer


Any of various instruments for measuring the humidity of the atmosphere.

humidity ratio

The ratio of the mass of water vapor to the mass of dry air in a mixture of air and water vapor. Also called mixing ratio.


enthalpy

A measure of the total heat contained in a substance, equal to the internal energy of the substance plus the product of its volume and pressure. The enthalpy of air is equal to the sensible heat of the air and the water vapor present in the air plus the latent heat of the water vapor, expressed in Btu per pound (kilojoules per kilogram) of dry air. Also called heat content.



adiabatic heating

A rise in temperature occurring without the addition or removal of heat, as when excess water vapor in the air condenses and the latent heat of vaporization of the water vapor is converted to sensible heat in the air.




evaporative cooling

A drop in temperature occurring without the addition or removal of heat, as when water evaporates and the sensible heat of the liquid is converted to latent heat in the vapor. Also called adiabatic cooling.

mean radiant temperature

The sum of the temperatures of the surrounding walls, floor, and ceiling of a room, weighted according to the solid angle subtended by each at the point of measurement. Mean radiant temperature is important to thermal comfort since the human body receives radiant heat from or loses heat by radiation to the surrounding surfaces if their mean radiant temperature is significantly higher or lower than the air temperature.

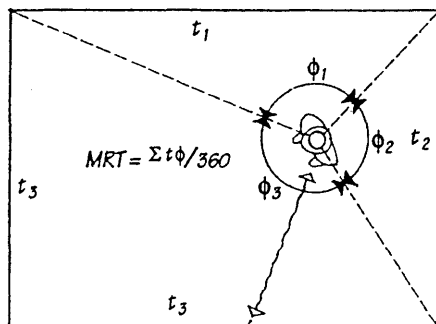


radiant heat

Heat energy transmitted by the radiation of electromagnetic waves in contrast to heat transmitted by conduction or convection.

thimble
A protective sleeve of sheet metal passing through the wall of a chimney, for holding the end of a stovepipe.

stovepipe
A pipe, usually of sheet metal, serving as a stove chimney or connecting a stove with a chimney flue.

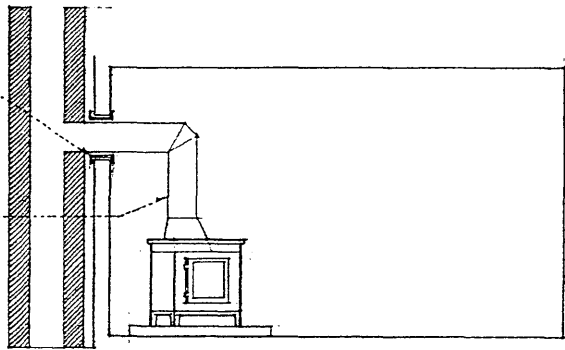


Franklin stove
A cast-iron stove resembling an open fireplace but having enclosed sides, back, top, and bottom and a front completely open or able to be closed with doors.

mechanical system
Any of the systems that provide essential services to a building, as water supply, sewage disposal, electric power, heating, ventilation, air-conditioning, vertical transportation, or fire fighting.

space heating
The heating of a limited area, as a room, esp. by means of a heat source located within the space.

central heating
A mechanical system that supplies heat to an entire building from a single source through a network of ducts or pipes.

vent
A pipe by which products of combustion are carried from a furnace or other appliance to the outside.

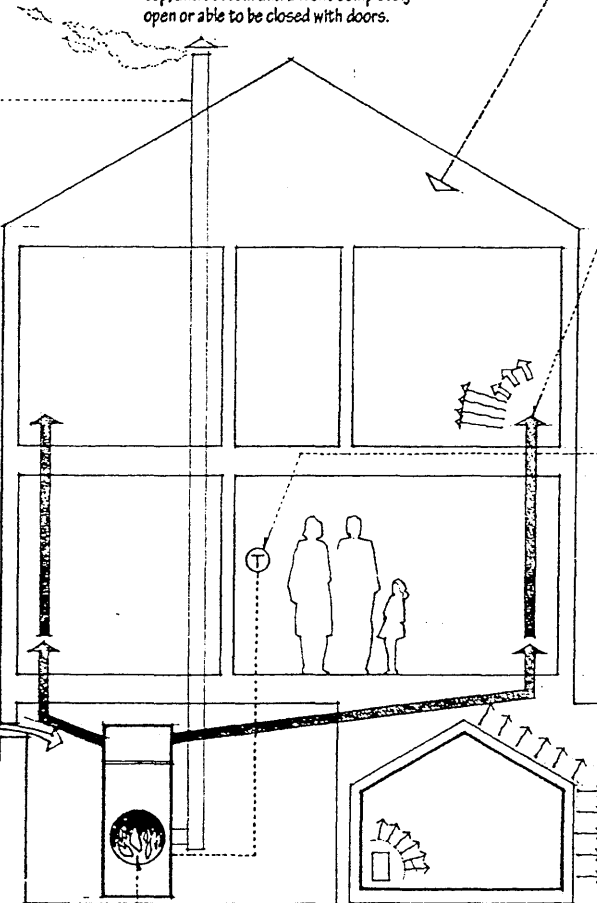


heating medium
A fluid substance, as warm air, hot water, or steam, capable of conveying heat from a source to the space being heated.

thermostat
A device that automatically responds to changes in temperature and activates switches controlling such equipment as furnaces, refrigerators, and air conditioners.


thermocouple
A device for measuring temperature in which a pair of dissimilar metals, as copper and iron, are joined so that a potential difference generated between the points of contact is a measure of the temperature difference between the points.

bimetallic element
A material made by bonding two metallic strips having different coefficients of expansion, used in temperature-indicating and temperature-controlling devices.

combustion air
The air required for combustion of fuel in a furnace.



horizontal furnace
A furnace designed for installation in a low attic or crawlspace.



wall furnace
A furnace recessed in or mounted on a wall and supplying heated air directly to a space without the use of ducts.

furnace
An apparatus in which heat is produced, as for heating a house or producing steam.

electric furnace
A furnace in which the heat required is produced through electricity.

gas furnace
A furnace using gas as a fuel.


oil burner
A furnace or boiler that burns fuel oil.

conversion burner
A burner designed for installation in a furnace that originally used another fuel.

heating load
The hourly rate of net heat loss in an enclosed space, expressed in Btu per hour and used as the basis for selecting a heating unit or system.

heating degree day
A degree-day below the standard temperature of 65°F (19°C), used in estimating fuel or power consumption by a heating system.

degree day
A unit that represents one degree of departure in the mean daily outdoor temperature from a given standard temperature.



HEAT

forced warm-air heating

A system for heating a building by means of air heated in a furnace and distributed by a fan through ductwork to registers or diffusers.

extended plenum system

A perimeter heating system in which a main duct conveys warm air to a number of branch ducts, each serving a single floor register.

bonnet

A chamber at the top of a hot-air furnace from which the leaders emerge. Also called plenum.

leader

A duct for conveying warm air from a furnace to a stack or branch duct. Also called main, trunk.

manifold

A pipe or duct fitting having several outlets for making multiple connections.

gathering

A tapered section of a duct or flue forming a transition between two sections, one of which has a greater area than the other.

boot

A duct fitting forming a transition between two sections which vary in cross-sectional shape.

duct

A pipe or conduit of sheet metal or fiberglass for conducting heated or conditioned air. Also called air duct.

ductwork

A system of ducts, connectors, and dampers for conveying air in a heating, ventilating, or air-conditioning system. Also called ducting.

stack

A vertical duct for conveying warm air from a leader to a register on an upper floor.

chase

A continuous space or recess built into a wall or through a floor for pipes or ducts.

grille

A grating or perforated screen for covering, concealing, or protecting a wall, floor, or ceiling opening.

register

A device for controlling the flow of warm or conditioned air from an outlet, composed of a grill with a number of parallel blades that may be adjusted so as to overlap and close the opening.

flexible duct

A pliable, airtight fitting installed between two ducts, or between a fan and a duct, to prevent the transmission of noise and vibrations along the ductwork.

duct liner

A fiberglass blanket for lining the inside of a duct to reduce noise and serve as thermal insulation.

perimeter heating

A heating system that distributes warm air to registers placed in or near the floor along exterior walls.

perimeter loop system

A perimeter heating system in which a loop of ductwork, usually embedded in a concrete ground slab, distributes warm air to each floor register.

perimeter radial system

A perimeter heating system in which a leader from a centrally located furnace carries warm air directly to each floor register.

throw

The distance a projected airstream travels from an outlet to a point where its velocity is reduced to a specified value.

terminal velocity

The average velocity of a projected airstream at the end of the throw.

drop


The vertical distance a horizontally projected airstream falls from the elevation of its outlet, measured at the end of the throw.


spread

The extent to which a projected airstream diffuses at the end of the throw.

diffuser

A device having slats at different angles for deflecting warm or conditioned air from an outlet in various directions.

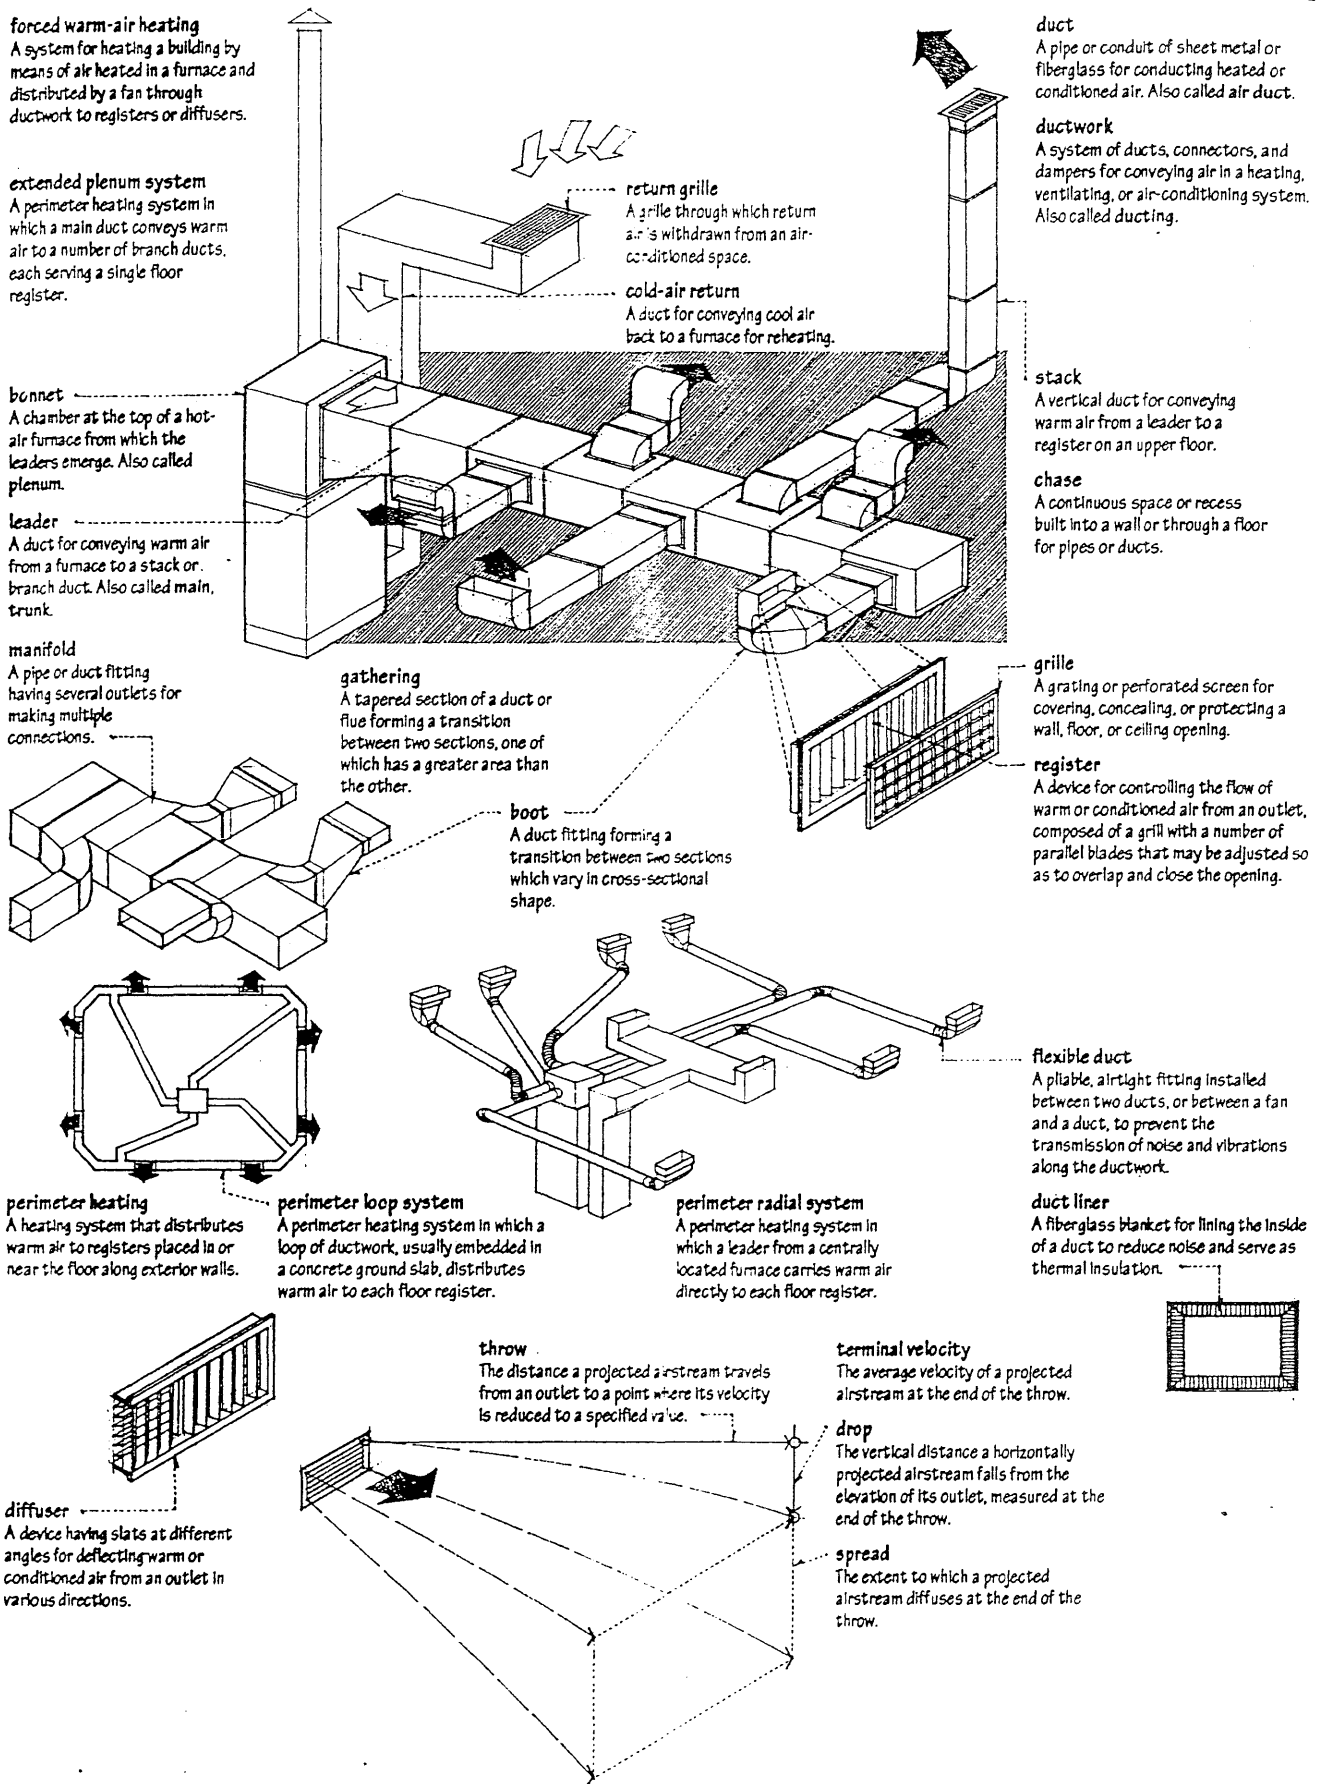



radiator
A heating device consisting of a series or coil of pipes through which hot water or steam passes.


bucket trap
A valve for eliminating air and condensed moisture from a radiator without allowing steam to escape. Also called **steam trap**.

bleeder
A valve for draining a pipe, radiator, or tank. Also called **bleeder valve**.

reverse return
A two-pipe hot-water system in which the lengths of the supply and return pipes for each radiator or convactor are nearly equal.

direct return
A two-pipe hot-water system in which the return pipe from each radiator or convactor takes the shortest route back to the boiler.

dry return
A return pipe in a steam-heating system that carries both air and water of condensation.

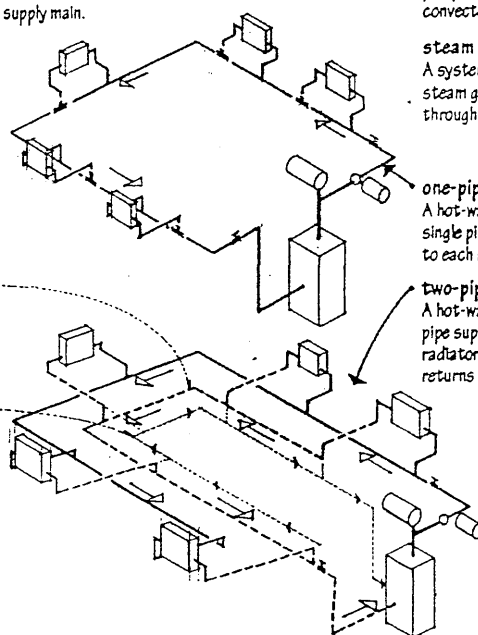


hot-water heating
A system for heating a building by means of water heated in a boiler and circulated by a pump through pipes to radiators or convectors. Also called **hydronic heating**.

steam heating
A system for heating a building by means of steam generated in a boiler and circulated through pipes to radiators.

one-pipe system
A hot-water heating system in which a single pipe supplies hot water from a boiler to each radiator or convactor in sequence.


two-pipe system
A hot-water heating system in which one pipe supplies hot water from a boiler to the radiators or convectors and a second pipe returns the water to the boiler.



convactor
A heating unit in which air heated by contact with a radiator or fin tube circulates by convection.

fin tube
A type of radiator having horizontal tubes with closely spaced vertical fins to maximize heat transfer to the surrounding air.


baseboard heater
A long, narrow hydronic or electric convactor designed for installation along the base of a wall.




safety valve
A relief valve that opens when actuated by a gas or vapor pressure above a predetermined level, allowing the gas or vapor to escape until its pressure is reduced to a safe or acceptable level.

relief valve
A valve that opens when actuated by static pressure above a predetermined level in order to reduce the pressure to it.

petcock
A small faucet or valve for draining or releasing compression in pipes, radiators, and boilers.




boiler
A closed vessel or arrangement of vessels and tubes in which water is heated or steam is generated to supply heat or power.



unit heater
A self-contained electric or gas-fired space heater, consisting of a heating element, fan, and a directional outlet.

space heater
A device for heating the space in which it is located, esp. a unit that has no external heating ducts or connection to a chimney.

quartz heater
An electric space heater having heating elements sealed in quartz-glass tubes that produce infrared radiation in front of a reflective backing.

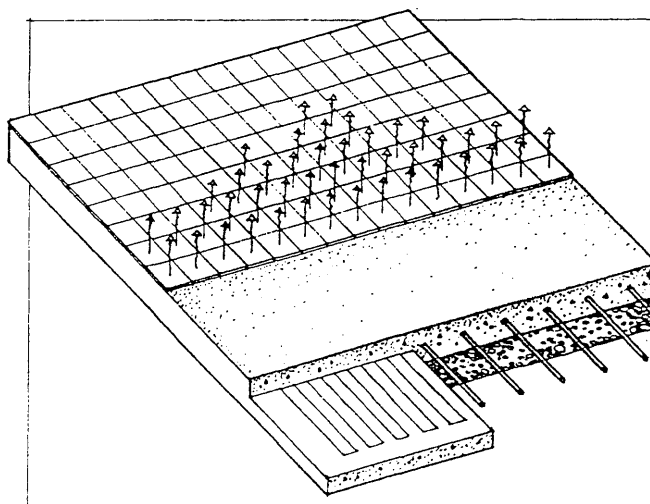

radiant heating
A system for heating by radiation from a surface, esp. one that is heated by means of electric resistance or hot water.

electric heat
Heat generated by the resistance of a conductor to the flow of electric current.

panel heating
The radiant heating of a room or building by means of wall, floor, baseboard, or ceiling panels containing electrical conductors, hot-water pipes, or hot-air ducts.

HEAT

air conditioning


A system or process for simultaneously controlling the temperature, humidity, purity, distribution, and motion of the air in an interior space, esp. one capable of cooling.

air conditioner

Any device or apparatus for controlling, esp. lowering, the temperature and humidity of a space.

packaged air conditioner

A factory-assembled air conditioner having a fan, filters, compressor, condenser, and evaporator coils for cooling. For heating, the unit may operate as a heat pump or contain auxiliary heating elements.



load

The demand placed on a heating, ventilating, or air-conditioning system in order to maintain the desired conditions of thermal comfort in a building.

cooling load

The hourly rate of heat gain in an enclosed space, expressed in Btu per hour and used as the basis for selecting an air-conditioning unit or system.

cooling degree-day

A degree-day above the standard temperature of 75°F (24°C), used in estimating energy requirements for air-conditioning and refrigeration.

cooling medium

A fluid substance, as chilled water or cool air, for removing heat, as from the interior spaces of a building.

ton of refrigeration

The cooling effect obtained when 1 ton of ice at 32°F (0°C) melts to water at the same temperature in 24 hours, equivalent to 12,000 Btu/hr. (3.5 kW).

energy efficiency rating


An index of the efficiency of a refrigerating unit, expressing the Btu removed per watt of electrical energy input.

compressive refrigeration

A refrigeration process in which cooling is effected by the vaporization and expansion of a liquid refrigerant.

expansion valve

A valve that reduces the pressure and evaporation temperature of a refrigerant as it flows to the evaporator.

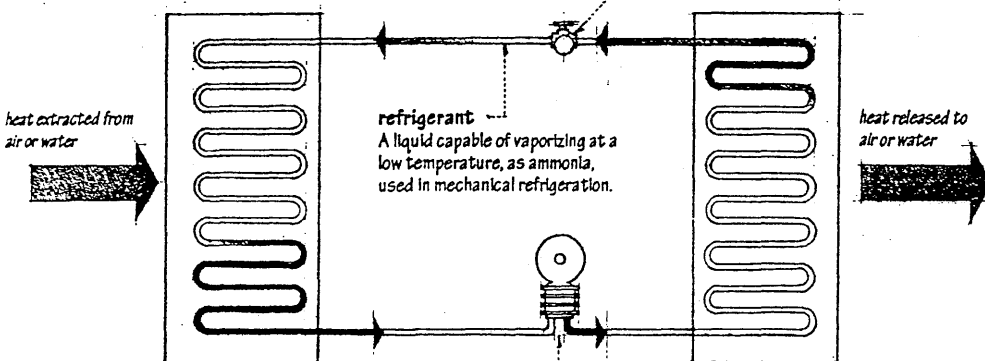

refrigerant
A liquid capable of vaporizing at a low temperature, as ammonia, used in mechanical refrigeration.

evaporator

The component of a refrigeration system in which the refrigerant absorbs heat from a cooling medium and changes from a liquid to a gas.

compressor

A pump or other machine for reducing the volume and increasing the pressure of a gas.

condenser

A device for reducing a vapor or gas to liquid or solid form.

coolant



A fluid agent for reducing the temperature of a system below a specified value by conducting away the heat produced in the operation of the system.

heat sink

A medium or environment for the absorption or dissipation of unwanted heat.

heat pump

A device that uses a compressible refrigerant to transfer heat from one reservoir to another, with the process being reversible so that it can be used for both heating and cooling a building.

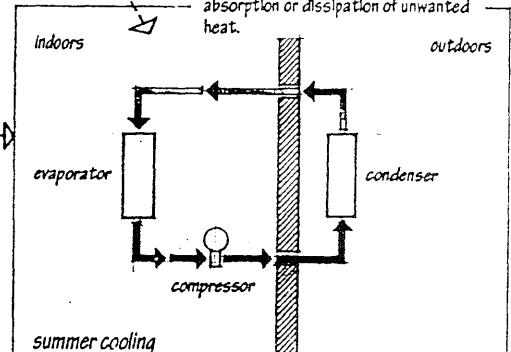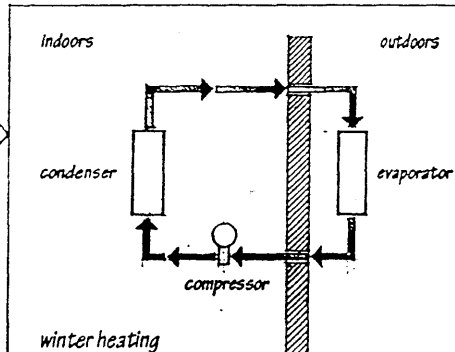

absorption refrigeration

A refrigeration process that uses a generator and an absorber instead of a compressor to transfer heat.

evaporator

heat extracted by means of a heat exchanger to produce chilled water for cooling

absorber

The component of an absorption-refrigeration system that uses a saline solution to draw water vapor from the evaporator, cooling the remaining water in the process.

heat exchanger


A device for transferring the heat of a fluid flowing on one side of a barrier to a fluid flowing on the other.

condenser

waste heat extracted from steam as it condenses before returning to evaporator

generator

The component of an absorption-refrigeration system that uses a heat source to remove excess water vapor from a saline solution.

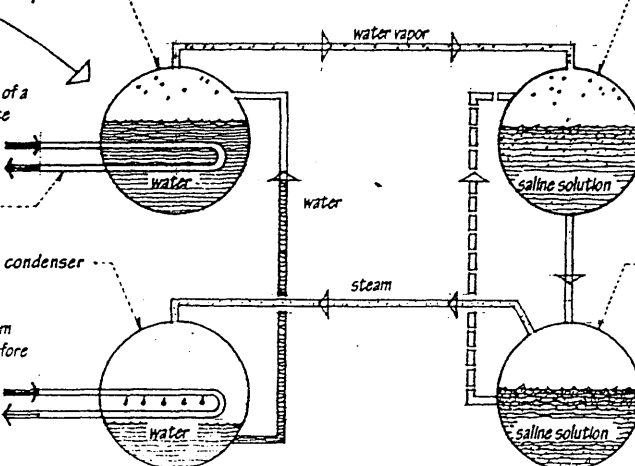


central air conditioning

An air-conditioning system that treats air at a central location and distributes the conditioned air to an entire building by means of fans and ductwork.

HVAC

Abbreviation for heating, ventilating, and air conditioning.

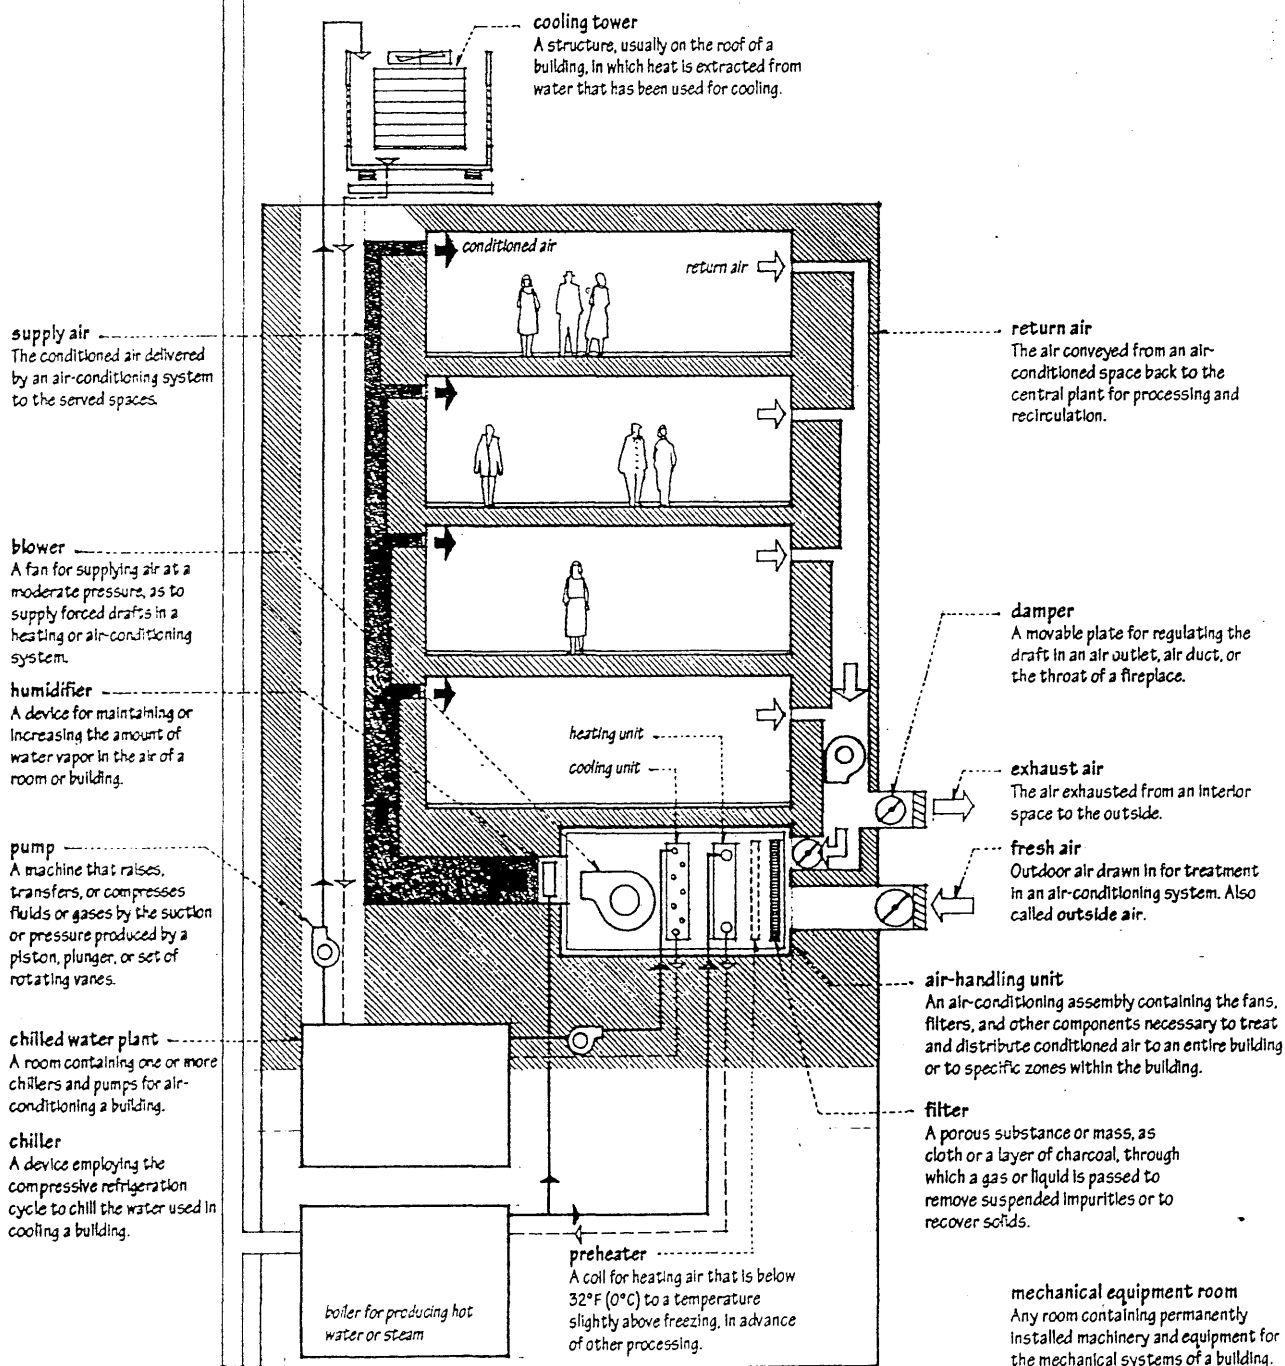

HEAT

all-water system

An air-conditioning system in which either hot or chilled water is piped to fan-coil units in the served spaces, where air is circulated locally.

two-pipe system

An all-water system in which one pipe supplies the hot or chilled water to fan-coil units, and the other pipe returns it to the boiler or chilled water plant.

four-pipe system

An all-water system in which separate hot-water and chilled-water piping circuits provide for simultaneous heating and cooling as needed in various zones of a building.

all-air system

An air-conditioning system in which central fans distribute conditioned air to the served spaces by means of ductwork.

single-duct system

An all-air system in which a single duct conveys conditioned air to the served spaces.

constant-air-volume system

An all-air system in which a master thermostat automatically regulates the quantity of conditioned air supplied to each zone.

variable-air-volume system

An all-air system in which a thermostatically controlled variable-volume box regulates the quantity of conditioned air supplied to each zone.

dual-duct system


An all-air system in which separate cold-air and warm-air supply ducts meet at a mixing box where the air is blended before distribution to each zone.

terminal reheat system

An all-air system in which a reheat coil regulates the temperature of the air being furnished to each individually controlled zone.

air-water system

An air-conditioning system in which high-velocity ducts supply conditioned air from a central plant to each zone where it mixes with room air and is further heated or cooled in an induction or fan-coil unit.

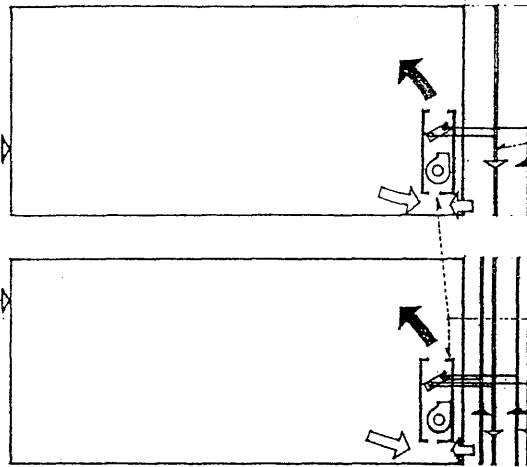

supply pipe

A pipe for conveying hot or chilled water from the boiler or chilled-water plant to a fan-coil unit.

return pipe

A pipe for conveying water from a fan-coil unit to the boiler or chilled-water plant.

terminal unit


Any of various devices for delivering a heating or cooling medium to a space.

fan-coil unit

A terminal unit containing an air filter, heating or cooling coils, and a centrifugal fan for drawing in a mixture of room air and outside air.

coil

A connected series of pipes or tubing in rows or layers, often having fins attached to dissipate heat.

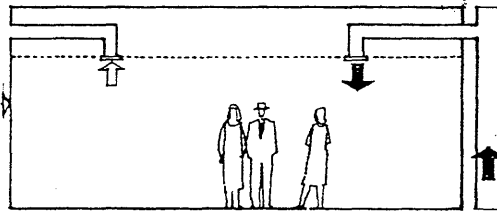


multizone system

A central air-handling unit capable of serving up to eight zones simultaneously.


zone

A space or group of spaces in a building whose temperature and air quality is regulated by a single control.

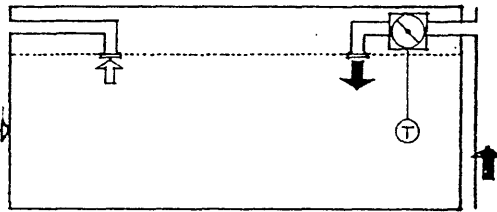


mixing box

A chamber for proportioning and blending cold and warm air under thermostatic control to reach the desired temperature.




reheat coil

An electric or hot-water coil for raising the temperature of the air in the supply duct of an air-conditioning system.



induction unit

A terminal unit in which primary air draws in room air through a filter and the mixture passes over coils that are either heated or chilled by secondary water from a boiler or chilled water plant.



high-velocity duct


A small duct capable of conveying primary air at a velocity of 2,400 ft. (730 m) per minute or higher.

primary air

The conditioned air supplied at a high pressure and high velocity by a central air handling unit.

vent

An opening, as in a wall, serving as an outlet for air, smoke, fumes, or the like.

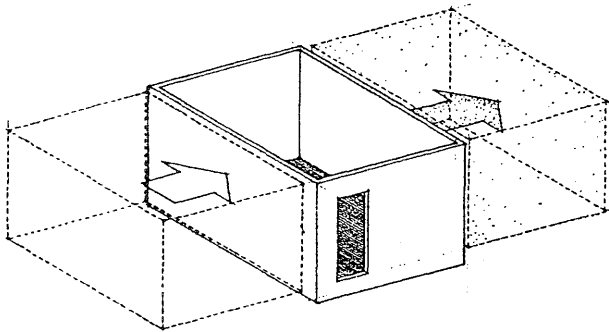

air change


The replacement of the volume of air contained within a room with an equivalent volume of fresh air within a given period of time. The term **air changes-per-hour** is often used to specify ventilation standards.

ventilate

To provide a room with fresh air to replace air that has been used or contaminated.


natural ventilation

The process of ventilating a space by the natural movement of air rather than by mechanical means.

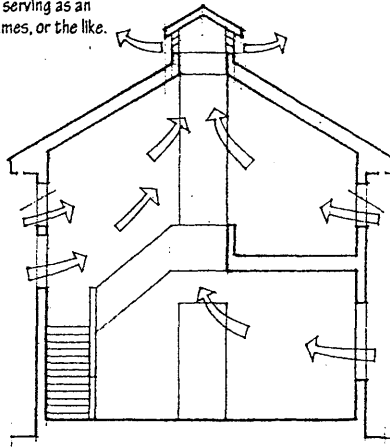

chimney effect

The tendency of air or gas in a shaft or other vertical space to rise when heated, creating a draft that draws in cooler air or gas from below.

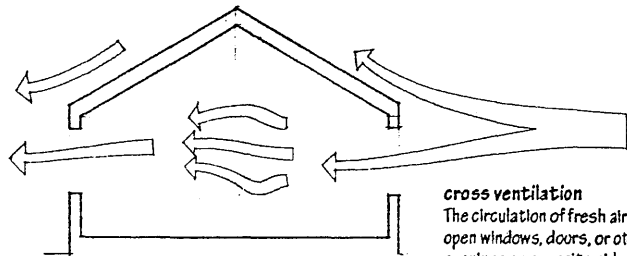

cross ventilation



The circulation of fresh air through open windows, doors, or other openings on opposite sides of a room.

ventilator

A louvered opening or motor-driven fan for replacing stagnant air with fresh air.


attic ventilator

A wind- or motor-driven fan for assisting the natural air flow through an attic space.

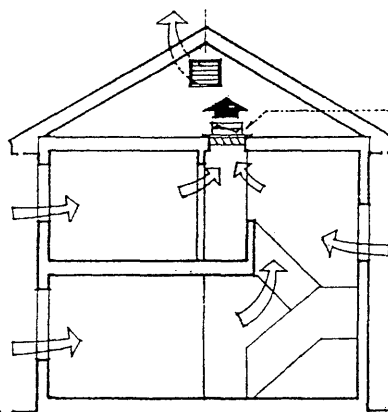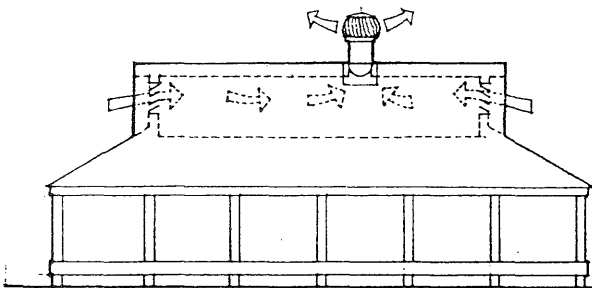


whole-house ventilator

A motor-driven fan for pulling stale air from the living areas of a house and exhausting it through attic vents.



plenum ventilation

A system of mechanical ventilation in which fresh air is forced into the space to be ventilated from a chamber (plenum chamber) at a pressure slightly higher than atmospheric pressure, so as to expel stale air.



fan


A device that rotates an array of blades or vanes about an axis in order to produce a current of air.

exhaust fan

A fan for ventilating an interior space by drawing air from the interior and expelling it outside.

centrifugal fan

A fan that receives air along its axis and discharges it radially.

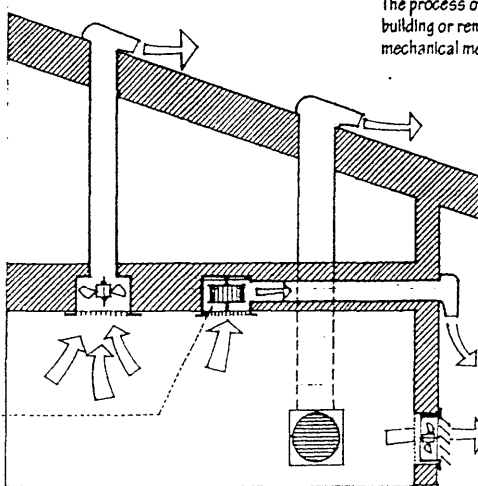

mechanical ventilation

The process of supplying fresh air to a building or removing stale air from it by mechanical means, as with fans.

HISTORY

A systematic, often chronological narrative of significant events as relating to a particular people, country, or period, often including an explanation of their causes.

civilization

An advanced state of human society marked by a relatively high level of cultural, technical, and political development.

society

An enduring and cooperating large-scale community of people having common traditions, institutions, and identity, whose members have developed collective interests and beliefs through interaction with one another.

culture

The integrated pattern of human knowledge, beliefs, and behaviors built up by a group of human beings and transmitted from one generation to the next.

style

A particular or distinctive form of artistic expression characteristic of a person, people, or period.

expression

The manner in which meaning, spirit, or character is symbolized or communicated in the execution of an artistic work.

prehistoric

Of, pertaining to, or existing in the time prior to the recording of human events, knowledge of which is gained mainly through archaeological discoveries, study, and research.

Stone Age

The earliest known period of human culture, preceding the Bronze Age and the Iron Age and characterized by the use of stone implements and weapons.

Neolithic

Of or relating to the last phase of the Stone Age, characterized by the cultivation of grain crops, domestication of animals, settlement of villages, manufacture of pottery and textiles, and use of polished stone implements: thought to have begun c3000–8000 B.C.



Lascaux Cave


A cave in Lascaux, France, containing wall paintings and engravings thought to date from c13,000–8500 B.C.

Mesopotamia

An ancient region in western Asia between the Tigris and Euphrates rivers, comprising the lands of Sumer and Akkad and occupied successively by the Sumerians, Babylonians, Assyrians, and Persians: now part of Iraq.

Fertile Crescent

An agricultural region arching from the eastern shores of the Mediterranean Sea in the west to Iraq in the east: the location of humankind's earliest cultures.



Catal Hüyük

A Neolithic settlement in Anatolia, dated 6500–5000 B.C. One of the world's earliest cities, it had mud-brick fortifications and houses, frescoed shrines, a fully developed agriculture, and extensive trading in obsidian, the chief material for tool-making.

Anatolia

A vast plateau between the Black, Mediterranean, and Aegean Seas, synonymous with the peninsula of Asia Minor: today comprises most of Turkey.

Bronze Age

A period of human history that began c4000–3000 B.C., following the Stone Age and preceding the Iron Age, characterized by the use of bronze implements.



Yang-shao

A Neolithic culture in China centered around the fertile plains of the Yellow River, characterized by pit dwellings and fine pottery painted in geometric designs.

Sumerian architecture


The architecture developed by the Sumerians who dominated southern Mesopotamia from the 4th to the end of the 3rd millennium B.C., characterized by monumental temples of sun-dried brick faced with burnt or glazed brick, often built upon the ruins of their predecessors.

Sumer

An ancient region in southern Mesopotamia, where a number of independent cities and city-states were established as early as 5000 B.C. A number of its cities, as Eridu, Uruk, and Ur, are major archeological sites.

tell

An artificial mound accumulated from the remains of one or more ancient settlements: often used in the Middle East as part of a place name.



Egyptian Architecture

The architecture of the ancient civilization that flourished along the Nile River in northwest Africa from before 3000 B.C. to its annexation by Rome in 30 B.C., characterized esp. by the axial planning of massive masonry tombs and temples, the use of trabeated construction with precise stonework, and the decoration of battered walls with pictographic carvings in relief. A preoccupation with eternity and the afterlife dominated the building of these funerary monuments and temples, which reproduced the features of domestic architecture but on a massive scale using stone for permanence.



Minoan architecture

The architecture of the Bronze Age civilization that flourished on Crete from about 3000 to 1100 B.C., named after the legendary King Minos of Knossos and characterized by the elaborate palaces at Knossos and Phaistos.

3000 BC • • • • •

Harappa

A Bronze Age culture that flourished in the Indus valley c2300–1500 B.C.



Chinese architecture

The indigenous architecture of a vast country in eastern Asia whose civilization has continually evolved and survived longer than any other nation in the world. Despite the marked diversity in the architecture of various regions caused by differences in geographic and climatic conditions, a unique system of wood frame construction gradually took shape over several millennia of innovation and synthesis and exerted a profound influence over the architecture of Korea, Japan, and Southeast Asia.

Preclassic


Of or pertaining to Mesoamerican culture from 2200 B.C. to A.D. 100.

Hittite architecture

The architecture of the Hittite Empire which dominated Asia Minor and northern Syria from about 2000 to 1200 B.C., characterized by fortifications of cyclopean stone masonry and gateways with portal sculptures.

Code of Hammurabi

A Babylonian legal code instituted by Hammurabi in the mid-18th century B.C., based on principles absorbed from Sumerian culture.

**Mycenaean architecture**

The architecture of the Aegean civilization that spread its influence from Mycenae in southern Greece to many parts of the Mediterranean region from about 1600 to 1100 B.C., characterized by shaft graves, monumental beehive tombs, and palaces fortified with cyclopean walls.

Assyrian architecture

The Mesopotamian architecture developed under the Assyrian king-emperors of the 9th to 7th centuries B.C. Within city walls strengthened by towers with crenelated battlements, palaces took precedence over religious buildings. Vaulting played a greater role than in southern Mesopotamia and polychrome glazed brickwork showed the influence of Egyptian decoration.

**Greek architecture**

The architecture of the civilization that flourished on the Greek peninsula, in Asia Minor, on the north coast of Africa, and in the western Mediterranean until the establishment of Roman dominion in A.D. 146, characterized by a system of construction based on rules of form and proportion. Temples of post-and-lintel construction were continually refined in a quest for perfection and their design influenced a wide range of secular, civic buildings.

Neo-Babylonian architecture

The Mesopotamian architecture that developed after the decline of the Assyrian Empire, deriving much from Assyrian architecture and enhanced by figured designs of heraldic animals in glazed brickwork.

Hanging Gardens of Babylon

A series of irrigated ornamental gardens planted on the terraces of the Citadel, the palace complex in ancient Babylon; regarded as one of the Seven Wonders of the World.

**Persian architecture**

The architecture developed under the Achaemenid dynasty of kings who ruled ancient Persia from 550 B.C. until its conquest by Alexander the Great in 331 B.C., characterized by a synthesis of architectural elements of surrounding countries, as Assyria, Egypt, and Ionian Greece.

Persian


A telamon portrayed in Persian dress.

Parthian architecture

The architecture developed under Parthian rule in Iran and western Mesopotamia, from the 3rd century B.C. to the 3rd century A.D., combining classical with indigenous features.

Etruscan architecture

The architecture of the Etruscan people in west-central Italy from the 8th to 3rd centuries B.C., before the rise of Rome. Its construction methods, esp. that of the true stone arch, influenced later Roman architecture.

**Hellenic**

Of or pertaining to ancient Greek history, culture, and art, esp. before the time of Alexander the Great.

Hellenistic

Of or pertaining to Greek history, culture, and art from the time of Alexander the Great's death in 323 B.C. through the 1st century B.C., during which Greek dynasties were established in Egypt, Syria, and Persia, and Greek culture was modified by foreign elements.

Indian architecture

The architecture of the Indian subcontinent, from the Indus valley culture of the Harappa to the Mauryan era, and later to periods of foreign domination and indigenous rule, characterized esp. by Hindu and Buddhist monuments, sometimes sharing the same site, and rhythmic, stratified multiplication of motifs and profuse carved ornamentation, often combining the religious and the sensuous.

**Maurya**

A member of an ancient Indian people who united northern India and established an empire c320 B.C.; architecture from this period shows the cultural influence of Achaemenid Persia and the first use of dressed stone.

Zhou

A Chinese dynasty, c1050 B.C.–256 B.C., marked by the division of China into separate feudal states and the emergence of Confucianism and Taoism, which gave thrust to all subsequent Chinese culture. Also, Chou.

Confucianism

A philosophy that dominated China until the early 20th century; an ethical system based on the teachings of the Chinese philosopher, Confucius, c551–478 B.C., emphasizing love for humanity, harmony in thought and conduct, devotion to family, and reverence for parents, including the spirits of one's ancestors.

Taoism

Chinese philosophy and religion considered next to Confucianism in importance. Based on the teachings of the Chinese philosopher, Lao-tzu, c604–531 B.C., it emphasizes a life of simplicity and noninterference with the course of natural events in order to attain a happy existence in harmony with the Tao. As a religion, it dates from A.D. 143, becoming popular during the decline of the Han dynasty and the introduction of Buddhism to China.

Tao


The Way; the creative principle that orders the universe.

**Great Wall of China**

A fortified wall commenced under the Zhou dynasty to protect China against nomads from the north and serve as a means of communication. Various sections were built and connected until, during the Ming dynasty, 1368–1644, it extended for 1,500 miles (2,415 km), from southern Kansu province to the coast east of Peking. Rebuilt and refaced repeatedly, it is the only human-made construction visible from outer space.

Qin

A dynasty in China, 221–206 B.C., marked by the emergence of a centralized government and the construction of much of the Great Wall of China. Also, Ch'in.

**Olmec architecture**

The architecture of the Mesoamerican civilization which flourished c1200–500 B.C. In the tropical lowlands of the Mexican Gulf Coast, characterized by temple-pyramids and large ceremonial centers.

**Chavin**

A Peruvian culture lasting from c1000 B.C. to c200 B.C., based on the worship of the jaguar god and characterized by excellent stone sculpture, elaborate gold work, and remarkable ceramics; named after the town of that name in central Peru, where a complex of massive stone buildings with subterranean galleries surround formal courtyards.

Mochica

A pre-Incan culture that flourished on the northern coast of Peru from c200 B.C. to A.D. 700, noted for its fine pottery and the colossal Temple of the Sun, a terraced pyramid made entirely of adobe bricks. Also called Moche.

HISTORY

Classical architecture


The architecture of ancient Greece and Rome, on which the Italian Renaissance and subsequent styles, as the Baroque and the Classic Revival, based their development.

Roman architecture

The architecture of the ancient Roman people, characterized by massive brick and concrete construction employing such features as the semicircular arch, the barrel and groin vaults, and the dome, a simplicity and grandeur of massing often combined with elaborate detailing, the elaboration of the Greek orders as purely decorative motifs for the adornment of facades and interiors, and the use of marble linings, mosaics, and molded stucco in interiors.

Rome

A city in the central part of Italy which, according to tradition, was founded by Romulus and Remus in 750 B.C.: ancient capital of the Roman Empire and site of Vatican City, the seat of authority of the Roman Catholic Church.



Sassanian architecture

The architecture prevalent in Persia under the Sassanian dynasty that ruled A.D. 226–651, forming a link between the older Mesopotamian traditions and the Byzantine, and characterized by palaces with elliptical vaults and domes set on squinches and stuccoed masonry walls articulated by pilasters and cornices.

Early Christian architecture

The final phase of Roman architecture, following the adoption of Christianity as the state religion by Constantine in A.D. 313 and lasting until the coronation of Charlemagne in A.D. 800 as emperor of the Holy Roman Empire, characterized by churches planned for congregational worship, esp. the basilica: coincident with and related to the rise of Byzantine architecture.

Byzantine architecture

The architecture of the eastern sphere of the later Roman Empire, developing from late Roman and early Christian antecedents in the 5th century and influencing church building in Greece, Italy, and elsewhere for more than a thousand years: characterized by masonry construction, round arches, shallow domes carried on pendentives, and the extensive use of rich frescoes, colored glass mosaics, and marble revetments to cover whole interiors.

Medieval architecture


The architecture of the European Middle Ages, comprising the architecture of the Byzantine, pre-Romanesque, Romanesque, and Gothic periods.

Middle Ages

The time in European history between classical antiquity and the Renaissance, often dated from A.D. 476 when Romulus Augustulus, the last Roman emperor of the Western Roman Empire, was deposed, to about 1500.

Dark Ages

The early part of the Middle Ages, from about A.D. 476 to c.1100.



AD 100

Gupta


The dynasty of the Mauryan empire in northern India, A.D. 320–540, whose court was the center of classical Indian art and literature; the earliest substantial architectural remains are from this period.

Pallava

A Hindu state established in southern India about A.D. 350; contributed to the expansion of Indian culture into Southeast Asia.

Dravidian

A style of Indian architecture in the Pallava period, named after the language spoken in southern India.

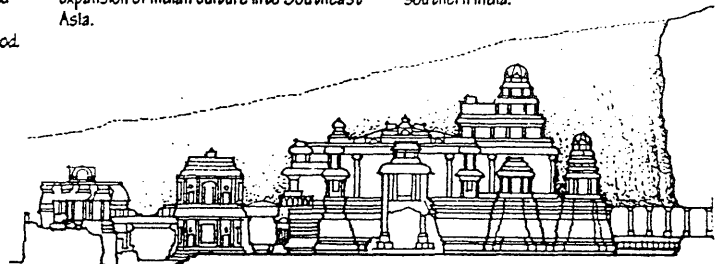

Pre-Columbian


Of or pertaining to the Americas before the voyages of Columbus.

Mesoamerica

The area extending from central Mexico and the Yucatán Peninsula to Honduras and Nicaragua in which pre-Columbian civilizations flourished. These cultures excelled in astronomy and the measurement of time, and shared temple-pyramids and a pantheon of deities including sun, wind, and rain gods.

Classic

Of or pertaining to Mesoamerican culture from A.D. 100 to 900.



Mayan architecture

The architecture of the Mesoamerican civilization of the Yucatán Peninsula, Guatemala, and part of Honduras, from the 1st century A.D. to its peak in the 9th century, characterized by magnificent ceremonial centers with temple-pyramids, ritual ball courts, spacious plazas, and palaces with sculptured facades.



Zapotec architecture

The eclectic architecture of the Amerindian civilization which flourished c.500 B.C.–A.D. 1000 in the highland valley of Oaxaca in southern Mexico, assimilating influences from the Olmecs and from Teotihuacán during the Classic period.

Tiahuanaco

A pre-Incan culture existing from about 300 B.C. to A.D. 900, chiefly in Peru and Bolivia, characterized by monolithic stone carving, polychrome pottery, and bronze artifacts.

Romanesque architecture


A style of architecture emerging in Italy and western Europe in the 9th century and lasting until the advent of Gothic architecture in the 12th century, comprising a variety of related regional styles and characterized by heavy, articulated masonry construction with narrow openings, the use of the round arch and barrel vault, the development of the vaulting rib and shaft, and the introduction of central and western towers for churches.

Carolingian architecture

The early Romanesque architecture of the Frankish dynasty that reigned in France A.D. 751–987 and in Germany until A.D. 911, characterized by a revival of the forms of classical antiquity modified by ecclesiastical requirements.

Lombard architecture


The early Romanesque architecture of northern Italy during the 7th and 8th centuries, characterized by the use of Early Christian and Roman forms and the development of the ribbed vault and vaulting shaft.

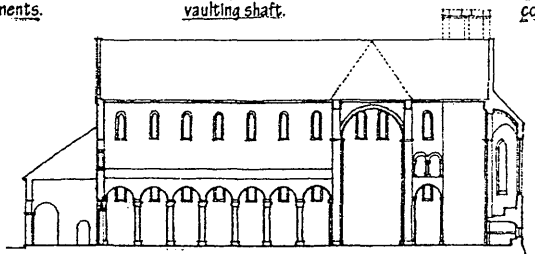**Ottoman architecture**

The early Romanesque architecture of the German dynasty that ruled as emperors of the Holy Roman Empire from A.D. 962–1002, characterized by the development of forms derived from Carolingian and Byzantine concepts.

Islamic architecture

The architecture of the Muslim peoples from the 7th century on, developing in the wake of Muhammadan conquests of diverse territories from Spain in the west to India in the east and absorbing elements of art and architecture from each region: characterized by the development of the mosque as a distinct building type, masonry domes and tunnel vaults, round and horseshoe arches, and rich surface decorations incorporating calligraphy and floral motifs in a geometric framework because of the ban on human and animal representations. Also referred to as Muslim architecture.

**Anglo-Saxon architecture**

The early Romanesque architecture of England before the Norman Conquest in 1066, characterized by the translation of timber prototypes into stone.

Norman architecture

The Romanesque architecture introduced from Normandy into England before the Norman Conquest and flourishing until the rise of Gothic architecture c.1200, characterized by the building of great Benedictine abbeys, the two-tower facade supplementing a central tower over the crossing, and the use of geometric ornamentation.

Norman Conquest

The conquest of England by the Normans under William the Conqueror, in 1066.

Islam

The religious faith of Muslims, based on the teachings of the prophet Muhammad, the central themes of which are belief in the one God, Allah, the existence of Paradise and Hell, and the universal Judgment Day to come. Also, the civilization built on Islamic faith. Also called Muhammadanism.

Muhammad

Arab prophet and founder of Islam, A.D. 570–632. Also, Mohammed.

Nara

A period in Japanese history, A.D. 710–794, characterized by the adoption of Chinese culture and form of government: named after the first permanent capital and chief Buddhist center in ancient Japan.

Moorish architecture


The Islamic architecture of North Africa and esp. of the regions of Spain under Moorish domination, characterized by the building of large mosques and elaborate fortress-palaces.

Moor


A member of the Muslim people of northwest Africa who invaded Spain in the 8th century and occupied it until 1492.

Mozarabic style

A style of Spanish architecture produced from the 9th to 15th centuries by Christians under Moorish influence, characterized by the horseshoe arch and other Moorish features.

**Japanese architecture**


The architecture of the civilization that emerged on the Japanese archipelago off the east coast of Asia, characterized by a synthesis of seminal ideas from China and native conditions producing a distinctive style characterized by lightness, delicacy, and refinement.

**Heian**

Of or pertaining to the period in Japan, A.D. 785–1185, characterized by the modification and naturalization of ideas and institutions that were earlier introduced from China. During this time indigenous feudalism superseded Chinese-based social order and Japanese architecture developed in isolation from China.

Mixtec architecture

The architecture of the Amerindian culture centered in the Oaxaca Valley of Mexico from about A.D. 800 to the Spanish conquest, characterized by great stone masses, the use of interior stone columns, and the highly detailed fretwork of interior and exterior friezes.

**Toltec architecture**

The architecture of the Amerindian people who settled in central Mexico around A.D. 900 and who are traditionally credited with laying the foundation of Aztec culture: characterized by colossal basalt telemones of Toltec warriors, colonnades several ranks deep, and stone panels carved with human-headed jaguars and symbols of Quetzalcóatl, set in plain wall surfaces.

Quetzalcóatl

Priest-ruler of the Toltec people, who was deified as the feathered-serpent god called by that name.



Gothic architecture


The style of architecture originating in France in the 12th century and existing in the western half of Europe through the middle of the 16th century, characterized by the building of great cathedrals, a progressive lightening and heightening of structure, and the use of the pointed arch, ribbed vault, and a system of richly decorated fenestration.

Early French style

The first of the three phases of French Gothic architecture, characterized by the pointed arch and geometric tracery.

Early English style

The first of the three phases of English Gothic architecture from the late 12th through the 13th centuries, characterized by the lancet window and plate tracery.



Rayonnant style

The middle phase of French Gothic architecture from the end of the 13th through the late 14th centuries, characterized by circular windows with radiating lines of tracery.

Decorated style

The second of the three phases of English Gothic architecture from the late 13th through the late 14th centuries, characterized by rich tracery, elaborate ornamental vaulting, and refinement of stonecutting techniques.

Geometric style

The early development of the Decorated style in the late 13th and early 14th centuries, characterized by the use of geometric tracery.

Curvilinear style

The later development of the Decorated style in the second half of the 14th century, characterized by use of curvilinear tracery.

Flamboyant style

The final phase of French Gothic architecture from the late 14th through the middle of the 16th centuries, characterized by flamelike tracery, intricacy of detailing, and frequent complication of interior space.

Perpendicular style

The final phase of English Gothic architecture prevailing from the late 14th through the early 16th centuries, characterized by perpendicular tracery, fine intricate stonework, and elaborate fan vaults. Also called Rectilinear style.

minster

Originally, a monastery church; later, any large or important church, as a cathedral or the principal church of a town.

Renaissance

The activity, spirit, or time of the humanistic revival of classical art, literature, and learning originating in Italy in the 14th century and extending to the 17th century, marking the transition from the medieval to the modern world.

Renaissance architecture

The various adaptations of Italian Renaissance architecture that occurred throughout Europe until the advent of Mannerism and the Baroque in the 16th and 17th centuries, characterized by the use of Italian Renaissance forms and motifs in more or less traditional buildings.

Italian Renaissance architecture

The group of architectural styles that originated in Italy in the 15th and 16th centuries, characterized by an emphasis on symmetry, exact mathematical relationships between parts, and an overall effect of simplicity and repose.

Early Renaissance

A style of Italian Renaissance art and architecture developed during the 15th century, characterized by the development of linear perspective, chiaroscuro, and in building, by the free and inventive use of classical details.



duomo
Italian designation for a true cathedral.

1100

Mudéjar architecture

A style of Spanish architecture produced from the 13th to 16th centuries by Mudéjars and Christians working within the Muslim tradition, characterized by a fusion of Romanesque and Gothic with Islamic elements.

Mudéjar


A Muslim permitted to remain in Spain after the Christian reconquest, esp. during the 8th to 13th centuries.

Seljuk architecture

The Islamic architecture of several Turkish dynasties that ruled over central and western Asia from the 11th to 13th centuries, much influenced by Persian architecture.

Ottoman architecture

The Islamic architecture of the Ottoman Empire from the 14th century on, much influenced by Byzantine architecture.

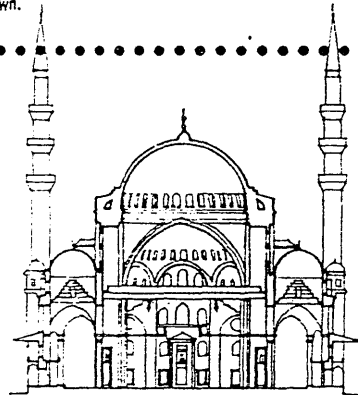

Quattrocento architecture

The Italian Renaissance architecture of the 15th century.

Chimu


An Amerindian people inhabiting the northern coast of Peru and having a highly developed urban culture that lasted from about A.D.1000 to its destruction by the Incas c1470.

Postclassic

Of or pertaining to Mesoamerican culture from A.D. 900 to the Spanish conquest in 1519.


Inca architecture


The architecture of the Quechuan people who migrated into the Cuzco area about A.D. 1100 and ruled Peru until the Spanish conquest in the 16th century, characterized esp. by strong simple forms of smooth ashlar or polygonal masonry which was cut, finished, and fitted with great precision without the use of iron chisels.

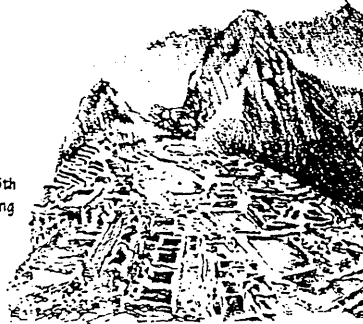

Aztec architecture


The architecture of the Amerindian people who settled near the shore of Lake Texcoco in central Mexico c1352 and who rose to dominance c1450; characterized chiefly by the pyramid supporting twin temples on a common platform, approached by parallel stairways. The destruction of Aztec architecture by the Spanish conquistadors have left few remains.

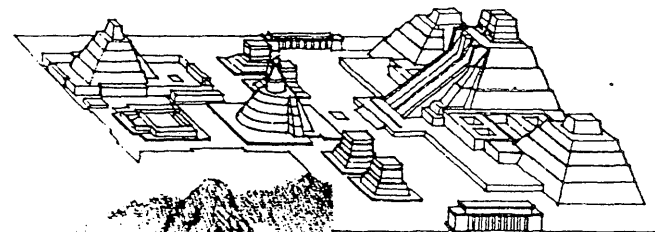



High Renaissance

A style of Italian Renaissance art and architecture developed in the late 15th and early 16th centuries, characterized by an emphasis on draftsmanship, the illusion of sculptural volume in painting, and in building, by the imitative use of whole orders and compositional arrangements in the classical style, with great attention to the formulation of compositional rules after the precepts of Vitruvius and the precedents of existing ruins.




Tudor architecture

A transitional style of English architecture that developed during the reign of the royal house of Tudor in the second half of the 16th century, characterized by the Tudor arch and the application of Renaissance details to buildings otherwise late Perpendicular in style.

Baroque architecture

A style of architecture originating in Italy in the early 17th century and variously prevalent in Europe and the New World for a century and a half, characterized by free and sculptural use of the classical orders and ornament, dynamic opposition and interpenetration of spaces, and the dramatic combined effects of architecture, sculpture, painting, and the decorative arts.



Rococo

A style of decorative art that evolved from the Baroque, originating in France about 1720 and distinguished by fanciful, curved spatial forms and elaborate, profuse designs of shellwork and foliage intended for a delicate overall effect.

classicism

The principles or styles characteristic of the culture, art, and literature of ancient Greece and Rome.

Classic Revival

Art and architecture in the style of the ancient Greeks and Romans, as that of the Italian Renaissance and the neoclassical movements in England and the United States in the late 18th and early 19th centuries. Also, Classical Revival.

Neoclassicism

The classicism prevailing in the architecture of Europe, America, and various European colonies during the late 18th and early 19th centuries, characterized by the introduction and widespread use of Greek and Roman orders and decorative motifs, the subordination of detail to simple, strongly geometric compositions, and the frequent shallowness of relief in ornamental treatment of facades.

zwinger


A protective fortress in or adjoining a German city; by extension, a term for several German palaces or parts of palaces, as in Dresden.

Cinquecento architecture

The Italian Renaissance architecture of the 16th century.


Mannerism

A transitional style in European architecture in the late 16th century, particularly in Italy, characterized by the unconventional use of classical elements. In the fine arts, Mannerism was chiefly characterized by a distortion of perspective, elongated forms, and intense, often strident color.



Mogul architecture

The Indo-Islamic architecture of the Mogul dynasty, 1526–1857, typified by monumental palaces and mosques with highly detailed decorative work.

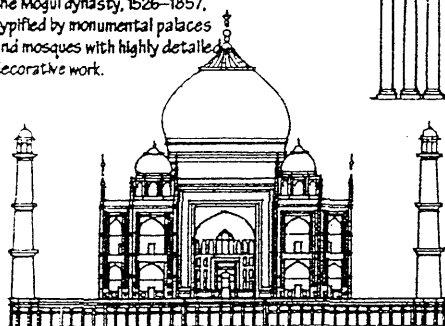

chinoiserie

A style of ornament prevalent chiefly in 18th-century Europe, characterized by intricate patterns and extensive use of motifs identified as Chinese.

Georgian architecture

The prevailing style of architecture, furniture, and crafts current in England and the North American colonies, esp. from 1714 to 1811, derived from classical, Renaissance, and Baroque forms; named after the four kings named George who reigned successively during this period.

Colonial architecture


The style of architecture, decoration, and furnishings of the British colonies in America in the 17th and 18th centuries, mainly adapted to local materials and demands from prevailing English styles.

Federal style

The Classic Revival style of the decorative arts and architecture current in the U.S. from c1780 to c1830.

Regency style

The neoclassic style of architecture, furnishings, and decoration during the period in British history, 1811–20, during which George, Prince of Wales (later George IV) was regent; similar to the Directoire and Empire styles and characterized by close imitation of ancient Greek forms as well as by less frequent and looser adaptations of ancient Roman, Gothic, Chinese, and ancient Egyptian forms.



Directoire style


A style of French furnishings and decoration preceding the Empire style, characterized by an increasing use of Greco-Roman forms along with an introduction, toward the end, of Egyptian motifs; named after the Directory, the body of five directors forming the executive power of France from 1795–99.

Empire style

The neoclassic style of architecture, furnishings, and decoration prevailing in France and imitated in various other countries during the first French Empire, c1800–30, characterized by the use of delicate but elaborate ornamentation imitated from Greek and Roman examples and by the occasional use of military and Egyptian motifs.

Gothic Revival

A movement aimed at reviving the spirit and forms of Gothic architecture, originating in the late 18th century but flourishing mainly in the 19th century in France, Germany, England and to a lesser extent in the U.S. Gothic remained the accepted style for churches well into the 20th century.



Steamboat Gothic


A florid architectural style used for homes built in the middle of the 19th century in the Ohio and Mississippi river valleys, suggesting the gingerbread-decorated construction of riverboats of the Victorian period.

gingerbread

Heavily, gaudily, and superfluously ornamented, esp. in architecture.

collegiate Gothic

A secular version of Gothic architecture, as in the older colleges of Cambridge and Oxford.

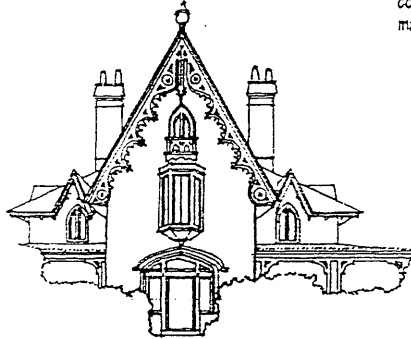

Victorian architecture

The revival and eclectic architecture, decor, and furnishings popular in English-speaking countries during the reign of Queen Victoria of England, 1837–1901, characterized by rapid changes of style as a consequence of aesthetic controversy and technological innovations, by the frequent presence of ostentatious ornament, and by an overall trend from classicism at the start to romanticism and eclecticism at the middle of the period and thence to classicism again.

Carpenter Gothic

A style of Victorian Gothic architecture in the 19th century adapted by artisan-builders to the resources of contemporary woodworking tools and machinery.

Beaux-Arts architecture

A style of architecture favored by the Ecole des Beaux-Arts in late 19th-century France and adopted in the U.S. and elsewhere c1900, characterized by symmetrical plans and the eclectic use of architectural features combined so as to give a massive, elaborate, and often ostentatious effect. The term is often used in a pejorative sense to designate excessive formalism disregarding considerations of structural truth, advanced aesthetic theory, rational planning, or economy.

eclecticism

A tendency in architecture and the decorative arts to freely mix various historical styles with the aim of combining the virtues of diverse sources, or of increasing allusive content, particularly during the second half of the 19th century in Europe and the U.S.


eclectic

Of or pertaining to works of architecture and the decorative arts that derive from a wide range of historic styles, the style in each instance being chosen for its deemed appropriateness to local tradition, geography, or culture.

1800

Rationalism

A design movement of the mid-19th century that emphasized the decorative use of materials and textures and the development of ornament as an integral part of a structure rather than as applied adornment.



Stick style

An eclectic style of American architecture in the second half of the 19th century, characterized esp. by the use of vertical board siding with battens or grids of boards over horizontal siding to express the frame construction beneath.




Arts and Crafts Movement

A movement that originated in England c1860 as a reaction against poor-quality mass-produced goods, conceiving of craft and decoration as a single entity in the handcrafting of both utilitarian and decorative objects.


Shingle style

An American style of domestic architecture during the second half of the 19th century, characterized by the extensive use of wood shingles as exterior cladding over a timber frame and frequently asymmetrical and fluid plan arrangements.



Mission Style

A style of architecture associated with that of early Spanish colonial missions in Mexico and the southwestern U.S., mainly in the 18th century.




Richardsonian Romanesque

The revival of the Romanesque style in the U.S. by Henry Hobson Richardson, 1838–86, and his followers, characterized by heavy arches, rusticated masonry walls, and dramatic asymmetrical effects.

Rundbogenstil

A style of architecture in the mid-19th century, esp. in Germany, characterized by the use of the round-arch motif and combining in various degrees elements from the Early Christian, Byzantine, Romanesque, and Early Renaissance styles: from the German term for round-arched style.



Art Nouveau

A style of fine and applied art current in the late 19th and early 20th centuries, characterized by fluid, undulating motifs, often derived from natural forms.

Stile Liberty

The Italian version of Art Nouveau, named after the firm of Liberty and Co. in London.

Sezession


The Austrian version of Art Nouveau, so named because its adherents seceded from the official Academy of Art in Vienna.

Modernismo

The Spanish, particularly Catalan, version of Art Nouveau.

Jugendstil

Art Nouveau as practiced in German-speaking countries: from the German term for youth style.



de Stijl



A school of art that was founded in the Netherlands in 1917, embracing painting, sculpture, architecture, furniture, and the decorative arts, marked esp. by the use of black and white with the primary colors, rectangular forms, and asymmetry. From 'the style', the name of a magazine published by participants in the movement.

cubism

A style of painting and sculpture developed in the early 20th century, characterized by an emphasis on formal structure, the reduction of natural forms to their geometrical equivalents, and the organization of the planes of a represented object independently of representational requirements.

Bauhaus

A school of design established in Weimar, Germany, in 1919 by Walter Gropius, moved to Dessau in 1926, and closed in 1933 as a result of Nazi hostility. The concepts and ideas developed at the Bauhaus were characterized chiefly by the synthesis of technology, craft, and design aesthetics, with an emphasis on functional design in architecture and the applied arts.



International Style

A functional architecture devoid of regional characteristics, developed in the 1920's and 1930's in Western Europe and the U.S. and applied throughout the world; characterized by simple geometric forms, large untextured, often white surfaces, large areas of glass, and general use of steel or reinforced concrete construction.

brutalism


A movement in architecture in the 1950's, emphasizing the aesthetic use of basic building processes, esp. of cast-in-place concrete, with no apparent concern for visual amenity.

abstract expressionism

A movement in experimental, nonrepresentational painting originating in the U.S. in the 1940's, embracing many individual styles marked in common by freedom of technique, a preference for dramatically large canvases, and a desire to give spontaneous expression to the unconscious.

modernism

A deliberate philosophical and practical estrangement from the past in the arts and literature occurring in the course of the 20th century and taking form in any of various innovative movements and styles.



post-modernism

A movement in architecture and the decorative arts that developed in the 1970's in reaction to the principles and practices of modernism, esp. the influence of the International Style, encouraging the use of elements from historical vernacular styles and often playful illusion, decoration, and complexity.


decorated shed

A design concept characterized by buildings of utilitarian design but having fronts intended to elevate their importance or to announce their functions.

1900

Chicago School

A group of U.S. architects active c1880-1910 and known for major innovations in high-rise construction and for the development of modern commercial building design.




Organic architecture

A philosophy of architectural design that emerged in the early 20th century, asserting that a building should have a structure and plan that fulfill its functional requirements, harmonize with its natural environment, and form an intellectually lucid, integrated whole. The shapes or forms in such a work are often of irregular contour and seem to resemble or suggest forms found in nature.

Art Deco

A style of decorative art developed originally in the 1920's with a revival in the 1960's, marked chiefly by geometric motifs, streamlined and curvilinear forms, sharply defined outlines, often bold colors, and the use of synthetic materials, as plastics; shortened from Exposition Internationale Des Arts Décoratifs et Industriels Modernes, an exposition of modern and decorative arts held in Paris, France, in 1925. Also called Style Moderne.




vernacular architecture

A style of architecture exemplifying the commonest building techniques based on the forms and materials of a particular historical period, region, or group of people.

avant-garde

The advance group in any field, esp. in the visual, literary, or musical arts, whose works are characterized chiefly by unorthodox and experimental methods.

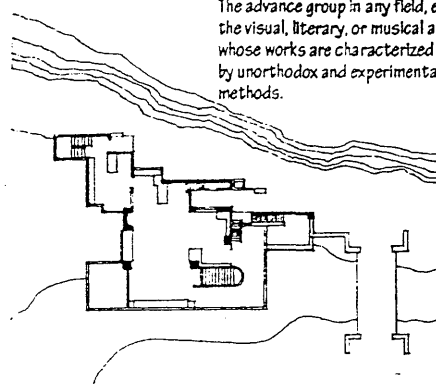

high-tech

A style of design incorporating industrial, commercial, and institutional fixtures, equipment, materials, or other elements having the utilitarian appearance characteristic of industrial design.

deconstruction

A philosophical and critical movement that started in the 1960's, esp. in the study of literature, questioning traditional assumptions about the ability of language to represent reality and emphasizing that a text has no stable reference because words essentially refer only to other words. A reader must therefore approach a text by eliminating any abstract reasoning or ethnocentric assumptions through an active role of defining meaning, sometimes by a reliance on etymology and new word construction.

HOUSE


A building in which people live.

shelter

Something beneath, behind, or within which a person is protected from storms or other adverse conditions.

hut

A small, simple dwelling or shelter, esp. one made of natural materials.



pit dwelling

A primitive form of shelter consisting of a pit excavated in the earth and roofed over. Also called pit house.


lake dwelling

A dwelling, esp. of prehistoric times, built on piles or other supports over the water of a lake.




longhouse

A communal dwelling characteristic of many early cultures, esp. that of the Iroquois and various other North American Indian peoples, consisting of a wooden, bark-covered framework often as much as 100 ft. (30.5 m) in length.



igloo

An Eskimo house, usually built of blocks of hard snow or ice in the shape of a dome, or when permanent, of sod, wood, or stone. Also, iglu.

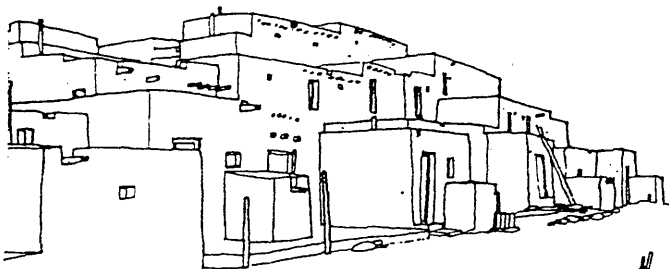


pueblo

A communal dwelling and defensive structure of the Pueblo Indians of the southwestern U.S., built of adobe or stone, typically many-storied, and terraced, with entry through the flat roofs of the chambers by ladder. Pueblo structures were built on the desert floor, in valleys, or in the more easily defended cliff walls of mesas.


mesa

A natural flat-topped elevation with one or more clifflike sides, common in arid and semiarid parts of the southwestern U.S. and Mexico.




yurt

A circular, tentlike dwelling of the Mongol nomads of central Asia, consisting of a cylindrical wall of poles in a lattice arrangement with a conical roof of poles, both covered by felt or animal skins.



teepee

A tent of the American Indians, made usually from animal skins laid on a conical frame of long poles and having an opening at the top for ventilation and a flap door. Also, teepee.



wigwam

An American Indian dwelling, usually of round or oval shape, formed of poles overlaid with bark, rush mats, or animal skins.




hogan

A Navaho Indian dwelling constructed usually of earth and logs and covered with mud and sod.

sod house

A house built of strips of sod, laid like brickwork, and used esp. by settlers on the Great Plains when timber was scarce.

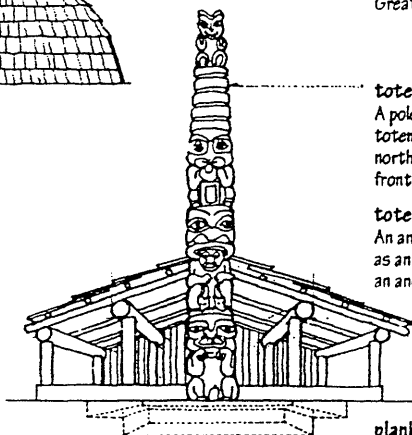

totem pole


A pole or post carved and painted with totemic figures, erected by Indians of the northwest coast of North America, esp. in front of their houses.

totem

An animal, plant, or natural object serving as an emblem of a family or clan by virtue of an ancestral relationship.


plank house

A large, usually rectangular house constructed of timber planks, built and used by Indians and, less frequently, by Eskimos.

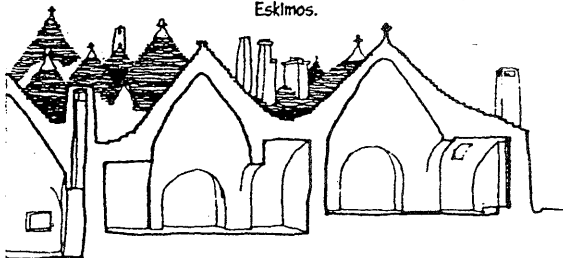

trullo

A circular stone shelter of the Apulia region of southern Italy, roofed with conical constructions of corbelled dry masonry, usually whitewashed and painted with figures or symbols. Many trulli are over 1,000 years old and still in use today, usually located among vineyards to serve as storage structures or as temporary living quarters during the harvest.



kiva

A large underground or partly underground chamber in a Pueblo Indian village, used by the men for religious ceremonies or councils.

compluvium

A roof opening in an ancient Roman house, through which rainwater discharged into a cistern in the atrium beneath it.

displuviate

Having roofs sloping downward toward the compluvium.

impluvium

A cistern set in the atrium of an ancient Roman house to receive rainwater from the compluvium.

atrium

The main or central inner hall of an ancient Roman house, open to the sky at the center and usually having a pool for the collection of rainwater. Also called *cavaedium*.

peristyle

A colonnade surrounding a building or a courtyard.

shoin-zukuri

A ceremonial style of Japanese residential architecture in the Kamakura period, deriving its name from the characteristic shoin or study-bay and marked by a hierarchical arrangement of public and private rooms.

zashiki

Reception room: the main room in a traditional Japanese house, used for receiving and entertaining guests. Its importance is evident in the presence of a tokonoma, tana, and shoin.

tana

In Japanese residential architecture, a recess with built-in shelving, usually adjoining a tokonoma.

shoji

One of a series of sliding translucent panels used in Japanese architecture between the exterior and the interior, or between two interior spaces, consisting of a light wooden framework covered on one side with rice paper; the lower section is occasionally filled by a thin wooden panel.

tatami

A thick straw mat, covered with smooth, finely woven reeds and bound with plain or decorated bands of silk, cotton, or hemp, serving as a floor covering and a standard for designating room size in a traditional Japanese house. Tatami measured approximately 3 x 6 ft. (0.9 x 1.8 m), but varied in actual dimensions according to region and method for determining column spacing.

ken

A linear unit for regulating column spacing in traditional Japanese construction, initially set at 6 ft. or 1.8 m, but later varying according to room width as determined by tatami units.

shoin

An elevated bay or projected window with a raised sill serving as a desk for writing or reading, usually placed at a right angle to the tokonoma in the reception room of a shoin-zukuri style residence.

kakemono

A vertical hanging scroll containing either text or a painting, intended to be viewed on a wall and rolled when not in use.

engawa


An extension of the floor on one or more sides of a Japanese-style house, usually facing a garden and serving as a passageway or sitting space.

tokonoma

Picture recess: a shallow, slightly raised alcove for the display of a kakemono or flower arrangement. One side of the recess borders the outside wall of the room through which light enters, while the interior side adjoins the tana. As the spiritual center of a traditional Japanese house, the tokonoma is located in its most formal room.

tokobashira


A post marking the front of the partition between the tokonoma and the tana, sometimes of exquisite wood of particular grain and shape.



HOUSE

detached dwelling

A house having no wall in common with another house.




Cape Cod

A style of cottage developed mainly on Cape Cod, Massachusetts, in the 18th and early 19th centuries, typically a rectangular, one- or one-and-a-half-story, wood-frame house with white clapboarded or shingle walls, a gable roof with low eaves and usually no dormer, a large central chimney, and a front door located on one of the long sides.



saltbox

A type of wood-framed house found esp. in New England, generally two full stories high in front and one story high in back, the roof having about the same pitch in both directions so that the ridge is well toward the front of the house.



Dutch Colonial

Of or pertaining to the domestic architecture of Dutch settlers in New York and New Jersey in the 17th century, often characterized by gambrel roofs having curved eaves over porches on the long sides.




bungalow

A derivative of the Indian bungalow, popular esp. in the first quarter of the 20th century, usually having one or one-and-a-half stories, a widely bracketed gable roof, a large porch, and often built of rustic materials.


bungalow court

A group of three or more detached, one-story, single-family dwellings, arranged with common utilities and accessories under a common ownership.

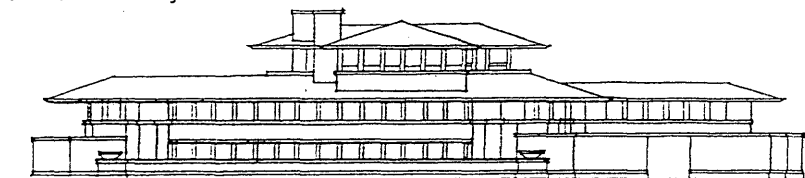

Prairie School

A group of early 20th-century architects, notably Frank Lloyd Wright, who designed houses and other buildings with emphasized horizontal lines responding to the flatness of the Midwestern prairie.

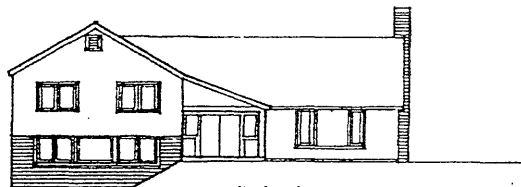

split-level

A house having a room or rooms somewhat above or below adjacent rooms, with the floor levels usually differing by approximately half a story.




rambler

A one-story house with a low-pitched roof, esp. one built in the suburbs.

tract house

A house forming part of a real-estate development, usually having a plan and appearance common to some or all of the houses in the development.




bi-level

A two-story house having the lower level sunken below grade and an entry at grade halfway between the two floor levels.



semidetached dwelling

A house joined by a party wall to another house or row of houses.




duplex house

A house having separate apartments for two families, esp. a two-story house having a complete apartment on each floor and two separate entrances. Also called duplex.

triplex

A building having three apartments, an apartment having three floors, or a multiplex of three theaters.



dogtrot

A breezeway linking two parts of a house.

breezeway


A porch or roofed passageway open on the sides, for connecting two buildings or parts of a building.

condominium

An apartment house, office building, or other multiple-unit complex, the units of which are individually owned, each owner receiving a recordable deed to the individual unit purchased, including the right to sell or mortgage that unit, and sharing in the joint ownership of any common elements, as hallways, elevators, mechanical and plumbing systems, or the like.

cooperative

A building owned and managed by a nonprofit corporation in which shares are sold, entitling the shareholders to occupy units in the building. Also called *co-op*, *cooperative apartment*.

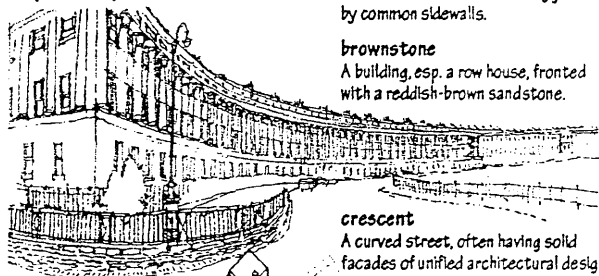**townhouse**

One of a row of houses in a city joined by common sidewalls.

brownstone

A building, esp. a row house, fronted with a reddish-brown sandstone.

crescent

A curved street, often having solid facades of unified architectural design.

terrace

A row of houses or residential street on or near the top of a slope.

terrace house

One of a row of houses situated on a terraced site.

cluster housing

A group of buildings and esp. houses built close together to form relatively compact units on a sizable tract in order to preserve open spaces larger than the individual yard for common recreation.

commons

A tract of land owned or used jointly by the residents of a community, usually a central square or park in a city or town.

**multifamily**

Designed or suitable for use by several or many families.

housing unit


A house, apartment, suite of rooms, or a single room, occupied or intended for occupancy as separate living quarters.

mew

A street having small apartments converted from stables. Also, *mews*.

row house

One of a row of houses having at least one sidewall in common with a neighboring dwelling, and usually uniform or nearly uniform plans, fenestration, and architectural treatment.

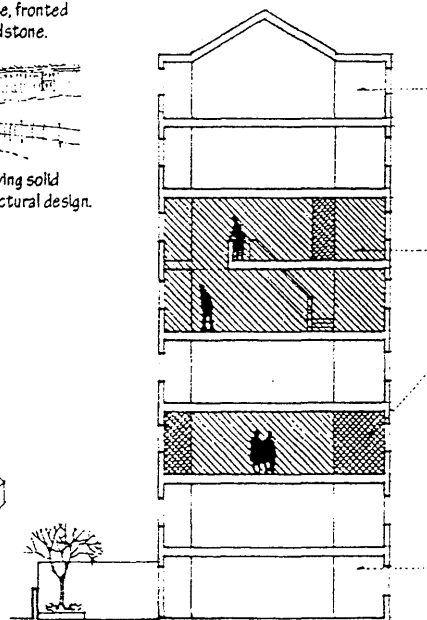**penthouse**

An apartment or residence on the top floor or roof of a building, often set back from the outer walls and opening onto a terrace.

duplex apartment

An apartment with rooms on two connected floors. Also called *duplex*.

flat

An apartment or suite of rooms on one floor forming a residence.

walk-up



An apartment above the ground floor in a building that has no elevator.

garden apartment

An apartment on the ground floor of an apartment building having access to a backyard or garden.

apartment house


A building containing a number of apartment units. Also called *apartment building*.

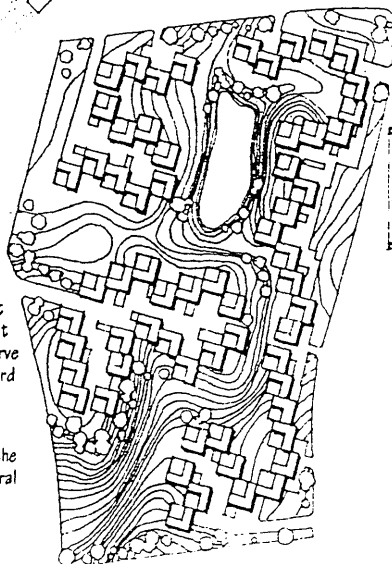**studio apartment**


An apartment consisting of a single, multifunctional room, a kitchen or kitchenette, and a bathroom. Also called *efficiency apartment*.

JOINERY


The art or craft of forming joints, esp. in woodwork.




end joint
Any joint formed by uniting two members end to end so as to increase their length. Also called lengthening joint.



edge joint
Any joint formed by uniting two members edge to edge so as to increase their width.



angle joint
Any joint formed by uniting two members at a corner so as to change direction.




miter joint
A joint between two members meeting at an angle, made by cutting each of the butting surfaces to an angle equal to half the angle of junction.

easement
A curved joint forming a smooth transition between surfaces that would otherwise intersect at an angle.


eased edge
A slightly rounded edge.

woodwork

The work produced by the carpenter's and joiner's art, generally applied to objects or parts of a wooden structure, as stairways, furniture, or moldings.




scarf joint
A lengthening joint made by overlapping the tapered, notched, or halved ends of two members and holding them in place with bolts, straps, keys, or fishplates, to resist tension or compression.




tongue and groove
A joint made by fitting a raised area or tongue on the edge of one member into a corresponding groove in the edge of another member to produce a flush surface. Abbr.: T & G

dado
A rectangular groove cut in a member to receive the end of another.




stopped dado
A dado that is not cut across the full width of a member.




square splice
A halved scarf joint used esp. to resist tension, having a thicker and a thinner section for each member, the thicker one being on the end.

spline
A thin strip of material inserted into the grooved edges of two members to make a butt joint between them. Also called feather.




dado joint
A joint made by inserting the end or edge of one member into a corresponding dado in the other. Also called housed joint.


miter
An oblique surface formed so as to butt against another oblique surface to be joined with it.




shoulder miter
A miter joint having a raised surface to limit motion between the joined parts.



tongued miter
A miter joint that incorporates a tongue and groove.




quirk
An acute angle or groove separating one element from another.



finger joint
A lengthening joint formed by interlacing finger-like projections on the ends of the joined members.

butterfly wedge
A fastener in the form of a double dovetail for joining two members at their edges. Also called butterfly.



rabbit joint
A joint between rabbeted parts.

fish joint
A lengthening joint in which the abutting members are held in alignment and strengthened by fishplates.


fishplate
A metal plate bolted to each of two abutting members.

butt joint
Any of various joints formed by abutting the surfaces of two members squarely together without overlapping.


flush joint
Any joint finished even or level with the surrounding surfaces.

rabbet
A channel, groove, or notch cut along or near one edge of a member so that something else can be fitted into it. Also, rebate.

route
To groove or hollow out with a gouge or machine.

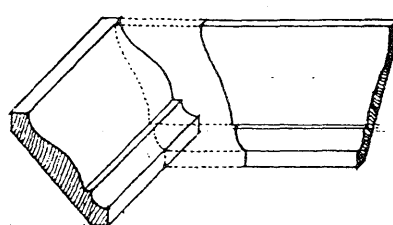


coped joint
A joint between two moldings made by undercutting the end of one of them to the profile of the other. Also called scribed joint.



stop chamfer
A chamfer that narrows gradually to merge with a sharp arris. Also, stopped chamfer.

chamfer
A beveled surface, usually formed or cut at a 45° angle to the adjacent principal faces.





joggle
A projection on one of two joining members fitting into a corresponding recess in the other to prevent slipping.

dap
A notch cut in a timber to receive a timber connector or part of another timber.


halved joint

A lap joint formed by cutting away half of each member at the place of joining so that a flush surface results. Also called half-lap joint.




end-lap joint

An angle joint formed by halving each member for a length equal to the width of the other.




cross-lap joint

A halved joint formed by two crossing members.




mitered halving

An end-lap joint incorporating a miter on one face.




plain lap

A lap joint formed by overlapping two members without any change in form.




lap joint

Any of various joints formed by overlapping the ends or edges of two members.




dovetail halving

A halved joint made by fitting a dovetail at the end of one member into a corresponding mortise in the second member.




secret dovetail

A corner dovetail joint showing only the line of a miter. Also called miter dovetail.




lap dovetail

A corner dovetail joint visible on one face only. Also called half-blind dovetail.




common dovetail

A corner dovetail joint visible on both faces.




dovetail joint

A joint formed by one or more dovetails fitting tightly within corresponding mortises.




blind mortise

A mortise that does not pass completely through a member. Also called stopped mortise.




chase mortise

A blind mortise having one inclined narrow side so that a tenon can be slid into it sideways.




open mortise

A mortise open on three sides. Also called slip mortise, slot mortise.




mortise

A notch or hole, usually rectangular, cut into a piece to receive a tenon of the same dimensions.



stub tenon

A short tenon for fitting into a blind mortise.




undercut tenon

A tenon having its shoulder cut at an angle to ensure that it bears on the mortised piece.




haunched tenon

A tenon that is narrower at its tip than at its root.




shoulder

The end surface from which a tenon projects.




bevel

A line or surface that meets another at any angle other than a right angle.




tusk

A beveled shoulder for strengthening a tenon.




root

The widened portion of a tenon in the plane of the shoulders.



gain

A notch, dado, or mortise cut into a member to receive another part.



drawbore

A hole in a tenon bored eccentric with the corresponding holes in the mortise so that the two pieces being joined will be forced tightly together when the drawbore pin is hammered into place.




bridle joint

A joint formed by fitting the end of one member, notched to form two parallel tenons, into two gains cut into the edge of a second member.




foxtail wedge

A small wedge in the split end of a stub tenon for spreading and securing it when driven into a blind mortise. Also called fox wedge.



through tenon

A tenon that extends completely through or beyond the piece into which its corresponding mortise is cut.




key

A piece of wood or metal used as a wedge to tighten a joint or to prevent motion between parts.




mortise joint

Any of various joints between two members made by housing a tenon in a mortise. Also called mortise-and-tenon joint.



tenon

A projection formed on the end of a member for insertion into a mortise of the same dimensions.




keyed joint

A joint fastened or secured by a key.

articulate

To unite by means of a joint or joints, esp. so as to make distinct or reveal how the parts fit into a systematic whole.



LIGHT



Electromagnetic radiation that the unaided human eye can perceive, having a wavelength in the range from about 370 to 800 nm and propagating at a speed of 186,281 mi./sec (299,972 km/sec).

nanometer

A unit of length equal to one billionth of a meter, used esp. to express the wavelengths of light in or near the visible spectrum. Abbr.: nm

angstrom

A unit of length equal to one ten-billionth of a meter, used esp. to express the wavelengths of radiation. Symbol: Å

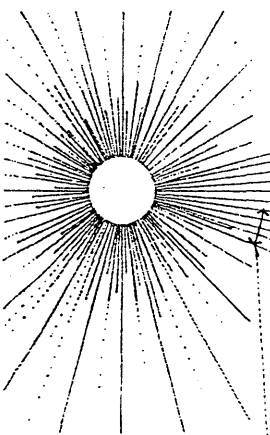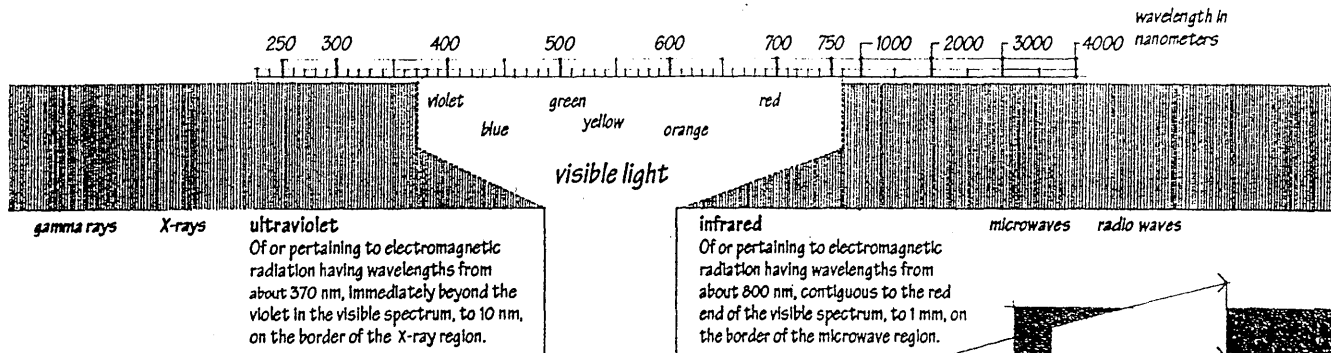

luminous intensity

The luminous flux emitted per unit solid angle by a light source, expressed in candelas.

candlepower

Luminous intensity expressed in candelas.

candle

A unit of luminous intensity used prior to 1948, equal to the luminous intensity of a wax candle of standard specifications.

candela

The basic SI unit of luminous intensity, equal to the luminous intensity of a source that emits monochromatic radiation of frequency 540×10^{12} hertz and that has a radiant intensity of $\frac{1}{683}$ watt per steradian. Also called standard candle. Abbr.: Cd

solid angle

An angle formed by three or more planes intersecting at a common point.

steradian

A solid angle at the center of a sphere subtending an area on the surface equal to the square of the radius of the sphere. Abbr.: sr

luminous flux

The rate of flow of visible light per unit time, expressed in lumens.

lumen

The SI unit of luminous flux, equal to the light emitted in a solid angle of one steradian by a uniform point source having an intensity of one candela. Abbr.: lm

cosine law

The law that the illumination produced on a surface by a point source is proportional to the cosine of the angle of incidence. Also called Lambert's law.

inverse square law

One of several laws relating two quantities such that one quantity varies inversely as the square of the other, as the law that the illumination produced on a surface by a point source varies inversely as the square of the distance of the surface from the source.

illumination

The intensity of light falling at any given place on a lighted surface, equal to the luminous flux incident per unit area and expressed in lumens per unit of area. Also called illuminance.

lux

The SI unit of illumination, equal to one lumen per square meter. Abbr.: lx

foot-candle

A unit of illumination on a surface that is everywhere one foot from a uniform point source of one candela and equal to one lumen incident per square foot. Abbr.: FC

luminance

The quantitative measure of brightness of a light source or an illuminated surface, equal to the luminous intensity per unit projected area of the source or surface viewed from a given direction.

lambert


A unit of luminance or brightness equal to 0.32 candela per square centimeter. Abbr.: L

foot-lambert

A unit of luminance or brightness equal to 0.32 candela per square foot. Abbr.: fL

brightness

The sensation by which an observer is able to distinguish between differences in luminance.

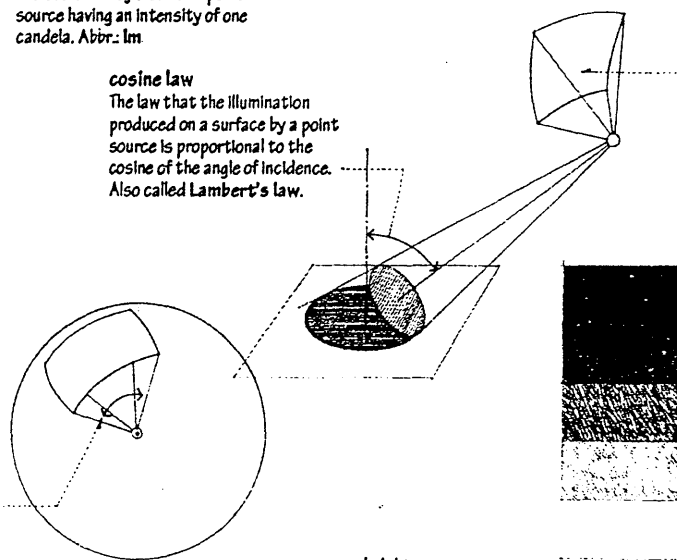



incidence
The striking of a ray of light or sound wave on a surface.

reflection
The return of light, sound, or radiant heat after striking a surface.


angle of incidence
The angle that a straight line, as a ray of light falling on a surface, makes with a normal to the surface at the point of incidence.

angle of reflection
The angle that a reflected ray makes with a normal to a reflecting surface at the point of incidence.

law of reflection
The principle that when light or sound is reflected from a smooth surface, the angle of incidence is equal to the angle of reflection, and the incident ray, the reflected ray, and the normal to the surface all lie in the same plane.

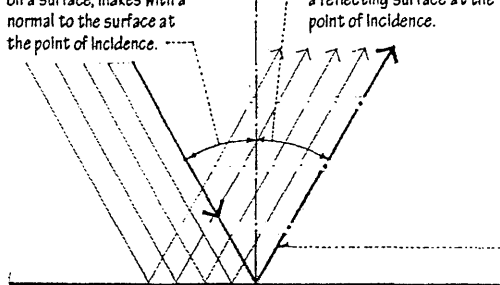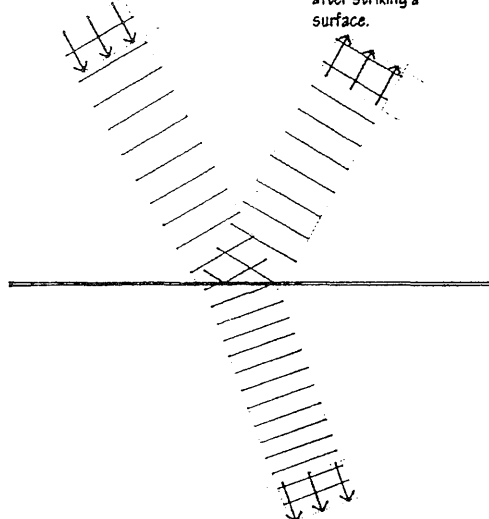



specular
Directed from a smooth, polished surface.

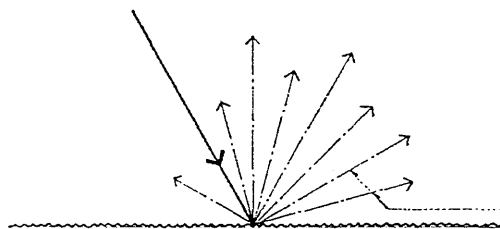

diffusion
A scattered reflection of light from an irregular surface or an erratic dispersion through a translucent material.

diffuse
Dispersed from an irregular surface.

refraction
The change of direction of a ray of light as it passes obliquely from one medium into another in which its velocity is different.

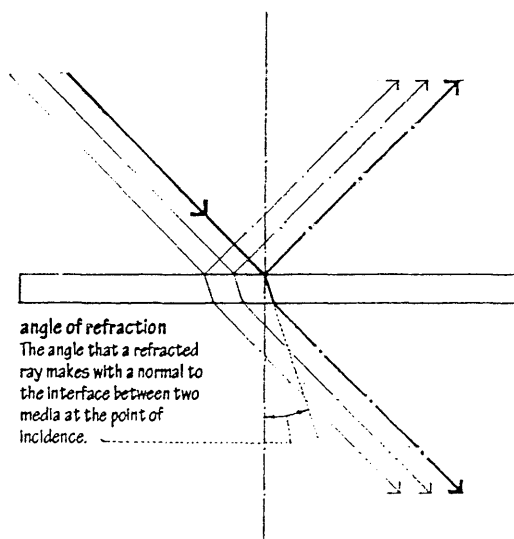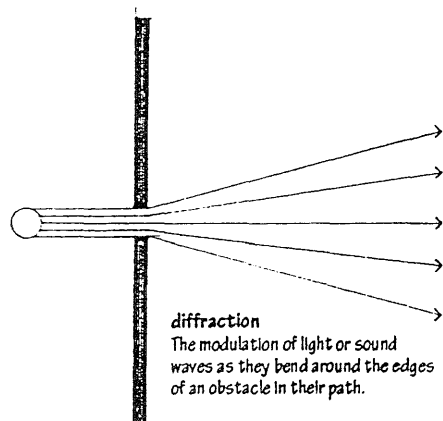


angle of refraction
The angle that a refracted ray makes with a normal to the interface between two media at the point of incidence.

reflectance
The ratio of the radiation reflected by a surface to the total incident on the surface.

absorptance
The ratio of the radiation absorbed by a surface to the total incident on the surface.

transmittance
The ratio of the radiation transmitted through and emerging from a body to the total incident on it, equivalent to one minus the absorptance.

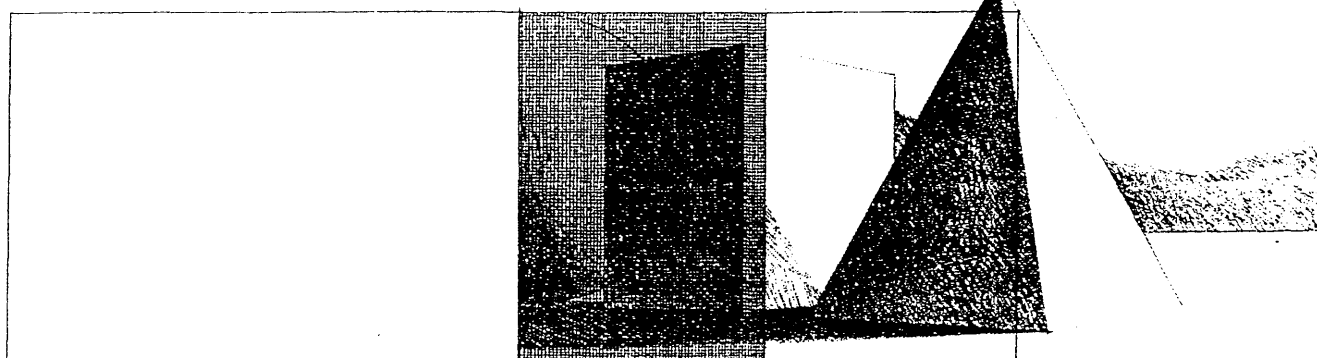

opaque
Impenetrable to light.

translucent
Transmitting and diffusing light so that bodies on the opposite side are not clearly visible.

transparent
Capable of transmitting light so that bodies situated beyond or behind can be distinctly seen.

LIGHT

Lamp

Any of various devices for producing light or heat, as by electricity or gas.

incandescent lamp

A lamp in which a filament gives off light when heated to incandescence by an electric current. Also called light bulb.

filament

The threadlike conductor of an electric lamp that is heated to incandescence by the passage of an electric current.

incandescence

The emission of visible light by a body when heated to a high temperature.

extended-service lamp

A lamp designed for reduced energy consumption and a life longer than the conventionally set value for its general class. Also called long-life lamp.

efficacy

A measure of the effectiveness with which a lamp converts electric power into luminous flux, equal to the ratio of flux emitted to power input and expressed in lumens per watt.

rated life

The average life in hours of a given type of lamp, based on laboratory tests of a representative group under controlled conditions.

three-way lamp

An incandescent lamp having two filaments so that it can be switched to three successive degrees of illumination.

tungsten lamp

An incandescent lamp having a tungsten filament.

tungsten-halogen lamp

A tungsten lamp having a quartz bulb containing a small amount of a halogen that vaporizes on heating and redeposits any evaporated tungsten particles back onto the filament. Also called halogen lamp, quartz lamp.

IR lamp

A tungsten-halogen lamp having an infrared dichroic coating for reflecting infrared energy back to the filament, raising lamp efficiency, and reducing radiant heat in the emitted light beam.

infrared lamp

An incandescent lamp having a higher percentage of its radiant power in the infrared region than a standard incandescent lamp, often having a red glass bulb to reduce the radiated visible light.

bulb

The glass housing of an incandescent lamp, filled with an inert gas mixture, usually of argon and nitrogen, to retard evaporation of the filament. Its shape is designated by a letter, followed by a number that indicates the lamp diameter.

lamp diameter

The maximum diameter of a lamp bulb, measured in eighths of an inch.

maximum overall length

The dimension in inches from the base of a lamp to the point on the bulb farthest away, or the base-to-base dimension of a lamp having a base at each end.

light center length

The distance in inches from the center of the filament of a lamp and a reference plane on the lamp base.

lamp base

The part of a lamp that connects to a lamp holder.

lamp holder

A device for mechanically supporting and making electrical contact with a lamp. Also called lamp socket.

A bulb

The standard rounded shape for the bulbs of general-service incandescent lamps.

B bulb

A flame-shaped bulb for low-wattage, decorative incandescent lamps.

C bulb

A cone-shaped bulb for low-wattage, decorative incandescent lamps.

CA bulb

A candle-shaped bulb for low-wattage, decorative incandescent lamps.

R bulb

A reflector bulb of blown glass for incandescent and high-intensity-discharge lamps, having an internal reflective coating and either a clear or frosted glass front to provide the desired beam spread.

PAR bulb

A parabolic aluminized reflector bulb of cast glass for incandescent and high-intensity-discharge lamps, having a precisely formed internal reflector and a lensed front to provide the desired beam spread.

ER bulb

An ellipsoidal reflector bulb for incandescent lamps, having a precisely formed internal reflector that collects light and redirects it into a dispersed pattern at some distance in front of the light source.

A/5B bulb

An A bulb having a hemispherical, reflective silver bowl opposite the lamp base to decrease glare.

G bulb

A globe-shaped bulb for incandescent lamps, having a low brightness for exposed use.

PS bulb

A pear-shaped bulb for large incandescent lamps.

S bulb

A straight-sided bulb for low-wattage, decorative incandescent lamps.

TB bulb

A quartz bulb for tungsten-halogen lamps, similar in shape to the A bulb but having an angular profile.

MR bulb

A multifaceted reflector bulb for tungsten-halogen lamps, having highly polished reflectors arranged in discrete segments to provide the desired beam spread.

ballast

A device for maintaining the current through a fluorescent or HID lamp at the desired constant value, and sometimes also providing the required starting voltage and current.

starter

A device used with a ballast to provide the starting voltage for a preheat fluorescent lamp.

T bulb

A tubular bulb for incandescent, fluorescent, and high-intensity-discharge lamps.

circuline lamp

A doughnut-shaped fluorescent lamp for circular luminaires.

U-bent lamp

A U-shaped fluorescent lamp for square or rectangular luminaires.

compact fluorescent lamp

Any of various small, improved efficiency fluorescent lamps having a single, double, or U-shaped tube, and often an adapter for fitting an incandescent lampholder.

color temperature


The temperature at which a blackbody emits light of a specified spectral distribution, used to specify the color of a light source.

spectral distribution curve

A curve plotting the radiant energy in each wavelength of a particular light source.

color rendering index

A measure of the ability of an electric lamp to render color accurately when compared with a reference light source of similar color temperature. A tungsten lamp operating at a color temperature of 3200°K, noon sunlight having a color temperature of 4800°K, and average daylight having a color temperature of 7000°K all have an index of 100 and are considered to render color perfectly.

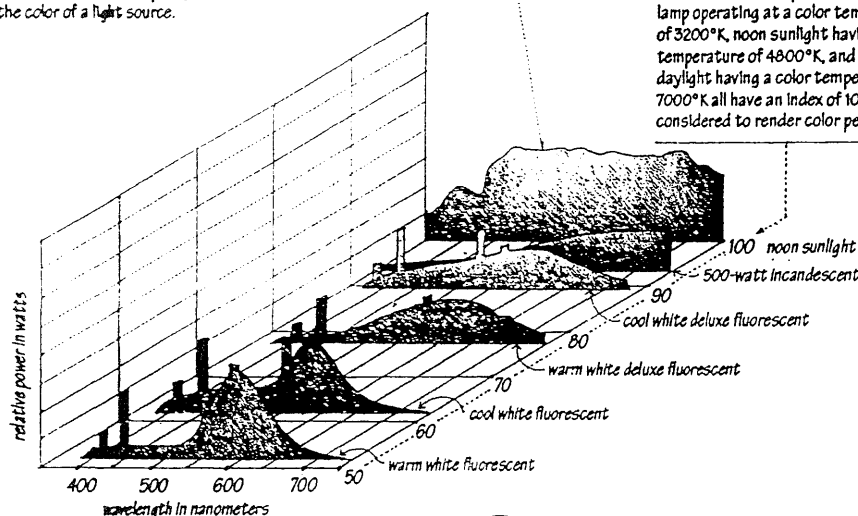


neon lamp

A cold-cathode lamp emitting a glow when a high voltage is applied across two electrodes in a neon-filled glass tube.

cold-cathode lamp

A discharge lamp having cathodes that emit electrons without having to be heated.

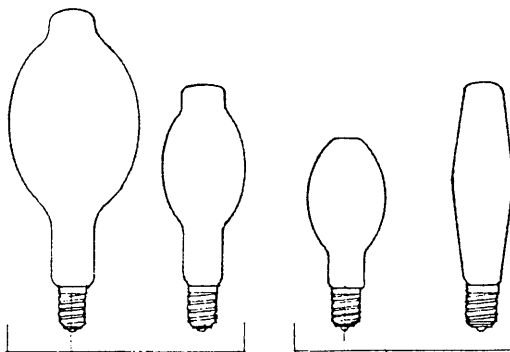

BT bulb

A bulged tubular bulb for high-intensity-discharge lamps.

E bulb

An ellipsoidal bulb for high-intensity-discharge lamps.

discharge lamp

A lamp in which light is produced by the discharge of electricity between electrodes in a gas-filled glass enclosure.

fluorescent lamp

A tubular discharge lamp in which light is produced by the fluorescence of phosphors coating the inside of the tube.

fluorescence

The emission of radiation, esp. of visible light, by a substance during exposure to external radiation.

preheat lamp

A fluorescent lamp that requires a separate starter to preheat the cathodes before opening the circuit to the starting voltage.

rapid-start lamp

A fluorescent lamp designed to operate with a ballast having a low-voltage winding for continuous heating of the cathodes, which allows the lamp to be started more rapidly than a preheat lamp.

instant-start lamp

A fluorescent lamp designed to operate with a ballast having a high-voltage transformer to initiate the arc directly without any preheating of the cathodes.

high-output lamp

A rapid-start fluorescent lamp designed to operate on a current of 800 milliamperes, resulting in a corresponding increase in luminous flux per unit length of lamp.

very-high-output lamp

A rapid-start fluorescent lamp designed to operate on a current of 1500 milliamperes, providing a corresponding increase in luminous flux per unit length of lamp.

high-intensity discharge lamp

A discharge lamp in which a significant amount of light is produced by the discharge of electricity through a metallic vapor in a sealed glass enclosure. Also, HID lamp.

mercury lamp

A high-intensity discharge lamp producing light by means of an electric discharge in mercury vapor. Also called mercury-vapor lamp.

sodium lamp

A high-intensity discharge lamp producing light by means of an electric discharge in sodium vapor. Also called sodium-vapor lamp.

low-pressure sodium lamp

A sodium lamp producing a yellow, glareless light and used esp. to illuminate roadways. Also, LPS lamp.

high-pressure sodium lamp

A sodium lamp producing a broader-spectrum, golden-white light than a low-pressure sodium lamp. Also, HPS lamp.

metal halide lamp

A high-intensity discharge lamp similar in construction to a mercury lamp, but having an arc tube to which various metal halides are added to produce more light and improve color rendering.

LIGHT

luminaire


A lighting unit consisting of one or more electric lamps with all of the necessary parts and wiring for positioning and protecting the lamps, connecting the lamps to a power supply, and distributing the light. Also called lighting fixture.

reflector

A surface for reflecting light, heat, or sound, esp. the device on a luminaire having such a surface for controlling the distribution of light emitted by a lamp.

lens

A piece of transparent material, as glass or plastic, having two opposite surfaces either or both of which are curved, used in luminaires to focus, disperse, or collimate the emitted light.




Fresnel lens

A lens having concentric, prismatic grooves to concentrate light from a small source.

prismatic lens

A lens having a multifaceted surface with parallel prisms to redirect the rays from a light source.

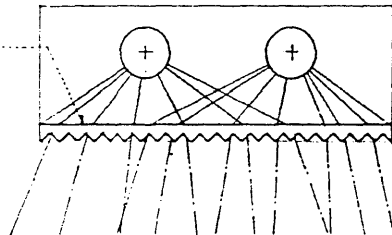


louver

A finned or vaned device for controlling the radiation from a light source.

eggcrate

A louvered construction divided into cell-like areas and used for redirecting the light emitted by an overhead source.






baffle

A louvered device for shielding a light source from view at certain angles.

shielding angle

The angle below which a light source can be seen.

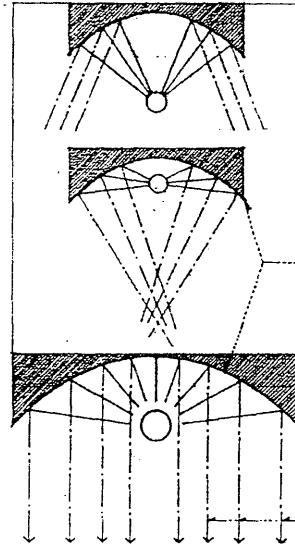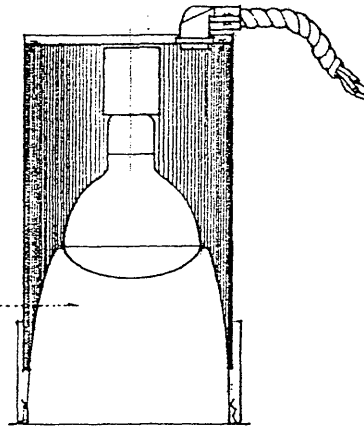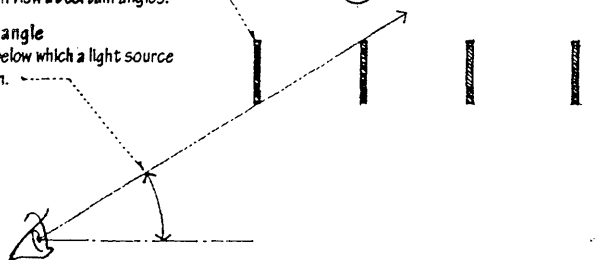

parabolic reflector

A reflector having a parabolic surface to collimate, spread, or focus the rays from a light source, depending on the location of the source.

collimate

To make rays of light parallel.




elliptical reflector

A reflector having an elliptical surface to focus the rays from a light source.

ridged baffle

A series of circular ridges for reducing the brightness of a light source at an aperture.




diffuser

Any of a variety of translucent materials for filtering glare from a light source and distributing the light over an extended area.


candlepower distribution curve

A polar plot of the luminous intensity emitted by a lamp, luminaire, or window in a given direction from the center of the light source, measured in a single plane for a symmetrical light source, and in a perpendicular, parallel, and sometimes a 45° plane for an asymmetrical source.



isochart

A graphic plot of the pattern of illumination produced on a surface by a lamp or luminaire.



isolux line

A line through all points on a surface where the level of illumination is the same. Called isofootcandle line if illumination is expressed in footcandles.

luminaire efficiency

The ratio of luminous flux emitted by a luminaire to the total flux emitted by the lamps in the luminaire.

wall washer

A downlight mounted close to the plane of a wall and equipped with a reflector, baffle, or lens to illuminate the vertical surface.

floodlight

A lamp designed to project or diffuse a comparatively uniform level of illumination over a large area. Also called flood, flood lamp.

downlight

A luminaire consisting of a lamp set in a metal cylinder, recessed into or mounted on a ceiling to direct a beam of light downward.

spotlight



A lamp designed to project a strong, focused beam of light on an object or area. Also called spot.

spill

Superfluous or useless light rays, as from a spotlight or other focused light source. Also called spill light.


point source

A light source having a maximum dimension less than one fifth the distance from the source to the surface illuminated.

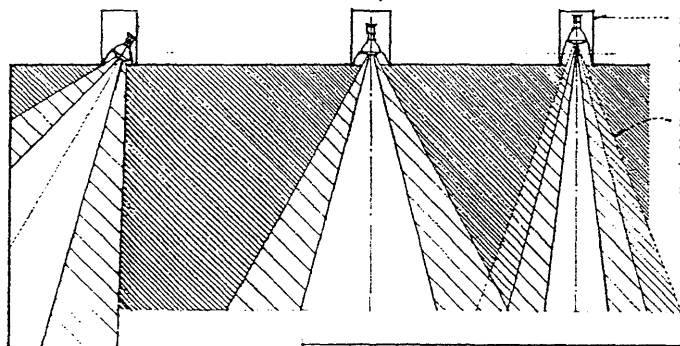


track lighting

Lighting provided by adjustable spotlights mounted along a narrow, ceiling- or wall-mounted metal track through which current is conducted.




cove lighting

Indirect lighting directed upward from an interior cornice at the edge of a ceiling.




valance lighting

Indirect lighting directed upward or downward from a light source concealed by a horizontal board or band.




cornice lighting

Indirect lighting directed downward from an interior cornice at the edge of a ceiling.

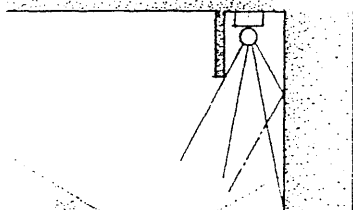


light strip

A rigid or flexible tape with exposed low-voltage light sources of 1 to 10 watts.




troffer

A luminaire having a trough-shaped reflector holding one or more fluorescent lamps.




linear source

A light source having one dimension significantly greater than its other dimensions, as a fluorescent lamp.




area source

A light source having significant dimensions in two directions, as a large window or a luminous ceiling.




droplight

A lighting fixture suspended from a ceiling or wall by a flexible cord, by which it can be raised or lowered.



pendant

A lighting fixture suspended from a ceiling.




chandelier

A decorative lighting fixture suspended from a ceiling, usually having branched supports for a number of lamps.

sconce

A decorative wall bracket for candles or other lights.



bridge lamp


A floor lamp having the light source on a hinged, horizontally adjustable arm.

gooseneck lamp

A desk lamp having a flexible shaft resembling the neck of a goose.

torchère

A floor lamp having its light source within a reflecting bowl that directs the light upward. Also, torchère, torchier.




LIGHT

lighting

The science, theory, or method of providing illumination through the use of electric lamps.


general lighting

Lighting designed to provide a uniform level of illumination throughout an area.



local lighting

Lighting designed to provide a relatively high level of illumination over a small area, with a surrounding area of lower intensity from spill light.




task lighting

Lighting designed to provide strong illumination for a visually demanding activity, as reading or drafting.

accent lighting

Lighting that calls attention to a particular object or feature in the visual field, or that forms a decorative pattern on a surface.

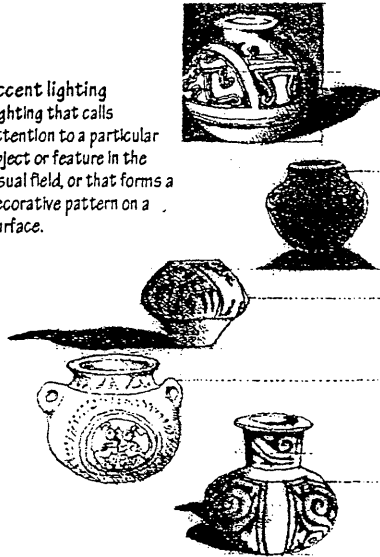

highlight

To emphasize by illuminating with a strong light.

backlight

To illuminate something from behind in order to enhance depth or to separate the subject from its background.

sidelight

Light coming or produced from the side.

soft light


Diffuse light that produces little contrast and poorly defined shadows on the subject.

hard light

Direct light that produces high contrast and distinct shadows on the subject.

direct lighting

Lighting in which luminaires distribute 90% to 100% of the emitted light downward on the surface or area to be illuminated.




semidirect lighting

Lighting in which luminaires distribute 60% to 90% of the emitted light downward.




general diffuse lighting

Lighting from luminaires that emit an approximately equal distribution of light upward and downward.




direct-indirect lighting

General diffuse lighting in which little light is emitted in the horizontal plane of the luminaires.




semi-indirect lighting

Lighting in which luminaires distribute 60% to 90% of the emitted light upward.



indirect lighting

Lighting in which luminaires distribute 90% to 100% of the emitted light upward, esp. to avoid glare or prevent shadows.



glare

The sensation produced by any brightness within the visual field that is sufficiently greater than the luminance to which the eyes are adapted to cause annoyance, discomfort, or loss of visibility.

adaptation


The regulating by the pupil of the quantity of light entering the eye, resulting in a change in the sensitivity of the eye's photoreceptors to light.

visual comfort probability

A rating of the likelihood that a lighting system will not cause direct glare, expressed as the percentage of people who may be expected to experience visual comfort when seated in the least favorable visual position.

brightness ratio

The ratio between the luminance of an object and that of its background. Also called **contrast ratio**.



blinding glare

Glare so intense that, for an appreciable length of time after it has been removed, visibility is lost.


disability glare

Glare that reduces visibility or impairs visual performance, often accompanied by discomfort.

discomfort glare

Glare that produces discomfort but does not necessarily interfere with visibility or visual performance.

CONTRAST

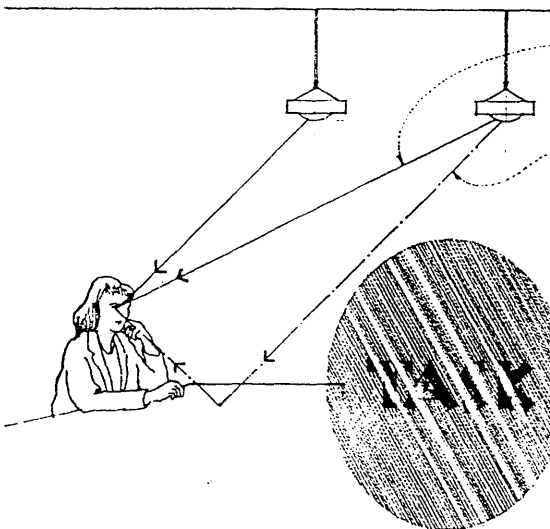

direct glare

Glare resulting from a high brightness ratio or an insufficiently shielded light source in the visual field.

reflected glare


Glare resulting from the specular reflection of a light source within the visual field. Also called **indirect glare**.

veiling reflectance

Reflected glare on a task surface that reduces the contrast necessary for seeing details.

beam spread

The angle of a light beam that intersects the candlepower distribution curve at points where the luminous intensity equals a stated percent of a maximum reference intensity.



beam

A group of nearly parallel rays of light.


throw

The effective length of a beam of light.

spacing criteria


A formula for determining how far apart luminaires may be installed for uniform lighting of a surface or area, based on mounting height.

$$\text{spacing criteria (sc)} = \text{spacing (s)} / \text{mounting height (mh)}$$

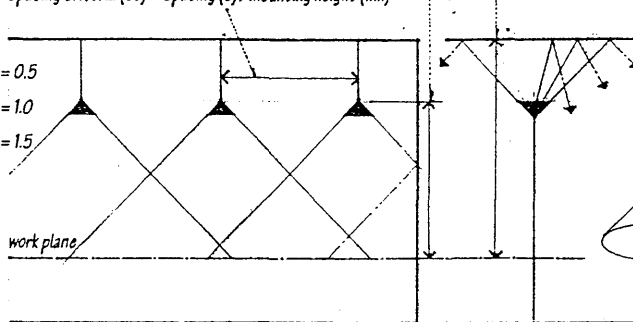

point method

A procedure for calculating the illumination produced on a surface by a point source from any angle, based on the inverse square and cosine laws.

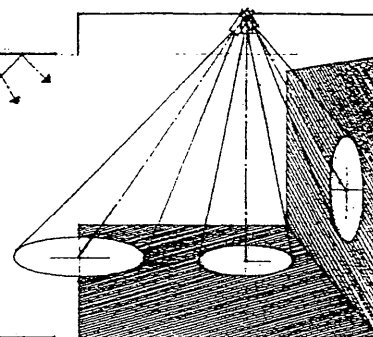

ceiling cavity


The cavity formed by the ceiling, a plane of suspended luminaires, and the wall surfaces between these two planes.

room cavity

The cavity formed by a plane of luminaires, the work plane, and the wall surfaces between these two planes.

floor cavity

The cavity formed by the work plane, the floor, and the wall surfaces between these two planes.

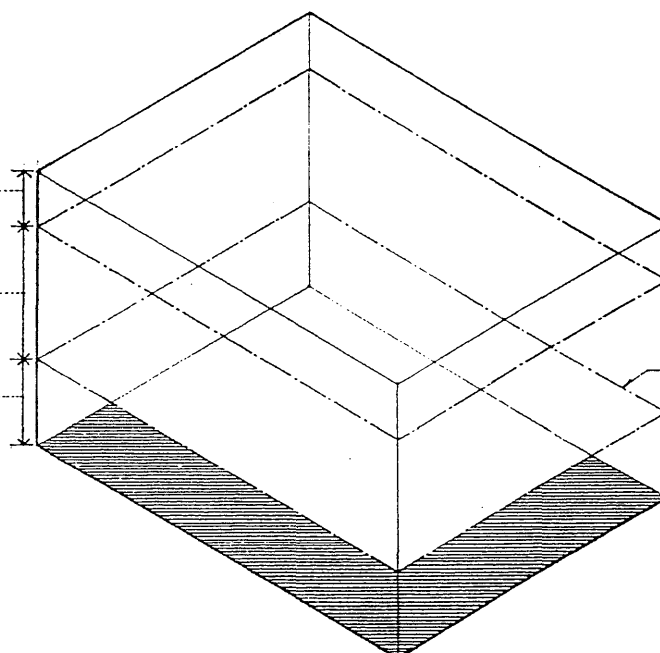

room cavity ratio

A single number derived from the dimensions of a room cavity for use in determining the coefficient of utilization.

light loss factor

Any of several factors used in calculating the effective illumination provided by a lighting system after a given period of time and under given conditions. Formerly called maintenance factor.

coefficient of utilization

The ratio of the luminous flux reaching a specified work plane to the total lumen output of a luminaire, taking into account the proportions of a room and the reflectances of its surfaces.

recoverable light loss factor

A light loss factor that may be recovered by relamping or maintenance, as lamp lumen depreciation, luminaire dirt depreciation, and room surface dirt depreciation.

lumen method

A procedure for determining the number and types of lamps, luminaires, or windows required to provide a uniform level of illumination on a work plane, taking into account both direct and reflected luminous flux. Also called zonal cavity method.

work plane

The horizontal plane at which work is done and on which illumination is specified and measured, usually assumed to be 30 in. (762 mm) above the floor.

lamp lumen depreciation

A light loss factor representing the decrease in luminous output of a lamp during its operating life, expressed as a percentage of initial lamp lumens.

luminaire dirt depreciation

A light loss factor representing the decrease in luminous output of a luminaire resulting from the accumulation of dirt on its surfaces, expressed as a percentage of the illumination from the luminaire when new or clean.

room surface dirt depreciation

A light loss factor representing the decrease in reflected light resulting from the accumulation of dirt on a room's surfaces, expressed as a percentage of the light reflected from the surfaces when clean.

$$\text{average maintained illuminance} = \frac{\text{initial lamp lumens} \times \text{CU} \times \text{RLLF} \times \text{NRLLF}}{\text{work area}}$$

$$\text{initial lamp lumens} = \text{lumens per lamp} \times \text{lamps per luminaire}$$

nonrecoverable light loss factor

Any of several permanent light loss factors that take into account the effects of temperature, voltage drops or surges, ballast variations, and partition heights.

LIGHT

daylighting

The science, theory, or method of providing illumination through the use of light of day.

daylight



To provide an interior space with daylight from both direct and indirect sources.

skylight

The light from the sky, reflected and diffused by air molecules.

sunlight

The direct light of the sun.

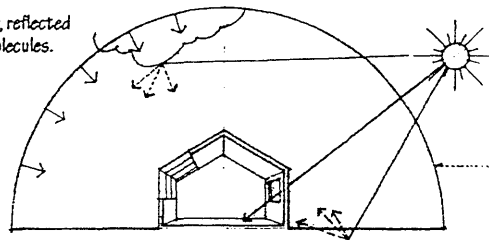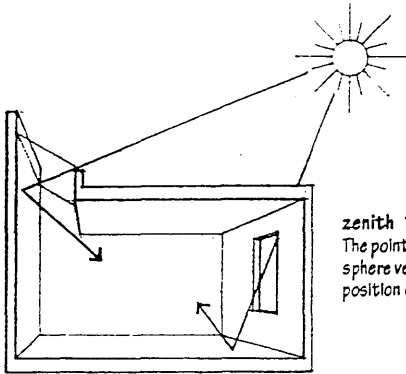

clear sky


A sky having less than 30% cloud cover with the solar disk unobstructed. Also, the CIE standard for a reference cloudless sky condition, having the greatest luminance near the sun and least luminance 90° from the sun.

ground light

Sunlight or skylight reflected by surfaces below the plane of the horizon.

zenith

The point on the celestial sphere vertically above a given position or observer.

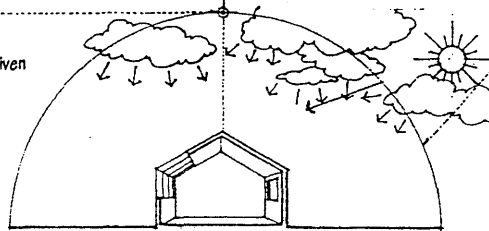

cloudy sky

A sky having between 30% and 70% cloud cover, with the solar disk obstructed.

overcast sky

A sky having 100% cloud cover. Also, the CIE standard for a reference sky having a luminance distribution three times brighter near the zenith than at the horizon.

CIE

Commission Internationale de l'Éclairage, an international commission developing definitions, standards, and procedures for the art, science, and technology of lighting.

IES

Illuminating Engineering Society, a professional society in North America devoted to the development and dissemination of standards and procedures relating to the art, science, and technology of lighting.

artificial sky

A hemispherical dome or similar enclosure illuminated by concealed light sources that simulate the luminance distribution of a clear or overcast sky, used for studying and testing daylighting techniques on architectural models placed near its center.

heliogon




A device for orienting an architectural model to a light source representing the sun, calibrated with respect to latitude, time of day, and season of the year and used for studying daylighting techniques and shadows cast by the sun.

counterlight

Light originating from sources facing each other, as from windows in opposite walls.

crosslight

Light originating from sources not facing each other, as from windows in adjacent walls.

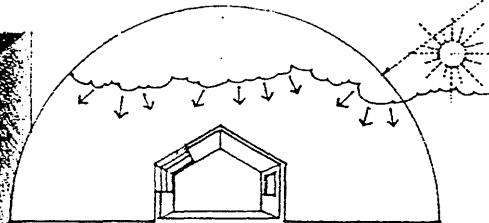

daylight factor method


A method for calculating the performance of a daylighting system, based on the daylight factor.

sky component

A component of the daylight factor, equal to the ratio of daylight illumination at a point on a given plane received directly from a sky of assumed or known luminance distribution to the simultaneously measured illuminance on a horizontal plane from an unobstructed hemisphere of this sky.

daylight factor

A measure of daylight illuminance, expressed as the ratio of daylight illumination at a point on a given plane to the simultaneously measured illuminance on a horizontal plane from an unobstructed sky of assumed or known luminance distribution.

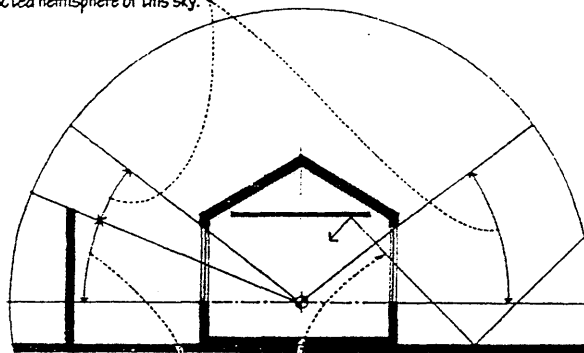


external reflected component

A component of the daylight factor, equal to the ratio of the daylight illumination at a point on a given plane received directly from exterior reflecting surfaces to the simultaneously measured illuminance on a horizontal plane from an unobstructed sky of assumed or known luminance distribution.

internal reflected component

A component of the daylight factor, equal to the ratio of the daylight illumination at a point on a given plane received directly or indirectly from interior reflecting surfaces to the simultaneously measured illuminance on a horizontal plane from an unobstructed sky of assumed or known luminance distribution.



Any of the forces to which a structure is subjected.

concentrated load

A load acting on a very small area or particular point of a supporting structural element.

distributed load

A load extending over the length or area of the supporting structural element.

uniformly distributed load

A distributed load of uniform magnitude.

static load

A load applied slowly to a structure until it reaches its peak value without fluctuating rapidly in magnitude or position. Under a static load, a structure responds slowly and its deformation reaches a peak when the static force is maximum.

occupancy load

The live load on a structure resulting from the weight of people, furniture, stored material, and other similar items in a building. Building codes specify minimum live loads for various uses and occupancies.

snow load

The live load resulting from the weight of snow accumulating on a roof. Snow loads vary with geographic location, site exposure, wind conditions, and roof geometry.

water load

The live load of water that may accumulate on a roof because of its form, deflection, or the clogging of its drainage system.

live load

Any moving or movable load on a structure resulting from occupancy, collected snow and water, or moving equipment. A live load typically acts vertically downward, but may act horizontally as well to reflect the dynamic nature of a moving load.

dead load

The static load acting vertically downward on a structure, comprising the self-weight of the structure and the weight of building elements, fixtures, and equipment permanently attached to it.

water pressure

The uplifting force a water table exerts on a foundation system.

earth pressure

The horizontal force a soil mass exerts on a vertical retaining structure.

settlement load

A load imposed on a structure by subsidence of a portion of the supporting soil and the resulting differential settlement of its foundation.

equivalent load

A load substituted by a building code for an actual load, derived on the basis of statistical evidence for given types of buildings. For safety, the equivalent load is usually a multiple of the load that would produce failure or unacceptable deflection.

load combination




The dead load and two or more live loads assumed to occur simultaneously on a structure when their combined effect can be reasonably expected to be less than the sum of their separate actions.

1.00 (dead + live + snow loads)

0.75 (dead + live + snow + wind or seismic loads)

load reduction

A reduction in design loading allowed by building codes for certain load combinations, based on the assumption that not all live loads will act simultaneously on a structure at their full value. After all possible load combinations are considered, a structure is designed to carry the most severe but realistic distribution, concentration, and combination of loads.

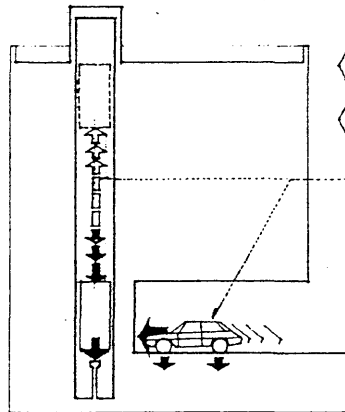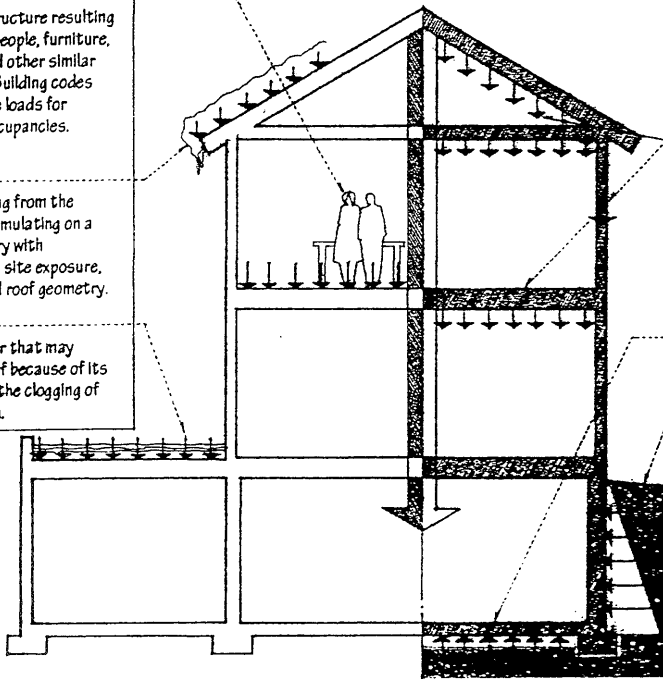

wind load

earthquake load

moving load

A kinetic load of short duration due to moving vehicles, equipment, and machinery. Building codes treat this load as a static load, compensating for its dynamic nature by amplifying the static load. Also called impact load.

impact factor

A factor by which the effect of a static load is multiplied to approximate the effect of applying the same load dynamically.

dynamic load



A load applied suddenly to a structure, often with rapid changes in magnitude and location. Under a dynamic load, a structure develops inertial forces in relation to its mass and its maximum deformation does not necessarily correspond to the maximum magnitude of the applied force.

erection stress

The stress induced on a building unit or component by loads applied during the erection process.

erection bracing

The temporary bracing required to secure the units or components of a building until permanently fastened in place.



construction load

A temporary load on a structure occurring during its erection, as from wind or the weight of construction equipment and stored materials.

LOAD

lateral load

A load acting horizontally on a structure, as a wind or earthquake load.

earthquake load

The forces exerted on a structure by an earthquake.

earthquake

A series of longitudinal and transverse vibrations induced in the earth's crust by the abrupt movement of plates along fault lines. The shocks of an earthquake propagate along the earth's surface in the form of waves and attenuate logarithmically with distance from its source.

epicenter

A point directly above the hypocenter, from which the shock waves of an earthquake apparently emanate.

hypocenter

The point of origin of an earthquake. Also called focus.

fault

A break in the earth's crust accompanied by a dislocation in the plane of the fracture.

plate


Any of the huge movable segments into which the earth's crust is divided.

seismic

Of, pertaining to, or caused by an earthquake or vibration of the earth.


seismic force

Any of the forces caused by the vibratory ground motions of an earthquake. While these motions are three-dimensional in nature, their horizontal components are considered to be the most important in structural design; the vertical load-carrying elements of a structure usually have considerable reserve for resisting additional vertical loads. During an earthquake, the mass of a structure develops an inertial force as it tries to resist ground acceleration. From Newton's second law, this force is equal to the product of mass and acceleration. For design purposes, a statically equivalent lateral force, base shear, is computed by formula.

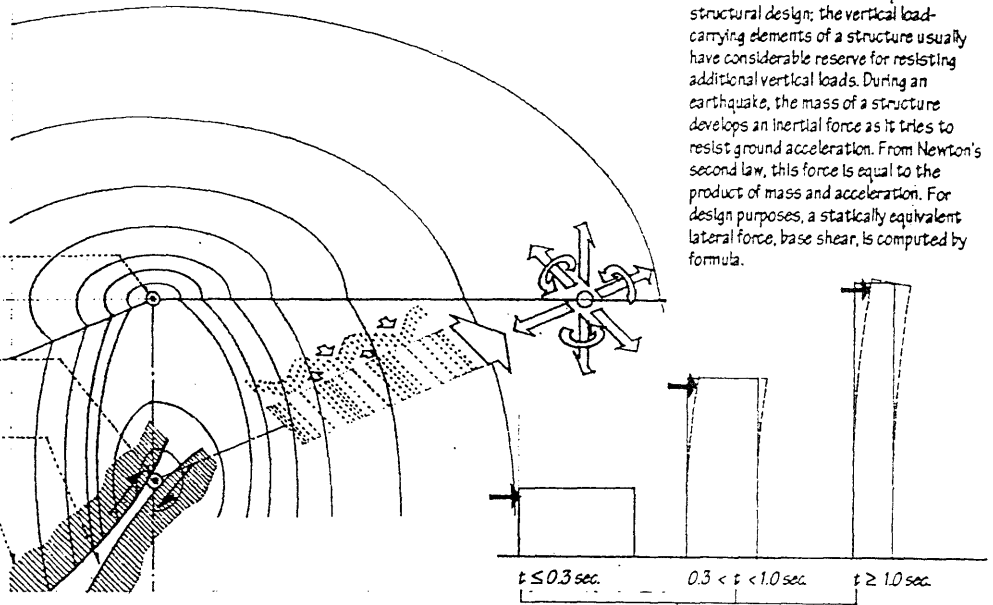

vibration

The oscillating, reciprocating, or other periodic motion of an elastic body or medium when forced from a position or state of equilibrium.



periodic motion

Any motion that recurs in the same form at equal intervals of time.

harmonic motion


Periodic motion consisting of one or more vibratory motions that are symmetric about a region of equilibrium, as the motion of a vibrating string of a musical instrument.

period

The time required for one complete cycle of a wave or oscillation.

natural period of vibration

The time required for a body subject to a vibratory force to go through one oscillation in the direction under consideration. A structure's natural period of vibration varies according to its height above the base and its dimension parallel to the direction of the applied forces. A relatively stiff structure tends to oscillate rapidly and has a short period of vibration while a more flexible structure tends to oscillate slowly and has a longer period. Also called fundamental period of vibration.

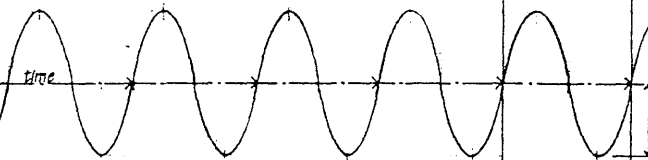

amplitude

The maximum displacement from the mean position during one period of an oscillation.

oscillation


A single swing of an oscillating body from one extreme limit to another.

oscillate

To swing back and forth like a pendulum between alternating extremes.

resonance

An abnormally large vibration in a system caused by a relatively small vibratory force of the same or nearly the same period as the natural period of vibration of the system.



drift

The lateral deflection or movement of a structure due to wind, earthquake, or asymmetrical vertical loading.


inertial force resisting ground acceleration


ground acceleration

The rate of change in the velocity of ground movement with respect to time. High accelerations are the most damaging to a structure, which must try to follow the rapid changes in ground movement during an earthquake.

damping

The absorption or dissipation of energy to progressively diminish successive oscillations or waves of a vibrating structure.

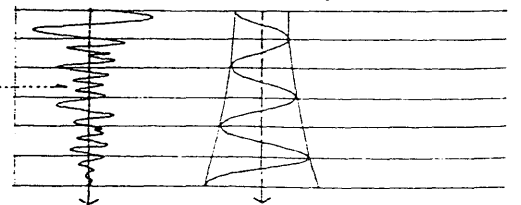

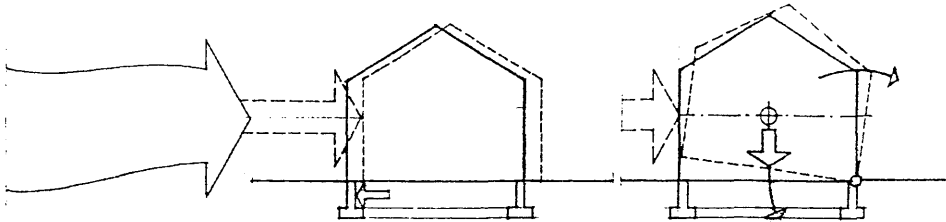

wind load

Any of the forces exerted by the kinetic energy of a moving mass of air, resulting in pressure on certain parts of a structure and suction on others.

sliding

The horizontal movement of a structure in response to a lateral load.

uplift

The raising of a structure or portion of structure in response to an overturning moment or wind suction.

flutter

The rapid oscillations of a flexible cable or membrane structure caused by the aerodynamic effects of wind. Also called aerodynamic oscillation.

Bernoulli equation

An expression of the conservation of energy in streamline flow, stating that the sum of the ratio of pressure to mass density, the square of the velocity divided by 2, and the product of the gravitational constant and vertical height, remains constant. Also called Bernoulli's theorem.

dynamic wind pressure

The pressure exerted by a moving mass of air, derived from Bernoulli's equation and equal to the product of the mass density of the air and the square of the velocity at a given height divided by 2.

design wind pressure

A minimum design value for the equivalent static pressure on the exterior surfaces of a structure resulting from a critical wind velocity, equal to the wind stagnation pressure modified by a number of coefficients to account for the effects of exposure condition, building height, wind gusts, and the geometry and orientation of the structure to the impinging air flow.

importance factor

A coefficient for increasing the design values for wind or seismic forces on a building because of its large occupancy, its potentially hazardous contents, or its essential nature in the wake of a hurricane or earthquake.

wind stagnation pressure

The static equivalent to dynamic wind pressure used as a reference in calculating design wind pressure, specified in pounds per square foot and equal to 0.00256 times the square of the basic wind speed for the geographic location. Wind velocity approaches zero as the moving air mass parts to flow around an obstruction. Since the sum of static and dynamic pressures remains constant in streamline flow, all of the energy in the flow at this point of stagnation is in the form of static pressure.

basic wind speed

The wind velocity used in calculating wind stagnation pressure, usually the extreme fastest-mile wind speed recorded for a geographic location at a standard height of 33 ft. (10 m) and based on a 50-year mean occurrence interval. Also called design wind velocity.

$$P = C_e C_q q_s I$$

pressure coefficient


A coefficient modifying design wind pressure to reflect how the geometry and orientation of the various parts of a structure alter the effects of an impinging air flow. Inward or positive coefficients result in wind pressure while outward or negative coefficients result in wind suction.

fastest-mile wind speed

The average speed of a one-mile-long column of air that passes over a given point, measured in miles per hour.

wind suction

The negative pressure exerted by wind on the sides and leeward vertical surfaces of a building and normal to windward roof surfaces having a slope less than 30°.

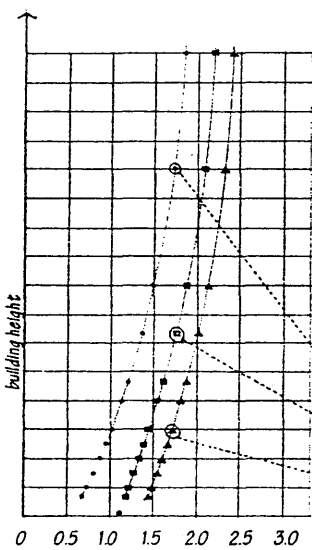

height factor

A coefficient increasing design wind pressure to account for the increase in wind velocity with height above the ground.

gust factor

A coefficient increasing design wind pressure to account for the dynamic effects of wind gusts.

exposure condition

One of four conditions modifying design wind pressure according to obstructions in the area surrounding a building site.

exposure A: urban areas with high-rise buildings, or rough, hilly terrain;

exposure B: suburban sites, wooded areas, or rolling terrain;


exposure C: flat, open terrain with minimal obstructions;

exposure D: flat, unobstructed terrain facing large bodies of water.

The more open a site, the greater the wind speed and the resulting design wind pressure.

leeward

Pertaining to, being in, or facing the direction toward which the wind is blowing.

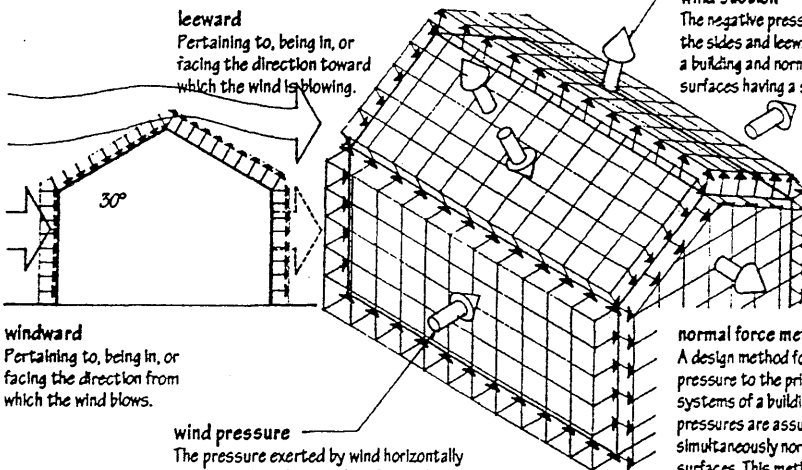

windward

Pertaining to, being in, or facing the direction from which the wind blows.

wind pressure

The pressure exerted by wind horizontally on the windward vertical surfaces of a building and normal to windward roof surfaces having a slope greater than 30°.

normal force method

A design method for applying design wind pressure to the primary frame and bracing systems of a building, in which wind pressures are assumed to act simultaneously normal to all exterior surfaces. This method may be used for any structure, but is required for gabled rigid frames.

Tall, slender buildings, structures with unusual or complex shapes, and lightweight, flexible structures subject to flutter require wind tunnel testing or computer modeling to investigate how they respond to the distribution of wind pressure.

projected area method

A design method for applying design wind pressure to the primary frame and bracing systems of a building. In which the total wind effect is considered to be a combination of a single inward or positive horizontal pressure acting on the full vertical projected area of the building and an outward or negative pressure acting on the full horizontal projected area of the building. This method may be used for any structure less than 200 ft. (61 m) high, except for gabled rigid frames.

Building with units of various natural or manufactured products, as stone, brick, or concrete block, usually with the use of mortar as a bonding agent.

field
The expanse of a masonry wall between openings and corners, usually composed primarily of stretchers.

head joint
The vertical joint between two masonry units, perpendicular to the face of a wall.

shoved joint
A head joint formed by applying mortar to the end of a masonry unit and forcing it in position against the last masonry unit laid.

collar joint
The vertical joint between two wythes of masonry.

bed joint
The horizontal joint between two masonry courses.

bed
The underside of a brick or other masonry unit, or the layer of mortar in which a masonry unit is laid.

clip joint
A bed joint made thicker than usual in order to level the course above.

wythe
A continuous vertical section of a masonry wall one unit in thickness. Also, wythe.

course
A continuous, usually horizontal range of bricks, tiles, or shingles, as in a wall or roof.

range
A continuous course of masonry units having the same height from end to end.

closer
The last masonry unit laid in a course.

corbel
A brick or stone projecting from within a wall, usually to support a weight.

corbeling
An overlapping arrangement of bricks or stones in which each course steps upward and outward from the vertical face of a wall.

tooled joint
A weather-resistant mortar joint compressed and shaped with any tool other than a trowel.

concave joint
A curved, hollowed mortar joint formed by a rounded bar.

V-joint
An angular, hollowed mortar joint formed by a V-shaped jointer.

weathered joint
A mortar joint smoothed by pressing the trowel in at the upper edge of the joint, forming a sloping surface that sheds water readily.

flush joint
A mortar joint struck flush with the masonry.

struck joint
A mortar joint pressed in at the lower edge and sloping in the reverse direction from a weathered joint.

raked joint
A mortar joint made by removing mortar to a given depth with a square-edged tool before hardening.



point
To fill and finish the surface of a masonry joint with mortar after the masonry has been laid, either to finish the joint or to repair a defective joint.

tuck pointing
The process of raking out defective mortar from a masonry joint, filling with fresh mortar, and tooling the joint.

tuck and pat pointing
Tuck pointing having an ornamental fillet of lime or putty projecting from the joint.

bastard pointing
An imitation of tuck and pat pointing, having a fillet made from the mortar of the joint.


flat-joint pointing
Pointing having flush joints of common mortar.

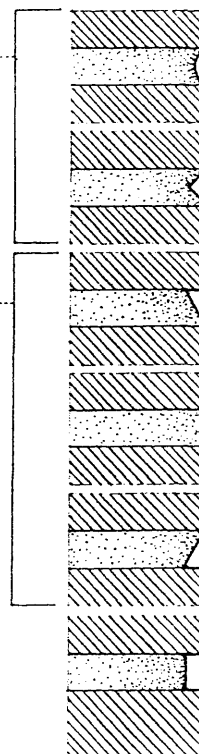

MASONRY

solid masonry

A wall constructed of brick or other solid masonry units laid contiguously with all joints solidly filled with mortar and adjacent wythes bonded by masonry headers or metal ties.

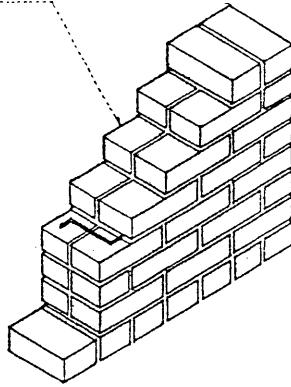

cavity wall

A masonry wall having a facing and backing completely separated except for metal ties and enclosing an inner space serving to prevent penetration by water.

facing


An ornamental or protective layer, as the outer wythe of a masonry wall.

backing

Something that forms the back or provides support, strength, or protection from the back, as the inner wythe or wythes of a masonry wall.

weep hole

A small opening in a cavity wall, retaining wall, or other construction for draining off accumulated moisture, as from condensation or leakage.

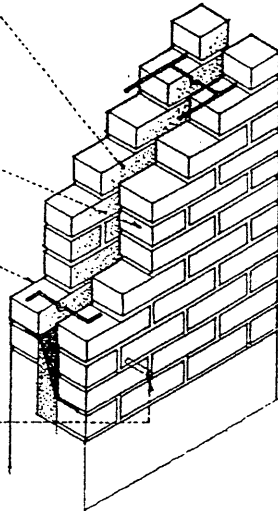

faced wall


A wall having a masonry facing bonded to a backing so as to exert a common action under load.

adhered veneer

A veneer supported by and secured to a backing by means of a bonding material.

veneer

A nonstructural facing of brick, stone, concrete, or tile attached to a backing for the purpose of ornamentation, protection, or insulation.

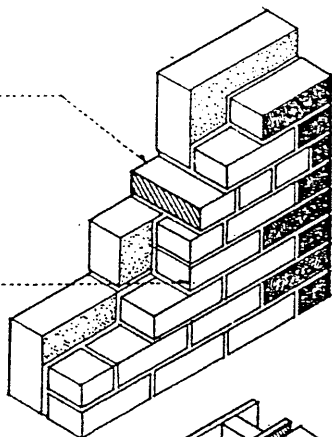


veneered wall

A wall having a nonstructural facing attached but not bonded to a supporting structure.


anchored veneer

A veneer supported by and secured to a backing by means of mechanical fasteners.

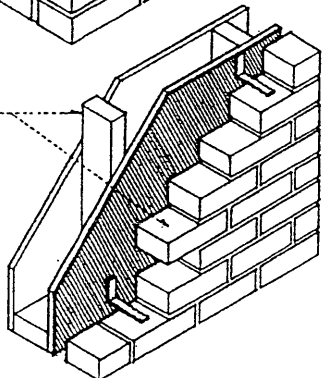

economy wall

A brick wall 4 in. (102 mm) thick, plastered and strengthened at intervals with 8-in. (203-mm) pilasters to support roof trusses.

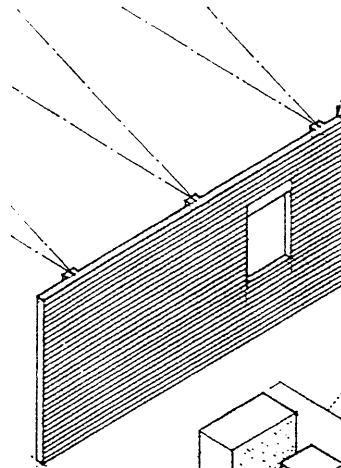

composite wall


A masonry wall having at least one wythe dissimilar to the other wythe or wythes with respect to type or grade of masonry unit or mortar.

adjustable tie

A metal tie consisting of two interlocking parts which enable it to adapt to bed joints at different elevations.


tie

Any of various corrosive-resistant metal devices for holding two parts of a construction together, as the wythes of a masonry wall.

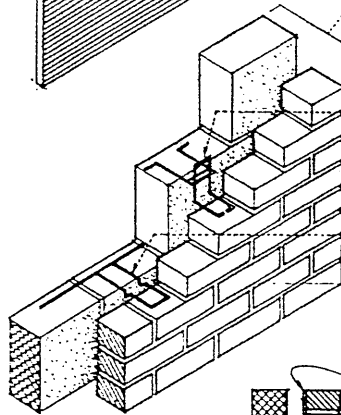

back plaster

To parge a part of a wall that is not seen, as behind the outer wythe of a cavity wall in order to exclude air and moisture from the interior of the wall.



panel wall

A non-load-bearing exterior masonry wall wholly supported at each story.


lewis

A device for lifting a dressed stone or precast concrete panel, consisting of a number of pieces fitting together to fill a dovetailed recess cut into the stone or panel.



soft joint

A compressible joint directly below a supporting shelf or relieving angle, allowing for the expansion and contraction of a panel wall and preventing the weight of higher courses from being transmitted to the masonry below.

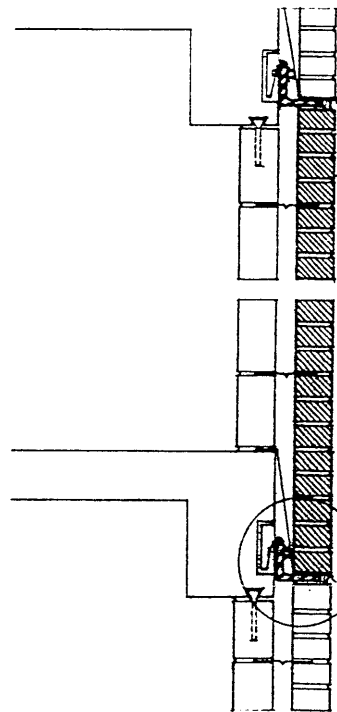

mortar

A plastic mixture of lime or cement, or a combination of both, with sand and water, used as a bonding agent in masonry construction.

cement mortar

A mortar made by mixing portland cement, sand, and water.

cement-lime mortar

A cement mortar to which lime is added to increase its plasticity and water-retentivity.

masonry cement

A proprietary mix of portland cement and other ingredients, as hydrated lime, plasticizers, air-entraining agents, and gypsum, requiring only the addition of sand and water to make cement mortar.

epoxy mortar

A mortar consisting of epoxy resin, a catalyst, and fine aggregate.

nonstaining mortar

A mortar having a low free-alkali content to minimize efflorescence or the staining of adjacent masonry by the migration of soluble materials.

lime mortar

A mixture of lime, sand, and water that is rarely used because of its slow rate of hardening and low compressive strength.

lime

A white or grayish white, caustic, odorless solid obtained by heating forms of calcium carbonate, as shells or limestone, at a high temperature. Also called calcium oxide, calx, caustic lime, quicklime.

hydrated lime

A soft, crystalline powder obtained by the action of water on lime and used in making mortar, plaster, and cement. Also called calcium hydroxide, slaked lime.

green

Of or pertaining to concrete or mortar that is freshly set but not completely hardened.

fat mix

A concrete or mortar mix that is easy to work or spread because of a relatively high cement or lime content. Also called rich mix.

lean mix

A concrete or mortar mix that is difficult to work or spread because of a shortness of cement or lime.

plasticizer

An admixture for making a concrete or mortar mix workable with little water.

Type M mortar

A high-strength mortar recommended for use in reinforced masonry below grade or in contact with the earth, as foundation and retaining walls subject to frost action or to high lateral or compressive loads.

Type S mortar

A medium-high-strength mortar recommended for use in masonry where bond and lateral strength are more important than compressive strength.

Type N mortar

A medium-strength mortar recommended for general use in exposed masonry above grade where high compressive and lateral strength are not required.

Type O mortar

A low-strength mortar suitable for use in interior non-load-bearing walls and partitions.

Type K mortar


A very-low-strength mortar suitable only for use in interior non-load-bearing walls where permitted by the building code.

grout

A fluid cement mortar that will flow easily without segregation of the ingredients, used to fill narrow cavities in masonry and consolidate the adjoining materials into a solid mass.

bond

The adhesion between mortar or grout and the masonry units or steel reinforcement being cemented.



grouted masonry

A wall constructed of brick or concrete brick units with all interior joints being filled with grout as the work progresses.

high-lift grouting

A technique for grouting a masonry wall constructed a story at a time in lifts not exceeding 6 feet (1.8 m).

low-lift grouting

A technique for grouting a masonry wall in lifts not exceeding six times the width of the grout space or a maximum of 8 inches (203 mm) as the wall is built.

grout pour

The total height of masonry to be filled with grout before the erection of additional masonry, consisting of one or more grout lifts.

grout lift


An increment of grout height within a total grout pour.

cleanout

Any of a series of temporary openings at the bottom of a masonry wall large enough to permit the removal of debris or obstructions from a cavity or cell prior to grouting.

reinforced grouted masonry

A masonry wall constructed with horizontal and vertical steel reinforcement fully embedded in grout for increased resistance to buckling and lateral wind and seismic loads.

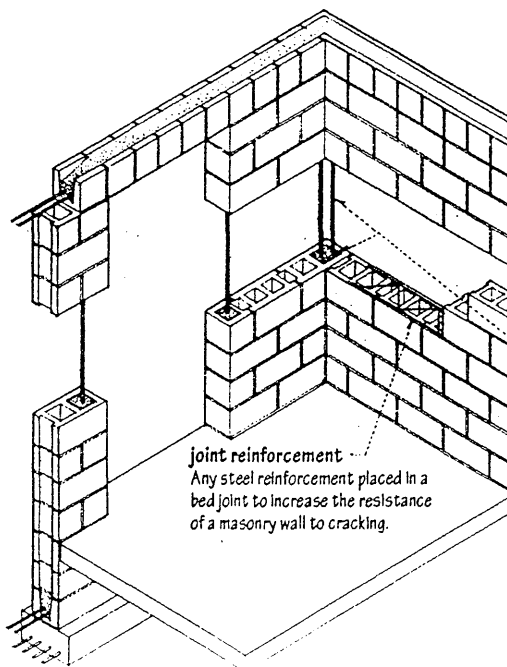

hollow unit masonry

A wall constructed of hollow masonry units laid and set with mortar, with adjacent wythes bonded by masonry headers or metal ties.

reinforced hollow-unit masonry


Hollow unit masonry having certain cells continuously filled with concrete or grout, in which reinforcing steel is embedded for increased resistance to buckling and lateral wind and seismic loads.

joint reinforcement


Any steel reinforcement placed in a bed joint to increase the resistance of a masonry wall to cracking.

MASONRY

rubble
Rough fragments of broken stone or the masonry built of such stones.




random rubble
A rubble wall having discontinuous but approximately level beds or courses.




ashlar
A squared building stone finely dressed on all faces adjacent to those of other stones so as to permit very thin mortar joints.


gallet
To embed small stone chips in the mortar joints of rough masonry to wedge larger stones in position or add detail to the appearance. Also, garret.




coursed rubble
A rubble wall having approximately level beds and brought at intervals to continuous level courses.




random ashlar
Ashlar masonry built in discontinuous courses.




squared rubble
A rubble wall built of squared stones of varying sizes and coursed at every third or fourth stone.



coursed ashlar
Ashlar masonry built of stones having the same height within each course, but each course varying in height.




cyclopean
Formed with large, irregular blocks of stones fitted closely together without the use of mortar.



broken rangework
Ashlar masonry laid in horizontal courses of varying heights, any one of which may be broken at intervals into two or more courses.

quoins
An exterior angle of a masonry wall, or one of the stones or bricks forming such an angle, usually differentiated from adjoining surfaces by material, texture, color, size, or projection.


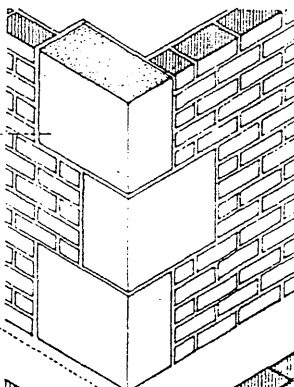


perpend
A large stone passing through the entire thickness of a wall and exposed on both faces. Also called through stone.

bondstone
A stone for bonding facing masonry to a masonry backing. Also called binder.

long-and-short work
An arrangement of rectangular quoins or jambstones set alternately horizontally and vertically.


in-and-out bond
A masonry bond having headers and stretchers alternating vertically.

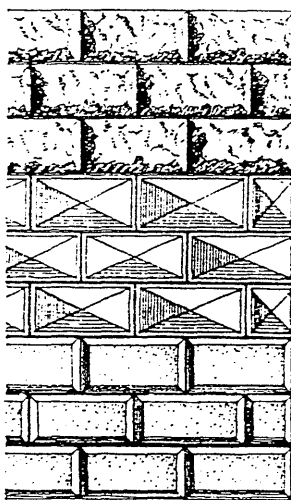

rustication
Ashlar masonry having the visible faces of the dressed stones raised or otherwise contrasted with the horizontal and usually the vertical joints, which may be rabbeted, chamfered, or beveled.


rustic joint
A mortar joint between stones recessed from the adjacent faces between sunken drafts or bevels.

rustic
Having rough, irregular surfaces and sunken or beveled joints.




interlocking joint
A joint in ashlar masonry made by fitting a projection on one stone into a routed groove on the next stone.

cramp iron
An iron bar or rod with bent ends for holding together stone masonry units.



corbie gable
A gable having corbiesteps.



fractable
A coping on a gable wall concealing the slopes of the roof, esp. one having an ornamental silhouette.

boss
A stone roughly formed and set in place for later carving.

tail in
To fasten a beam or stone by one end.

tail in
The part of a stone or brick projecting from a wall.






label
A molding or dripstone over a door or window, esp. one that extends horizontally across the top of the opening and vertically downward for a short distance at the sides.

jambstone
A stone, or one of the stones, forming the jamb of a door or window opening.

embrasure
A splayed enlargement of a door or window opening toward the inner face of a wall.

corbiestep
Any of a series of steplike projections that terminate a masonry gable above the surface of the roof. Also called crowstep.

saddle joint
A vertical joint raised above the level of the washes on a stone sill or coping to prevent the penetration of rainwater.

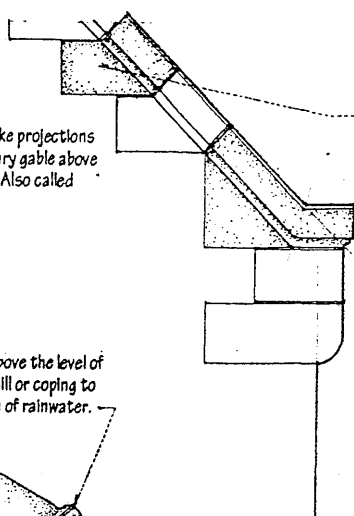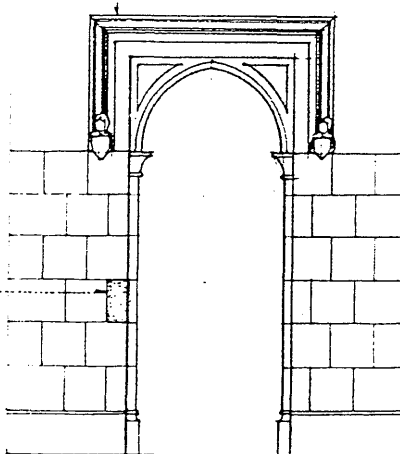


capstone
A finishing stone of a structure, as a copestone.

kneeler
Any of the stones having a sloping top for supporting or forming a gable coping. Also called skew.

skew corbel
A stone overhanging at the foot of a gable coping, often serving as a stop for eave gutters or wall cornices.

copestone
A stone forming a coping.

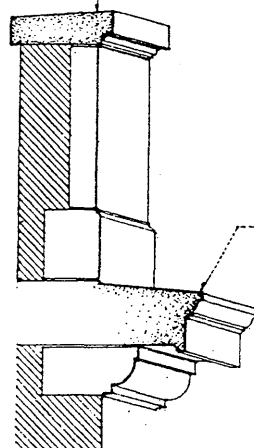

dripstone
A stone molding used as a drip, as on a cornice over a window or doorway.

string course
A horizontal course of brick or stone flush with or projecting beyond the face of a building, often molded to mark a division in the wall. Also called belt course.

cordons
A stringcourse, esp. one having little or no projection.

table
A course or band, esp. of masonry, having a distinctive form or position.

water table
A projecting stringcourse, molding, or ledge placed so as to divert rainwater from a building.

scarcement
A footing or ledge formed by a setback in the face of a wall.

plinth
A continuous, usually projecting course of stones forming the base or foundation of a wall. Also called plinth course.

MASONRY

concrete masonry unit

A precast masonry unit of portland cement, fine aggregate, and water, molded into various shapes.

stretcher block

A concrete masonry unit having nominal dimensions of 8 x 8 x 16 in. (203 x 203 x 406 mm).

partition block

A concrete masonry unit used in constructing non-load-bearing walls, usually having a nominal thickness of 4 or 6 in. (102 or 152 mm).

bullnose block

A concrete masonry unit having one or more rounded exterior corners.

corner block

A concrete masonry unit having a solid end face and used in constructing the end or corner of a wall.

return-corner block

A concrete masonry unit used at the corners of walls to maintain horizontal coursing with the appearance of full- and half-length units.

double-corner block

A concrete masonry unit having solid faces at both ends and used in constructing a masonry pier.

pilaster block

Any of various concrete masonry units used in constructing a plain or reinforced masonry pilaster.

coping block

A solid concrete masonry unit used in constructing the top or finishing course of a masonry wall.

sash block

A concrete masonry unit having an end slot or rabbet to receive the jamb of a door or window frame. Also called jamb block.

sill block

A solid concrete masonry unit having a wash to shed rainwater from a sill.

wash

An upper surface inclined to shed rain water from a building. Also called weathering.

cap block

A concrete masonry unit having a solid top for use as a bearing surface in the finishing course of a foundation wall. Also called solid-top block.

control-joint block

Any of various concrete masonry units used in constructing a vertical control joint.

bond-beam block

A concrete masonry unit used in constructing a bond beam, having a depressed section in which reinforcing steel can be placed for embedment in grout.

bond beam

A masonry course grouted and reinforced to serve as a beam, a horizontal tie, or a bearing course for structural members.

concrete block

A hollow or solid concrete masonry unit, often incorrectly referred to as cement block.

face shell

One of the two sidewalls of a hollow concrete masonry unit.

web

One of the cross walls connecting the face shells of a hollow masonry unit.

core

The molded open space in a concrete masonry unit. Also called cell.

open-end block

A concrete masonry unit having one end open in which vertical steel reinforcement can be placed for embedment in grout.

lintel block

A concrete masonry unit used in constructing a lintel or bond beam, having a U-shaped section in which reinforcing steel can be placed for embedment in grout.

header block

A concrete masonry unit having a portion of one face shell removed to receive headers in a bonded masonry wall.

sound-absorbing masonry unit

A concrete masonry unit having a solid top and a slotted face shell, and sometimes a fibrous filler, for increased sound absorption.

slump block

A concrete masonry unit having an irregular face and surface texture caused by the settlement of a wet mix during curing.

split-face block

A concrete masonry unit, split lengthwise by a machine after curing to produce a rough, fractured face texture.

faced block

A concrete masonry unit having a special ceramic, glazed, or polished face.

scored block

Any of various concrete masonry units having one or more vertical grooves which simulate raked joints.

shadow block

Any of various concrete masonry units having a face shell with a pattern of beveled recesses.

screen block

A concrete masonry unit used esp. in tropical architecture, having a decorative pattern of transverse openings for admitting air and excluding sunlight.

concrete brick

A solid rectangular concrete masonry unit, usually not larger than 4 x 4 x 12 in. (102 x 102 x 305 mm).

sand-lime brick

A hard, light-colored brick made by molding a mixture of damp sand and slaked lime under high pressure and curing in a steam oven.

solid masonry unit

A masonry unit having a net cross-sectional area in any plane parallel to the bearing surface that is 75% or more of the gross cross-sectional area measured in the same plane.

hollow masonry unit

A masonry unit having a net cross-sectional area in any plane parallel to the bearing surface less than 75% of the gross cross-sectional area measured in the same plane.

gross cross-sectional area

The total cross-sectional area of a hollow masonry unit perpendicular to the direction of loading, including cellular and reentrant spaces, except when these spaces are to be occupied by portions of adjacent masonry.

net cross-sectional area

The gross cross-sectional area of a hollow masonry unit minus the area of ungrouted cores of cellular spaces.

equivalent thickness

The thickness that would be obtained if the amount of concrete contained in a hollow masonry unit were recast without any cellular spaces, used esp. to determine the fire resistance of a wall constructed with such units.

absorption

The weight of water absorbed by a concrete masonry unit when immersed in water, expressed in pounds of water per cubic foot of concrete.

Grade N

A grade of load-bearing concrete masonry unit suitable for general use, as in exterior walls above and below grade.

Grade S

A grade of load-bearing concrete masonry unit limited to use above grade, in exterior walls with weather-protective coatings, or in walls not exposed to the weather.

Type I

A concrete masonry unit manufactured to a specified limit of moisture content in order to minimize the drying shrinkage that can cause cracking.

Type II

A concrete masonry unit not manufactured to a specified limit moisture content.

normal-weight block


A concrete masonry unit made with sand, gravel, or other dense aggregate and weighing more than 125 pcf (2000 kg/m³).

lightweight block

A concrete masonry unit made with lightweight aggregate, as cinder or expanded slag, and weighing less than 125 pcf (2000 kg/m³).

surface bonding

The bonding of a concrete masonry wall by stacking the units without mortar and troweling on a stucco-like compound of white portland cement and glass fiber.

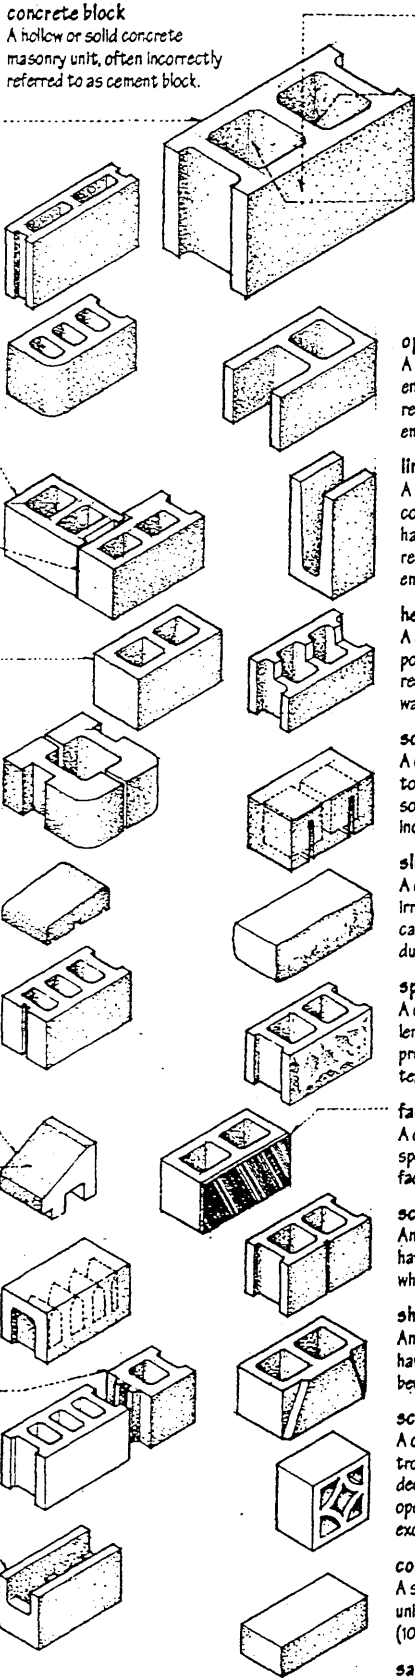

bond

The attractive force by which atoms, ions, or groups of atoms are bound together in a molecule or crystalline structure. Also called chemical bond.

ionic bond

A chemical bond characteristic of salts and ceramic materials, formed by the complete transfer of one or more electrons from one kind of ion to another. Also called electrovalent bond.

positive ion


A positively charged ion created by electron loss. Also called cation.

ion

An electrically charged atom or group of atoms formed by the loss or gain of one or more electrons.

covalent bond

A chemical bond formed by the sharing of pairs of electrons between two atoms.



hydrogen bond

An electrostatic bond between an electronegative atom and a hydrogen atom already linked to another electronegative atom by a covalent bond.

molecule

The smallest particle of a substance that displays all of the characteristic physical and chemical properties of the substance, consisting of one or more like atoms in an element, or two or more different atoms in a compound.

molecular weight

The average weight of a molecule of an element or compound calculated as the sum of the atomic weights of the molecule's constituent atoms. Also called formula weight.

mole

The molecular weight of a substance expressed in grams; gram molecule. Also, mol.

condense

To reduce to a denser form, as a gas or vapor to a liquid or solid state.

heat of condensation

The heat liberated by a unit mass of gas at its boiling point as it condenses to a liquid.

heat of vaporization

The quantity of heat required to convert a unit mass of liquid at its boiling point into vapor at the same temperature; equal to the heat of condensation.

liquid

Matter distinguished from the solid or gaseous states by a characteristic readiness to flow, little or no tendency to disperse, and relatively high incompressibility.

negative ion

A negatively charged ion created by electron gain. Also called anion.

valence

A measure of the capacity of an atom or group to combine with other atoms or groups, equal to the number of chemical bonds the atom or group can form.

valence electron

An electron located in the outer shell of an atom that can be transferred or shared in forming a chemical bond with another atom.

inert gas configuration

The stable configuration of an element in which the outer shells of its atoms or ions are filled with the maximum number of electron pairs. Nature moves atoms and ions toward this configuration by capturing, surrendering, or sharing electrons with neighboring atoms or ions in an effort to achieve a relatively inert state of low energy.

noble gas

Any of the chemically inert gaseous elements: helium, neon, argon, krypton, xenon, and radon. Also called inert gas.

fluid

A substance, as a gas or liquid, that is capable of flowing, yields easily to pressure, and conforms to the shape of its container.

matter

That which occupies space, can be perceived by the senses, and constitutes the substance of a physical body.

shell

Any of up to seven spherical surfaces containing the orbits of electrons of approximately equal energy about the nucleus of an atom.

electron

A fundamental particle of matter having a negative charge.

neutron

A fundamental particle having no charge.

proton


A positively charged particle that is a fundamental constituent of all atomic nuclei.

periodic table

A tabular arrangement of the chemical elements in related groups, formerly in the order of their atomic weights and now according to their atomic numbers.

Down a group, elements share certain characteristics and behave in a similar manner because of the way electrons are arranged in their outer shells.

Across a period, elements change gradually from metals through metal-like elements to nonmetals.

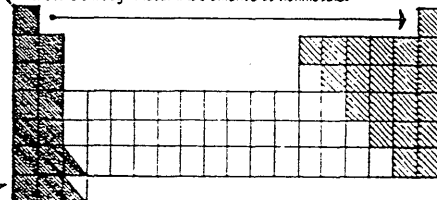

atom

The smallest unit of an element that can exist either alone or in combination, consisting of a nucleus of neutrons and protons surrounded by one or more electrons bound to the nucleus by electrical attraction.

atomic number


The number of protons in the nucleus of an atom of a given element, which equals the number of electrons normally surrounding the nucleus. Also called proton number.

element

One of a class of substances that cannot be separated into simpler substances by chemical means, composed of atoms having an identical number of protons in each nucleus.

atomic weight

The average weight of an atom of an element based on 1/12 the weight of the carbon-12 atom.



gas


Matter having neither independent shape nor volume, possessing perfect molecular mobility and the tendency to expand indefinitely.

solid

Matter having relative firmness, coherence of particles, or persistence of form.

metallic bond

A chemical bond characteristic of metals, produced by the sharing of valence electrons which move freely through the lattice of a usually stable crystalline structure.



lattice

A regular pattern of isolated points in space showing the location of atoms, ions, or molecules in a crystalline solid.

crystal

A solid having a regularly repeating internal structure of atoms, ions, or molecules and enclosed by symmetrically arranged plane surfaces.

amorphous

Not crystalline in structure.

evaporate

To change or convert from a liquid or solid into a vapor.

solidify

To change or convert from a liquid or gas into a solid.

heat of solidification

The heat liberated by a unit mass of liquid at its freezing point as it solidifies.

heat of fusion

The quantity of heat required to convert a unit mass of a solid at its melting point into a liquid at the same temperature; equal to the heat of solidification.

MATERIAL

property

An essential or distinctive attribute or quality belonging specifically to the constitution of, or found in, the behavior of a thing.

mechanical property


Any of the physical properties of a material that exhibit a response to applied forces.

strength

The capability of a material to resist the forces imposed on it, esp. the ability to sustain a high stress without yielding or rupturing.

strength of materials

The study of the relationship between applied external forces and the internal effects produced by these forces in a body.



isotropic

Exhibiting the same physical properties along all axes.

anisotropic

Having different physical properties along different axes, as wood and other fibrous materials.

tension

The act of stretching or state of being pulled apart, resulting in the elongation of an elastic body.

tensile force

An applied force producing or tending to produce tension in an elastic body.

axial force

A tensile or compressive force acting along the longitudinal axis of a structural member and at the centroid of the cross section, producing axial stress without bending, torsion, or shear. Also called axial load.

axial stress

The tensile or compressive stress that develops to resist an axial force, assumed to be normal to and uniformly distributed over the area of the cross section. Also called direct stress, normal stress.

compression

The act of shortening or state of being pushed together, resulting in a reduction in size or volume of an elastic body.

compressive force

An applied force producing or tending to produce compression in an elastic body.

eccentric force

A force applied parallel to the longitudinal axis of a structural member but not to the centroid of the cross section, producing bending and an uneven distribution of stresses in the section. Also called eccentric load.

stress

The internal resistance or reaction of an elastic body to external forces applied to it, equal to the ratio of force to area and expressed in units of force per unit of cross-sectional area. Also called unit stress.

tensile stress

The axial stress that develops at the cross section of an elastic body to resist the collinear tensile forces tending to elongate it.

tensile strain

The elongation of a unit length of material produced by a tensile stress.

strain

The deformation of a body under the action of an applied force. Strain is a dimensionless quantity, equal to the ratio of the change in size or shape to the original size or shape of a stressed element.

Young's modulus

A coefficient of elasticity of a material, expressing the ratio of longitudinal stress to the corresponding longitudinal strain caused by the stress.

Poisson's ratio

The ratio of lateral strain to the corresponding longitudinal strain in an elastic body under longitudinal stress.

tensile test

A test for determining the behavior of a material under axial tension, in which a specimen is gripped at both ends and pulled apart until rupture occurs; the most common test for structural materials.

tensile strength

The resistance of a material to longitudinal stress, measured by the minimum amount of longitudinal stress required to rupture the material.

elongation

A measure of the ductility of a material, expressed as the percentage increase in length of a test specimen after failure in a tensile test.

reduction of area

A measure of the ductility of a material, expressed as the percentage decrease in cross-sectional area of a test specimen after rupturing in a tensile test.

compression test

A test for determining the behavior of a material under axial compression, in which a specimen is crushed until fracture or disintegration occurs. The compression test is used for brittle materials since their low tensile strength is difficult to measure accurately.

strain gauge


An instrument for measuring minute deformations in a test specimen caused by tension, compression, bending, or twisting. Also called extensometer.

bulk modulus

A coefficient of elasticity of a material, expressing the ratio between a pressure and the corresponding fractional change in volume produced.


compressibility

The reciprocal of bulk modulus, equal to the ratio of the fractional change in volume to the pressure applied to a substance.

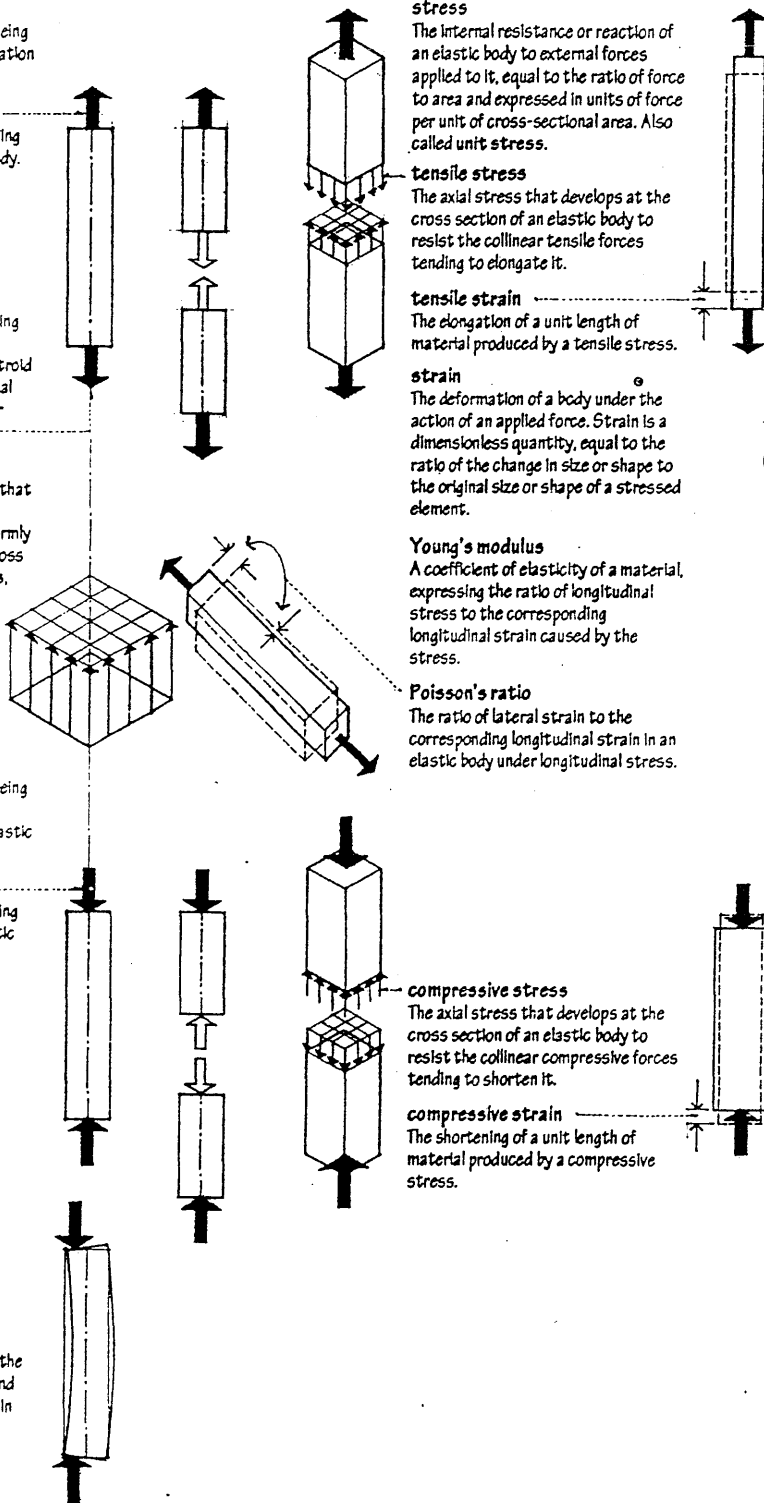


shearing force

An internal force tangential to the surface on which it acts, developed by a body in response to a shear force. For equilibrium of a rectangular element subject to shear, shearing in a vertical plane necessarily involves shearing in a horizontal plane, and vice versa.



shearing stress

The force per unit area developed along a section of an elastic body to resist a shear force. Also called shear stress, tangential stress.



shearing strain

The lateral deformation developed in a body in response to shearing stresses, defined as the tangent of the skew angle of the deformation. Since this skew angle is always very small, shearing strain is a pure number very nearly equal to the skew angle in radians. Also called shear strain.

shear modulus

A coefficient of elasticity of a material, expressing the ratio between shearing stress and the corresponding shearing strain produced by the stress. Also called modulus of rigidity, modulus of torsion.

shear


The lateral deformation produced in a body by an external force that causes one part of the body to slide relative to an adjacent part in a direction parallel to their plane of contact.

shear force

An applied force producing or tending to produce shear in a body.

combined stresses

A set of tensile and compressive stresses resulting from the superposition of axial and bending stresses in the cross section of a structural member, acting in the same direction and equal at any point to their algebraic sum.





bending

The bowing of an elastic body as an external force is applied transversely to its length. Bending is the structural mechanism that enables a load to be channeled in a direction perpendicular to its application.

transverse force


A force applied perpendicular to the length of a structural member, producing bending and shear. Also called transverse load.

* See beam for bending stresses.

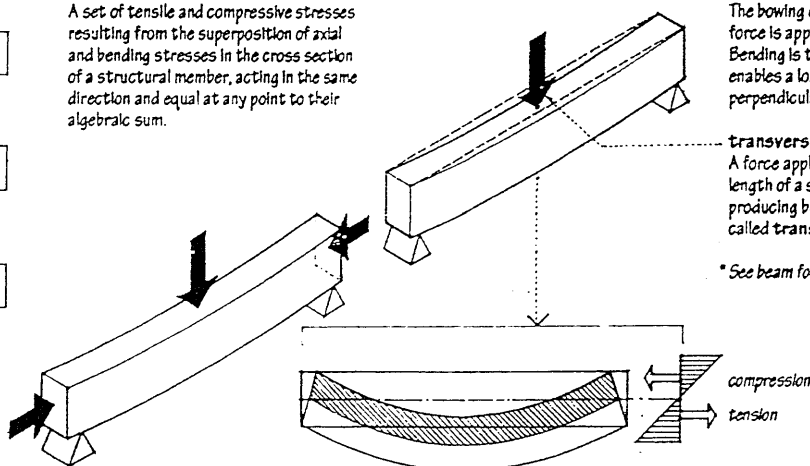

stress concentration

An increase in stress that develops at discontinuities or flaws in a material. Stress concentrations in brittle materials develop cracks which propagate until failure. In ductile materials, stress concentrations develop local deformations which serve to redistribute and relieve the stresses.

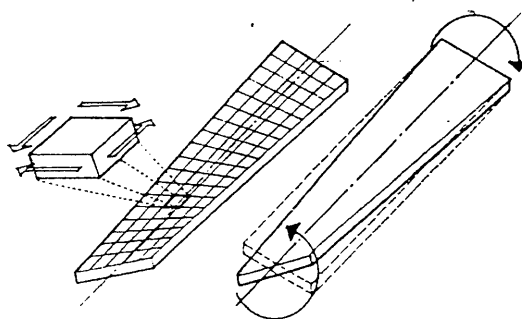

torque

The moment of a force system that causes or tends to cause rotation or torsion.

torsion

The twisting of an elastic body about its longitudinal axis caused by two equal and opposite torques, producing shearing stresses in the body.

MATERIAL

stress-strain diagram

A graphic representation of the relationship between unit stress values and the corresponding unit strains for a specific material.

elastic range

The range of unit stresses for which a material exhibits elastic deformation.

deformation

A change in the shape or dimensions of a body or structure resulting from stress.

elastic deformation

A temporary change in the dimensions or shape of a body produced by a stress less than the elastic limit of the material.

brittleness

The property of a material that causes it to rupture suddenly under stress with little evident deformation. Since brittle materials lack the plastic behavior of ductile materials, they can give no advance warning of impending failure.

proportional limit

The stress beyond which the ratio of stress to strain for a material no longer remains constant.

stiffness


A measure of a material's resistance to deformation when stressed within its elastic range.

allowable stress

The maximum unit stress permitted for a material in the design of a structural member, usually a fraction of the material's elastic limit, yield strength, or ultimate strength. The allowable stresses for various materials are specified by building codes, engineering societies, and trade associations, based on specifications and methods of testing established by the American Society for Testing and Materials. Also called allowable unit stress, working stress.

yield strength

The stress necessary to produce a specified limiting permanent set in a material, usually 0.2% of its original length when tested in tension. Yield strength is used to determine the limit of usefulness of a material having a poorly defined yield point. Also called proof stress.

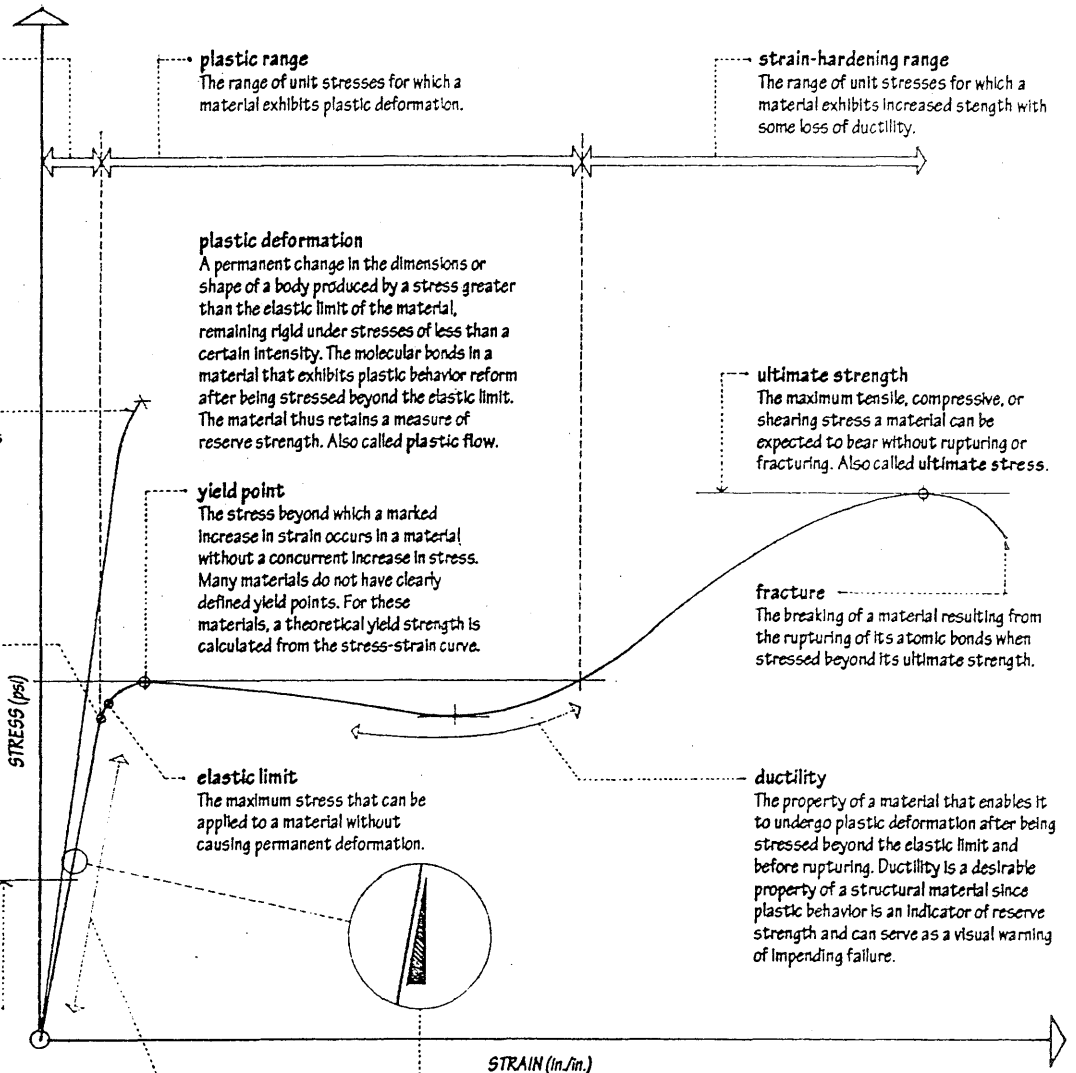

plastic range

The range of unit stresses for which a material exhibits plastic deformation.

strain-hardening range

The range of unit stresses for which a material exhibits increased strength with some loss of ductility.

plastic deformation

A permanent change in the dimensions or shape of a body produced by a stress greater than the elastic limit of the material, remaining rigid under stresses of less than a certain intensity. The molecular bonds in a material that exhibits plastic behavior reform after being stressed beyond the elastic limit. The material thus retains a measure of reserve strength. Also called plastic flow.

yield point

The stress beyond which a marked increase in strain occurs in a material without a concurrent increase in stress. Many materials do not have clearly defined yield points. For these materials, a theoretical yield strength is calculated from the stress-strain curve.

ultimate strength

The maximum tensile, compressive, or shearing stress a material can be expected to bear without rupturing or fracturing. Also called ultimate stress.

fracture

The breaking of a material resulting from the rupturing of its atomic bonds when stressed beyond its ultimate strength.

elastic limit

The maximum stress that can be applied to a material without causing permanent deformation.

ductility

The property of a material that enables it to undergo plastic deformation after being stressed beyond the elastic limit and before rupturing. Ductility is a desirable property of a structural material since plastic behavior is an indicator of reserve strength and can serve as a visual warning of impending failure.

elasticity


The property of a material that enables it to deform in response to an applied force and to recover its original size and shape upon removal of the force.

modulus of elasticity

A coefficient of elasticity of a material, expressing the ratio between a unit stress and the corresponding unit strain caused by the stress, as derived from Hooke's law and represented by the slope of the straight-line portion of the stress-strain diagram. Also called coefficient of elasticity, elastic modulus.

Hooke's law

The law stating that the stress on a body is directly proportional to the strain produced, provided the stress does not exceed the elastic limit of the material.

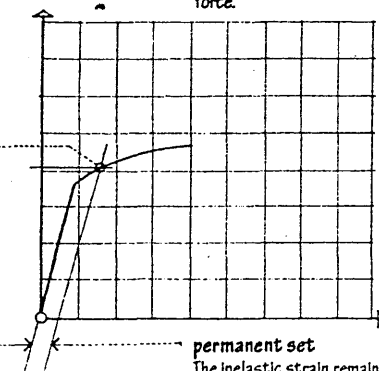


permanent set

The inelastic strain remaining in a material after complete release of the stress producing the deformation.

strong but brittle

ductile and tough




toughness

The property of a material that enables it to absorb energy before rupturing, represented by the area under the stress-strain curve derived from a tensile test of the material. Ductile materials are tougher than brittle materials.


moisture expansion

An increase in the bulk of a material caused by the absorption of water or water vapor. Also called balking.



absorption

The taking in or reception of a gas or liquid by molecular or chemical action.




adsorption

The adhesion of a thin, condensed layer of gas, liquid, or dissolved substance to the surface of a solid, usually without any physical or chemical change in the material.

coefficient of expansion

The fractional change in length, area, or volume of a material per unit change in temperature at a given constant pressure. Also called expansivity.

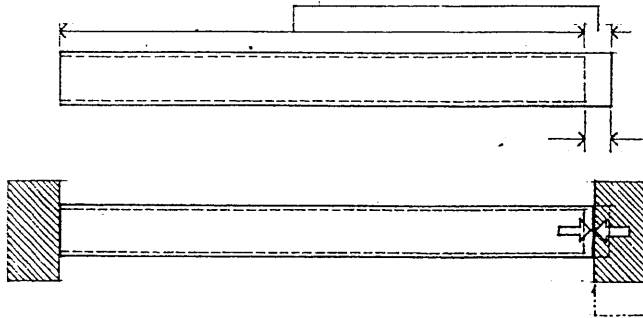

dimensional stability

The property of a material that enables it to maintain its original shape and dimensions when subjected to changes in temperature or humidity.

kinetic theory of heat

The theory that the temperature of a substance increases with an increase of the average kinetic energy of its particles when heat is absorbed.

thermal expansion

An increase in length, area, or volume of a material caused by a rise in temperature.

thermal contraction

A decrease in length, area, or volume of a material caused by a drop in temperature.

thermal stress

The tensile or compressive stress developed in a material constrained against thermal expansion or contraction.

thermal shock


The sudden stress a rapid change in temperature can produce in a material.

weatherability

The property of a material that enables it to retain its appearance and integrity when exposed to the effects of sun, wind, moisture, and changes in temperature.

weatherometer

A device for determining the weather resistance of a material by subjecting a test specimen to accelerated weathering.

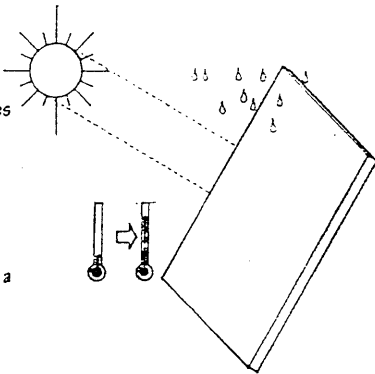

accelerated weathering

A process for exposing a material to ultraviolet rays, water sprays, and heating elements in order to simulate the long-term effects of sun, rain, and temperature changes. Also called accelerated aging.

abrasion resistance

The property of a material that enables it to resist being worn away by friction when rubbed with another object. Abrasion resistance is a measure of toughness rather than hardness and is a necessary quality of flooring materials and surface finishes.




abrasion-resistance index

A measure of the abrasion resistance of a material, commonly expressed as the depth of penetration or material loss after testing with a weighted abrasive wheel for a specified number of cycles.

hardness

The property of a material that enables it to resist deformation by compression, indentation, or penetration.



Mohs' scale

A scale for measuring the hardness of a mineral. Its degrees, in increasing hardness, are: 1, talc; 2, gypsum; 3, calcite; 4, fluorite; 5, apatite; 6, feldspar; 7, quartz; 8, topaz; 9, sapphire; 10, diamond.

Brinell number

A measure of the hardness of a material, determined by pressing a standard steel ball into a test piece using a standard force and dividing the load by the area of indentation. The higher the number, the harder the material.

Rockwell number

A measure of the hardness of a material, determined by indenting a test piece with a conoidal diamond indenter, or with a standard steel ball, under two successive loads and measuring the net increase in depth of the impressions: the higher the number, the harder the material.

Vickers number

A measure of the hardness of a material, determined by indenting a test piece with the point of a diamond using a known force and dividing the load by the surface area of indentation: the higher the number, the harder the material.

strain-rate effect

The brittle behavior an increased rate of load application can cause in a normally ductile material.

temperature effect


The brittle behavior low temperatures can cause in a normally ductile material.

stress relaxation

The time-dependent decrease in stress in a constrained material under a constant load.

creep

The gradual and permanent deformation of a body produced by a continued application of stress or prolonged exposure to heat. Creep deflection in a concrete structure continues over time and can be significantly greater than the initial elastic deflection.



fatigue

The weakening or failure of a material at a stress below the elastic limit when subjected to a repeated series of stresses.

fatigue limit

The maximum stress to which a material can be subjected for an indefinite number of cycles without failing.

fatigue ratio

The ratio between the fatigue limit and the tensile strength of a material. Also called endurance ratio.

MEASURE

A unit or standard of measurement used to ascertain the dimensions, quantity, or capacity of something.

metric system

A decimal system of weights and measures, adopted first in France but now widespread and universally used in science.

International System of Units

An internationally accepted system of coherent physical units, using the meter, kilogram, second, ampere, kelvin, and candela as the basic units of the fundamental quantities of length, mass, time, electric current, temperature, and luminous intensity.

length

The extent of anything measured along its greatest dimension.

conversion table

A tabular arrangement of the equivalent values of the weight or measure units of different systems.

SI unit

One of the basic units of the International System of Units.

meter

The basic unit of length in the metric system, equivalent to 39.37 inches, originally defined as one ten-millionth of the distance from the equator to the pole measured on the meridian, later as the distance between two lines on a platinum-iridium bar preserved at the International Bureau of Weights and Measures near Paris, and now as $1/299,972,458$ of the distance light travels in a vacuum in one second. Abbr.: m

kilometer

A unit of length and distance equal to 1000 meters and equivalent to 3280.8 feet or 0.621 mile. Abbr.: km

are


A metric unit of area equal to $1/100$ of a hectare, 100 square meters, or 119.6 square yards. Abbr.: a

hectare

A metric unit of area equal to 10,000 square meters or 2.47 acres. Abbr.: ha

liter

A metric unit of capacity equal to $1/1000$ of a cubic meter or 61.02 cubic inches. Abbr.: L



cubic meter

scale

A system of ordered marks laid down at known intervals and used as a standard reference in measuring.

centimeter

A metric unit of length equal to $1/100$ of a meter or 0.3937 inch. The use of the centimeter is not recommended for use in construction. Abbr.: cm

millimeter

A metric unit of length equal to $1/1000$ of a meter or 0.03937 of an inch. Abbr.: mm

micron

The millionth part of a meter. Also called micrometer. Symbol: μ , μ

foot

A unit of length originally derived from the length of the human foot, divided into 12 inches and equal to 304.8 millimeters. Abbr.: ft.

inch

A unit of length, $1/12$ th of a foot, equivalent to 25.4 millimeters. Abbr.: in.

mil

A unit of length equal to 0.001 of an inch or 0.0254 mm, used in measuring the diameter of wires and the thickness of very thin sheet materials.

yard

A unit of length equal to 3 feet or 36 inches, and equivalent to 0.9144 meter. Abbr.: yd.

rod

A unit of length equal to $5\frac{1}{2}$ yards or $16\frac{1}{2}$ feet, and equivalent to 5.029 meters.

mile

A unit of distance on land equal to 5280 feet or 1760 yards, and equivalent to 1.609 km. Also called statute mile. Abbr.: mi

nautical mile

A unit of distance used in sea or air navigation, equal to 1.852 kilometers or about 6,076 feet. Also called air mile.

square measure

A unit or system of units for measuring area, derived from units of linear measure.

area

A quantitative measure of a plane or curved surface.

cubic measure

A unit or system of units for measuring volume or capacity, derived from units of linear measure.

volume

The size or extent of a three-dimensional object or region of space, measured in cubic units.

acre

A unit of land area equal to $1/640$ of a square mile, 4840 square yards, 43,560 square feet, or 4047 square meters.

circular mil

A unit used principally for measuring the cross-sectional area of wire, equal to the area of a circle having a diameter of one mil.

milliliter

A metric unit of capacity equal to $1/1000$ of a liter or 0.0162 cubic inch. Abbr.: ml

fluid ounce

A unit of liquid capacity equal to 1.805 cubic inches or 29.573 milliliters. Abbr.: fl oz

pint


A unit of liquid capacity equal to 16 fluid ounces, 28.875 cubic inches, or 0.473 liter. Abbr.: pt.

quart

A unit of liquid capacity equal to two pints, 57.75 cubic inches, or 0.946 liter. Abbr.: qt.

gallon

A unit of liquid capacity equal to 4 quarts, 231 cubic inches, or 3.785 liters. Abbr.: gal.



density
The mass of a substance per unit volume.

specific volume
The reciprocal of density, equal to volume per unit mass.

specific gravity
The ratio of the density of a substance to the density of another substance taken as a standard, usually distilled water for liquids and solids, and air or hydrogen for gases.

pound
A unit of force equal to the weight of a one-pound mass under the acceleration of gravity. Abbr.: lb

newton
The SI unit of force equal to the force required to accelerate a mass of one kilogram at the rate of one meter per second per second. Abbr.: N

kilogram
A unit of force and weight equal to the weight of a kilogram mass under the acceleration of gravity. Abbr.: kg

atmosphere
A unit of pressure equal to the normal pressure of the air at sea level, equal to $1.01325 \times 10^5 \text{ N/m}^2$ or about 14.7 pounds per square inch. Abbr.: atm.

standard atmosphere
A standard unit of atmospheric pressure, having a value of 29.92 in. (760 mm) of mercury.

atmospheric pressure
The pressure exerted by the earth's atmosphere at any given point, usually expressed in terms of the height of a column of mercury. Also called barometric pressure.

barometer
An instrument for measuring atmospheric pressure, used in weather forecasting and determining elevation.

horsepower
A unit of power equal to 550 foot-pounds per second or 745.7 watts. Abbr.: hp

mechanical equivalent of heat
The number of units of work or energy equal to one unit of heat, as 778.2 ft-lb, which equals one Btu, or 4.1858 joules, which equals one calorie.

metric ton
A unit of mass equal to 1,000 kilograms and equivalent to 2,204.62 avoirdupois pounds. Also called tonne. Abbr.: m.t.

gram
A metric unit of mass equal to $1/1000$ of a kilogram or 0.035 ounce. Abbr.: g

mass
A measure of a body's inertia, as determined by the quantity of material it contains and its weight in a field of constant gravitational acceleration. Abbr.: M

kilogram
The base SI unit of mass, equal to the mass of a platinum-iridium cylinder kept at the International Bureau of Weights and Measures near Paris; equivalent to 2.205 avoirdupois pounds. Abbr.: kg

pound
A unit of weight equal to 16 ounces and equivalent to 0.453 kg. Abbr.: lb.

kip
A unit of weight equal to 1000 pounds or 453.6 kg.

ton
A unit of weight equal to 2,000 pounds or 0.907 metric ton. Also called short ton.

weight
The gravitational force exerted by the earth on a body, equal to the mass of the body times the local acceleration of gravity.

gravity
The central force of attraction exerted by the mass of the earth on a body near its surface.

acceleration of gravity
The acceleration of a freely falling body in the earth's gravitational field, having an approximate value at sea level of 32 ft. (9.8 m) per second per second.

Boyle's law
The principle that, at relatively low pressures and a fixed temperature, the pressure of a confined ideal gas varies inversely with its volume.

foot-pound
A unit of energy equal to the work done when the point of application of a force of one pound moves through a distance of one foot in the direction of the force. Abbr.: ft-lb

inch-pound
One-twelfth of a foot-pound. Abbr.: in-lb

pressure
The force exerted over a surface, measured as force per unit area.

pascal
The SI unit of pressure equal to one newton per square meter. Abbr.: Pa









energy
The work a physical system is capable of doing in changing from its actual state to a specified reference state.

joule
The SI unit of work or energy equal to the work done when the point of application of a force of one newton moves through a distance of one meter in the direction of the force; approximately 0.7375 ft-lb. Also called newton-meter. Abbr.: J

watt-hour
A unit of energy equal to energy of one watt operating for one hour and equivalent to 3,600 joules. Abbr.: Wh

power
The amount of work done or energy transferred per unit of time, usually expressed in watts or horsepower.

work
The transfer of energy produced by the motion of the point of application of a force, equal to the product of the component of the force that acts in the direction of the motion of the point of action and the distance through which the point of application moves.

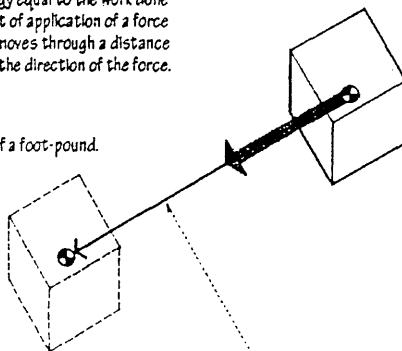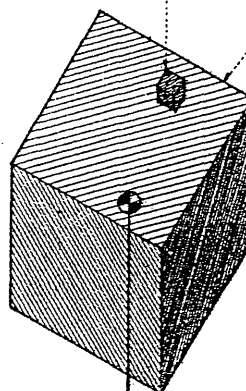


MEMBRANE

A thin, flexible surface that carries loads primarily through the development of tensile stresses.

tent structure


A membrane structure prestressed by externally applied forces so that it is held completely taut under all anticipated load conditions. To avoid extremely high tensile forces, a membrane structure should have relatively sharp curvatures in opposite directions.

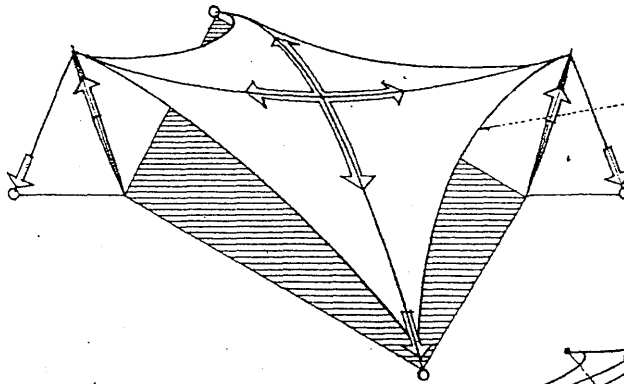

reinforcing edge cable
A cable stiffening the free edges of a prestressed membrane structure.


cable loop
A reinforcing edge cable tied to the mast support of a membrane structure.

distribution cap
The broadened end of a mast over which a prestressed membrane structure is stretched.






net structure

A membrane structure having a surface of closely spaced cables instead of a fabric material.

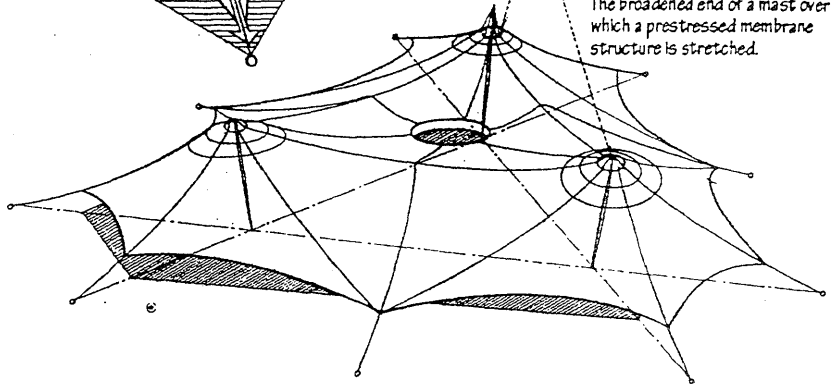

pneumatic structure

A membrane structure that is placed in tension and stabilized by the pressure of compressed air.






air-supported structure

A pneumatic structure consisting of a single membrane supported by an internal air pressure slightly higher than normal atmospheric pressure, and securely anchored and sealed along the perimeter to prevent leaking. Air locks are required at entrances to maintain the internal air pressure.

cable-restrained pneumatic structure

An air-supported structure that uses a net of cables placed in tension by the inflating force to restrain the membrane from developing its natural inflated profile.

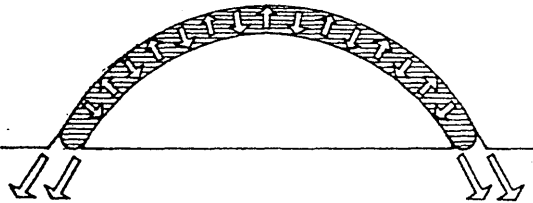

air-inflated structure


A pneumatic structure supported by pressurized air within inflated building elements, which are shaped to carry loads in a traditional manner, while the enclosed volume of building air remains at normal atmospheric pressure. The tendency for a double-membrane structure to bulge in the middle is restrained by a compression ring or by internal ties or diaphragms.

ingot

A mass of metal cast into a convenient shape for storage or transportation before further processing.

blank

A piece of metal ready to be drawn, pressed, or machined into a finished object.



bloom


A bar of steel reduced from an ingot to dimensions suitable for further rolling.

blooming mill

A mill for rolling ingots into blooms.

billet

A narrow, generally square, bar of steel, forged or hot-rolled from an ingot or bloom.

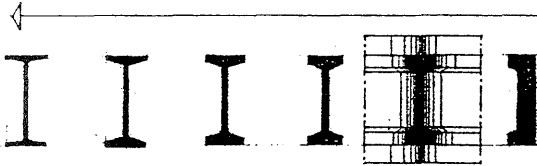

hot-roll

To roll metal at a heat high enough to permit recrystallization.

hot-rolled finish


The dark, oxidized, relatively rough finish obtained by rolling metal while hot.

scale

An oxide occurring in a scaly form on the surface of metal when brought to a high temperature.

mill scale

A loose coating of iron oxide that forms on iron or steel during hot-rolling. Mill scale increases the bond between steel and concrete in reinforced concrete or in structural steelwork encased in concrete for fire protection.

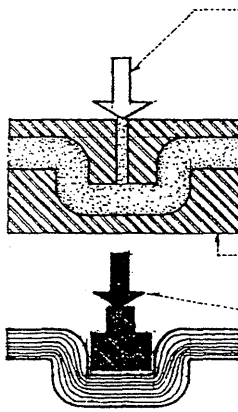

die casting

The process or product of forcing molten metal into a metallic mold under hydraulic pressure to give it a particular shape or form.

casting


The process or product of forming a material into a particular shape by pouring it into a mold in a fluid state and letting it harden.

mold

A hollow form or matrix for giving a particular shape to something in a molten or plastic state.

forge

To form metal by heating and hammering.



heat treatment

The controlled heating and cooling of a metal to develop certain desirable physical or mechanical properties.

anneal

To remove internal stress from metal or glass by heating to a temperature below that of recrystallization and then gradually cooling in a liquid or air, esp. to make the material more ductile.

quench

To rapidly cool a heated metal by immersion in water, esp. to increase its hardness.

temper

To strengthen or toughen a metal by reheating at a lower temperature and slowly cooling the material.

stress relieving


The tempering of a metal at a temperature high enough to relieve residual stresses, followed by slow, uniform cooling.

residual stress

Microscopic stress in a metal resulting from nonuniform thermal changes, plastic deformation, or other causes aside from external forces or applications of heat.

case-harden

To make the outside surface of an iron-based alloy hard by carburization and heat treatment, leaving the interior tough and ductile.

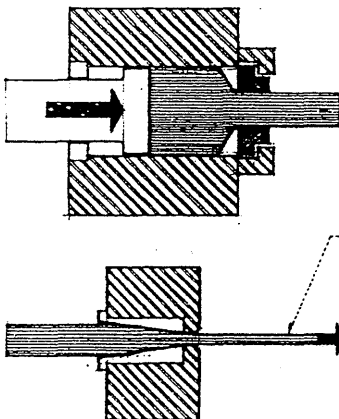

cold-roll

To roll metal at a temperature below that at which recrystallization occurs, so as to increase its tensile strength or improve its surface finish.

mill finish

The striated finish that cold rolling or extrusion imparts to a metal surface.

extrusion

The process or product of forming a metal or plastic with a desired cross section by forcing it through a die with a pressure ram.

cold-draw

To draw metal through a set of dies to reduce its cross-sectional area without preheating, as in the fabrication of wire or tubing.

drawn finish

A smooth, bright finish produced by drawing metal through a die.

die

A steel block or plate having small conical holes through which metal or plastic is extruded or drawn for shaping.


Any of a class of elementary substances, as gold, silver, or copper, all of which are crystalline when solid and many of which are characterized by opacity, ductility, conductivity, and a unique luster when freshly fractured.

hot-working

The working of a metal at a temperature high enough to permit recrystallization.

recrystallize

To acquire a new granular structure with new crystals because of plastic deformation, as when worked after being heated.

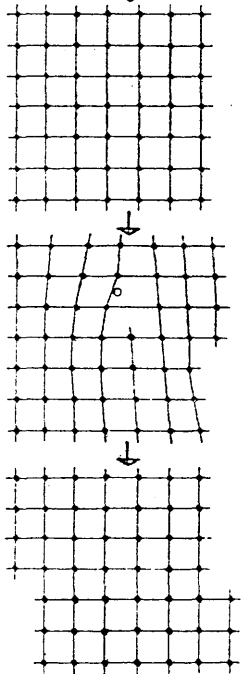

cold-working

The working of metal below the temperature at which recrystallization occurs, as in drawing, pressing, or stamping.

METAL

ferrous metal

A metal containing iron as a principal element.

iron

A malleable, ductile, magnetic, silver-white metallic element from which pig iron and steel are made. Symbol: Fe

pig iron

Crude iron that is drawn from a blast furnace and cast into pigs in preparation for conversion into cast iron, wrought iron, or steel.

cast iron


A hard, brittle, nonmalleable iron-based alloy containing 2.0% to 4.5% carbon and 0.5% to 3% silicon, cast in a sand mold and machined to make many building products.

wrought iron

A tough, malleable, relatively soft iron that is readily forged and welded, having a fibrous structure containing approximately 0.2% carbon and a small amount of uniformly distributed slag.

steel

Any of various iron-based alloys having a carbon content less than that of cast iron and more than that of wrought iron, and having qualities of strength, hardness, and elasticity varying according to composition and heat treatment.



smelt

To melt or fuse ore in order to separate the metal constituents.

pig


An oblong mass of metal that has been poured while still molten into a mold of sand, esp. such a mass of iron from a blast furnace.

malleable cast iron

Cast iron that has been annealed by transforming the carbon content into graphite or removing it completely.

malleable

Capable of being shaped or formed by hammering or by pressure from rollers.



carbon steel

Ordinary, unalloyed steel in which the residual elements, as carbon, manganese, phosphorus, sulfur, and silicon, are controlled. Any increase in carbon content increases the strength and hardness of the steel but reduces its ductility and weldability.

carbon

A nonmetallic element occurring in a pure state as diamond and graphite, or as a constituent of coal and petroleum. Symbol: C

alloy steel


Carbon steel to which various elements, as chromium, cobalt, copper, manganese, molybdenum, nickel, tungsten, or vanadium, have been added in a sufficient amount to obtain particular physical or chemical properties.

alloy

A substance composed of two or more metals, or of a metal and a nonmetal, intimately mixed, as by fusing or electrodeposition.

base metal

The principal metal of an alloy or a piece underlying a coating of another metal.



A mixture of iron ore, limestone, and coke

coke

The solid residue of coal left after destructive distillation, used as a fuel.

blast furnace

A large vertical furnace for smelting iron from ore, in which combustion is intensified by a continuous blast of air through the fuel.

blast-furnace slag

Slag left as a residue by the smelting of iron ore in a blast furnace.

slag

The vitrified matter left as a residue from the smelting of a metallic ore. Also called cinder.



mild steel

A low-carbon steel containing from 0.15% to 0.25% carbon. Also called soft steel.

medium steel

A carbon steel containing from 0.25% to 0.45% carbon.

hard steel

A high-carbon steel containing from 0.45% to 0.85% carbon.

spring steel

A high-carbon steel containing 0.85% to 1.80% carbon.

stainless steel

An alloy steel containing a minimum of 12% chromium, sometimes with nickel, manganese, or molybdenum as additional alloying elements, so as to be highly resistant to corrosion.

high-strength low-alloy steel

Any of a group of low-carbon steels containing less than 2% alloys in a chemical composition specifically developed for increased strength, ductility, and resistance to corrosion.

weathering steel

A high-strength, low-alloy steel that forms an oxide coating when exposed to rain or moisture in the atmosphere, which adheres firmly to the base metal and protects it from further corrosion. Structures using weathering steel should be detailed to prevent the small amounts of oxide carried off by rainwater from staining adjoining materials.



rust


The reddish brittle coating formed on the surface of iron esp. when exposed to moisture and air, consisting essentially of hydrated ferric oxide formed by oxidation.

oxidation

The process or result of combining with oxygen to form an oxide.

oxide

A binary compound of oxygen with another element.

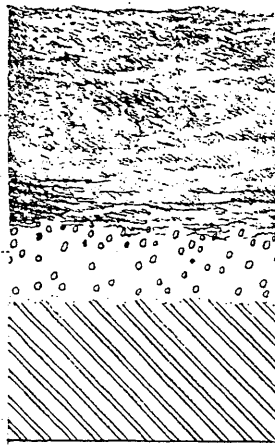

noble metal

A metal, as gold, silver, and mercury, that resists oxidation when heated in air, and solution by inorganic acids.

cathode
(most noble)

- GOLD & PLATINUM
- TITANIUM
- SILVER
- STAINLESS STEEL
- BRONZE
- COPPER
- BRASS
- NICKEL
- TIN
- LEAD
- IRON & STEEL
- CADMIUM
- ALUMINUM
- ZINC
- +
- MAGNESIUM

(least noble)

anode

sacrificial anode

An anode that is attached to a metal object subject to electrolysis and is decomposed instead of the object.

corrosion


The gradual deterioration of metal by chemical action, as when exposed to weather, moisture, or other corroding agents.

galvanic corrosion

An accelerated corrosive action that takes place when dissimilar metals are in contact in the presence of an electrolyte.

galvanic series

A list of metals arranged in order from least noble to most noble. The farther apart two metals are on the list, the more susceptible the least noble one is to corrosive deterioration.



cladding


The process or product of bonding one metal to another, usually to protect the inner metal from corrosion.

pickle

An acid or other chemical solution in which a metal object is dipped to remove oxide scale or other adhering substances.

bonderize

To coat steel with an anticorrosive phosphate solution in preparation for the application of paint, enamel, or lacquer.



anodize

To coat a metal, esp. aluminum or magnesium, with a hard, noncorrosive film by electrolytic or chemical action.

chrome

To coat or plate a metal surface with a compound of chromium. Also called chromeplate.

chromium

A lustrous, hard, brittle metallic element used in alloy steels for hardness and corrosion resistance, and for electroplating other metals.

galvanize

To coat metal, esp. iron or steel, with zinc, esp. to immerse in molten zinc to produce a coating of zinc-iron alloy.

hot-dip galvanizing

The protective coating of ferrous metal by dipping in a bath of molten zinc.

galvanized iron

Iron coated with zinc to prevent rust.

zinc

A ductile, crystalline, bluish-white metallic element, used for galvanizing iron and steel and in making other alloys. Symbol: Zn

tinplate

Thin iron or steel sheet plated with tin for protection against oxidation.

tin

A lustrous, low-melting, bluish-white metallic element that is malleable and ductile at ordinary temperatures and used in plating and in making alloys and soft solders. Symbol: Sn

cathodic protection



The protection of ferrous metals against electrolysis by the attachment of sacrificial anodes. Also called electrolytic protection.

electroplate

To plate with an adherent metallic coating by electrolysis, usually to increase the hardness, improve the durability, or enhance the appearance of the base metal.

electrolysis


The producing of chemical changes by the passage of an electric current through an electrolyte, with subsequent migration of positively and negatively charged ions to the negative and positive electrodes.

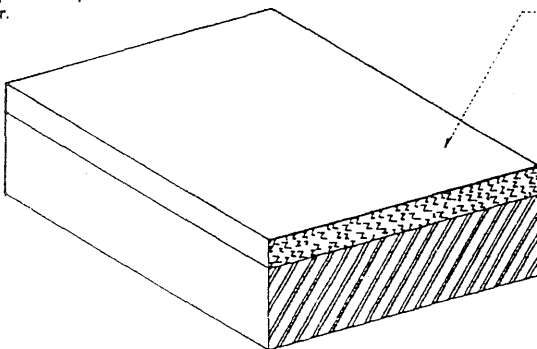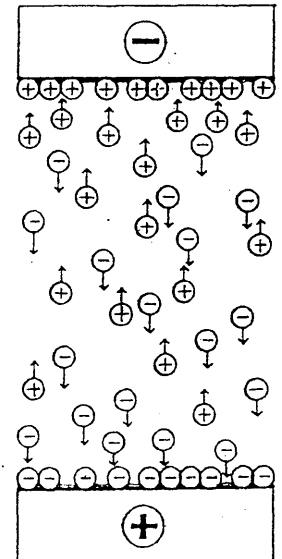

METAL


W-shape

A hot-rolled structural steel section having an H-shape with wide parallel flanges, designated by the prefix W followed by the size and weight of the member. Also called wide flange.



M-shape

A hot-rolled structural steel shape similar to but not classified as a W-shape, designated by the prefix M followed by the size and weight of the member.




HP-shape

A hot-rolled structural steel section similar to a W-shape but having flanges and web of equal thickness and typically used as a load-bearing pile, designated by the prefix HP followed by the size and weight of the member.

S-shape

A hot-rolled structural steel section having an I-shape with sloped inner flange surfaces, designated by the prefix S followed by the size and weight of the member. Also called American standard beam.

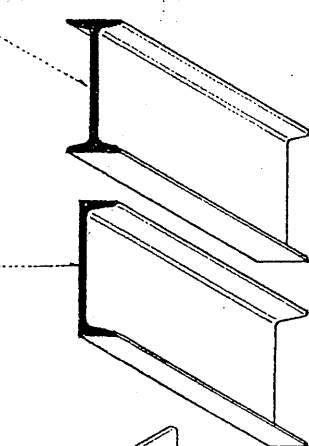

American standard channel


A hot-rolled structural steel section having a rectangular C-shape with sloped inner flange surfaces, designated by the prefix C followed by the size and weight of the member.

Miscellaneous channel

A hot-rolled structural steel section similar to a C-shape but designated by the prefix MC followed by the size and weight of the member.

angle

A hot-rolled structural steel section having an L-shape, designated by the prefix L followed by the length of each leg and their thickness. Also called angle iron.



equal leg angle


An angle iron having legs of equal length.

unequal leg angle

An angle iron having legs of unequal length.


double angle

A structural member consisting of a pair of angles joined back to back. The parallel legs may be in contact or slightly separated.



structural tee

A structural steel section cut from a W-, S-, or M-shape and having a T-shape. It is designated by the prefix WT, ST, or MT, depending on the section from which it is cut, followed by the size and weight of the member.




tee

A rolled metal bar having a T-shaped cross section. Also called T-bar.


zee

A rolled metal bar having a Z-shaped cross section with internal right angles. Also called Z-bar.




bar

A long, solid piece of metal, esp. one having a square, rectangular, or other simple cross-sectional shape.



structural tubing

A hollow structural steel shape of square, rectangular, or circular cross section. It is designated by the prefix TS followed by the side dimensions or diameter and the wall thickness.



standard pipe


A structural steel pipe of standard weight and wall thickness, designated as Pipe (nominal inside diameter) Std.

extra-strong pipe

A structural steel pipe having increased wall thickness for greater strength, designated as Pipe (nominal inside diameter) X-Strong.

double-extra-strong pipe

A structural steel pipe having a wall thickness greater than that of extra-strong pipe, designated as Pipe (nominal inside diameter) XX-Strong.



equivalent round

The diameter of a circle having a circumference equal to the perimeter of a noncircular tube.




plate

A thin, flat sheet or piece of metal, esp. one of uniform thickness.

checkered plate

A steel or cast-iron plate having a wafflelike pattern.




sheet metal

Metal in thin sheets or plates, used in the manufacture of ductwork, flashing, and roofing.

corrugated metal

Sheet metal drawn or rolled into parallel ridges and furrows for additional mechanical strength.




expanded metal

Sheet metal slotted and stretched into a stiff, open mesh or lattice, used esp. as lath.

blackplate

Cold-rolled sheet steel before pickling or cleaning, used for coating with zinc, tin, or other metal.



gauge

Any of various standards for designating the thickness or diameter of a thin object, as the thickness of sheet metal or the diameter of a wire or screw. Also, gage.

wire gauge


A gauge calibrated for determining the diameter of wire or thickness of sheet metal, consisting of a steel plate with a series of standard-sized notches around the edge.

wire cloth

A fabric of woven metallic wire, used in screens, sieves, or the like.

hardware cloth

A galvanized steel wire cloth with a mesh between 0.25 and 0.50 in. (6.4 to 12.7 mm).



mesh

The number of openings per inch in wire cloth.



wire rope

A heavy rope made of or containing wire strands twisted around a central core.

flange

A broad ridge or pair of ridges projecting at a right angle from the edge of a structural shape in order to strengthen or stiffen it.

web

An integral part of a beam that forms a flat, rigid connection between two broader, parallel parts, as the flanges of a structural shape.

I-beam


A rolled or extruded metal beam having a cross section resembling the capital letter I.

structural steel

Steel that is hot-rolled or cold-formed in a variety of standard shapes and fabricated for use as load-bearing members or elements.

steel beam

A beam consisting of a single or built-up structural steel section.

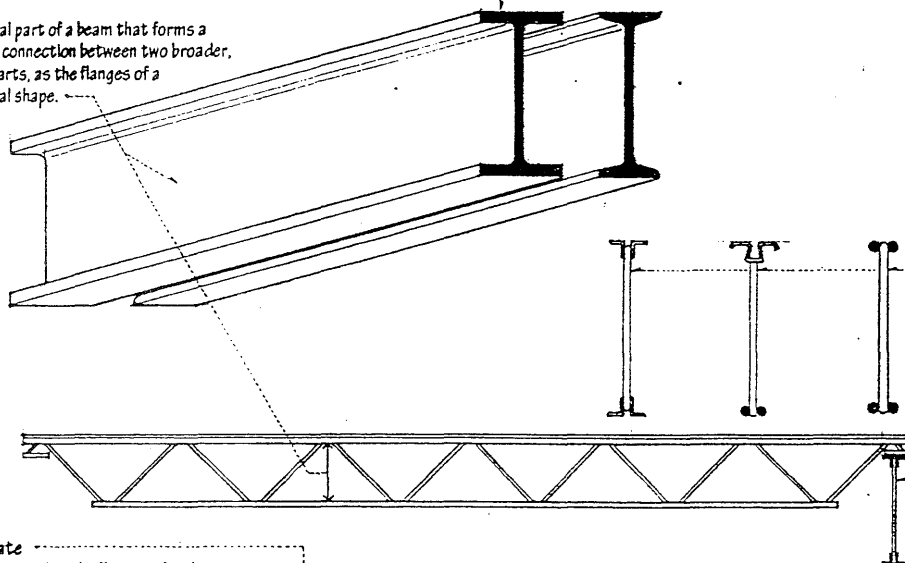**open-web steel joist**

A lightweight, fabricated steel joist having an open web. A K-Series joist has a web consisting of a single bent bar, running in a zigzag pattern between the upper and lower chords. LH- and DLH-Series joists have heavier web and chord members for increased loads and spans. Also called *bar joist*.

joist girder

A trussed girder for supporting open-web steel joists.

cover plate

A plate fastened to the flanges of a plate girder to increase its section modulus in areas subject to high-bending stresses.

flange angle



One of the angles forming the top or bottom flange of a plate girder.

web plate


A steel plate forming the web of a plate girder.

shear plate

A plate fastened to the web of a plate girder to increase its resistance to shearing stresses.

**plate girder**

A steel girder built up from plates or shapes that are welded or riveted together.

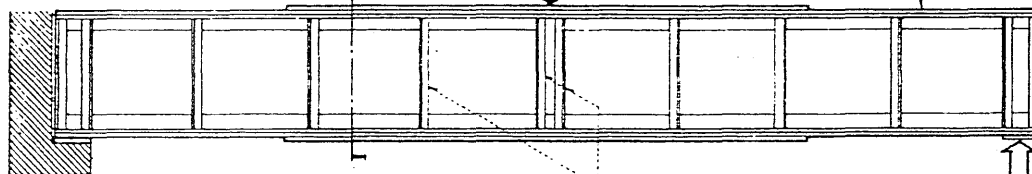**stiffener**


One of a pair of vertical angles fastened to each side of a web plate to stiffen it against buckling.

bearing stiffener


A stiffener angle for the web of a plate girder, placed at a point of support or under a concentrated load.

intermediate stiffener

A stiffener angle for the web of a plate girder, placed between bearing stiffeners for increased resistance to diagonal compressive stresses.

**box girder**

A steel beam built up from shapes and having a hollow, rectangular cross section.

**castellated beam**

A steel beam fabricated by dividing the web of a wide-flange section with a lengthwise zigzag cut, then welding both halves together at the peaks, thus increasing its depth without increasing its weight.

MOISTURE PROTECTION

joint sealant

Any of various viscous substances injected into a building joint, curing to form a flexible material that adheres to the surrounding surfaces and seals the joint against the passage of air and water.

joint movement

The change in width of a building joint resulting from a change in temperature.

extensibility

The capacity of a sealant to be extended in tension.

high-range sealant

A joint sealant of polysulfide, polyurethane, or silicone capable of elongations up to 25%, used for sealing joints in curtain-wall systems.

medium-range sealant

A joint sealant of butyl rubber or acrylic capable of elongations up to 10%, used for sealing nonworking or mechanically fastened joints.

caulk

A low-range joint sealant used for filling or closing a seam, crevice or crack in order to make it watertight and airtight. Also, caulking.

bead

A narrow deposit of sealant applied to a building joint.

bond face

The surface of a building component or joint that serves as a substrate for a sealant and to which the sealant is bonded.

substrate

Any material that underlies and serves as a base or foundation.

primer





A liquid for improving the adhesion of a sealant to a substrate.

joint filler

A compressible strip, rod, or tube of resilient material, as neoprene or butyl, used for filling a joint and controlling the depth of a sealant. Also called backup rod.

bond breaker

Any of various materials, as polyethylene tape, used for preventing the adhesion of a sealant to the bottom of a joint.

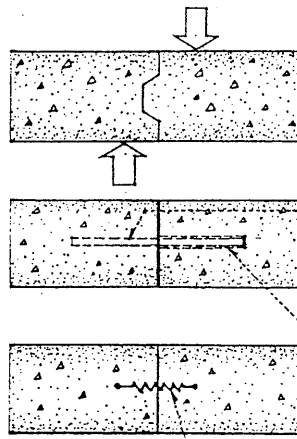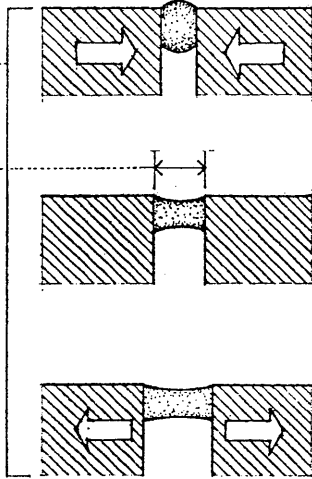

construction joint

A joint between two successive placements of concrete, often keyed or doweled to provide lateral stability across the joint.

dowel


A short reinforcing bar extending equally into two abutting sections of concrete to prevent differential movement.

expansion sleeve

A pipe sleeve that allows the housed element to move freely in a longitudinal direction.

waterstop

A flexible strip of rubber or plastic inserted across a concrete or masonry joint to prevent the passage of water.




expansion joint

A joint between two parts of a building or structure permitting thermal or moisture expansion to occur without damage to either part. Expansion joints also serve as isolation joints and control joints.

expansion joint cover

A prefabricated cover for protecting an expansion joint while allowing relative movement between the two parts being connected.




control joint

A continuous groove or separation formed, sawed, or tooled in a concrete or masonry structure to form a plane of weakness and thus regulate the location and amount of cracking resulting from drying shrinkage or thermal stresses.

contraction joint

A joint between two parts of a structure, designed to compensate for the contraction of either part.



isolation joint

A joint separating two sections of a structure so that differential movement or settlement can occur between the parts.

cymatium
The crowning member of a classical cornice, usually a cyma recta.

corona
The projecting, slablike member of a classical cornice, supported by the bed molding and crowned by the cymatium.

bed molding
The molding or group of moldings immediately beneath the corona of a cornice.

columniation
The use or arrangement of columns in a structure.

distyle
Having two columns on one or each front.

tristyle
Having three columns on one or each front.

tetrastyle
Having four columns on one or each front.

pentastyle
Having five columns on one or each front.

hexastyle
Having six columns on one or each front.

heptastyle
Having seven columns on one or each front.


octastyle
Having eight columns on one or either front.

enneastyle
Having nine columns on one or on each front. Also, enneastylar.

decastyle
Having 10 columns on one or on each front.

dodecastyle
Having 12 columns on one or either front. Also, dodecastylar, duodecastyle.

intercolumniation
The space between two adjacent columns, usually the clear space between the lower parts of the shafts, measured in diameters. Also, a system for spacing columns in a colonnade based on this measurement.

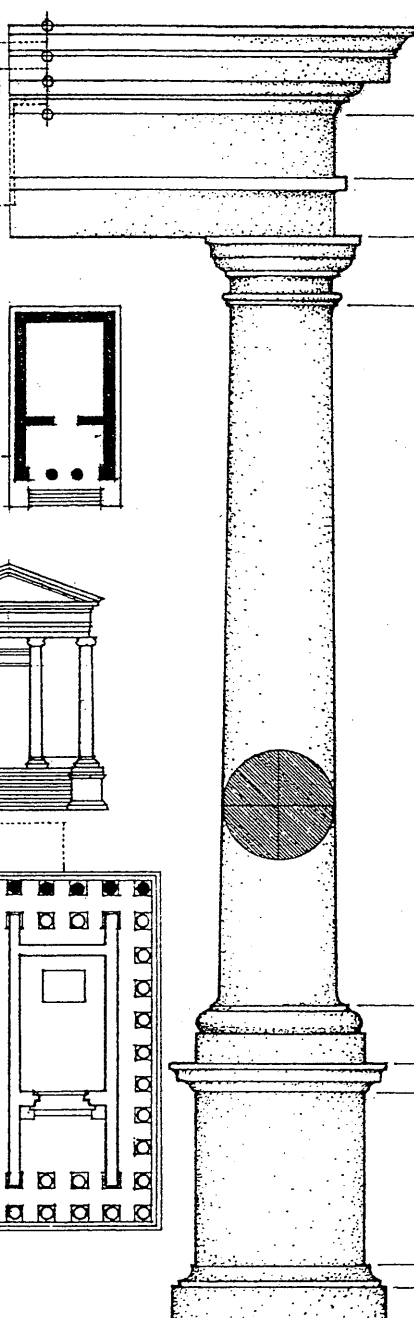

cornice
The uppermost member of a classical entablature, consisting typically of a cymatium, corona, and bed molding.

frieze
The horizontal part of a classical entablature between the cornice and architrave, often decorated with sculpture in low relief.

architrave
The lowermost division of a classical entablature, resting directly on the column capitals and supporting the frieze.

capital
The distinctively treated upper end of a column, pillar, or pier, crowning the shaft and taking the weight of the entablature or architrave.

shaft
The central part of a column or pier between the capital and the base.

base
The lowermost portion of a wall, column, pier, or other structure, usually distinctively treated and considered as an architectural unit.

cornice or cap
dado
The part of a pedestal between the base and the cornice or cap. Also called die.

base molding
plinth
The usually square slab beneath the base of a column, pier, or pedestal.

Any of five styles of classical architecture characterized by the type and arrangement of columns and entablatures employed, as the Doric, Ionic, Corinthian, Tuscan, and Composite orders.

entablature
The horizontal section of a classical order that rests on the columns, usually composed of a cornice, frieze, and architrave.

column
A cylindrical support in classical architecture, consisting of a capital, shaft, and usually a base, either monolithic or built up of drums the full diameter of the shaft.

pedestal
A construction upon which a column, statue, memorial shaft, or the like, is elevated, usually consisting of a cornice or cap, a dado, and a base.


pycnostyle
Having an intercolumniation of $1\frac{1}{2}$ diameters.

systyle
Having an intercolumniation of two diameters.

eustyle
Having an intercolumniation of $2\frac{1}{4}$ diameters.

diastyle
Having an intercolumniation of three diameters.

araeostyle
Having an intercolumniation of four diameters. Also, araeostyle.




accouplement
The placement of two columns or pilasters very close together.

preda
 $\frac{1}{2}$ 2 $\frac{2}{3}$ 4

ORDER

Doric order

The oldest and simplest of the five classical orders, developed in Greece in the 7th century B.C. and later imitated by the Romans, characterized by a fluted column having no base, a plain cushion-shaped capital supporting a square abacus, and an entablature consisting of a plain architrave, a frieze of triglyphs and metopes, and a cornice, the corona of which has mutules on its soffit. In the Roman Doric order, the columns are more slender and usually have bases, the channeling is sometimes altered or omitted, and the capital consists of a bandlike necking, an echinus, and a molded abacus.

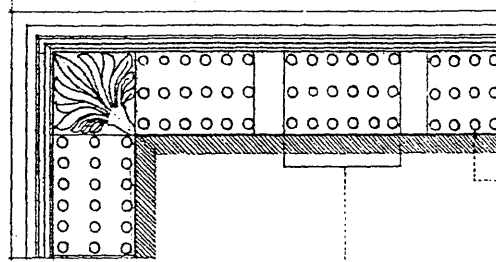

soffit

The underside of an architectural element, as an arch, beam, cornice, or staircase.

gutta

One of a series of small, droplike ornaments, attached to the undersides of the mutules and regulae of a Doric entablature. Also called drop.

mutule

A projecting flat block under the corona of a Doric cornice, corresponding to the modillion of other orders.

triglyph

One of the vertical blocks separating the metopes in a Doric frieze, typically having two vertical grooves or glyphs on its face, and two chamfers or hemiglyphs at the sides.

metope

Any of the panels, either plain or decorated, between triglyphs in the Doric frieze. Also called intertriglyph.

taenia

A raised band or fillet separating the frieze from the architrave on a Doric entablature. Also, tenia.

regula

A fillet beneath the taenia in a Doric entablature, corresponding to a triglyph above and from which guttae are suspended. Also called guttae band.

abacus

The flat slab forming the top of a column capital, plain in the Doric style, but molded or otherwise enriched in other styles.

echinus

The prominent circular molding supporting the abacus of a Doric or Tuscan capital.

necking

The upper part of a column, just above the shaft and below the projecting part of the capital, when differentiated by a molding, groove, or the omission of fluting.

annulet


An encircling band, molding, or fillet, on a capital or shaft of a column.

fluting

A decorative motif consisting of a series of long, rounded, parallel grooves, as on the shaft of a classical column.

flute

A rounded channel or groove. Also called stria.

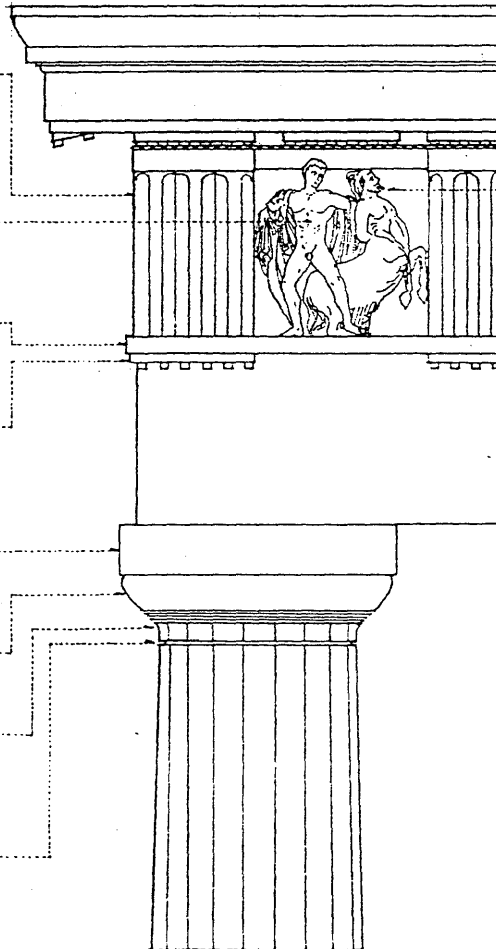

zoophorus

A frieze bearing carved figures of people or animals. Also, zoophorus.

trachelium

That part of the necking between the hypotrachelium and the capital of a classical column.

hypotrachelium


Any member between the capital and the shaft of a classical column.

entasis

A slight convexity given to a column to correct an optical illusion of concavity if the sides were straight.

drum

Any of several cylindrical stones laid one above the other to form a column or pier.

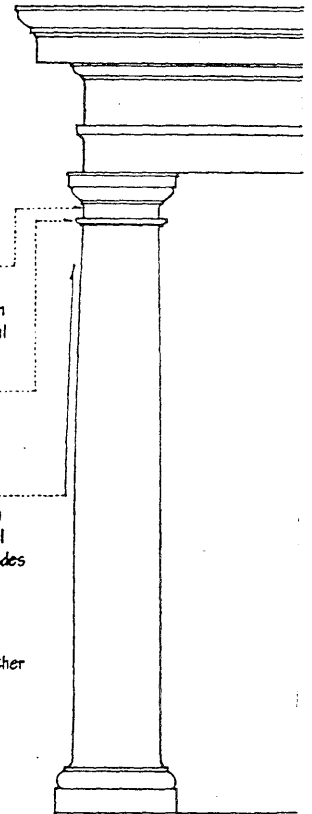

Tuscan order

A classical order of Roman origin, basically a simplified Roman Doric characterized by an unfluted column and a plain base, capital, and entablature having no decoration other than moldings.

egg and dart

An ornamental motif for enriching an ovolo or echinus, consisting of a closely set, alternating series of oval and pointed forms. Also called egg and tongue.

dentil

Any of a series of closely spaced, small, rectangular blocks forming a molding or projecting beneath the coronas of Ionic, Corinthian, and Composite cornices.

fascia

One of the three horizontal bands making up the architrave in the Ionic order.

Attic base

A base to a classical column, consisting of an upper and a lower torus separated by a scotia between two fillets.

scotia

A deep concave molding between two fillets. Also called trochilus.

torus

A large convex, semicircular molding, commonly found directly above the plinth of the base of a classical column.

Ionic order

A classical order that developed in the Greek colonies of Asia Minor in the 6th century B.C., characterized esp. by the spiral volutes of its capital. The fluted columns typically had molded bases and supported an entablature consisting of an architrave of three fascias, a richly ornamented frieze, and a cornice corbeled out on egg-and-dart and dentil moldings. Roman and Renaissance examples are often more elaborate, and usually set the volutes of the capitals 45° to the architrave.

volute

A spiral, scroll-like ornament, as on the capitals of the Ionic, Corinthian, and Composite orders.

cathetus

The vertical guideline through the eye of a volute in an Ionic capital, from which the spiral form is determined.

echinus

The circular molding under the cushion of an Ionic capital between the volutes, usually carved with an egg-and-dart pattern. Also called cymatium.

fillet

A narrow part of the surface of a column left between adjoining flutes.

apophyge

A small, concave curve joining the shaft of a classical column to its base. Also called apophysis.

modillion

An ornamental bracket, usually in the form of a scroll with acanthus, used in series beneath the corona of a Corinthian, Composite, or Roman Ionic cornice.

helix

A spiral ornament, as any of the volutes issuing from a cauliculus in a Corinthian capital.

cauliculus

Any of the ornamental stalks rising between the acanthus leaves of a Corinthian capital, from which the volutes spring. Also called caulcole.

bell

The underlying part of a foliated capital, between the abacus and neck molding.

acanthus

An ornament, as on the Corinthian capital, patterned after the large, toothed leaves of a Mediterranean plant of the same name.

Composite order

One of the five classical orders, popular esp. since the beginning of the Renaissance but invented by the ancient Romans, in which the Corinthian order is modified by superimposing four diagonally set Ionic volutes on a bell of Corinthian acanthus leaves.

Corinthian order

The most ornate of the five classical orders, developed by the Greeks in the 4th century B.C. but used more extensively in Roman architecture, similar in most respects to the Ionic but usually of slenderer proportions and characterized esp. by a deep bell-shaped capital decorated with acanthus leaves and an abacus with concave sides.

ORNAMENT

An accessory, article, or detail that lends grace or beauty to something to which it is added or of which it is an integral part.

pictograph

A pictorial sign or symbol.

graffito




An ancient drawing or writing scratched on stone, plaster, or other hard surface.

graffiti

Inscriptions or drawings spray-painted or sketched on a public surface, as a sidewalk or wall of a building.

sgraffito

Decoration produced by cutting or scratching through a surface layer of paint or plaster to reveal a ground of contrasting color.

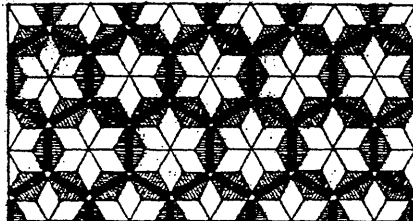

mosaic



A picture or decorative pattern made by inlaying small, usually colored pieces of tile, enamel, or glass in mortar.

tessera

One of the small pieces of colored marble, glass, or tile used in mosaic work.

smalto

Colored glass or enamel, esp. in the form of minute squares, used in mosaic work.

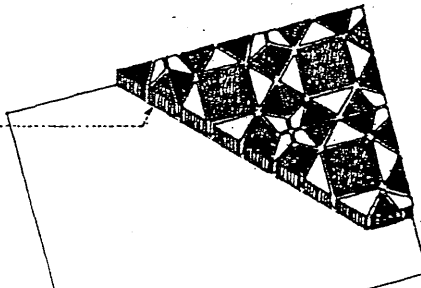

opus sectile

Any mosaic of regularly cut material.

opus Alexandrinum

A form of opus sectile having a geometric pattern formed with few colors, as black and white, or dark green and red.

opus vermiculatum

A mosaic of tessera arranged in waving lines resembling the form or tracks of a worm.

Florentine mosaic

A mosaic made by inlaying fine, delicately colored stones into a white or black marble surface.

relief

The projection of a figure or form from the flat background on which it is formed.

cavo-relievo

Sculptural relief in which the highest points of the modeled forms are below or level with the original surface. Also called sunk relief.

alto-relievo

Sculptural relief in which the modeled forms project from the background by at least half their depth. Also called high relief.

mezzo-relievo


Sculptural relief intermediate between high relief and bas-relief. Also called demirelief, half relief.

bas-relief

Sculptural relief that projects very slightly from the background. Also called basso-relievo, low relief.

anaglyph

An ornament carved or embossed in low relief.



appliqué

A decoration or ornament made by cutting out a design and fastening it to a larger piece of material.

inlay

To decorate by setting pieces of wood, ivory, or the like into a surface, usually at the same level.

emboss

To raise, mold, or carve a surface design in relief.

engrave

To carve, cut, or etch designs on a hard surface, as of metal, stone, or the end grain of wood.

intaglio


A figure or design incised into the surface of a stone or metal plate so that an impression yields a figure in relief.

openwork

Ornamental or structural work having a latticelike nature or showing openings through its substance.

filigree

Ornamental openwork of delicate or intricate design. Also, filagree.



pastiche

An artistic composition consisting of forms or motifs borrowed from different sources.

postiche

Artificial counterfeit, or false, as an architectural ornament that is added superfluously or inappropriately.

star

A conventional figure usually having five or more points radiating from a center, often used as an ornament and symbol.

Star of David

A hexagram used as a symbol of Judaism. Also called Magen David, Mogen David.

hexagram

A six-pointed starlike figure, formed by extending each of the sides of a regular hexagon into equilateral triangles.

glory

A ring, circle, or surrounding radiance of light, as a halo, nimbus, or aureole.

halo

A disk or ring of radiant light around or above the head, traditionally symbolizing the sanctity of a divine or sacred personage in religious paintings and sculptures. Also called nimbus.

aureole

A circle of light or radiance surrounding the head or body in the representation of a sacred personage.

vesica piscis

An elliptical, pointed figure used esp. in early Christian art as an emblem of Christ. Also called mandorla.

Chi-Rho

A Christian monogram and symbol formed by superimposing the first two letters of the Greek word for Christ. Also called chrismon.

table

A raised or sunken rectangular panel on a wall, distinctively treated or ornamented with inscriptions, painting, or sculpture.

tablet

A flat slab or plaque having a surface suitable for or bearing an inscription, carving, or the like.

medallion

A usually oval or circular tablet, often bearing a figure or ornament in relief.

cartouche

An oval or oblong, slightly convex surface, usually surrounded with ornamental scrollwork, for receiving a painted or low-relief decoration. Also, cartouch.

grotesque

A decorative style characterized by the fantastic shaping and combining of incongruous human and animal forms with foliage or similar figures, often distorting the natural into caricature or absurdity.

antic

A grotesque sculpture of animal, human, or foliated forms, as a gargoyle.

mask

An often grotesque representation of a head or face, used as an architectural ornament. Also called mascarón.

griffin

A mythological animal typically having the head and wings of an eagle and the body and tail of a lion. Also, griffon, gryphon.

griffe

An ornament projecting from the round base of a column toward a corner of a square or polygonal plinth. Also called spur.

ballflower

A medieval English ornament suggesting a flower of three or four petals enclosing and partially concealing a ball.

cross

An object or figure consisting essentially of an upright and a transverse piece at right angles to each other, often used as a symbol of Christianity.

Latin cross

A cross having an upright or vertical shaft crossed near the top by a shorter horizontal bar.

Celtic cross

A cross shaped like a Latin cross and having a ring about the intersection of the shaft and crossbar.

Greek cross

A cross consisting of an upright crossed in the middle by a horizontal of the same length.

Jerusalem cross












A cross whose four arms each terminate in a crossbar, often with a small Greek cross centered in each quadrant.

Maltese cross

A cross formée having the outer face of each arm indented in a V.

cross formée

A cross having arms of equal length, each expanding outward from the center.



ORNAMENT

motif

A distinctive and recurring shape, form, or color in a design.

checker

To mark or decorate with a squared pattern.

reticulate

Resembling or covered with a network of regularly intersecting lines.

diaper

A pattern of small, repeated figures connecting or growing out of one another, originally used in the Middle Ages in weaving silk and gold.

imbrication

A pattern or design resembling the regular overlapping of tiles or shingles.

herringbone

A pattern consisting of rows of short, parallel lines which in any two adjacent rows slant in opposite directions, used in masonry, parquetry, and weaving.

chevron

A V-shaped pattern used in heraldry and as ornamentation.

dancette

An ornamental zigzag, as in a molding.

fret

A decorative design contained within a band or border, consisting of repeated, often geometric figures. Also called key pattern.

meander

A running ornament consisting of an intricate variety of fret or fretwork.

guilloche

An ornamental border formed of two or more interlaced bands around a series of circular voids.

dentil band

A molding occupying the position of a row of dentils, and often carved to resemble one.

Venetian dentil

Any of a series of small rectangular blocks alternating with sloping surfaces on an archivolt or molding.

scroll

An ornament having a spiral or convoluted form resembling a partly or loosely rolled parchment.

Vitruvian scroll












A series of scrolls forming a stylized wave pattern. Also called Vitruvian wave, wave scroll.

banderole

A sculptured band resembling a long ribbon or scroll, adapted to receive an inscription. Also, banderol, bandrole.

strapwork

Ornamentation composed of folded, crossed, and interlaced bands, sometimes cut with foliations.



foliated

Ornamented with foils or representations of foliage. Also, foliate.

wreath

A decorative band or garland of flowers, foliage, or other ornamental material.

festoon

A decorative representation of a string or garland of flowers, foliage, ribbon, or the like, suspended in a curve between two points.

fleur-de-lis

A stylized three-petaled iris flower tied by an encircling band, used as the heraldic bearing of the royal family of France. Also, fleur-de-lys.

lotus

A representation of various aquatic plants in the water lily family, used as a decorative motif in ancient Egyptian and Hindu art and architecture.

anthemion

An ornament of honeysuckle or palm leaves in a radiating cluster. Also called honeysuckle ornament.

palmette

A stylized palm leaf shape used as a decorative element in classical art and architecture.

rosette

An ornament having a generally circular combination of parts resembling a flower or plant. Also, rose.

dogtooth

Any of a series of closely spaced, pyramidal ornaments, formed by sculptured leaves radiating from a raised center, used esp. in early English Gothic architecture.

arabesque

A complex and ornate design that employs flowers, foliage, and sometimes animal and geometric figures to produce an intricate pattern of interlaced lines.

calf's-tongue

A molding having pendant, tongue-like elements carved in relief against a flat or curved surface.

scallop

Any of a series of curved projections forming an ornamental border.

purfler

To decorate a shrine or tabernacle with miniature architectural forms so as to produce a lay effect.

arris

A sharp edge or ridge formed by two surfaces meeting at an exterior angle. Also called *piend*.

bullnose

A rounded or obtuse exterior angle. Also, bull's-nose.

splay

A surface that makes an oblique angle with another.

fillet

A narrow flat molding or area, raised or sunk to separate larger moldings or areas. Also called *list*.

billet

Any of a series of closely spaced cylindrical forms ornamenting a hollow molding or cornice.

cove

A concave surface or molding, esp. at the transition from wall to ceiling.

cavetto

A concave molding having an outline that approximates a quarter circle.

congé

A concave molding having the form of a quadrant curving away from a given surface and terminating perpendicular to a fillet parallel to that surface. Also, *congee*.

ogee

A molding having a profile of a double curve in the shape of an elongated S. Also called *gula*.

cyma

A projecting molding having the profile of a double curve formed by the union of a convex line and a concave line.

cyma recta

A cyma having the concave part projecting beyond the convex part. Also called *Doric cyma*.

cyma reversa

A cyma having the convex part projecting beyond the concave part. Also called *Lesbian cyma*.

beak

A small pendant molding forming a drip and casting a deep shadow, as on the soffit of a cornice. Also called *bird's beak*.

brace molding

A projecting molding having a profile formed by two ogees symmetrically disposed about an arris or fillet. Also called *keel*.

profile

An outline of an object formed on a vertical plane passed through the object at right angles to one of its principal horizontal dimensions.

molding

Any of various long, narrow, ornamental surfaces with uniform cross sections and a profile shaped to produce modulations of light, shade, and shadow. Almost all moldings derive at least in part from wood prototypes, as those in classical architecture, or stone prototypes, as those in Gothic architecture. By extension, the term now refers to a slender strip of wood or other material having such a surface and used for ornamentation and finishing. Also, *mold*, *moulding*.

half round

A molding having a semicircular cross section.

quarter round

A convex molding whose section is a quarter circle.

ovolo

A convex molding having a profile approximating a quarter section of a circle or ellipse.

bollet

A convex, rounded molding. Also, *boutel*, *bowtel*.

gadroon

A convex molding elaborately carved with reeding or indented with notches. Also, *godroon*.

Aaron's rod

A convex molding having pointed leaves or scrollwork emerging at regular intervals.

cabie molding

A convex molding having the form of a rope.

bead

A small convex molding usually having a continuous cylindrical surface.

astragal

A small convex molding usually semicircular in section.

baguette

A small convex molding of semicircular section, smaller than an astragal. Also, *baguet*.

bead and reel

A convex molding having the form of disks alternating with spherical or elongated beads.

pearl molding

A molding having the form of a row of pearls or beads. Also called *bead molding*, *Paternoster*.

reeding

A parallel set of small convex moldings for ornamenting a plane or curved surface.

ORNAMENT

trim

The finished woodwork or the like used to decorate, border, or protect the edges of openings or surfaces.

cornice

A continuous, molded projection that crowns a wall or other construction, or divides it horizontally for compositional purposes.

picture mold

A horizontal molding near a ceiling from which pictures can be suspended. Also called picture rail.

plate rail

A rail or narrow shelf fixed along a wall and grooved to hold plates, esp. for ornament or display.

chair rail

A horizontal molding on an interior wall for preventing the backs of chairs from rubbing against and damaging the wall surface.

base molding

An ornamental molding above the plinth of a pedestal, pillar, or wall.

baseboard

A board or molding concealing the joint between an interior wall and the floor. Also called mopboard, skirt.

shoe

A small molding, as a quarter round, covering the joint between a baseboard and the floor. Also called base shoe.

broken pediment



A pediment having its raking cornices interrupted at the crown or apex, the gap often being filled with an urn, a cartouche, or other ornament.

architrave

A molded or decorative band framing a rectangular door or window opening.



return

The continuation of a molding, projection, or other part at an angle, usually 90°, to the main part.



crown molding

Any ornamental molding terminating the top of a structure or decorative feature.

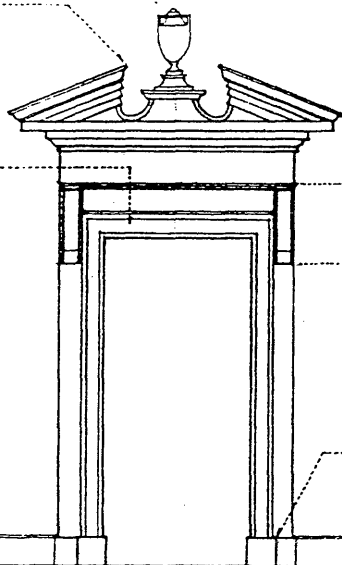

tabernacle frame

A frame around a doorway or niche, having two columns or pilasters on a base supporting a pediment.

ancon

A bracket or console used in classical architecture to support a cornice or the entablature over a doorway or window.

console

An ornamental bracket, usually formed with scrolls and higher than its projection.

stop

A feature terminating a molding or chamfer.

plinth block

A plinth for stopping the architrave of a door or window above the floor.

plinth

A flat, plain member at the bottom of an architrave, dado, or baseboard.

plant

To attach or fasten a molding to a surface.



kerfing

Making a series of parallel saw cuts partway through the thickness of a piece of wood to enable the piece to bend toward the kerfed side.




frieze

A decorative band, as one along the top of an interior wall, immediately below the cornice, or a sculptured one in a stringcourse on an outside wall.

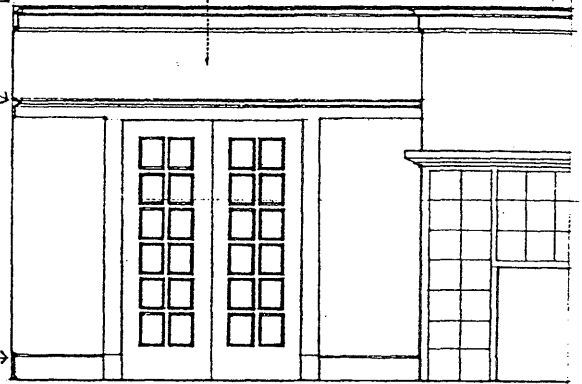

swan's neck pediment

A broken pediment having an outline formed by a pair of S-curves tangent to the horizontal cornice at the ends of the pediment and rising to a pair of scrolls on either side of the center, where a finial often rises between the scrolls.



coronet

A pedimental ornament wrought in relief over a window or door.

gloss
The degree of surface luster of a dried paint film, ranging in decreasing order of gloss from high gloss, semigloss, eggshell, to flat.

high gloss
Having a brilliant sheen or luster.

enamel
Any paint or varnish drying to a very smooth, hard, usually glossy finish.

semigloss
Having a moderate, satiny luster, producing a finish midway between high gloss and eggshell. Also called satin finish.

eggshell
Having little or no gloss, producing a finish midway between semigloss and flat.

flat
Without gloss or sheen.


colorfast
Having color that will not fade or run with washing, age, or exposure to light, esp. sunlight.

actinic ray
A ray of light, as ultraviolet, that produces photochemical effects, as the yellowing, chalking, and disintegration of paint coatings.

photochemical
Of or pertaining to the chemical action of radiant energy, esp. light.

coverage
A measure of the area over which a gallon of paint may be spread at a given thickness, usually expressed in square feet per gallon.

hiding power
The ability of a paint film to conceal any marks, pattern, or color on the surface to which it is applied. Also called covering power.



anticorrosive paint
A paint or primer specially formulated with rust-inhibiting pigments to prevent or reduce the corrosion of metal surfaces. Also called rust-inhibiting paint.

fire-retardant paint
A paint specially formulated with silicone, polyvinyl chloride, or other substance to reduce the flame-spread of a combustible material.

heat-resistant paint
A paint specially formulated with silicone resins to withstand high temperatures.

binder
The nonvolatile part of a paint vehicle that bonds particles of pigment into a cohesive film during the drying process.

solvent
The volatile part of a paint vehicle that evaporates during the drying process.

thinner
A volatile liquid used to dilute paint or varnish to the desired or proper consistency for ease in application.

mineral spirits
A volatile distillation of petroleum, used as a solvent and thinner for paints and varnishes.

turpentine
A colorless, volatile oil obtained by distilling oleoresin from various conifers and used as a thinner and solvent for paints and varnishes. Also called oil of turpentine, spirits of turpentine.

paint system
A combination of one or more coatings selected for compatibility with each other and the surface to which they are applied, as well as suitability for the expected exposure and desired decorative effect.

glaze coat
A thin coat of transparent color applied to enhance the color of a painted surface.

mistcoat
A thin, sometimes pigmented coat applied to a finish coat to improve its luster.

topcoat
The final coat of paint applied to a surface. Also called finish coat.

undercoat
A primer or intermediate coat applied to hide the color of the substrate and improve adhesion of the topcoat.

ground coat
A primer or basecoat of paint intended to show through a topcoat. Also called ground color.

basecoat
A first coat of paint or other liquid finish applied to a surface.

primer
A basecoat applied to a surface to improve the adhesion of subsequent coats of paint or varnish. Also called prime coat.

sealer
A basecoat applied to a surface to reduce the absorption of subsequent coats of paint or varnish, or to prevent bleeding through the finish coat.

pigment
A finely ground, insoluble substance suspended in a liquid vehicle to impart color and opacity to a paint.

vehicle
A liquid in which pigment is dispersed before being applied to a surface, to control consistency, adhesion, gloss, and durability.

drying oil
Any of various oil, organic liquids, as linseed oil, that oxidizes and hardens to form a tough elastic film when exposed in a thin layer to air.

alkyd resin
Any of a group of synthetic resins derived from a polyvalent alcohol in reaction with an organic acid, used chiefly in adhesives and paints.

latex
A water emulsion of synthetic rubber or plastic globules obtained by polymerization and used in paints and adhesives.

dye
A soluble coloring material that imparts color by absorption.

water stain
A penetrating stain made by dissolving dye in a water vehicle.

spirit stain
A penetrating stain made by dissolving dye in an alcohol or spirit vehicle.

oil stain
A stain made by dissolving dye or suspending pigment in a drying oil or oil varnish vehicle.

copal
A hard, lustrous resin obtained from various tropical trees, used chiefly in making varnishes.

spar varnish
A durable, weather-resistant varnish made from durable resins and linseed or tung oil. Also called marine varnish.

polyurethane varnish
An exceptionally hard, abrasion-resistant, and chemical-resistant varnish made from a plastic resin of the same name.

lac
A resinous secretion of the female of the lac insect, used in making shellac.

Chinese lacquer
A natural varnish obtained from an Asian sumac, used to produce a highly polished, lustrous surface on wood. Also called Japanese lacquer.

A mixture of a solid pigment suspended in a liquid vehicle, applied as a thin, usually opaque coating to a surface for protection and decoration.

oil paint
A paint in which the vehicle is a drying oil.

alkyd paint
A paint in which the vehicle is an alkyd resin.

epoxy paint
A paint having an epoxy resin as a binder for increased resistance to abrasion, corrosion, and chemicals.

latex paint
A paint having a latex binder that coalesces as water evaporates from the emulsion. Also called rubber-base paint, water-base paint.

stain
A solution of dye or suspension of pigment in a vehicle, applied to penetrate and color a wood surface without obscuring the grain.

penetrating stain
A stain that penetrates a wood surface, leaving a very thin film on the surface.

pigmented stain
An oil stain containing pigments capable of obscuring the grain and texture of a wood surface. Also called opaque stain.

varnish
A liquid preparation consisting of a resin dissolved in an oil (oil varnish) or in alcohol (spirit varnish), that when spread and allowed to dry forms a hard, lustrous, usually transparent coating.

shellac
A spirit varnish made by dissolving purified lac flakes in denatured alcohol. Also called shellac varnish.

lacquer
Any of various clear or colored synthetic coatings consisting of nitrocellulose or other cellulose derivative dissolved in a solvent that dries by evaporation to form a high-gloss film.

PLASTER

A composition of gypsum or lime, water, sand, and sometimes hair or other fiber, applied in a pasty form to the surfaces of walls or ceilings in a plastic state and allowed to harden and dry.

gypsum plaster
A basecoat plaster made of calcined gypsum mixed with sand, water, and various additives to control its setting and working qualities.

calcined gypsum
Gypsum heated to drive off most of its chemically combined water.

plaster of Paris
Calcined gypsum in white, powdery form, containing no additives to control the set, used as a base for gypsum plaster, as an additive in lime plaster, and as a material for making ornamental casts.

gypsum
A soft mineral, hydrated calcium sulfate, used as a retarder in portland cement and in the making of gypsum plaster.

alabaster
A finely granular form of pure gypsum, often white and translucent, used for ornamental objects and work.

lime plaster
A mixture of lime, sand, and sometimes a fiber, used as a basecoat plaster.

cement temper
The addition of portland cement to lime plaster to improve its strength and durability.

three-coat plaster
Plasterwork applied in three successive coats, a scratch coat followed by a brown coat and a finish coat.

two-coat plaster
Plasterwork applied in two coats, a basecoat followed by a finish coat.

finish coat
The final coat of plaster, serving either as a finished surface or as a base for decoration.

skim coat
A thin leveling or finish coat of plaster.

brown coat
A roughly finished, leveling coat of plaster, either the second coat in three-coat plaster or the base coat in two-coat plaster applied over gypsum lath or masonry. Also called floating coat.

basecoat
Any plaster coat applied before the finish coat.

scratch coat
The first coat in three-coat plaster, which is scratched to provide a better bond for the second or brown coat.

gauged plaster
A finish coat in plastering, consisting of lime putty to which gauging plaster is added to control the setting time and counteract shrinkage.

gauging plaster
A specially ground gypsum plaster for mixing with lime putty, formulated to provide either a quick-set or a slow-set for a finish coat of plaster.

hard finish
A finish coat of lime putty and Keene's cement or gauging plaster, troweled to a smooth, dense finish.

lime putty
Quicklime slaked with sufficient water to form a thick paste. Also called plasterer's putty.

Keene's cement
Trademark for a brand of white anhydrous gypsum plaster that produces an exceptionally strong, dense, crack-resistant finish.

anhydrous
Having all water of crystallization removed.

white coat
A finish coat of lime putty and white gauging plaster, troweled to a smooth, dense finish.

veneer plaster
A ready-mixed gypsum plaster applied as a very thin, one- or two-coat finish over a veneer base. Also called thin-coat plaster.

acoustical plaster
A low-density plaster containing vermiculite or other porous material to enhance its ability to absorb sound.

hardwall
A basecoat of neat gypsum plaster.

neat plaster
A gypsum basecoat plaster having no admixture except hair or other fiber, used for on-the-job mixing with aggregates.


wood-fibered plaster
A mill-mixed gypsum basecoat plaster containing coarse cellulose fibers for greater bulk, strength, and fire resistance, used neat or mixed with sand to obtain a basecoat of superior hardness.

bond plaster
A gypsum basecoat plaster containing a small amount of lime and chemical additives to improve the bond of succeeding coats to dense, nonporous surfaces.

gypsum-perlite plaster
A gypsum basecoat plaster containing perlite as an aggregate to reduce its weight and increase its thermal and fire resistance.

gypsum-vermiculite plaster
A gypsum basecoat plaster containing vermiculite as an aggregate to reduce its weight and increase its thermal and fire resistance.


ready-mixed plaster
Plaster that is formulated and dry-mixed by the manufacturer, requiring only the addition of water at the job site.

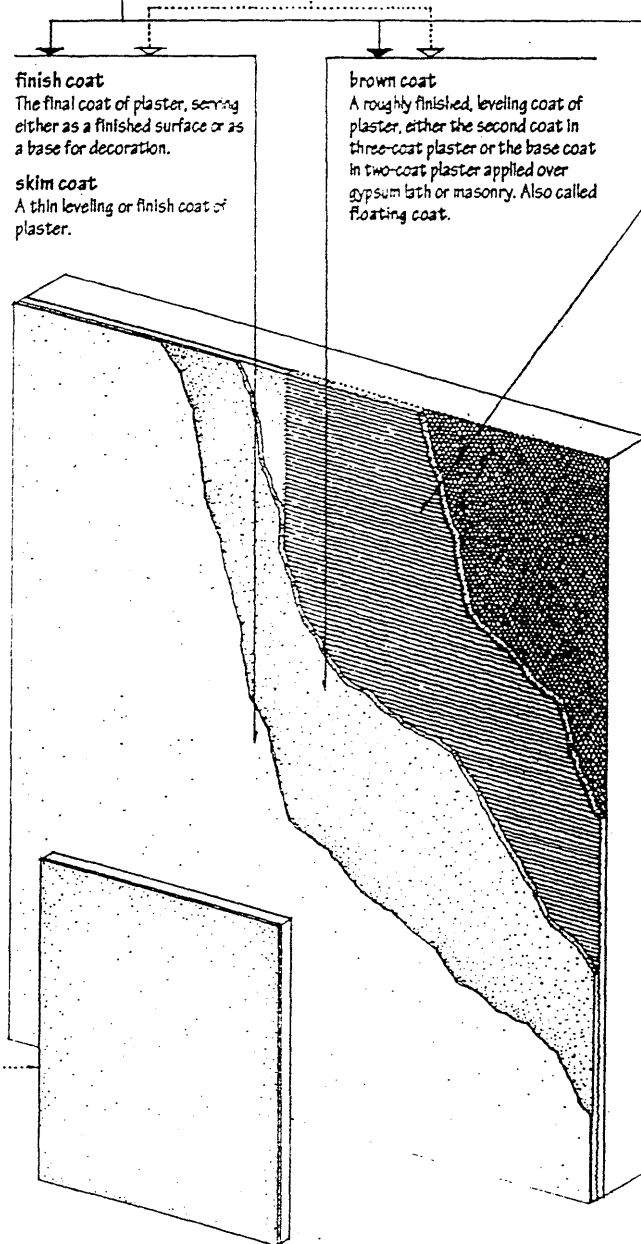

rendering coat
The first coat of plaster on a masonry wall. Also called rough coat.

spatter dash
A wet, rich mix of portland cement and sand thrown onto a smooth brick or concrete surface and allowed to harden to provide a key for a first coat of plaster.

key
A grooving or roughness applied to a surface to improve its bond with another surface.

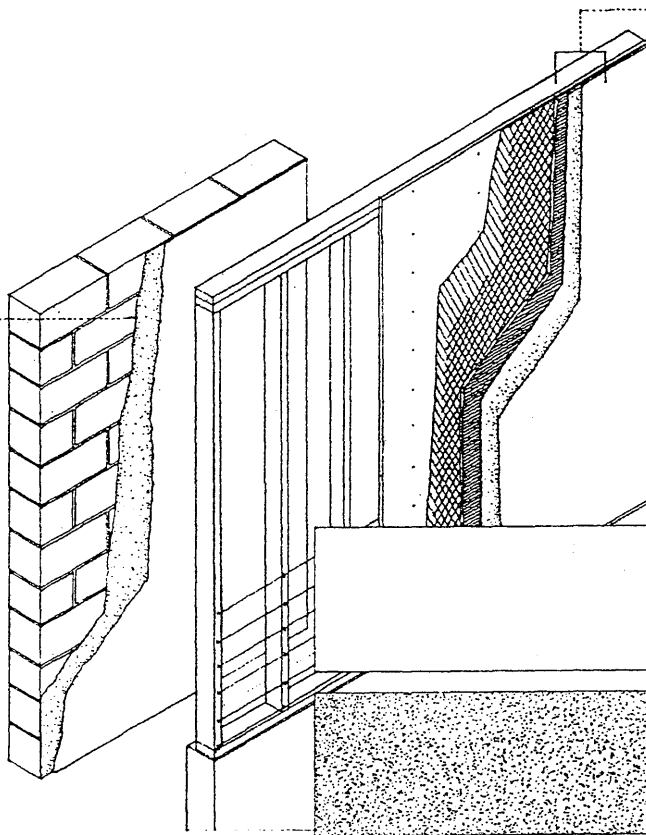

stucco

A coarse plaster composed of portland or masonry cement, sand, and hydrated lime, mixed with water and applied in a plastic state to form a hard covering for exterior walls.

portland cement stucco

Stucco made with masonry cement or with portland cement mixed with less than 50% by volume of lime.

portland cement-lime stucco

Portland cement stucco to which lime is added in an amount greater than 50% by volume to improve the plasticity of the mix.

albarium

A stucco used in ancient times, made from powdered marble and lime mortar and often polished.

intonaco

A finish coat of plaster made with white marble dust to receive a fresco.

scagliola

Plasterwork imitating granite or marble.

sand-float finish

A textured finish coat of plaster containing sand, leveled and smoothed with a float.

float finish

A fine-textured stucco finish produced by smoothing with a carpet or rubber-faced float.

combed finish

A stucco finish produced by dragging a serrated tool across the stucco surface before it sets. Also called dragged finish.

dash-troweled finish

A stucco finish produced by troweling the high spots of a dashed stucco surface before it sets.

stipple-troweled finish

A stucco finish produced by troweling the high spots of a stippled stucco surface before it sets.

daubing

The process of giving a wall a rough finish by throwing plaster against it.

pebble dash

An exterior wall finish produced by throwing and pressing small pebbles into unset stucco.

roughcast

An exterior wall finish composed of a stucco mixed with fine pebbles and dashed against a wall. Also called spatter dash.

molding plaster



A plaster used in ornamental work, consisting of finely ground gypsum and hydrated lime.

running mold

A sheet-metal template cut to the desired profile, backed with wood, and pushed along between temporary grounds or rules to form a plaster molding along the angle between a wall and ceiling. Also called horsed mold.






horse

The wooden support for the sheet-metal template of a running mold.

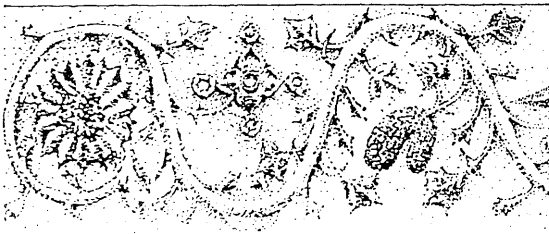

parquetry

Fine ornamental plasterwork, esp. exterior plasterwork bearing designs in low relief. Also, parget.



PLASTER

lath

Any of a number of suitable surfaces for receiving plasterwork, as gypsum lath, metal lath, wood lath, masonry, or brickwork.

wood lath

A thin, narrow strip of wood used with other strips to form latticework, a backing for plaster or stucco, or a support for slates or other roofing material.

furring

The attaching of wood strips or metal channels to a wall or other surface, as to provide an even base for lath or a finish material, or to provide an air space between a wall and a finish material.

metal lath

A plaster base fabricated of expanded metal or of wire fabric, painted or galvanized for corrosion resistance.

expanded-metal lath

Metal lath fabricated by slitting and expanding a sheet of steel alloy to form a stiff network with diamond-shaped openings.

rib lath

An expanded-metal lath having V-shaped ribs to provide greater stiffness and permit wider spacing of the supporting framing members.

self-centering lath

A rib lath used over steel joists as formwork for concrete slabs, or as lathing in solid plaster partitions.

self-furring lath

Expanded-metal, welded-wire, or woven-wire lath that is dimpled to space itself from the supporting surface, creating a space for the keying of plaster or stucco.

wire lath

Welded- or woven-wire fabric, usually with a paper backing, used as a base for plaster or stucco.

paper-backed lath

Expanded-metal or wire lath having a backing of perforated or building paper, used as a base for plaster or stucco.

corner lath

A strip of expanded-metal lath bent to form a 90° angle, used at an internal corner to prevent cracks in plastering. Also called corner reinforcement.

strip lath

A narrow strip of expanded-metal lath for reinforcing joints in gypsum lath or junctures between different types of plaster bases.

scrim

Coarse cotton, fiberglass, or metal mesh, used for bridging and reinforcing a joint or as a base for plastering or painting.

gypsum lath

Gypsum board having an air-entrained core faced with absorbent paper, used as a base for plaster. Also called rock lath.

perforated gypsum lath

Gypsum lath punched with small holes to provide a mechanical key for plaster.

insulating gypsum lath

Gypsum lath having an aluminum foil backing that serves as a vapor retarder and reflective thermal insulator.

veneer base

Gypsum lath having a special paper facing for receiving veneer plaster.

plaster bond

The adhesion of plaster to its base produced by mechanical or chemical means.

mechanical bond

The physical keying of a plaster coat to a plaster base or with another plaster coat roughened by scoring.

bonding agent

A chemical substance applied to a suitable substrate to improve its bond with a succeeding layer.

suction

The absorption of water from a finish coat of plaster by the basecoat or gypsum lath, resulting in a better bond.

ground

A strip of wood or a metal bead used at an opening as a guide for plastering to a given thickness and as a stop for the plasterwork.

screed

A strip of wood, plaster, or metal applied to a surface to be plastered to serve as a guide for making a true surface and plastering to a given thickness.

base screed

A preformed metal screed for separating a plastered surface from another material along the base of a wall.

vented screed

A perforated metal screed for venting a concealed space behind a plastered surface.

expansion screed

A preformed metal screed applied over joints in gypsum lath to control cracking.

control joint

A preformed metal strip installed to relieve shrinkage, temperature, or structural stresses within a large plastered or stuccoed area.

corner bead

A preformed metal strip having two expanded or perforated flanges and variously shaped projecting noses, used as a ground and to strengthen and protect an external angle in plasterwork or a gypsum board surface. Also called angle bead.

bullnose corner bead

A corner bead having a rounded edge.

arch corner bead

A flexible corner bead for forming and reinforcing the curved portion of an arched opening.

casing bead

A preformed metal strip having an expanded or perforated flange and variously shaped ends, used as a ground and to strengthen and reinforce the edges of plasterwork or a gypsum board surface.


square edge

tapered edge

beveled edge

rounded edge

tongue & groove



wallboard


Any of various sheet materials used in covering a wall or ceiling as a substitute for plaster or paneling.

gypsum board

A sheet material having a gypsum core faced with paper on each side, used for covering walls or as lath. Also called drywall, plasterboard.

Sheetrock

Trademark for a brand of gypsum board.

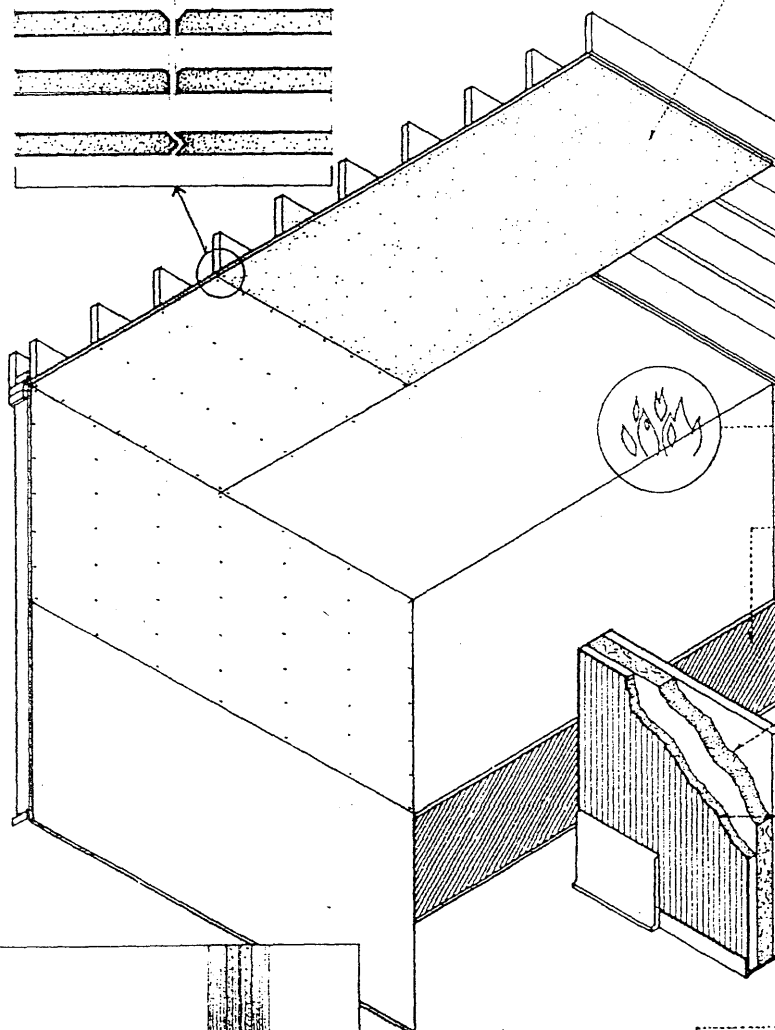

type-X gypsum board

A gypsum board having a core containing additives for increased fire resistance.

backing board

An inexpensive gypsum board used as the base layer in a multilayer assembly for increased rigidity, sound insulation, and fire resistance.

coreboard

A gypsum board 1-in. (25.4 mm) thick, used as a base in solid gypsum-board partitions and for lining shafts.

prefinished gypsum board


A gypsum board having a decorative vinyl or printed paper surface.

joint compound

A pasty compound for embedding joint tape, filling indentations, and finishing the joints in a gypsum-board surface.

joint tape

A strip of paper, paper-faced cotton, or plastic mesh used with joint compound to cover the joints between sheets of gypsum board.




foil-backed gypsum board

Gypsum board having an aluminum foil backing that serves as a vapor retarder and as a reflective thermal insulator when the foil faces a 3/4 in. (19 mm) minimum air space.

gypsum sheathing

A gypsum board having a fire-resistant core and faced with a water-repellent paper, used as exterior sheathing.

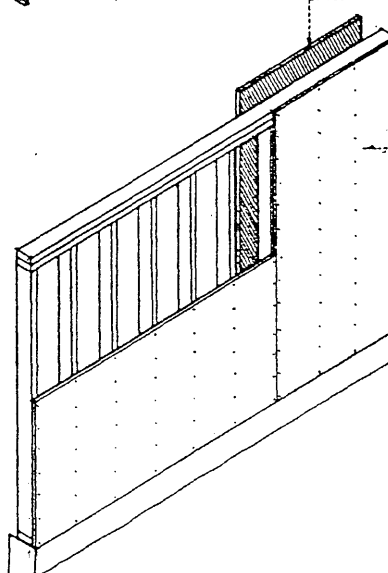

PLASTIC

Any of numerous synthetic or natural organic materials that are mostly thermoplastic or thermosetting polymers of high molecular weight and that can be molded, extruded, or drawn into objects, films, or filaments.

polymerization

A chemical reaction in which the molecules of a monomer combine to form larger molecules that contain repeating structural units of the original molecules.

monomer

A molecule of low molecular weight that can be chemically bound as a unit of a polymer.

polymer

A compound of high molecular weight formed by polymerization and consisting essentially of repeating structural units.

high polymer

A polymer consisting of molecules that are large multiples of monomers.

copolymer

A compound of high molecular weight formed by polymerizing two or more different monomers together.

casting

A method of shaping a plastic object by pouring the material into a mold and allowing it to harden without the use of pressure.

blow molding

A method of forming hollow ware by injecting air under pressure into a molten mass, as of a thermoplastic or glass, and shaping the material within a mold.

injection molding

A method of forming a thermoplastic, thermoset, metal, or ceramic material by rendering it fluid in a heating chamber and then forcing it under high pressure into a closed mold.

compression molding

A method of forming thermosetting plastic by closing a mold on it, forming the material by heat and pressure.

transfer molding

A method of forming thermosetting plastic by softening it in one chamber before it is forced into an adjacent mold where it is cured under heat and pressure.

thermoforming








A method of shaping a thermoplastic sheet by heating and forcing it against the contours of a mold by heat and pressure.

pressure forming

A method of thermoforming a plastic sheet by forcing it against the contours of a mold with compressed air.

vacuum forming

A method of thermoforming a plastic sheet by evacuating the space between the sheet and the contours of a mold.



resin

Any of numerous solid or semisolid organic substances prepared by polymerization and used with fillers, stabilizers, and other components to form plastics.

filler

A relatively inert substance added to modify the bulk, strength, heat resistance, electrical resistance, or working properties of a resin.

stabilizer




A substance added to prevent or retard the degradation of a plastic when exposed to the ultraviolet radiation or other environmental conditions.

plasticizer

Any of various substances added to a resin to increase its workability and flexibility.

catalyst

A substance that causes or accelerates a chemical reaction without itself undergoing a permanent change in composition.



calendering

A method of producing plastic film or sheeting by passing the material between a series of revolving, heated rollers.

sheeting

A thin form of plastic, having a thickness very small in proportion to its length and width.

film

Sheeting having a nominal thickness not greater than 10 mils.

thermoplastic

A plastic capable of softening or fusing when heated without a change in any inherent properties, and of hardening again when cooled.

acrylic resin

Any of a class of thermoplastic resins used for casting or molding plastic parts that are exceptionally transparent, tough, and resistant to weather and chemicals, or as the main ingredient in coatings, adhesives, and caulking compounds.

Lucite

Trademark for a brand of transparent acrylic resin.

Plexiglas

Trademark for a brand of light, transparent, weather-resistant acrylic resin.

polycarbonate

A tough, transparent thermoplastic characterized by its high-impact strength and used for lighting fixtures, safety glazing, and hardware.

Lexan

Trademark for a brand of tough polycarbonate used for shatterproof windows.

polyethylene

A tough, light, and flexible thermoplastic used esp. in the form of sheeting and film for packaging, dampproofing, and as a vapor retarder. Also called polythene.

polypropylene

A tough, thermoplastic that is resistant to heat and chemicals and used for pipe fittings, electrical insulation, and carpeting fibers.

polystyrene

A hard, tough, stable thermoplastic that is easily colored and molded, expanded, or rolled into sheeting.

acrylonitrile-butadiene-styrene

A thermoplastic used for making plastic pipes and hardware products that are tough, rigid, and resistant to heat and chemicals. Abbr.: ABS

vinyl

Any of various tough, flexible plastics made from polyvinyl resin.

polyvinyl resin

Any of a class of thermoplastic resins formed by polymerizing or copolymerizing a vinyl compound. Also called vinyl resin.

polyvinyl chloride

A white, water-insoluble thermoplastic widely used in the manufacture of floor coverings, insulation, and piping. Abbr.: PVC

polyvinyl butyral

A thermoplastic resin used chiefly as the interlayer of safety glass.

nylon

Any of a class of thermoplastics characterized by extreme toughness, strength, and elasticity and capable of being extruded into filaments, fibers, and sheets.

thermosetting plastic

A plastic that becomes permanently rigid when heated and cannot be softened again. Also called **thermoset**.

polyurethane

Any of various thermoplastic or thermosetting resins used in flexible and rigid foams, elastomers, and resins for sealants, adhesives, and coatings.

polyester

Any of a group of thermosetting resins used in the manufacture of plastics and textile fibers.

fiberglass-reinforced plastic

A polyester reinforced with glass fibers and used in translucent roofs and skylights, facings for sandwich panels, and molded plumbing fixtures.

Dacron

Trademark for a brand of strong, wrinkle-resistant polyester fiber.

Mylar

Trademark for a brand of strong, thin polyester film used in photography, recording tapes, and electrical insulation.

epoxy resin

Any of various thermosetting resins capable of forming tight cross-linked polymer structures characterized by toughness, strong adhesion, and high corrosion and chemical resistance, used esp. in surface coatings and adhesives.

melamine resin

Any of a class of thermosetting resins formed by the interaction of melamine and formaldehyde and used for molded products, adhesives, and surface coatings.

phenolic resin

Any of a class of hard, heat-resistant thermosetting resins formed by the condensation of phenol with formaldehyde and used for molded products, adhesives, and surface coatings. Also called **phenoplast**.

Bakelite

Trademark for a brand of dark phenolic resin, invented by Dr. Leo Baekeland in 1916, and used for telephone receivers, radio cabinets, electric insulators, and molded plastic hardware.

urea-formaldehyde resin




Any of various thermosetting synthetic resin made by condensing urea with formaldehyde and used in appliance housings, electrical devices, adhesives, and surface coatings.

service temperature

The maximum temperature at which a plastic can be continuously employed without a noticeable reduction in any of its inherent properties.



softening point

The temperature at which a plastic changes from a rigid to a soft state.

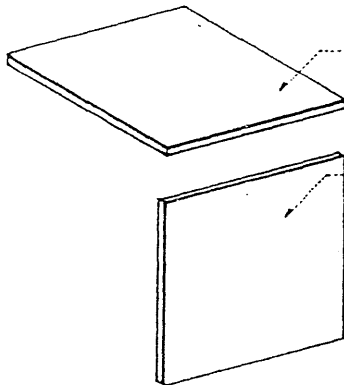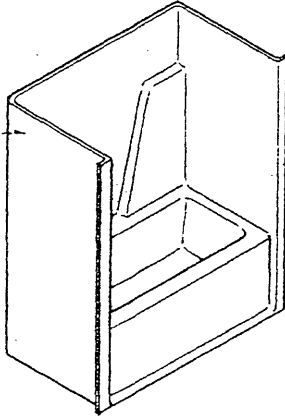

postforming

A method of shaping a fully or partially cured thermosetting laminate over a mold by heat and pressure.

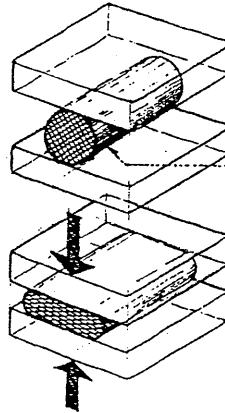

laminate

A product made by uniting two or more layers of material by an adhesive or other means, as plywood and plastic laminate.

plastic laminate

A hard surfacing material consisting of superposed layers of paper impregnated with melamine and phenolic resins, fused together under heat and pressure.

high-pressure laminate

A plastic laminate molded and cured in the range of pressures from 1,200 to 2,000 psi (84 to 140 kg per sq. cm), used for surfacing countertops and cabinetry.

low-pressure laminate

A plastic laminate molded and cured with a maximum pressure of 400 psi (28 kg per sq. m), used in vertical and low-wear applications.

Formica

Trademark for a brand of plastic laminate.

rubber

A material made by chemically treating and toughening natural rubber, valued for its elasticity, nonconduction of electricity, and resistance to shock and moisture.

natural rubber

A highly elastic solid substance, essentially a polymer of isoprene, obtained by coagulating the milky juice of rubber trees and plants. Also called **india rubber**.

foam rubber

A light, spongy, cellular rubber made by foaming latex before vulcanization.

vulcanization

The treatment of rubber with sulfur and heat to impart greater elasticity, strength, and durability.

synthetic rubber

An elastomer similar to natural rubber in properties and uses, produced by the polymerization of an unsaturated hydrocarbon, as butylene or isoprene, or by the copolymerization of hydrocarbons with styrene or butadiene.

elastomer

Any of various polymers having the elastic properties of natural rubber, as butyl rubber or neoprene.

butyl rubber

A synthetic rubber having exceptional resistance to sunlight and unusually low gaseous permeability, produced by polymerizing butylene and used in roofing membranes and waterproofing barriers.

Butyl

Trademark for a brand of butyl rubber.

neoprene


A synthetic rubber characterized by superior resistance to oils and sunlight, and used in paints, roofing membranes, flashing, gaskets, and bearings.

silicone rubber

A rubber made from silicone elastomers and noted for its retention of flexibility, resilience, and tensile strength over a wide temperature range.

silicone

Any of a group of polymers containing alternating silicon and oxygen atoms, characterized by thermal stability, chemical inertness, and extreme water repellence, and used in adhesives, lubricants, protective coatings, and synthetic rubber.

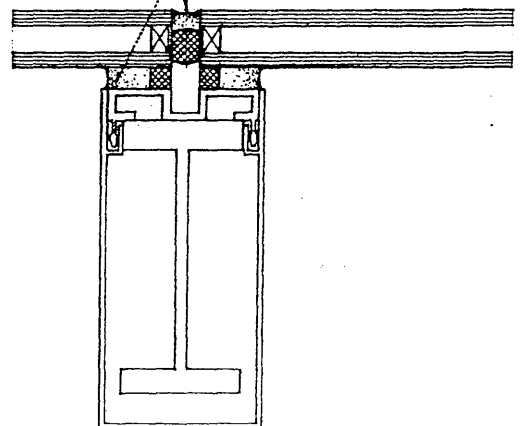

PLATE

A rigid, planar, usually monolithic structure that disperses applied loads in a multidirectional pattern, with the loads generally following the shortest and stiffest routes to the supports.

plate action

The manner in which an applied load is transmitted to the supports of a plate in a multidirectional pattern.

A plate can be envisioned as a series of adjacent beam strips interconnected continuously along their lengths.

As an applied load is transmitted to the supports through bending of one beam strip, the load is distributed over the entire plate by vertical shear transmitted from the deflected strip to adjacent strips.


The bending of one beam strip also causes twisting of transverse strips, whose torsional resistance increases the overall stiffness of the plate. Therefore, while bending and shear transfer an applied load in the direction of the loaded beam strip, shear and twisting transfer the load at right angles to the loaded strip.

continuous plate


A plate extending as a structural unit over three or more supports in a given direction. A continuous plate is subject to lower bending moments than a series of discrete, simply supported plates.

folded plate

A plate structure composed of thin, deep elements joined rigidly along their boundaries and forming sharp angles to brace each other against lateral buckling. The resulting stiffness of the cross section enables a folded plate to span relatively long distances.

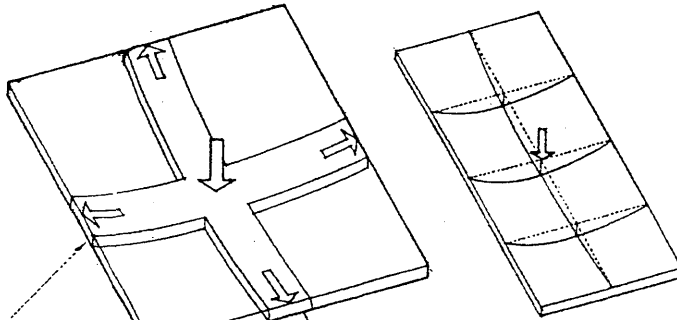


A plate should be square or nearly square to ensure that it behaves as a two-way structure. As a plate becomes more rectangular than square, the two-way action decreases and a one-way system spanning the shorter direction develops since the shorter plate strips are stiffer and carry a greater portion of the load.





isostatic plate

A plate reinforced by a grid of curved ribs which follow the isostatics of the structure.



isostatics


Lines of principal stress indicating the flow of bending stresses and along which torsional shear stresses are zero.

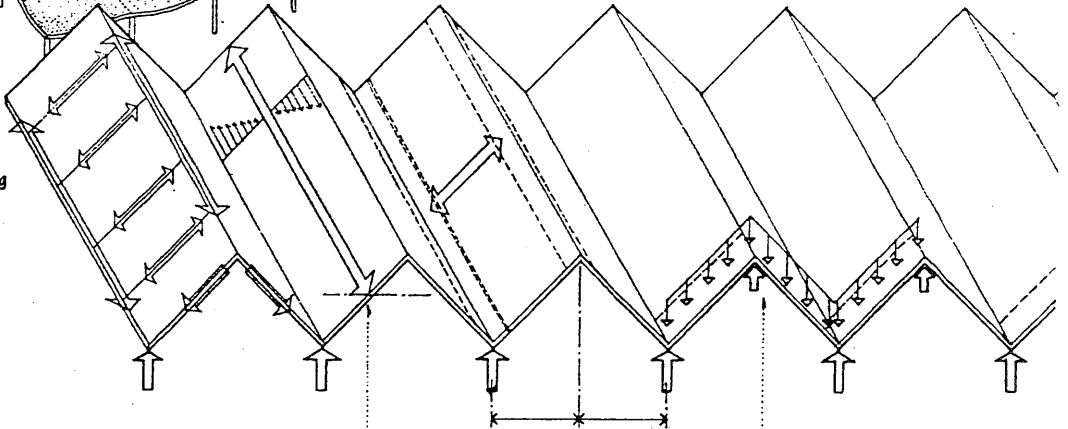


Each plane behaves as a beam in the longitudinal direction.

In the short direction, the span is reduced by each fold acting as a rigid support.

Transverse strips behave as a continuous beam supported at fold points.




Vertical diaphragms or rigid frames stiffen a folded plate against deformation of the fold profile.

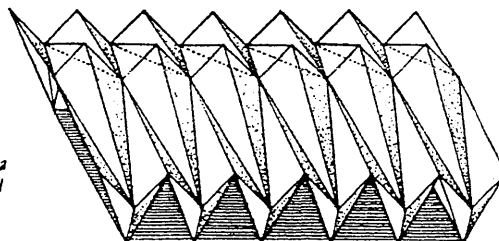


skew grid

A grid structure of beams or flat trusses running obliquely to the sides of the base rectangle in order to equalize their spans and stiffnesses. The shorter spans at the corners result in additional stiffness.

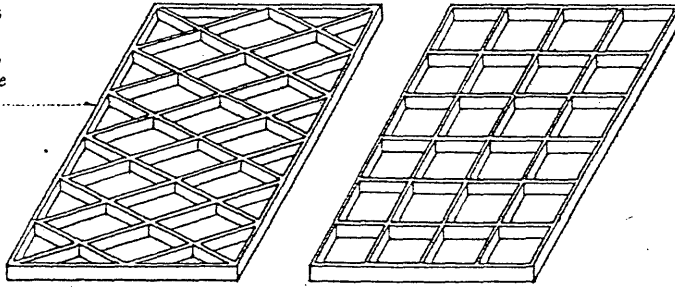

lamella roof

A vaulted roof composed of lamellae forming a crisscross pattern of parallel arches skewed with respect to the sides of the covered space.




lamella

One of the relatively short timber, metal, or reinforced-concrete elements forming a lamella roof.

grid structure









A framework of crisscrossing beams connected at their intersections by rigid joints and dispersing an applied load in two directions according to the physical properties and dimensions of the beam elements.

All beam elements participate in carrying a load through a combination of bending and twisting. If two beams at right angles to each other are identical, they share an applied load equally in bending. If the beams have different lengths, however, the shorter beam carries more of the load since the stiffness of a beam is inversely proportional to the cube of its length and a load generally follows the path of least resistance to supports. For example, if two beams have a span ratio of 1:2, their stiffnesses will have a ratio of 1:8. Consequently, the shorter beam will carry $\frac{8}{9}$ of the load. The torsional resistance of beams against the twisting induced by the bending of a transverse beam increases the stiffness of the grid.

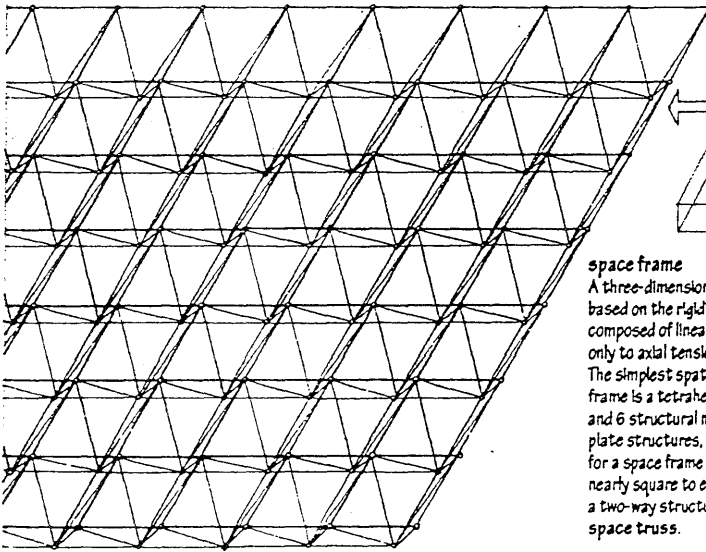

space frame

A three-dimensional structural frame based on the rigidity of the triangle and composed of linear elements subject only to axial tension or compression. The simplest spatial unit of a space frame is a tetrahedron having 4 joints and 6 structural members. As with plate structures, the supporting bay for a space frame should be square or nearly square to ensure that it acts as a two-way structure. Also called space truss.

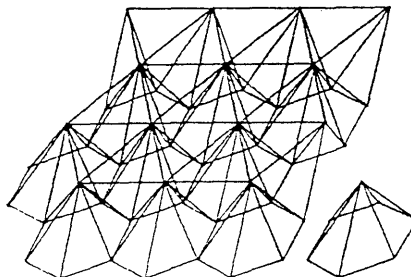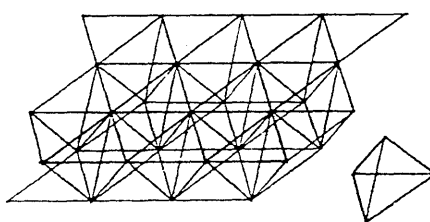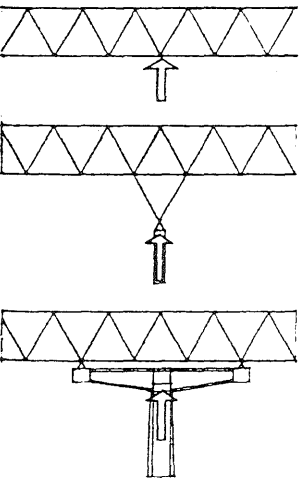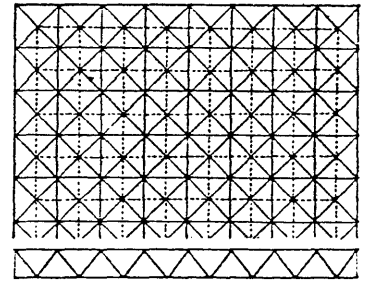

Increasing the bearing area of the supports increases the number of members into which shear is transferred and reduces the forces in the members.

PLUMBING

The system of pipes, valves, fixtures, and other apparatus of a water supply or sewage system.

water supply

The supply of purified water to a community, usually including facilities for storing and distributing this water, as reservoirs and pipelines.

cistern

A reservoir or tank for storing or holding water or other liquid, as rainwater collected from a roof, for use when required.

well

A hole drilled or bored into the earth to obtain water, petroleum, or natural gas.

aquifer

A geological formation containing or conducting groundwater, esp. one capable of providing water in usable quantities to springs or wells.

artesian well

A well in which water rises under pressure from a permeable stratum overlaid by impermeable rock.

drawdown

A lowering of the water surface level, as in a well, or the distance by which the groundwater level is lowered as a result of pumping.

reservoir

A natural or artificial place where water is collected and stored for use, esp. water for supplying a community, irrigating land, or furnishing power.

water tower

A tower into which water is pumped to a height sufficient to maintain a desired pressure for distribution to customers, or for firefighting.

potable water


Water fit for human consumption.

water treatment

The act or process of making water more potable or useful, as by purifying, clarifying, or softening.

raw water

Water that requires treatment before it can be used for drinking.

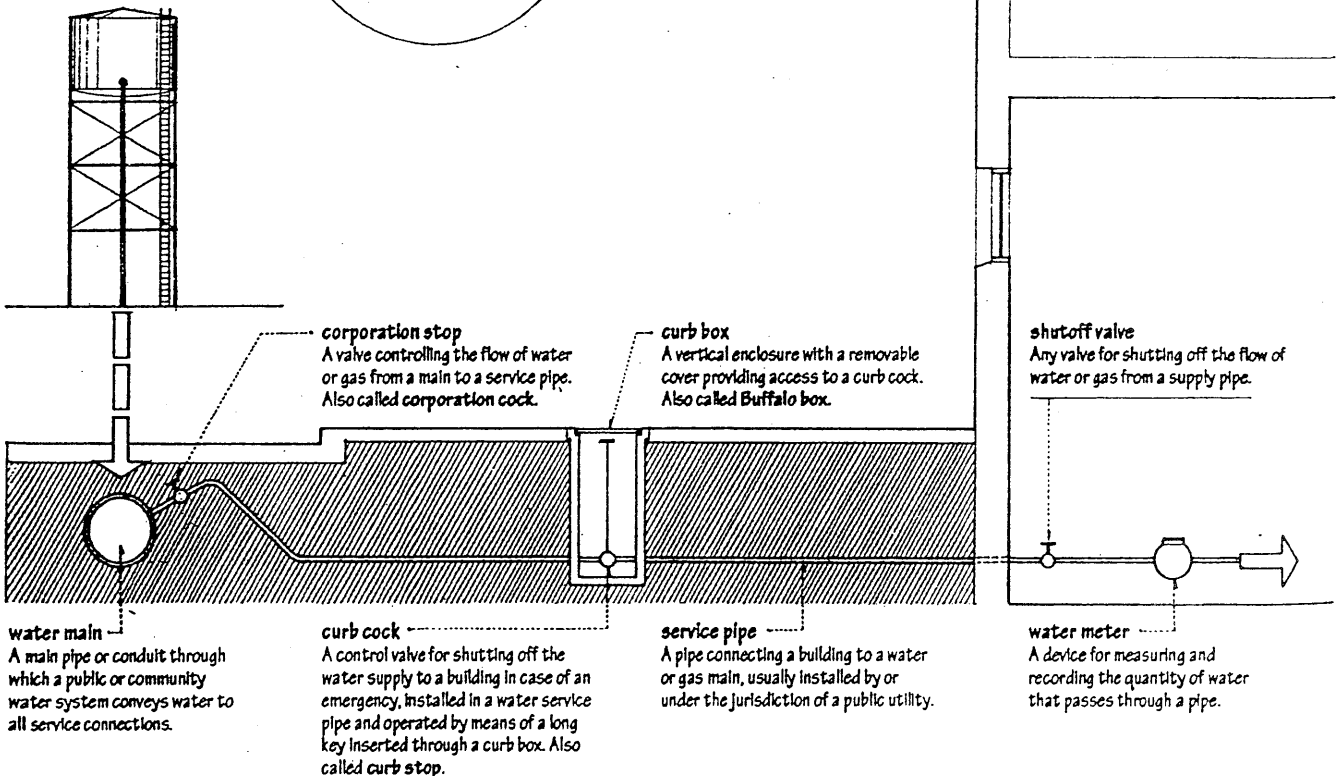

water system

A system of pipes, valves, and fixtures for distributing and using water in a building.

gravity water system

A water supply and distribution system in which the water source is set at a height sufficient to maintain adequate supply pressure throughout the water distribution system. Also called downfeed distribution system.

head


The pressure at the lower of two given points in a liquid, expressed in terms of the vertical distance between the points. Also called pressure head.

pressure drop

A loss of head or fluid pressure between two points of a pipe or across a valve, due to hydraulic friction.

fixture unit

A unit for measuring the probable demand for water by a plumbing fixture, or the probable discharge of liquid waste from the fixture, equivalent to 7 1/2 gallons or one cubic foot per minute.

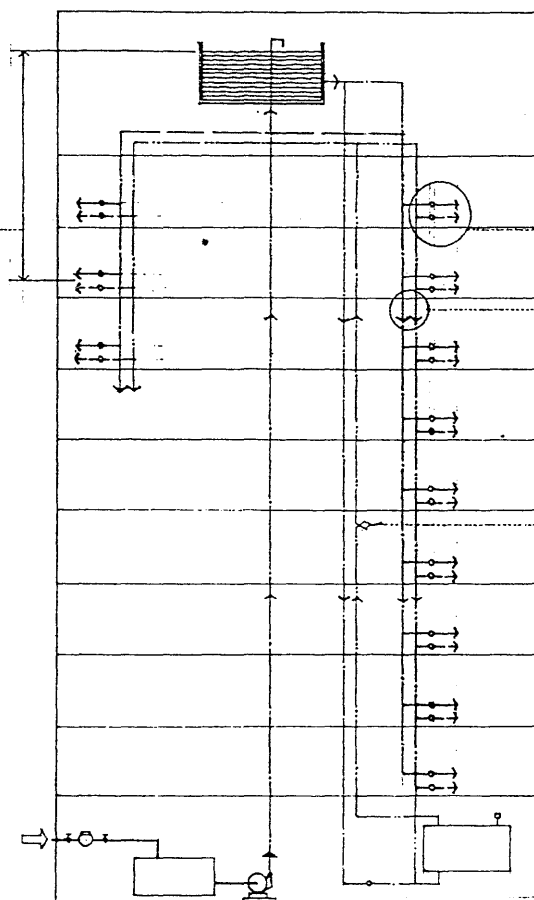

branch

Any member of a piping system other than a main, riser, or stack.

riser


A vertical pipe, conduit, or duct in a utility system.

main

A principal pipe, conduit, or duct in a utility system.


expansion bend

An expansion joint of pipe and pipe fittings permitting thermal expansion to occur in a long run of hot-water piping. Also called expansion loop.



pneumatic water supply

A water supply system in which water is distributed from a water main or an enclosed storage tank under pressure from compressed air. Also called upfeed distribution system.

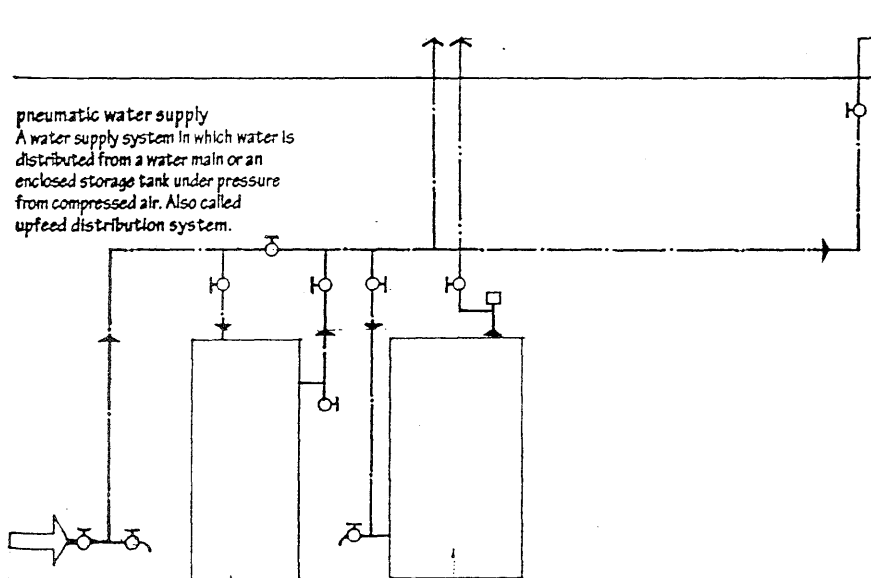

hose bibb


A threaded exterior faucet, as for attaching a garden hose, often attached to the side of a house at about the height of a sill. Also called hosecock, sillcock.

faucet

A device for controlling the flow of a liquid from a pipe by opening or closing an orifice. Also called spigot, tap.

flow pressure

The fluid pressure in a supply pipe at a faucet or other outlet while the faucet or outlet is wide open and water is flowing, expressed in psi (N/m²).



mixing faucet

A faucet having a single outlet for water from separately controlled hot-water and cold-water taps. Also called mixer.

aerator

A sieve-like device for mixing air with the water flowing from the end of a spigot.

anti-scald faucet

A faucet having a thermostatically controlled valve for maintaining the desired water temperature regardless of pressure or flow.

water softener

An apparatus that removes calcium and magnesium salts from hard water by ion exchange in order to give the water more efficient sudsing ability with soap.

hard water

Water containing dissolved salts of calcium or magnesium and forming soap lather with difficulty.

water heater

An electric or gas appliance for heating water to a temperature between 120°F and 140°F (50°C and 60°C) and storing it for use.


PLUMBING

plumbing fixture

Any of various receptacles for receiving water from a water system and discharging the liquid waste into a drainage system.

sanitary ware

Plumbing fixtures, as sinks and toilet bowls, made of vitreous china, porcelain enamel, or enameled metal.



water hammer

The concussion and banging noise that results when a volume of water moving in a pipe suddenly stops or loses momentum.

air chamber

A compartment in a water system containing air that elastically compresses and expands to equalize the pressure and flow of water in the system. Also called air cushion.

overflow

An outlet, pipe, or receptacle for excess liquid.

backflow

A flow of a liquid opposite to the usual or desired direction.

back-siphonage

A backflow of used or contaminated water from a plumbing fixture into a pipe supplying potable water due to negative pressure in the pipe.

backwater valve


A valve for preventing flowing liquid, as sewage, from reversing its direction. Also called backflow valve.

flow rate

The rate of discharge from a plumbing fixture, equal to the total number of gallons discharged per minute divided by 7.5 and expressed in fixture units.

ball cock

A device for regulating the supply of water in a flush tank by means of a hollow floating ball which by its rise or fall shuts or opens a supply valve. Also called float valve.




water closet

A fixture consisting of a ceramic bowl with a detachable, hinged seat and lid and a device for flushing with water, used for defecation and urination. Also called toilet.

flushometer valve

A valve that supplies a fixed quantity of water to fixtures for flushing purposes when actuated by direct water pressure.

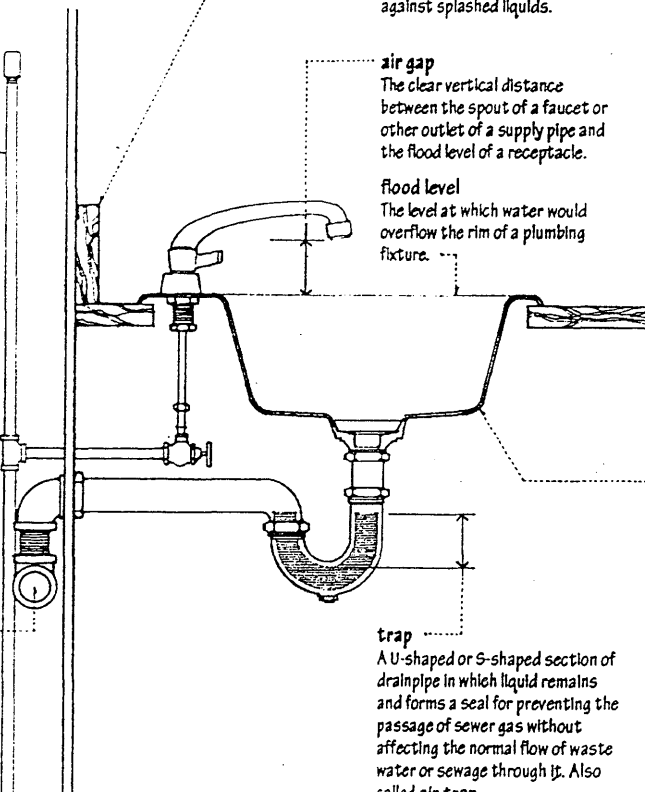

backsplash

A vertical panel of waterproof material attached to the wall behind a countertop or stovetop to protect against splashed liquids.

air gap

The clear vertical distance between the spout of a faucet or other outlet of a supply pipe and the flood level of a receptacle.

flood level

The level at which water would overflow the rim of a plumbing fixture.

trap

A U-shaped or S-shaped section of drainpipe in which liquid remains and forms a seal for preventing the passage of sewer gas without affecting the normal flow of waste water or sewage through it. Also called air trap.

drum trap

A cylindrical trap closed on the bottom and having a cover plate for access, usually installed on the drain line from a bathtub.


siphon-jet

A toilet bowl in which the flushing water enters through the rim and siphonic action initiated by a waterjet draws the contents of the bowl through the trapway.



reverse-trap

A toilet bowl similar to the siphon-jet, but having a smaller water surface and trapway.




siphon-vortex

A toilet bowl similar to the siphon-jet, but having the flushing water directed through the rim to create a vortex that scours the bowl.



wash-down

A toilet bowl having a simple washout action and emptying through a small, irregular passage; prohibited by some health codes.



bidet

A basinlike fixture designed to be straddled for bathing the genitals and posterior parts of the body.

urinal

A flushable fixture used by men for urinating.

toilet partition

A panel forming an enclosure around a water closet for privacy in a public lavatory.

bathtub

An oblong tub to bathe in, esp. one that is a permanent fixture in a bathroom.

shower

A bath in which water is sprayed on the body from an overhead nozzle or showerhead.

grab bar

A bar attached to a wall near a bathtub or shower to provide a hand grip for a person who is bathing.

receptor

The shallow base pan of a stall shower.

lavatory

A bowl or basin with running water for washing the face and hands.

sink

A basin, as in a kitchen or laundry, connected with a water supply and drainage system for washing.

disposal


An electrical device in the drain of a sink, for grinding food wastes to be washed down the drain. Also called disposer.

laundry tray

A deep sink for washing clothes.

service sink

A deep sink used in janitorial work. Also called slop sink.

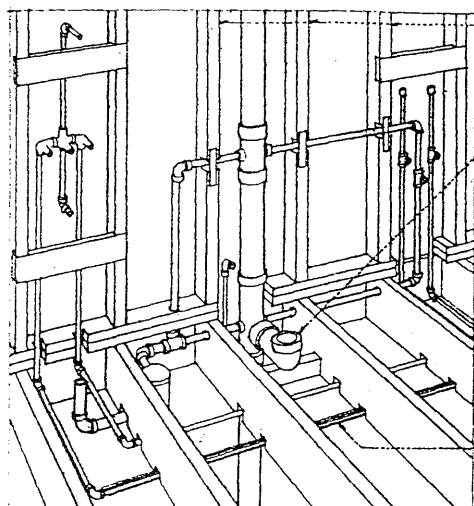

roughing-in

The act or process of installing all parts of a plumbing system that will later be concealed, usually to the fixture connections.

valve

Any device for controlling or stopping the flow of a liquid or gas by a movable part that opens, partially obstructs, or shuts a passage, pipe, inlet, or outlet.

bonnet

The part of a valve casing through which the stem passes and that forms a guide and seal for the stem.

seat

The part or surface of a valve on which the stem is closed to stop flow completely.

globe valve

A valve with a globular body, closed by a disk seating on an opening in an internal wall.

gate valve

A shutoff valve closed by lowering a wedge-shaped gate across the passage.

angle valve

A globe valve having an outlet at a right angle to the inlet.

alignment valve




A washerless valve opened by aligning holes in a disk, cylinder, or ball.

mixing valve

A valve for controlling the relative amount of hot and cold water admitted from separate hot-water and cold-water lines.

check valve

A valve permitting a liquid or gas to flow in one direction only.




bell-and-spigot

A pipe joint made by fitting the end (spigot) of one pipe into the enlarged end (bell) of another pipe and sealing with a caulking compound or a compressible ring.

gasket

A rubber or metal ring inserted between two mating surfaces to make the joint watertight.



plumbing wall
A wall or partition containing vertical space for a plumbing stack. Also called stack partition.

closet bend
A 90° soil fitting installed directly beneath a water closet.

developed length
The length of a pipeline measured along the centerline of the pipe and pipe fittings.

molded insulation
Thermal insulation premolded to fit around pipes and pipe fittings.

pipe

A hollow cylinder of metal or plastic used for the conveyance of water, steam, gas, or other fluid material.

pipe fitting

A standard part, as an elbow, union, or tee, for connecting two or more pipes.

elbow

A pipe fitting having an angled, usually 90° bend. Also called ell, el.

drop elbow

An elbow having lugs for attachment to a wall or joist. Also called drop ell.

sweep fitting

A pipe fitting having a large radius of curvature.

return bend

A 180° bend in a pipe.

tee

A T-shaped pipe fitting for making a three-way joint.

drop tee

A tee having lugs for attachment to a wall or joist.

sanitary tee

A tee having a slight curve in the 90° transition to channel the flow from a branch pipe in the direction of the main.

wye

A Y-shaped pipe fitting for joining a branch pipe with a main, usually at a 45° angle.

cross

A pipe fitting for making a four-way connection.

sanitary cross

A cross having a slight curve in each of the 90° transitions to channel the flow from branch pipes in the direction of the main.

crossover

A U-shaped pipe for bypassing another pipe.

nipple

A short length of pipe with threads on each end, used for joining couplings or other pipe fittings.

coupling

A short length of pipe having each end threaded on the inside, used for joining two pipes of the same diameter.

increaser

A coupling increasing in diameter at one end.

reducer

A coupling decreasing in diameter at one end.

union








A coupling device for connecting two pipes, neither of which can be turned, consisting of two internally threaded end pieces which are tightened around the pipe ends to be joined, and an externally threaded center piece, which draws the two end pieces together as it is rotated.

plug

An externally threaded fitting for closing the end of a pipe.

cap

An internally threaded fitting for enclosing the end of a pipe.



PLUMBING

drainage system

A system of pipes, traps, and other apparatus for conveying sewage, waste water, or rainwater to a public sewer or a private treatment facility.

drain

Any pipe or channel by which a liquid is drawn off.

fixture drain

A drain extending from the trap of a plumbing fixture to a junction with a waste or soil stack.

branch drain

A drain connecting one or more fixtures to a soil or waste stack.

stack

A vertical waste pipe or vent pipe serving a number of floors.

soil stack

A vertical soil pipe.

soil pipe

Any pipe carrying the discharge from water closets or urinals to the building drain or building sewer.

waste stack

A vertical waste pipe.

waste pipe

Any pipe carrying the discharge from plumbing fixtures other than water closets or urinals.

indirect waste pipe

A waste pipe that is not connected directly with a drainage system, but discharges into it through a properly trapped plumbing fixture.

branch interval

A length of soil or waste stack corresponding to a story height but never less than 8 ft. (2.4 m), within which the horizontal branch drains from one floor are connected.

fall

The downward slope of a pipe, conduit, or channel, expressed either as a percentage or in inches per foot.

wet vent

An oversized pipe functioning both as a soil or waste pipe and a vent.

cleanout

A pipe fitting with a removable plug giving access to a soil or waste pipe for inspection or cleaning.

sump pump

A pump for removing the accumulations of liquid from a sump.

sump

A pit or reservoir serving as a drain or receptacle for water or other liquids.

invert

The lowest point on the interior of a drain pipe or sewer where the liquid is deepest.

vent system

A system of pipes supplying a flow of air to or from a drainage system or providing a circulation of air within the system to protect trap seals from siphonage and back pressure.

stack vent

The extension of a soil or waste stack above the highest horizontal drain connected to the stack. Also called soil vent, waste vent.

battery

A group of two or more similar plumbing fixtures discharging into a common waste or soil branch.

vent

A pipe connecting a drain near one or more traps to a vent stack or stack vent.

relief vent

A vent that provides circulation of air between a drainage and a venting system by connecting a vent stack to a horizontal drain between the first fixture and the soil or waste stack.

loop vent

A circuit vent that loops back and connects with a stack vent instead of a vent stack.

common vent

A single vent serving two fixture drains connected at the same level. Also called dual vent.

vent stack

A vertical vent installed primarily to provide circulation of air to or from any part of a drainage system.

branch vent

A vent connecting one or more individual vents with a vent stack or stack vent.

individual vent

A vent connecting a fixture drain to a main or branch vent. Also called revent.

circuit vent

A vent serving two or more traps and extending from in front of the last fixture connection of a horizontal branch to the vent stack.

back vent

A vent installed on the sewer side of a trap.

continuous vent

A vertical vent formed by a continuation of the drain line to which it connects.

fresh-air inlet

A vent pipe admitting fresh air into the drainage system of a building, connected to the building drain at or before the building trap.

building sewer

A drain connecting a building drain to a public sewer or private treatment facility. Also called house sewer.

sewer


A pipe or other artificial conduit, usually underground, for carrying off sewage and other liquid waste to a treatment plant or other point of disposal.


sanitary sewer

A sewer conveying only the sewage from plumbing fixtures and excluding storm water.

sewage

The liquid waste containing animal or vegetable matter in suspension or solution that passes through a sewer.

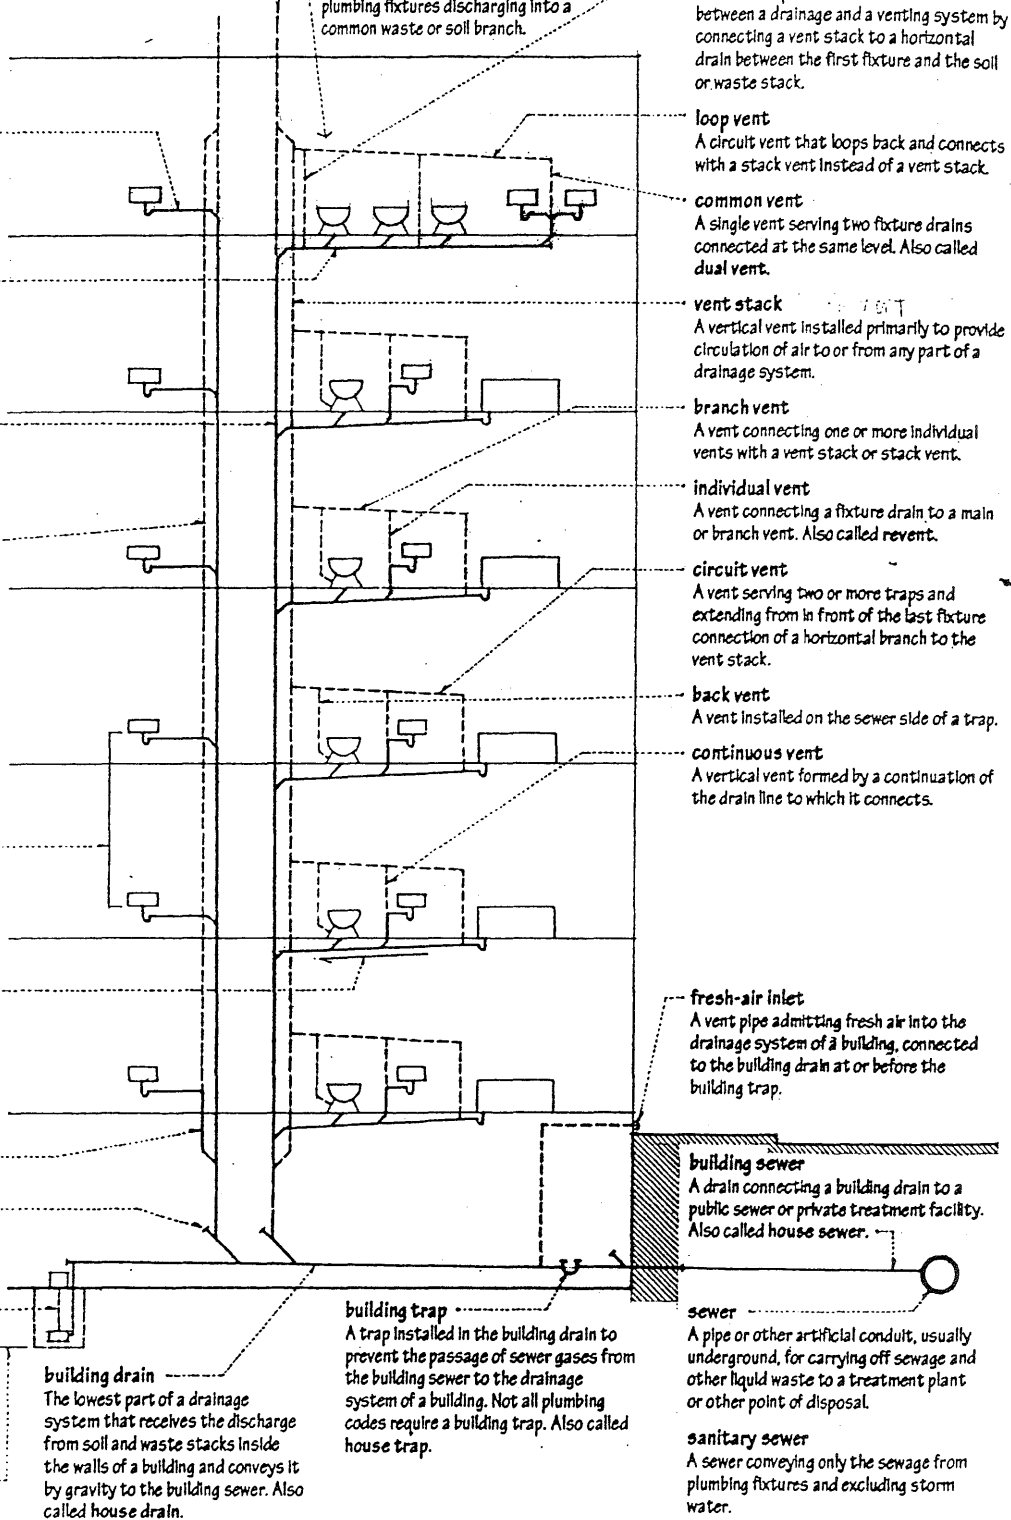

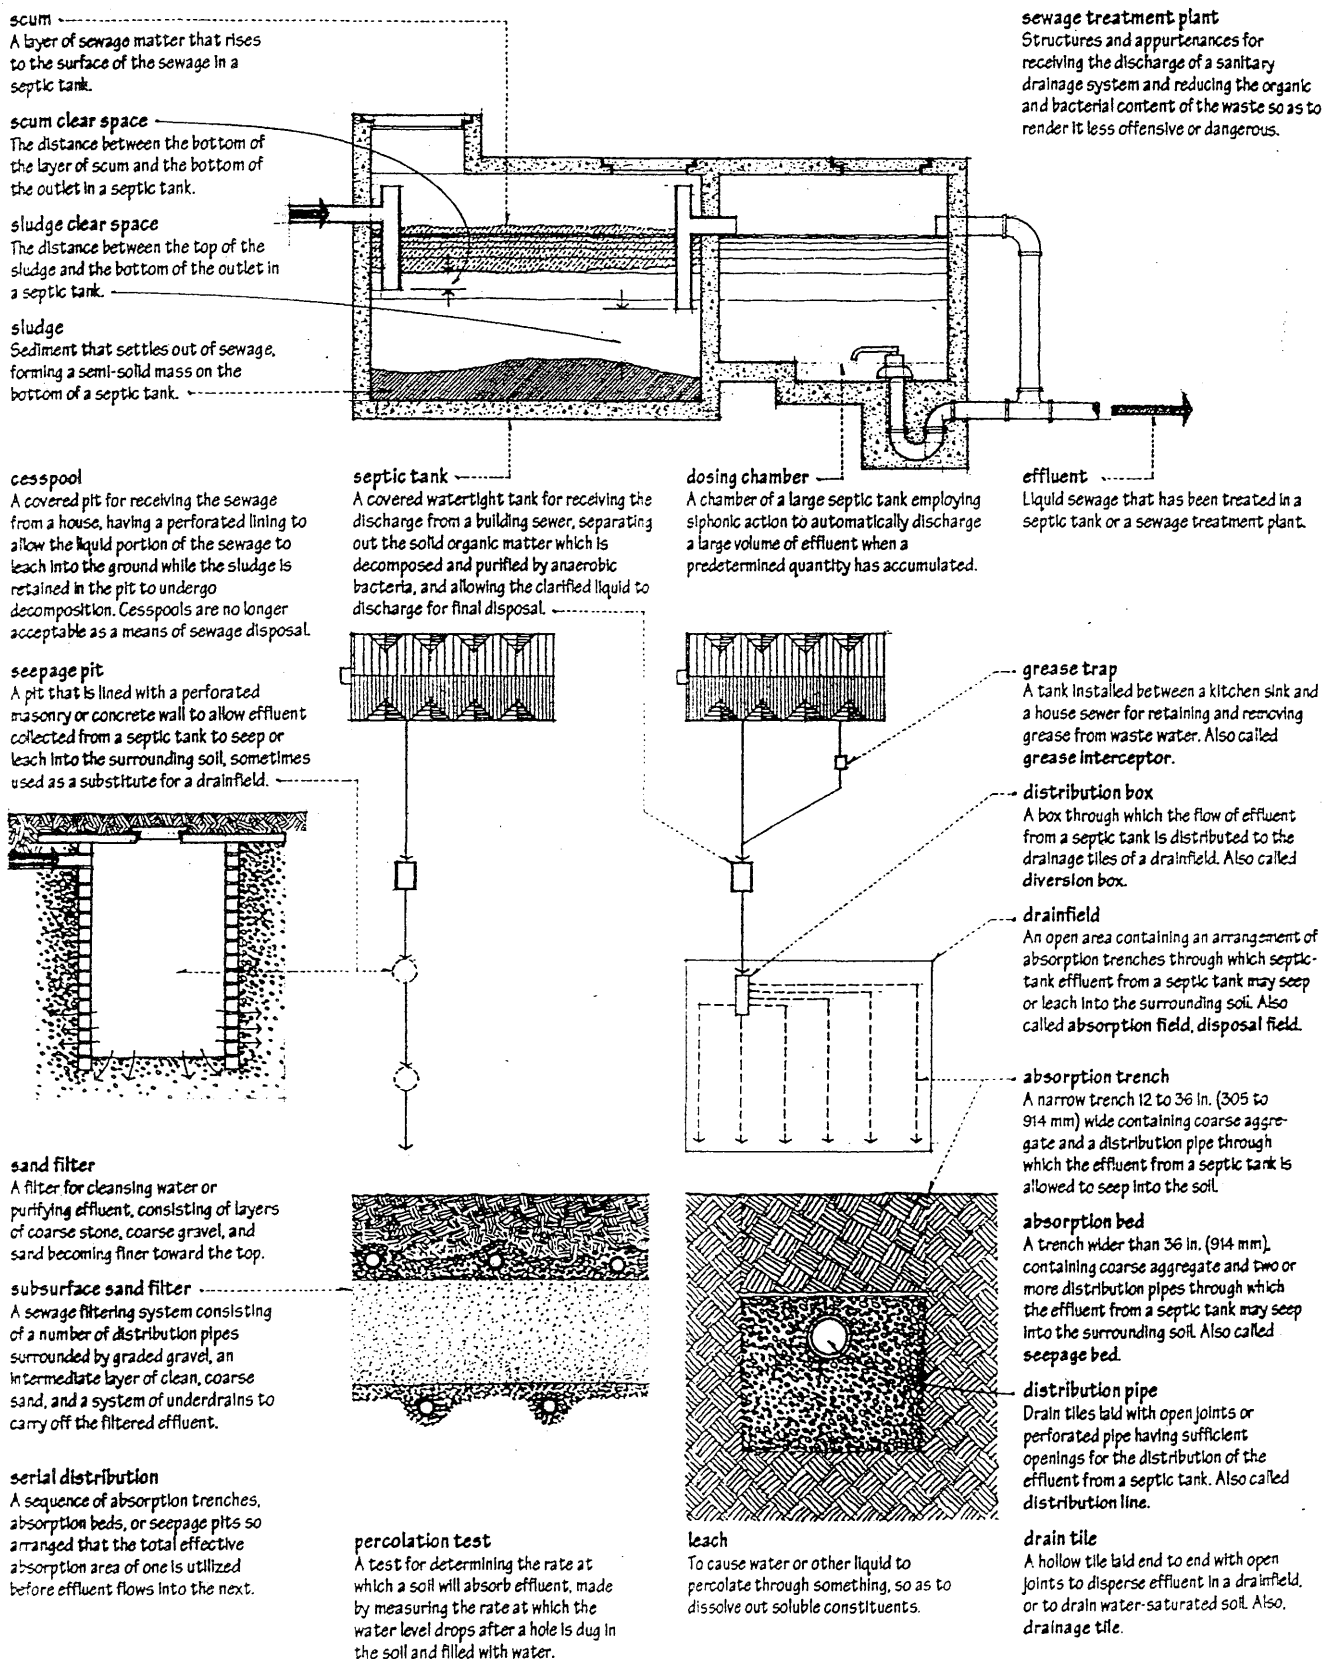

REINFORCED CONCRETE

Concrete in which steel reinforcement is embedded in such a manner that the two materials act together in resisting forces. Also called *béton armé*, *ferroconcrete*.

reinforcement

A system of steel bars, strands, or wires for absorbing tensile, shearing, and sometimes the compressive stresses in a concrete member or structure.

reinforcing bar

A steel bar for reinforcing concrete, usually specified by a number equivalent to its diameter in eighths of an inch. Also called *rebar*.

deformed bar

A reinforcing bar hot-rolled with surface deformations to develop a greater bond with concrete.

tension reinforcement

Reinforcement designed to absorb tensile stresses.

compression reinforcement

Reinforcement designed to absorb compressive stresses.

plain concrete

Concrete having no reinforcement, or reinforced only for drying shrinkage or thermal stresses.

ferrocement



Constructed of cement-sand mortar over a wire mesh that has been preshaped over a mold.

fiber-reinforced concrete

Concrete reinforced with dispersed, randomly oriented fibers of glass or plastic.


gfrc

Abbreviation for glass-fiber-reinforced concrete.




welded-wire fabric

A grid of longitudinal and transverse steel wires or bars welded together at all points of intersection, usually specified by the size of the grid in inches and the wire gauge. Also called *welded-wire mesh*.



woven-wire fabric

A mesh of cold-drawn steel wires mechanically twisted together to form hexagonally shaped openings.

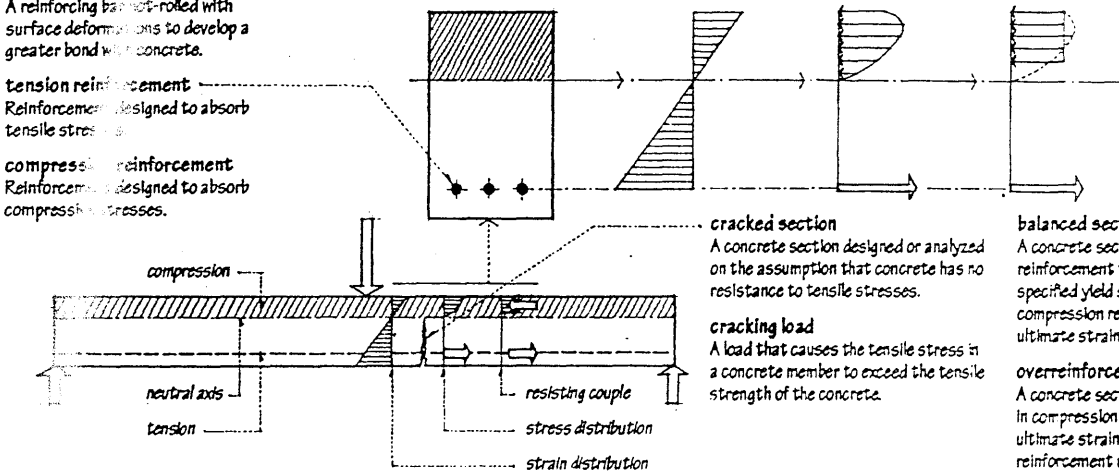

cracked section

A concrete section designed or analyzed on the assumption that concrete has no resistance to tensile stresses.

cracking load

A load that causes the tensile stress in a concrete member to exceed the tensile strength of the concrete.

balanced section

A concrete section in which the tension reinforcement theoretically reaches its specified yield strength as the concrete in compression reaches its assumed ultimate strain.

overreinforced section

A concrete section in which the concrete in compression reaches its assumed ultimate strain before the tension reinforcement reaches its specified yield strength. This is a dangerous condition since failure of the section could occur instantaneously without warning.

underreinforced section

A concrete section in which the tension reinforcement reaches its specified yield strength before the concrete in compression reaches its assumed ultimate strain. This is a desirable condition since failure of the section would be preceded by large deformations, giving prior warning of impending collapse.

effective depth

The depth of a concrete section measured from the compression face to the centroid of the tension reinforcement.

bar spacing

The center-to-center spacing of parallel reinforcing bars, the resulting bar distance between the bars being regulated by bar diameter, maximum size of coarse aggregate, and thickness of the concrete section.

cover


The amount of concrete required to protect steel reinforcement from fire and corrosion, measured from the surface of the reinforcement to the outer surface of the concrete section.

bond

The adhesion between two substances, concrete and reinforcing bars.

bond stress

The adhesive force per unit area of contact between a reinforcing bar and the surrounding concrete developed at any section of a flexural member.

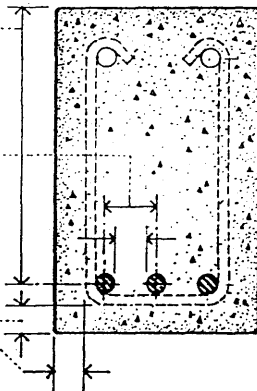

effective area of concrete


The area of a concrete section between the compression face and the centroid of the tension reinforcement.

effective area of reinforcement

The product of the right cross-sectional area of reinforcement and the cosine of the angle between its direction and the direction for which its effectiveness is considered.

percentage reinforcement

The ratio of effective area of reinforcement to effective area of concrete at any section of a reinforced concrete member, expressed as a percentage.



embedment length

The length of embedded reinforcement provided beyond a critical section for anchorage.

hook

A bend or curve given to the end of a tension bar to develop an equivalent embedment length, used where there is insufficient room to develop an adequate embedment length.

standard hook

A 90°, 135°, or 180° bend made at the end of a reinforcing bar according to industry standards with a radius based on the bar diameter.

anchorage

Any of various means, as embedment length or hooked bars, for developing tension or compression in a reinforcing bar on each side of a critical section in order to prevent bond failure or splitting.

critical section

The section of a flexural concrete member at a point of maximum stress, a point of inflection, or a point within the span where tension bars are no longer needed to resist stress.

truss bar

A longitudinal bar bent up or down at points of moment reversal in a reinforced concrete beam.

top bar

Any of the longitudinal bars serving as tension reinforcement in the section of a concrete beam or slab subject to a negative moment.

reinforced concrete beam

A concrete beam designed to act together with longitudinal and web reinforcement in resisting applied forces.

longitudinal reinforcement

Reinforcement essentially parallel to the horizontal surface of a slab or to the long axis of a concrete beam or column.

deep beam

A reinforced concrete beam having a depth-to-span ratio greater than 2.5 for continuous spans, or 4.5 for simple spans, subject to nonlinear distribution of stress and lateral buckling.

T-beam

A monolithic reinforced concrete construction in which a portion of the slab on each side of a beam acts as a flange in resisting compressive stresses, and the portion of the beam projecting below the slab serves as a web or stem in resisting bending and shear stresses.

web reinforcement

Reinforcement consisting of bent bars or stirrups, placed in a concrete beam to resist diagonal tension.

bent bar

A longitudinal bar bent to an angle of 30° or more with the axis of a concrete beam, perpendicular to and intersecting the cracking that could occur from diagonal tension.

bottom bar

Any of the longitudinal bars serving as tension reinforcement in the section of a concrete beam or slab subject to a positive moment.

stirrup

Any of the U-shaped or closed-loop bars placed perpendicular to the longitudinal reinforcement of a concrete beam to resist the vertical component of diagonal tension.

diagonal tension

The principle tensile stresses acting at an angle to the longitudinal axis of a beam.

vertical reinforcement

Longitudinal reinforcement placed in a concrete column to absorb compressive stresses, resist bending stresses, and reduce the effects of creep and shrinkage in the column. The effective cross-sectional area of vertical reinforcement should not be less than 0.01 nor more than 0.08 times the gross cross-sectional area of the column, with a minimum of four #5 bars for tied columns and a minimum of six #5 bars for spiral columns.

lap splice

A splice for transferring tensile or compressive stresses from one longitudinal bar to another, made by lapping their ends for a length specified in bar diameters.

butt splice

A splice for transferring tensile or compressive stresses from one longitudinal bar to another, made by butting their ends together and connecting them in a positive fashion.

welded splice



A butt splice made by arc-welding the butted ends of two reinforcing bars.

compression splice

A butt splice made by connecting the butted ends of two reinforcing bars with a mechanical fastener, as a sleeve clamp.



offset bend

A bend displacing a section of longitudinal bar to a position parallel to the original bar, used esp. in the vertical reinforcement of concrete columns.




tied column

A concrete column reinforced with vertical bars and individual lateral ties. Lateral ties should have a diameter of at least 3/8 in. (9.5 mm), spaced apart not over 48 tie diameters, 16 bar diameters, or the least dimension of the column section. Each corner and alternate longitudinal bar should be laterally supported by the bend of a tie having an included angle of not more than 135°, with no bar being more than 6 in. (152 mm) clear from such a supported bar.



spiral column

A concrete column with spiral reinforcement enclosing a circular core reinforced with vertical bars.



reinforced concrete column

A concrete column designed to act together with vertical and lateral reinforcement in resisting applied forces. Reinforced concrete columns constituting the principal supports for a floor or roof should have a minimum diameter of 10 in. (254 mm), or if rectangular in section, a minimum thickness of 8 in. (203 mm), and a minimum gross area of 96 sq. in. (61935 sq. mm).

lateral reinforcement

Spiral reinforcement or lateral ties placed in a concrete column to laterally restrain the vertical reinforcement and prevent buckling.

spiral reinforcement

Lateral reinforcement consisting of an evenly spaced continuous spiral held firmly in place by vertical spacers. Spiral reinforcement should have a diameter of at least 3/8 in. (9.5 mm), with a maximum center-to-center spacing between spirals of 1/6 of the core diameter, and a clear spacing between spirals not to exceed 3 in. (76 mm) nor be less than 1 1/8 in. (35 mm) or 1/2 times the size of the coarse aggregate.

compound column

A structural steel column encased in concrete at least 2 1/2 in. (64 mm) thick, reinforced with wire mesh.

composite column

A structural steel column thoroughly encased in concrete reinforced with both vertical and spiral reinforcement.

REINFORCED CONCRETE

reinforced concrete slab

A rigid planar structure of concrete designed to act together with principal and secondary reinforcement in resisting applied forces.

principal reinforcement

Reinforcement designed to absorb the stresses from applied loads and moments.

shrinkage reinforcement

Reinforcement placed perpendicular to the principal reinforcement in a one-way slab to absorb the stresses resulting from shrinkage or changes in temperature. Also called temperature reinforcement.

topping

A thin layer of high-quality concrete placed over a concrete base to form a floor surface.

bonding layer

A thin layer of mortar spread on a moistened and prepared existing concrete surface prior to laying a new concrete slab.

one-way slab

A concrete slab of uniform thickness reinforced in one direction and cast integrally with parallel supporting beams. One-way slabs are suitable only for relatively short spans.

beam-and-girder slab

A one-way slab supported by secondary beams which in turn are supported by primary beams or girders.

ribbed slab


A reinforced concrete slab cast integrally with a series of closely spaced joists which in turn are supported by a parallel set of beams. Ribbed slabs are designed as a series of parallel T-beams and economical for medium spans with light to medium live loads. Also called joist slab.

two-way slab

A concrete slab of uniform thickness reinforced in two directions and cast integrally with supporting edge beams or bearing walls on four sides. Two-way slabs are economical for medium spans with intermediate to heavy loads.

continuous slab

A reinforced concrete slab extending as a structural unit over three or more supports in a given direction. A continuous slab is subject to lower bending moments than a series of discrete, simply supported slabs.

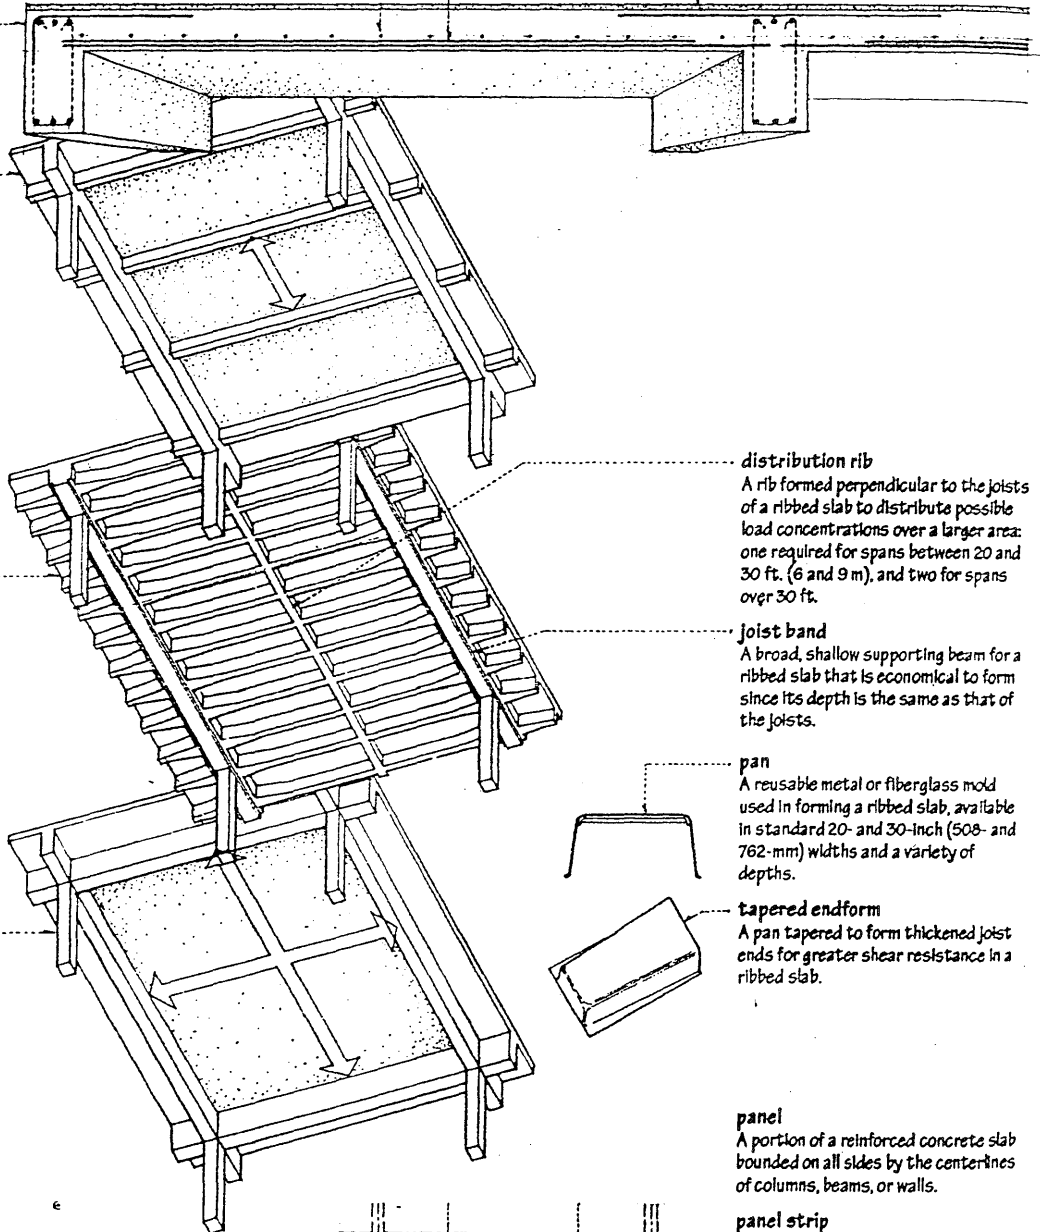

distribution rib

A rib formed perpendicular to the joists of a ribbed slab to distribute possible load concentrations over a larger area: one required for spans between 20 and 30 ft. (6 and 9 m), and two for spans over 30 ft.

joist band

A broad, shallow supporting beam for a ribbed slab that is economical to form since its depth is the same as that of the joists.

pan

A reusable metal or fiberglass mold used in forming a ribbed slab, available in standard 20- and 30-inch (508- and 762-mm) widths and a variety of depths.

tapered endform

A pan tapered to form thickened joist ends for greater shear resistance in a ribbed slab.

panel

A portion of a reinforced concrete slab bounded on all sides by the centerlines of columns, beams, or walls.

panel strip



A strip running in each direction of a two-way slab, within which moments per foot are assumed to be constant.

middle strip

A panel strip, one-half panel in width and symmetrical about the panel centerline.


column strip

A panel strip occupying the adjacent quarter panels on both sides of a column centerline.

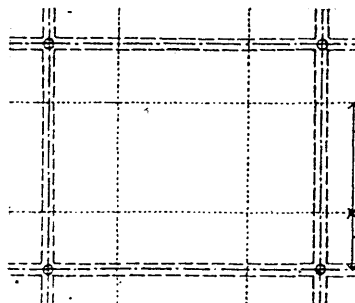

flat plate

A concrete slab of uniform thickness reinforced in two or more directions and supported directly by columns without beams or girders. Flat plates are suitable for short to medium spans with relatively light live loads. Since there are no column capitals or drop panels, shear governs the thickness of a flat plate.

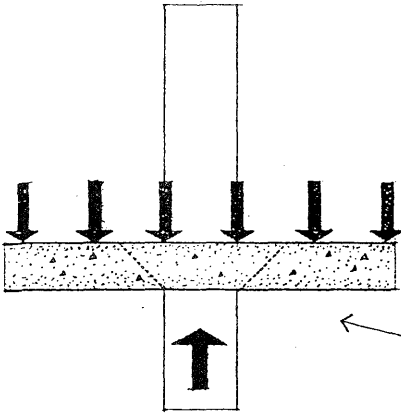


punching shear

The potentially high-shearing stress developed by the reactive force of a column on a reinforced concrete slab.


shear head

The overstressed region of a reinforced concrete slab at a column support.

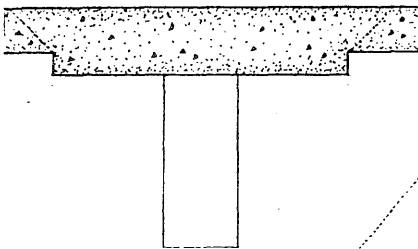

drop panel

The portion of a flat slab thickened around a column or column capital to increase its resistance to shear.

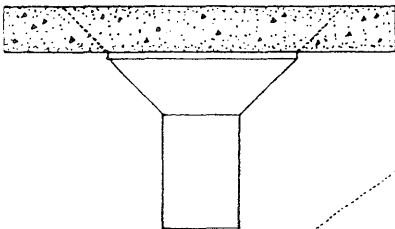


column capital

The head of a column support for a flat slab enlarged to increase the plate area in shear.



exterior panel

A panel of a flat slab having at least one edge which does not adjoin another panel.

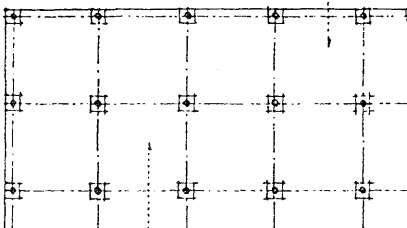

interior panel

Any panel of a flat slab that adjoins other panels along all four edges.

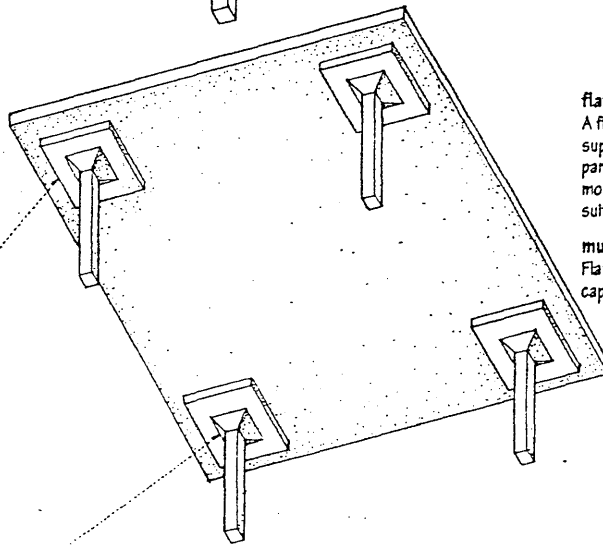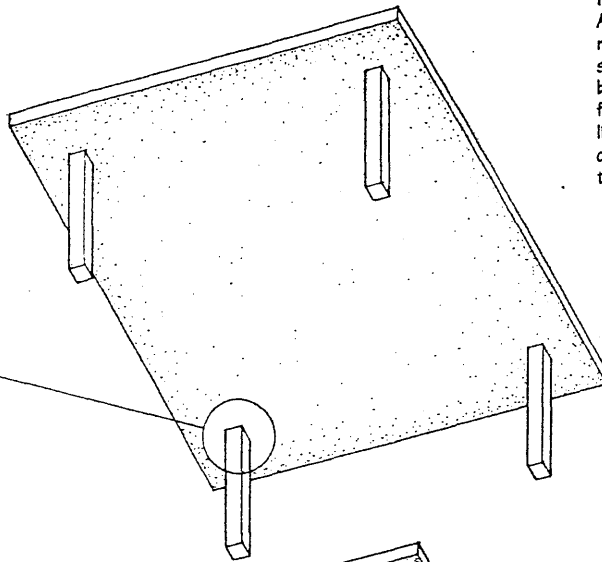

flat slab

A flat plate thickened at its column supports with column capitals and drop panels to increase its shear strength and moment-resisting capacity. Flat slabs are suitable for heavily loaded spans.

mushroom construction



Flat slab construction utilizing column capitals and drop panels.

waffle slab

A two-way concrete slab reinforced by ribs in two directions. Waffle slabs are able to carry heavier loads and span longer distances than flat slabs. Supporting beams and drop panels can be formed by omitting dome forms in selected areas.

dome

A square metal or fiberglass pan used in forming the ribs of a waffle slab, available in standard 19- and 30-in. (483- and 762-mm) widths and a variety of depths.

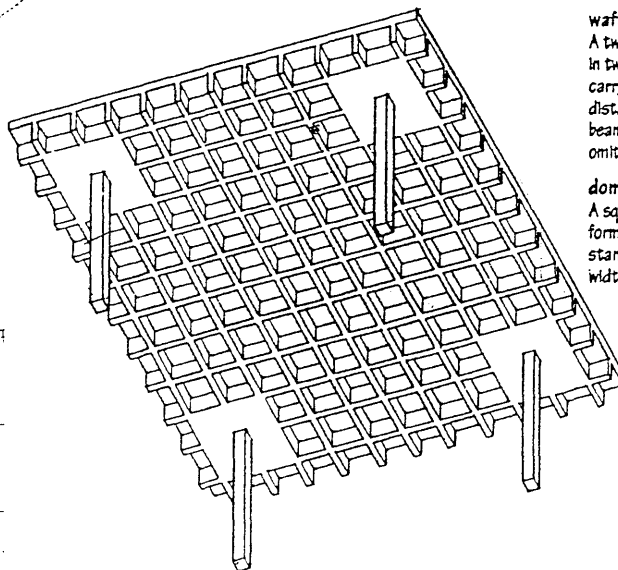

REINFORCED CONCRETE

precast concrete

A concrete member or product that is cast and cured in a place other than where it is to be installed in a structure.

solid flat slab


A precast, prestressed concrete plank suitable for short spans and uniformly distributed floor and roof loads.

hollow-core slab

A precast, prestressed concrete plank internally cored to reduce dead weight. Hollow-core slabs are suitable for medium to long spans and uniformly distributed floor and roof loads.

topping

A layer of reinforced concrete cast to form a composite structural unit with a precast concrete floor or roof deck.

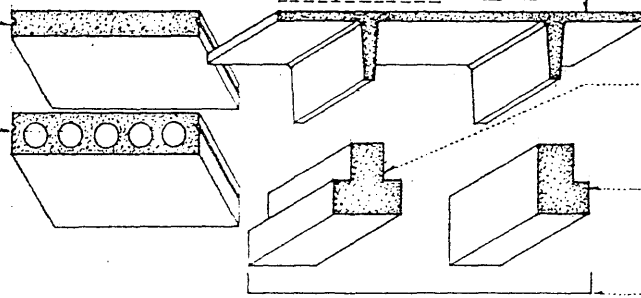

single tee

A precast, prestressed concrete slab having a broad, T-shaped cross section.

double tee

A precast, prestressed concrete slab having two stems and a broad cross section resembling the capital letters TT.

inverted tee

A precast, prestressed ledger beam having a cross section resembling an inverted capital T.

L-beam

A precast, prestressed ledger beam having a cross section resembling the capital letter L.

ledger beam

A reinforced concrete beam having projecting ledges for receiving the ends of joists or slabs.

prestressed concrete

Concrete reinforced by pretensioning or posttensioning high-strength steel tendons within their elastic limit to actively resist a service load. The tensile stresses in the tendons are transferred to the concrete, placing the entire cross section of a flexural member in compression. The resulting compressive stresses counteract the tensile-bending stresses from the applied load, enabling the prestressed member to deflect less, carry a greater load, or span a greater distance than a conventionally reinforced member of the same size, proportion, and weight.

prestress

To introduce internal stresses to a concrete member in order to counteract the stresses that will result from an applied load.

pretension

To prestress a concrete member by tensioning the reinforcing tendons before the concrete is cast. The tendons are first stretched between two abutments until a predetermined tensile force is developed. Concrete is then cast in formwork around the tendons and fully cured. Finally, the tendons are cut, and the tensile stress in the tendons is transferred to the concrete through bond stresses.

tendon

A high-strength steel strand or bar for prestressing concrete.

strand

A cable composed of high-strength steel wires twisted about a core.

casting bed

A long horizontal slab on which a number of pretensioned concrete members may be prestressed, formed, and cast simultaneously.

abutment

A structure for anchoring the reinforcing tendons in the pretensioning of a concrete member.

anchor



A mechanical device for locking a stressed tendon in position and delivering the prestressing force to the concrete, either permanently in a posttensioned member or temporarily during hardening of a pretensioned concrete member. Also called anchorage.

jacking force

The tensile force exerted temporarily by a jack in the prestressing of a concrete member.

jack

A hydraulic device for stretching and stressing tendons in the prestressing of a concrete member.



initial prestress

The tensile force in the reinforcing tendons transferred to a concrete member at the time of stressing.

loss of prestress

A reduction in initial prestress resulting from the combined effects of creep, shrinkage, or elastic shortening of the concrete, relaxation of the reinforcing steel, friction losses resulting from the curvature of draped tendons, and slippage at the anchorages.

final prestress


The internal stress that exists in a prestressed concrete member after all losses in prestress have occurred.

effective prestress

The final prestress in a prestressed concrete member, including the effect of the weight of the member but excluding the effect of any superimposed load.

partial prestressing

The prestressing of a concrete member to a level of stress such that nominal tensile stresses exist at design or service loads.

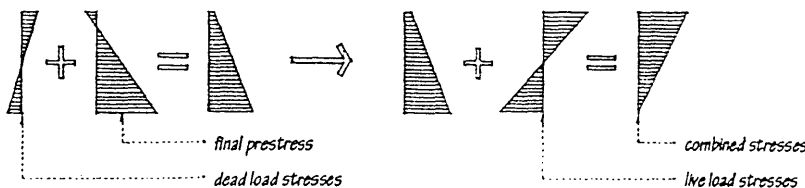




posttension

To prestress a concrete member by tensioning the reinforcing tendons after the concrete has set. Unstressed tendons are placed in sheaths before concrete is cast in formwork around the tubes. After the concrete has cured, the tendons are clamped on one end and jacked against the concrete on the other end until the required force is developed. The tendons are then anchored on the jacking end and the jack removed.




bonded posttensioning

Posttensioning in which the reinforcing tendons are bonded to the surrounding concrete by injecting grout into the annular spaces around the strands.



unbonded posttensioning

Posttensioning in which the annular spaces around the reinforcing tendons are not grouted, allowing the tendons to move relative to the surrounding concrete.




sheath

A tube for encasing tendons in a posttensioned member to prevent their bonding to the concrete during placement.




pre-posttension

To prestress a concrete member by pretensioning some of the tendons and posttensioning others.



concentric tendon

A tendon having a straight trajectory coincident with the centroidal axis of a prestressed concrete member. When tensioned, the tendon produces a uniformly distributed compressive stress across the section that counteracts the tensile stress from bending.




eccentric tendon

A tendon having a straight trajectory not coincident with the centroidal axis of a prestressed concrete member. When tensioned, the tendon produces an eccentric prestressing force that reduces the compressive stress across the section to that produced by bending alone.


load balancing

The concept of prestressing a concrete member with draped tendons, theoretically resulting in a state of zero deflection under a given loading condition.



draped tendon

A posttensioning tendon having a parabolic trajectory that mirrors the moment diagram of a uniformly distributed gravity load. When tensioned, the tendon produces a variable eccentricity that responds to the variation in applied bending moment along the length of the member.



depressed tendon

A pretensioning tendon that approximates the curve of a draped tendon with straightline segments, used in the pretensioning process since the prestressing force does not allow for draping the tendon.

harped tendon

One of a series of depressed tendons having varying slopes.

ROOF

The external upper covering of a building, including the frame for supporting the roofing.

flat roof

A roof having no slope, or one with only a slight pitch so as to drain rainwater.

pitched roof

A roof having one or more slopes.

gable roof

A roof sloping downward in two parts from a central ridge, so as to form a gable at each end.

gable

The triangular portion of wall enclosing the end of a pitched roof from cornice or eaves to ridge.

hip roof

A roof having sloping ends and sides meeting at an inclined projecting angle. Also, hipped roof.

curb roof

A roof divided on each side of the ridge into two or more slopes, as a gambrel or mansard.

mansard

A roof having on each side a steeper lower part and a shallower upper part. Also called mansard roof.

butterfly roof

A roof having two slopes, each descending inward from the eaves.

shed roof

A roof having a single slope.

lean-to

A shed roof with the higher end abutting a wall or larger building.

penthouse

A shed roof projecting from a wall or the side of a building, as to shelter a door. Also called apprentice, pent, pentice.

pitch

The slope of a roof, commonly expressed in inches of vertical rise per foot of horizontal run.

rise

The measured height of a sloping roof from the eaves to the ridge.

run

The horizontal distance from the eaves to the ridge of a sloping roof.

pavilion roof

A pyramidal hip roof.

hipped gable

A roof having a hipped end truncating a gable. Also called Jerkinhead, shreadhead.

gambrel roof

A ridged roof divided on each side into a shallower slope above a steeper one.

curb

The arris between an upper and a lower slope on a gambrel or mansard roof.

rainbow roof













A gable roof in the form of a broad Gothic arch, with gently sloping convex surfaces.


barrel roof

A roof or ceiling having a semicylindrical form.

sawtooth roof

A roof composed of a series of small parallel roofs of triangular cross section, usually asymmetrical with the shorter slope glazed.

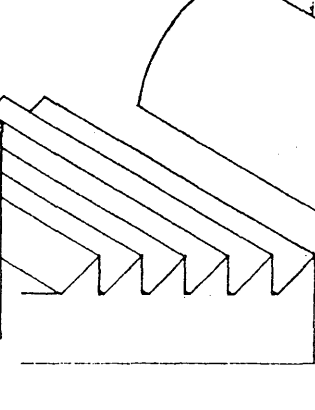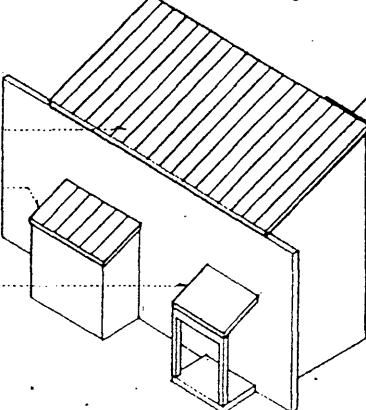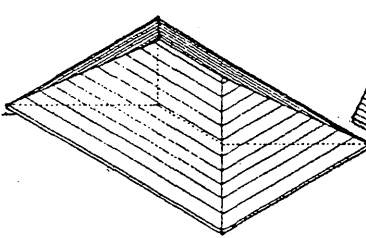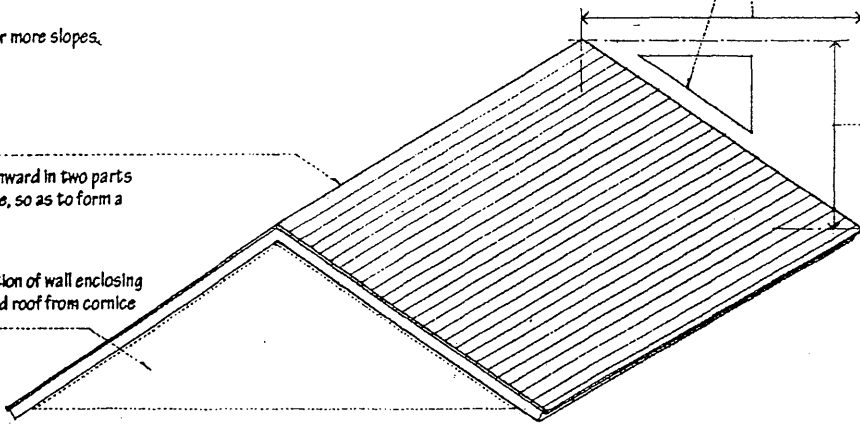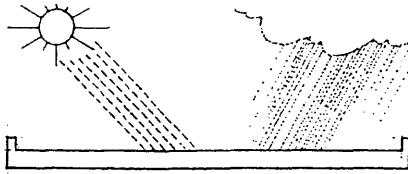

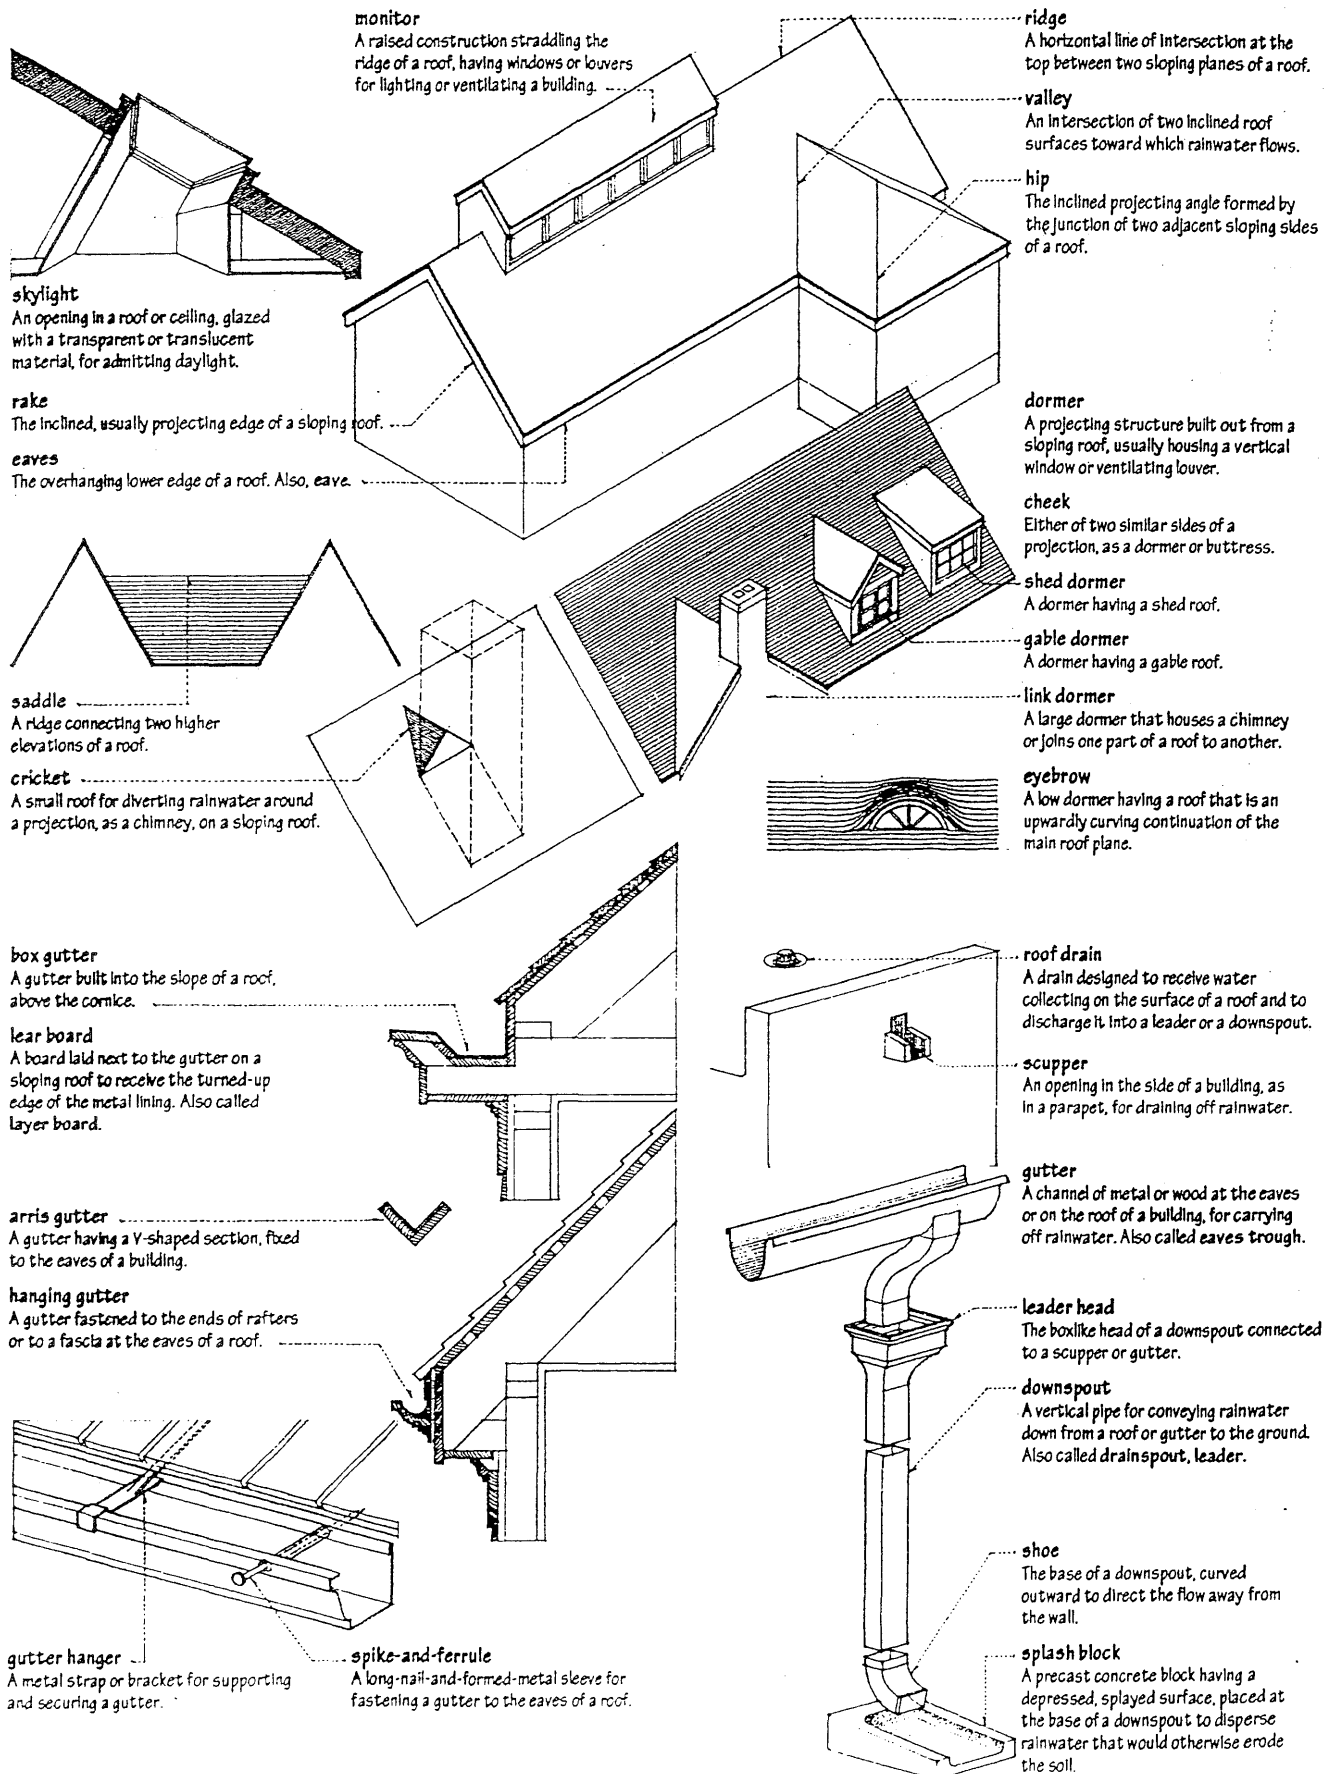

ROOF

double roof

A roof in which longitudinal members, as a ridge beam and purlins, are used as intermediate supports for common rafters. Also called double-framed roof.

king post


A vertical member from the apex to the bottom chord of a pitched truss.

joggle post

A king post having notches or raised areas for receiving and supporting the feet of inclined struts. Also called joggle piece.

joggle

An enlarged area of a post for supporting the foot of a strut or brace.

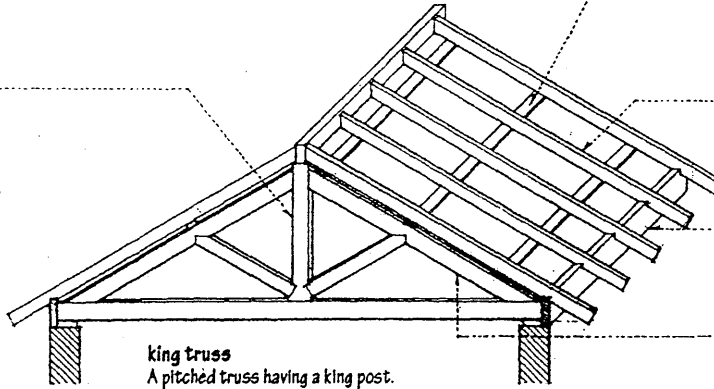

king truss
A pitched truss having a king post.

purlin

A longitudinal member of a roof frame for supporting common rafters between the ridge and the eaves. Also, purline. Also called binding rafter.

subpurlin

A light structural member for carrying roofing materials, supported by and running at right angles to purlins.

common rafter

A rafter extending from a wallplate to a ridgeboard or ridgebeam and having no function other than to support sheathing and covering of a roof.

pole plate

A beam perpendicular to the ends of the beams in a trussed roof and supporting common rafters near their lower ends.

principal rafter

A diagonal member of a roof principal, usually forming part of a truss and supporting the purlins on which common rafters rest.

principal

A member in a frame structure upon which adjacent or similar members depend for support or reinforcement.

straining piece

A horizontal tie beam uniting the tops of two queen posts. Also called straining beam.

queen post


Either of the two vertical web members set at equal distances from the apex of a pitched truss.

tie beam

A horizontal timber for connecting two structural members to keep them from spreading apart, as a beam connecting the feet of two principal rafters in a roof truss.

straining sill


A compression member lying along and dogged to the tie beam of a queen truss and separating the feet of the queen posts.

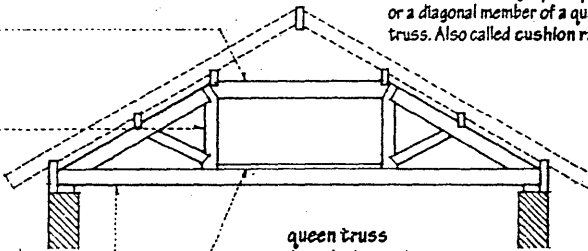

queen truss
A pitched truss having two queen posts connected by a straining piece.

auxiliary rafter

A rafter reinforcing a principal rafter or a diagonal member of a queen truss. Also called cushion rafter.

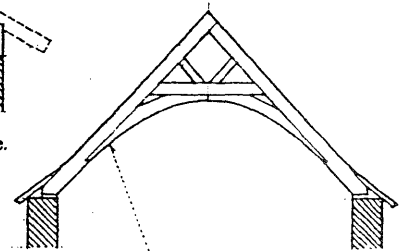

arch brace

A curved brace, usually used in pairs to support a roof frame and give the effect of an arch.

hammer post

A vertical timber set on the inner end of a hammer beam and braced to a collar beam above to support a purlin.

hammer beam

One of pair of short horizontal members attached to the foot of a principal rafter at the level of the wall plate, used in place of a tie beam.

hammer brace


A bracket for supporting a hammer beam.

bracket


A support projecting horizontally from a wall to bear the weight of a cantilever or to strengthen an angle.

pendant post

A vertical timber supported at its lower end by a corbel and carrying at its upper end a hammer beam or tie beam.

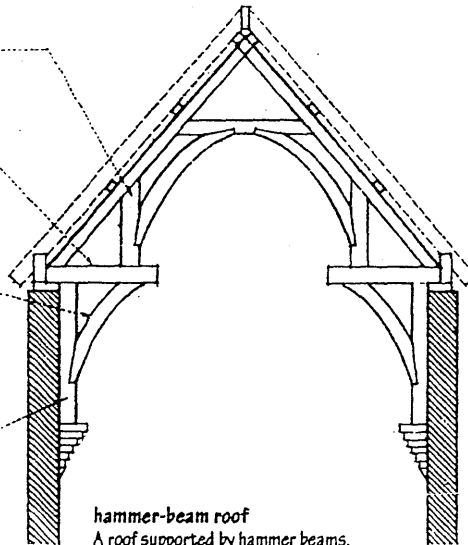

hammer-beam roof
A roof supported by hammer beams.



cruck

One of a pair of naturally curved timbers, forming one of several arched frames supporting the roof of an old English cottage or farm building.

ridge beam

A beam for supporting the upper ends of rafters at the ridge of a roof.

ridge board

A horizontal timber at the ridge of a roof, to which the upper ends of the rafters are fastened. Also called *ridgepole*, *ridgepiece*.

roof framing

The act, process, or manner of constructing the structural frame of a roof.

couple

A pair of rafters connected by a collar beam or tie beam. Also called *couple-close*.

collar beam

A horizontal timber uniting two opposing common rafters at a point below the ridge, usually in the upper half of the rafter length. Also called *collar tie*.

rafter

Any of a series of small, parallel beams for supporting the sheathing and covering of a pitched roof.

ceiling joist

A joist for carrying the finish ceiling of a room.

knee wall

A short wall supporting rafters at some intermediate position along their length.

bird's mouth

A right-angled notch cut on the underside of a rafter to fit over a longitudinal member, as a wall plate.

seat cut

A horizontal cut at the lower end of a rafter that allows it to rest on and be connected to a wall plate. Also called *foot cut*, *plate cut*.

top cut

A plumb cut at the upper end of a rafter where it butts against a ridgeboard.

plumb

Vertical or perpendicular in direction.

stepping off

A method of determining the length of a rafter with a framing square, by marking an increment of angular length for each foot of horizontal run.

lookout

A relatively short bracket or cantilever for supporting the overhang of a roof. Also called *tailpiece*.

fly rafter

Either of the end rafters in the part of a gable roof that projects beyond the gable wall.

jack

Having a length or height less than that of most of the others in a framed structure, as a *jack rafter* or *jack truss*.

jack rafter

Any rafter that is shorter than the full length of the roof slope, as one meeting a hip or a valley.

valley jack

A jack rafter extending from a valley rafter to a ridge.

valley rafter

A rafter connecting the ridge to the wall plate along a valley.

cripple jack

A rafter joining a hip to a valley. Also called *double jack rafter*.

hip jack

A jack rafter extending from a wall plate to a hip rafter.

hip rafter

A rafter forming the junction of the sloping sides of a hip roof.

dragon beam

A short beam receiving and holding the foot of a hip rafter to counteract its thrust. Also called *dragon piece*.

dragon tie

An angle brace for supporting one end of a dragon beam.

barge couple

A pair of rafters supporting the part of a gable roof that projects beyond the gable wall.

bargeboard

A board, often carved, attached to the projecting end of a gable roof. Also called *vergeboard*.

outrigger



A beam extending outward from a main structure to support the projection of a floor or roof.

backing

A bevel given to the outer and upper edge of a hip rafter in order to allow sheathing to fit the top of the rafter without leaving a triangular space between it and the lower side of the roof covering.

cheek cut

An oblique angular cut at the end of a jack rafter enabling it to fit tightly against a hip rafter or valley rafter. Also called *side cut*.



ROOF

roofing

Any of various water-resistant materials, as shingles, slates, or tiles, laid on a roof to shed or drain rainwater.

shingle

A thin, usually oblong piece of wood, asphaltic material, slate, metal, or concrete, laid in overlapping rows to cover the roof and walls of buildings.

imbrication

The overlapping of shingles or roofing tiles with break joints to form a weathertight covering.

break joints

The arranging of building units, as masonry, shingles, or siding, to ensure that vertical joints are not continuous in adjacent courses. Also called **staggered joints**.

common lap

A method of laying shingles by offsetting alternate courses one-half the width of a shingle.

toplap

The distance by which a shingle, slate, or roofing tile overlaps another in the course immediately below it.

exposure

The portion of the length of a shingle, slate, or roofing tile left exposed to the weather when laid in place. Also called **gauge**, **margin**.

headlap

The distance by which a shingle, slate, or roofing tile overlaps another in the second course below it.

ridgecap

A course or layer of roofing material covering the ridge of a roof.

ridge course

The top course of shingles, slates, or roofing tiles next to a ridge, cut to the required length.

ribbon course

One of the alternate courses of shingles or slate laid with shorter or longer exposure.

staggered course


A course of shingles laid with the butts slightly above or below the one adjacent.

doubling course

A double layer of shingles or tiles laid at the foot of a roof slope or a vertical section of shingling.

starting course

The first course of shingles, slates, or tiles along the eaves of a roof before the first regular course is laid.

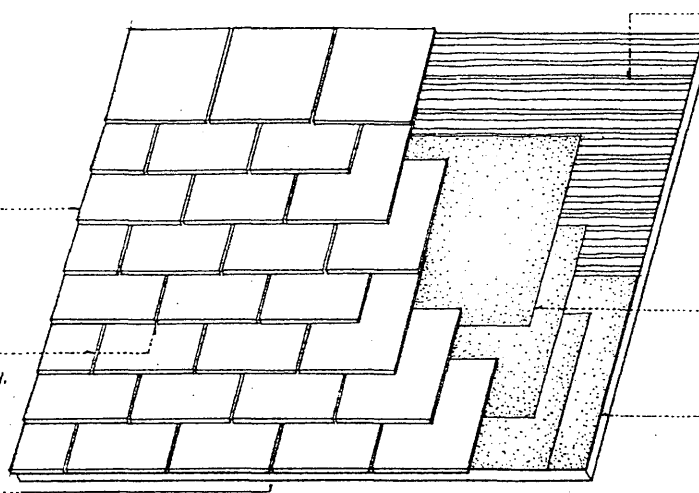

sheathing

Boards or structural panels, as plywood, fastened to the frame of a wall or roof as a base for cladding or roofing.

panel clip

An H-shaped metal device for joining sheets of plywood roof sheathing at unsupported joints.

underlayment

A weather-resistant material, as roofing felt, for covering and protecting a roof deck before shingles are applied.

eaves flashing

An additional layer of underlayment cemented to a roof deck to prevent melting ice and snow from backing up under the roofing along the eaves.

ice dam

A buildup of snow and ice along the eave of a sloping roof.

Dutch lap

A method of laying shingles or slates by lapping each shingle over one to the side and one below.

sidelap

The distance by which a shingle, slate, or roofing tile overlaps an adjacent one along its side edge. Also called **endlap**.

coverage

The amount of weather protection provided by the overlapping of shingles or slates.

square

A unit for measuring roofing materials, equal to 100 sq. ft. (9.3 sq. m) of coverage.

asphalt shingle

A composition shingle having an asphalt-impregnated felt base, surfaced on the weather side with colored mineral granules embedded in a hot asphaltic coating.

fiberglass shingle

A composition shingle having an inorganic fiberglass base, saturated with asphalt and surfaced on the weather side with colored ceramic granules.

closed valley

A valley formed by overlapping successive courses of shingles in alternate directions. Also called **laced valley**, **woven valley**.

open valley


A valley at which shingles or slates are not laid to the intersection, exposing a lining of sheet metal or roll roofing.

valley flashing

A wide strip of sheet metal or roofing felt for lining the valley of a roof.

drip edge

A metal molding placed along the eaves and rakes of a sloping roof to allow rainwater to drip free.

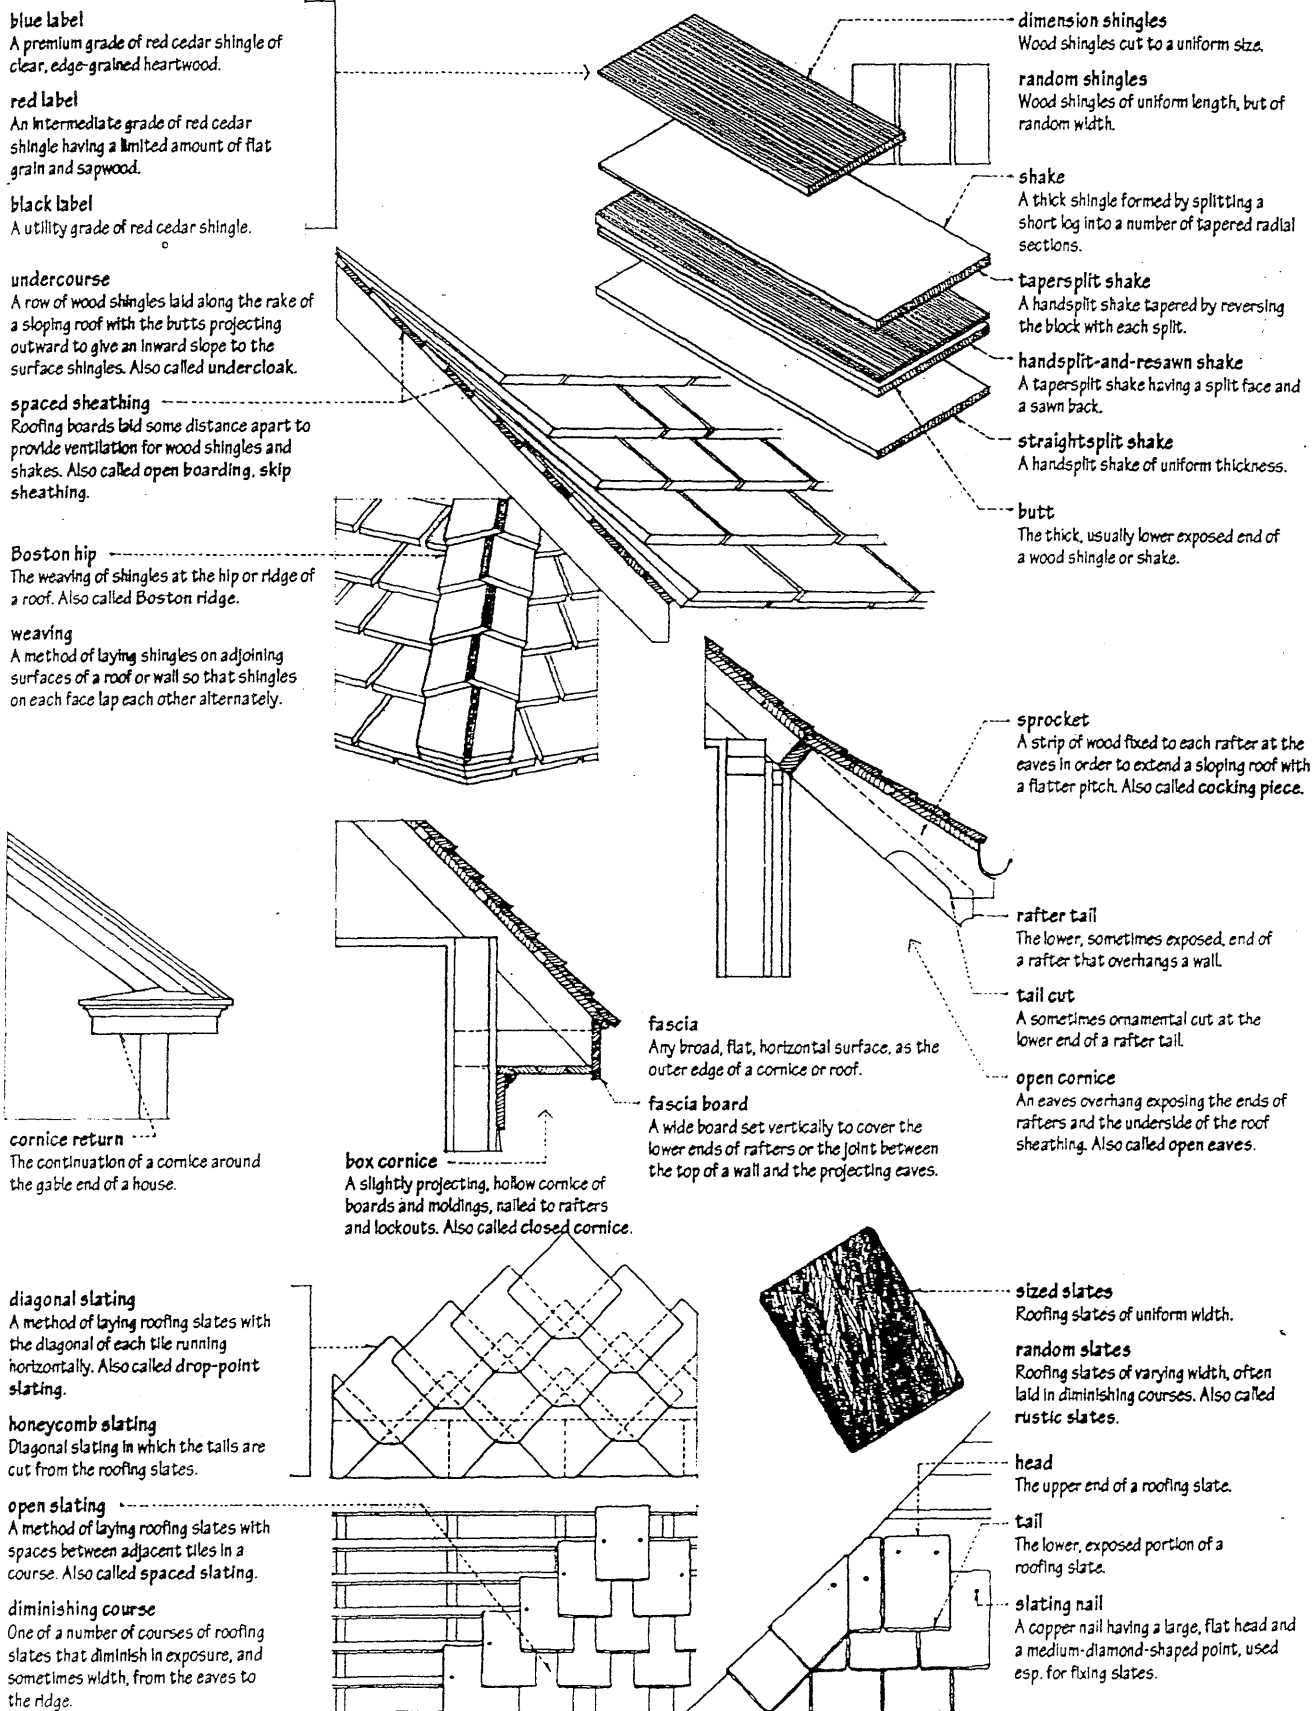

ROOF

roofing tile

Any of various clay or concrete tiles for covering a roof.

field tile


One of the roofing tiles covering the main expanse of a roof.

hip tile

A convex roofing tile for covering the hip of a roof. Also called bonnet tile.

ridge tile

A convex, sometimes decorated roofing tile for covering the ridge of a roof. Also called crown tile.

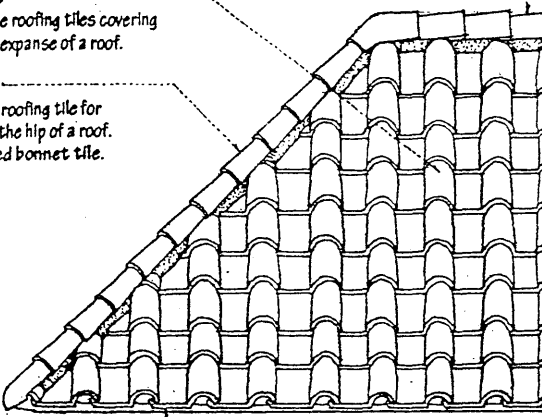

eaves course

A first course of shingles, slates, or tiles on a roof.

barge course


A row of slates or tiles placed on and projecting over the raking edges of a gable.

rake tile

A roofing tile formed to cover the rake of a sloping roof.

arris tile

An L-shaped roofing tile for covering the ridge, hip, or rake of a roof. Also called angle tile.



starter tile


A roofing tile, usually shorter or plainer than the field tiles, placed under the eaves course to give it a proper slope.

ridge roll

A rounded cap for covering the ridge of a roof.

oil-canning

The slight waviness of a sheet metal surface.

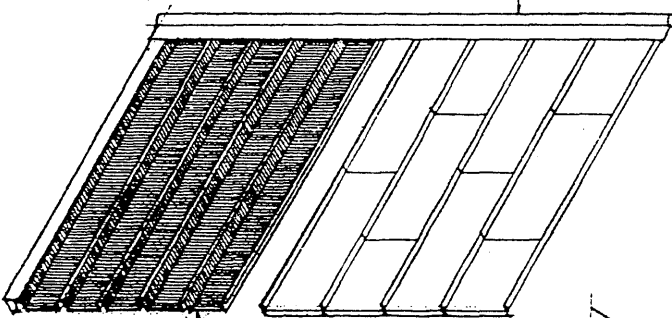

corrugated roofing

A roof covering of corrugated sheets of galvanized iron, coated steel, aluminum, fiberglass, or reinforced plastic.

copper roofing

A roof covering of copper sheets, joined by standing seams.

tin roofing

A roof covering of flexible tinplate or terneplate.

Monel metal

Trademark for a brand of an alloy consisting mainly of nickel and copper.

hold-down clip

A metal clip for securing lengths of sheet metal.

overcloak

The part of a sheet of metal roofing that laps over a sheet beneath it at a drip or seam.

undercloak

The lower sheet of metal roofing at a drip or seam.

cleat

A strip of metal or wood attached to a surface to restrain or support an element or member.

tile tie

A twisted wire tie extending from the eaves to the ridge of a roof, to which roofing tiles are secured.

mission tile

A tapered, semicylindrical roofing tile laid convex side up to overlap flanking, similar tiles laid concave side up. Also called Spanish tile.

imbrex

A tapered, semicylindrical roofing tile laid convex side up.

tegula

A tapered, semicylindrical roofing tile laid concave side up.

pantile

A roofing tile having an S-shaped cross section, laid so the downturn of one overlaps the upturn of the next in the same course.

pan-and-roll tiling

A system of roofing tiles consisting of tapered, semicylindrical tiles overlapping the flanges of flat undertiles in the same course.

interlocking tile

A flat, rectangular roofing tile having a groove along one edge that fits over a flange in the next tile in the same course.

shingle tile

A flat, rectangular roofing tile laid in an overlapping pattern.

batten

A horizontal wood strip on which roofing tiles or slates are hung.

tilting fillet

A wooden strip of triangular section used to raise the edge of a double eaves course and ensure that the tails of the lowest tiles bed tightly on each other. Also called aris fillet.

lock seam

A joint between two pieces of sheet metal, made by folding up the adjoining edges against each other, folding them over, and flattening the interlock.

standing seam

A joint between two pieces of sheet metal, made by folding up the adjoining edges against each other, then folding their upper portion over in the same direction a number of times.

batten seam

A joint between two pieces of sheet metal, made by turning up the adjoining edges against a batten and locking them in place with a metal strip placed over the batten.

roll seam



A joint between two pieces of sheet metal in the direction of fall of a curved or sloping roof, made by turning up the adjoining edges against each other, then bending them around to form a cylindrical roll.

bead

An edge of sheet metal stiffened by bending and flattening a narrow strip or rolling the edge into a tube shape.

Hypalon
Trademark for a brand of chlorinated polyethylene.

EPDM
Ethylene propylene diene monomer, a synthetic rubber manufactured in sheets and used as a roofing membrane.

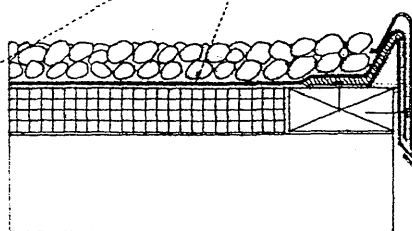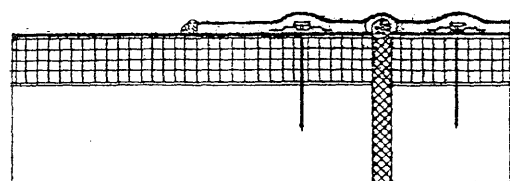


single-ply roofing
A sheet of elastomeric material, as neoprene, EPDM, or PVC, having seams fused by heat or a solvent, fixed to a roof deck with adhesive, mechanical fasteners, or by the weight of a gravel ballast. Also called elastomeric roofing.


elastomeric
Having the elastic qualities of natural rubber.

gravel stop
A metal strip with a vertical flange for retaining surfacing aggregate and preventing leaks around the edge of a built-up roof.

protected membrane roof
A single-ply roofing membrane protected from sunlight and extremes of temperature by a layer of rigid board insulation and an additional layer of gravel ballast.

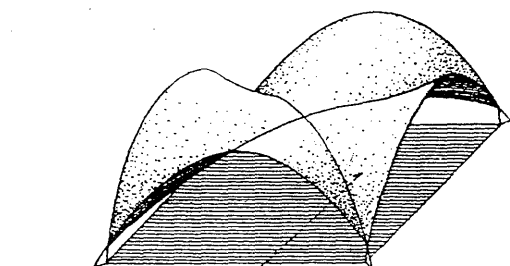


fluid-applied roofing
A continuous covering for roofs of complex geometry, consisting of an elastomeric material, as neoprene, Hypalon, or butyl rubber, applied in multiple coats with a roller or spray gun and curing to form a continuous membrane.




selvage
The edge of a sheet of roll roofing that is free of granules and most of the asphalt coating so as to provide a better bond with the lap of the next sheet.

roll roofing
A roofing material consisting of felt saturated with asphalt and surfaced on the weather side with a harder asphalt mixed with mineral or glass fibers, and a covering of mineral granules.

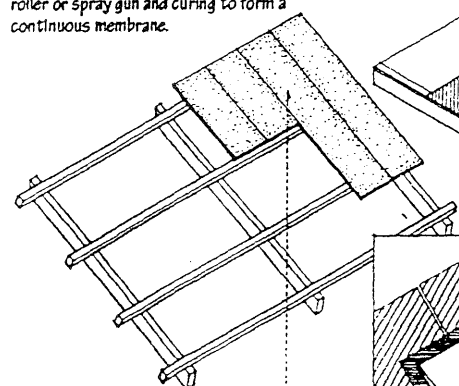

structural insulating roof deck
A cementitious insulating board of lightweight aggregate or wood fibers bonded under pressure with portland cement, having a factory-finished underside for use on roofs with exposed beams.

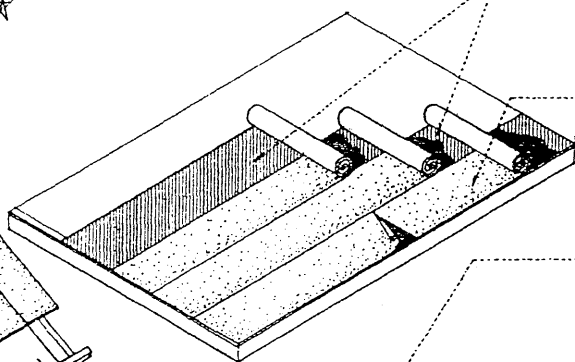

bitumen
Any of various mixtures of hydrocarbons occurring naturally or distilled from coal or petroleum, as asphalt or coal tar, used for surfacing roads, waterproofing, and roofing. Before application, the semisolid matter must be dissolved in a solvent, emulsified, or heated to a liquid state.

asphalt
A brownish-black mixture of bitumens obtained from native deposits or as a petroleum by-product, used for paving, waterproofing, and roofing.

coal tar
A viscous, black liquid formed during the distillation of coal, used for paints, waterproofing, and roofing.

wear course
A layer of gravel serving to protect a roofing membrane from mechanical abrasion and uplifting wind forces.

cap sheet
A sheet of coated, mineral-surfaced felt, used as the top ply in a built-up roof.


base sheet
A felt impregnated with asphalt or coal tar for use as the first ply in the laying of a built-up roof.

roofing felt
A matted, fibrous material impregnated with a bituminous material for increased toughness and resistance to weather. Also called roofing paper.

rigid board insulation

cold-process roofing
A roof covering consisting of layers of roofing felt or synthetic fabric bonded and sealed with a cold application of an asphalt mastic or cement.



roofing bond
A guarantee by a surety company that a roofing manufacturer will repair a roof membrane or covering under the conditions listed in the bonding contract.

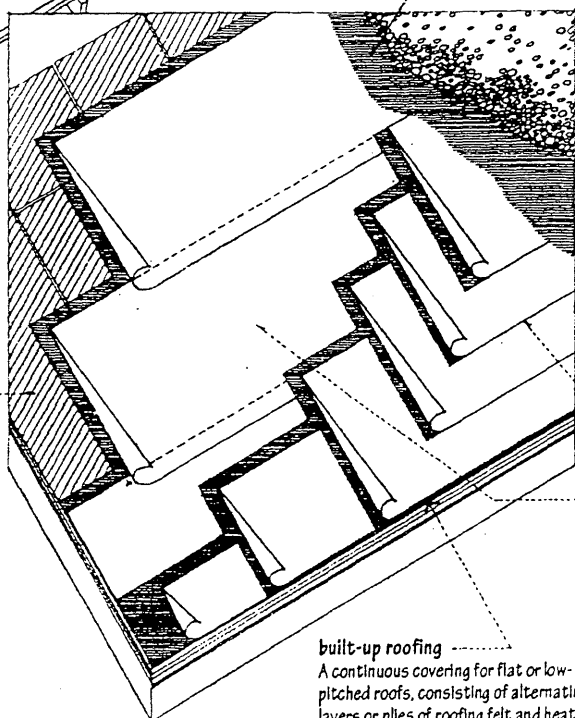

built-up roofing
A continuous covering for flat or low-pitched roofs, consisting of alternating layers or plies of roofing felt and heated bitumen, surfaced with a cap sheet or a layer of gravel or slag in a heavy coat embedded in bitumen.

ROOM

A portion of space within a building, separated by walls or partitions from other similar spaces.

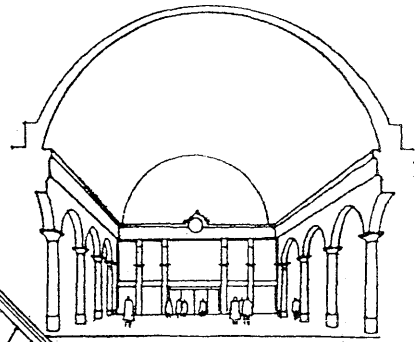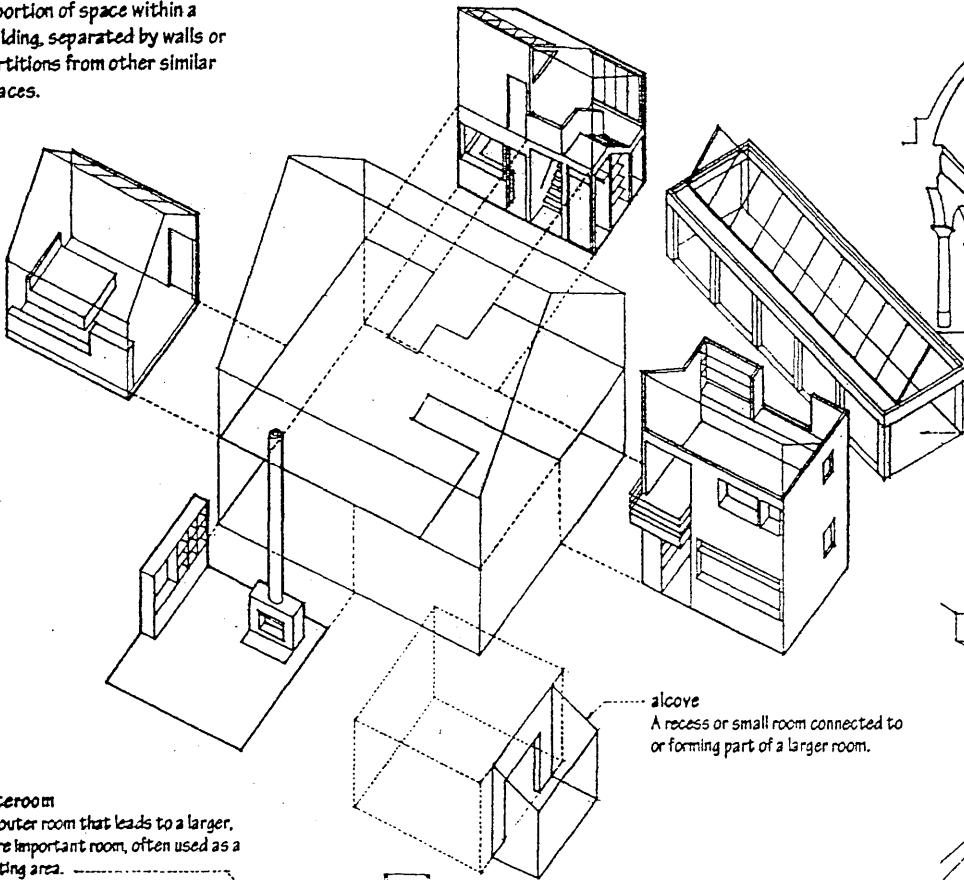

hall
A large room or building for public gatherings or entertainment.

gallery
A long, relatively narrow room or hall, esp. one for public use and having architectural importance through its scale or decorative treatment.


anteroom
An outer room that leads to a larger, more important room, often used as a waiting area.

hallway
A corridor or passageway in a house, hotel, or other building. Also called hall.

corridor
A narrow passageway or gallery connecting parts of a building, esp. one into which several rooms or apartments open.

suite
A connected series or group of rooms arranged to be used together.

closed plan
A floor plan consisting of fully enclosed spaces or distinct rooms linked by doorways.


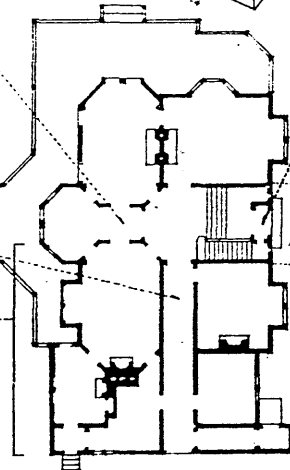


alcove
A recess or small room connected to or forming part of a larger room.


vestibule
A small entrance hall between the outer door and the interior of a house or building.

functional grouping
A set of furniture pieces arranged according to function and use.

tight fit
A close, often compact correspondence between functional groupings and the form or structure of the enclosing space.

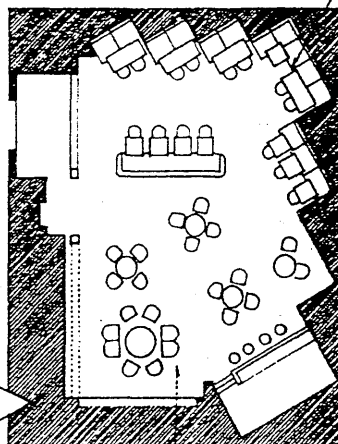


enfilade
An axial arrangement of doorways connecting a series of rooms so as to provide a vista down the entire length of the suite.





loose fit
A free and unrestrained arrangement of furniture groupings that does not necessarily correspond to the form or structure of the surrounding space.

open plan
A floor plan having no fully enclosed spaces or distinct rooms.

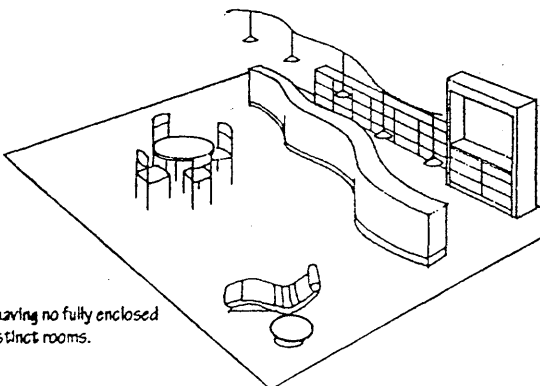

mass

The physical volume or bulk of a solid body.

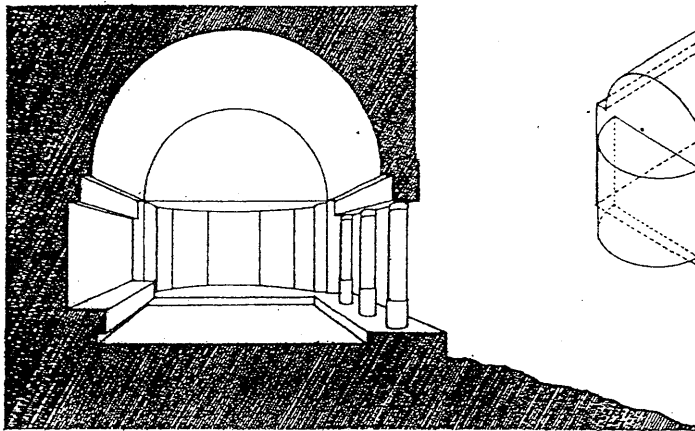


space

The three-dimensional field in which objects and events occur and have relative position and direction, esp. a portion of that field set apart in a given instance or for a particular purpose.


Euclidean space

Ordinary two- or three-dimensional space in which Euclid's definitions and axioms apply. Also called Cartesian space.

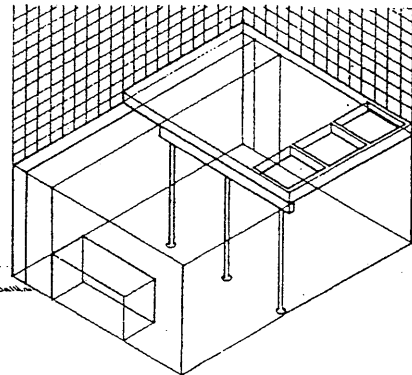

void

An empty space contained within or bounded by mass.

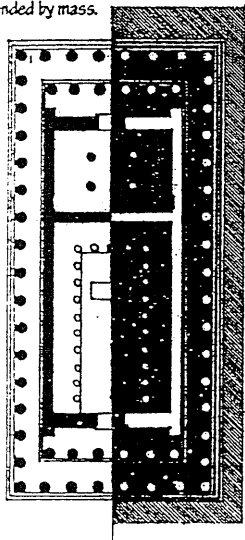

place




A physical environment having particular characteristics or used for a particular purpose.

ambience

The mood, character, or atmosphere of an environment or milieu. Also, *ambiance*.

animated

Full of life, activity, movement, or spirit.

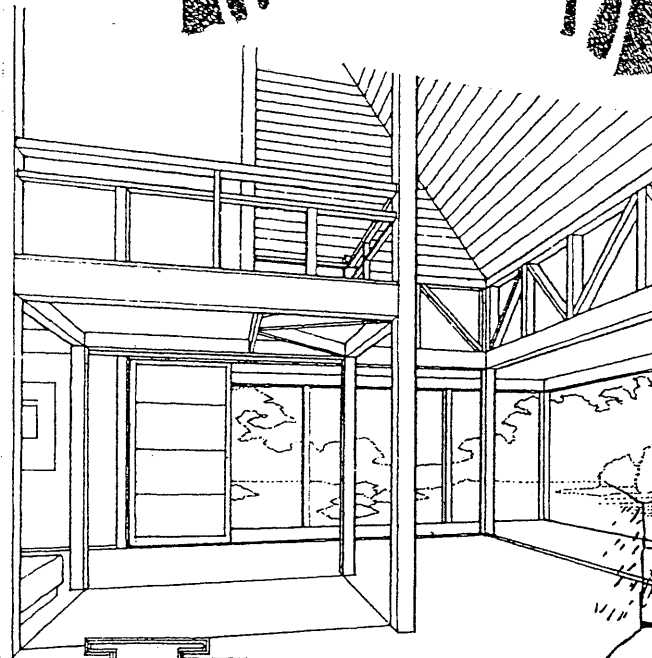


refuge

A place affording shelter, protection, or safety from danger or distress.

repose

A place of rest and tranquility.




center

A point or place upon which interest, activity, or emotion focuses.



focus

A central point of attraction, attention, or activity.

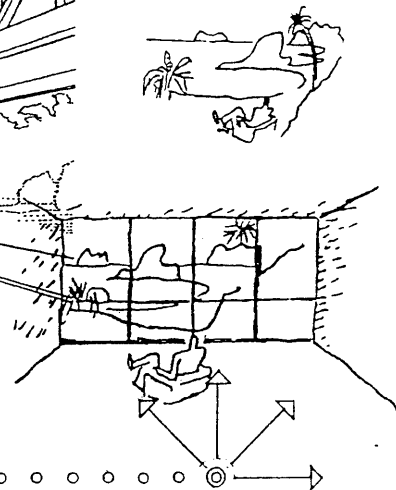

outlook


A view from a particular place, or the place offering a view.

prospect

An outlook over a region or in a particular direction, or the place that commands such a view.


adjacent spaces

Two spaces abutting or contiguous with each other, esp. when having a common boundary or border.




linked spaces

Two spaces joined or connected by a third intervening space.




interlocking spaces

Two spaces interwoven or fit into each other so as to form a zone or field of shared space.




embedded space

A space enveloped or incorporated as an essential part of a larger space.

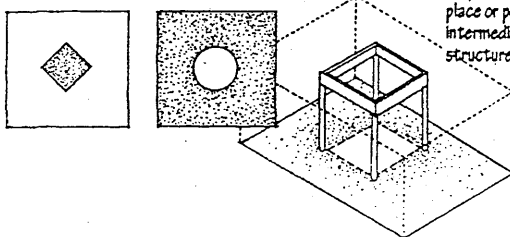


linear organization

Spaces extended, arranged, or linked along a line, path, or gallery.




centralized organization

Spaces gathered about or coming together at a large or dominant central space.

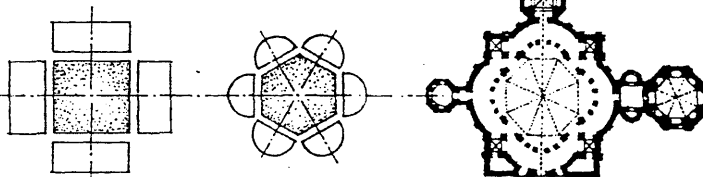


radial organization

Spaces arranged like radii or rays from a central space or core.





grid organization

Spaces organized with reference to a rectangular system of lines and coordinates.



clustered organization

Spaces grouped, collected, or gathered closely together and related by proximity rather than geometry.

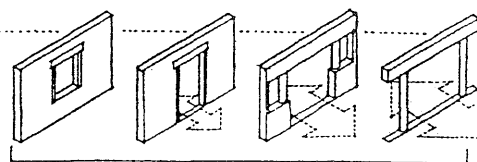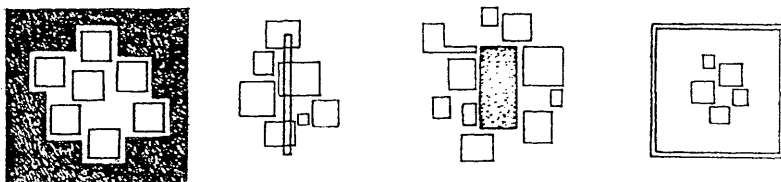

transition

Movement, passage, or change from one form, state, or place to another.

interstice

A small or narrow intervening space between things or parts.

mediating space


A space occupying an intermediate place or position, esp. to serve as an intermediary between differing forms, structures, or functions.

edge

A line or narrow part where an area begins or ends.

threshold

A place or point of entering or beginning.


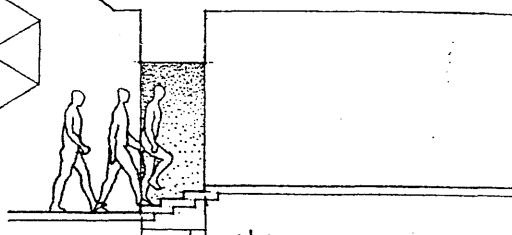


circulation

The passage of persons or things from one place to another or through an area.


path

A route or course along which movement occurs, or the pattern of such movement.

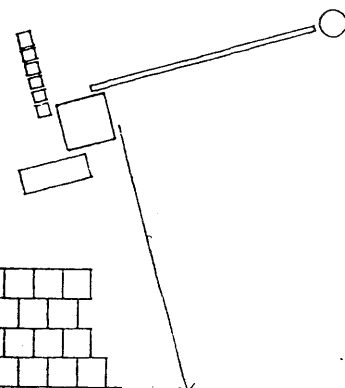


membrane stresses

The compressive, tensile, and shear stresses acting in the plane of the surface of a shell structure. A shell can sustain relatively large forces if uniformly applied. Because of its thinness, however, a shell has little bending resistance and is unsuitable for concentrated loads.

**thin shell**



A shell structure constructed of reinforced concrete.



A thin, curved plate structure, shaped to transmit applied forces by compressive, tensile, and shear stresses acting in the plane of the surface.

translational surface

A surface generated by sliding a plane curve along a straight line or over another plane curve.

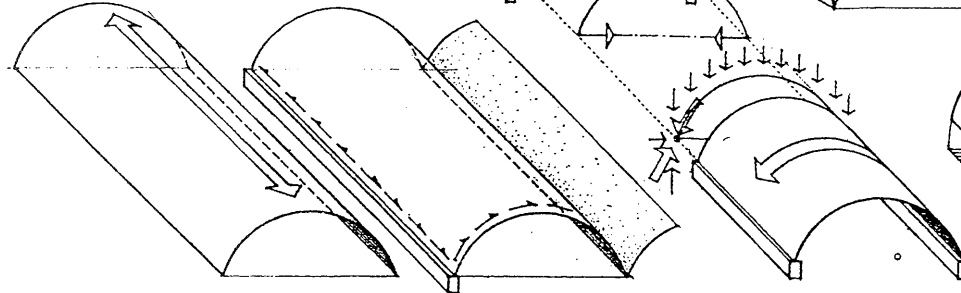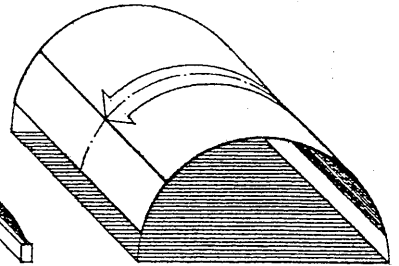**barrel shell**



A rigid cylindrical shell structure.

If the length of a barrel shell is three or more times its transverse span, it behaves as a deep beam with a curved section spanning in the longitudinal direction. Edges are stiffened with beams or adjoining shells.

If it is relatively short, it exhibits archlike action. Tie rods, transverse rigid frames, or the like are required to counteract the outward thrusts of the arching action.

cylindrical surface

A surface generated by sliding a straight line along a plane curve, or vice versa. Depending on the curve, a cylindrical surface may be circular, elliptic, or parabolic. Because of its straight line geometry, a cylindrical surface can be regarded as being either a translational or a ruled surface.

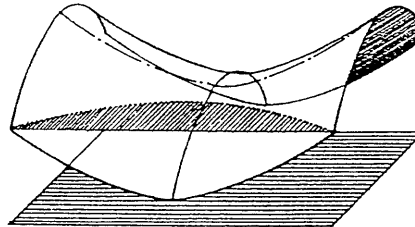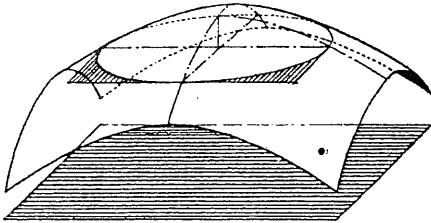**elliptic paraboloid**



A surface generated by sliding a vertical parabola with downward curvature along a perpendicular parabola with downward curvature. Its horizontal sections are ellipses while its vertical sections are parabolas.

hyperbolic paraboloid

A surface generated by sliding a parabola with downward curvature along a parabola with upward curvature, or by sliding a straight line segment with its ends on two skew lines. It can be considered to be both a translational and a ruled surface. Also called hyper.

paraboloid

A surface all of whose intersections by planes are either parabolas and ellipses or parabolas and hyperbolas.



**saddle surface**

A surface having an upward curvature in one direction and a downward curvature in the perpendicular direction.

In a saddle-surfaced shell structure, regions of downward curvature exhibit archlike action, while regions of upward curvature behave as a cable structure. If the edges of the surface are not supported, beam behavior may also be present.

anticlastic


Having opposite curvatures at a given point.

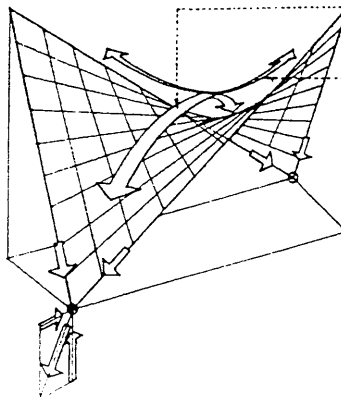

SHELL

ruled surface

A surface generated by the motion of a straight line. Because of its straight line geometry, a ruled surface is generally easier to form and construct than a rotational or translational surface.

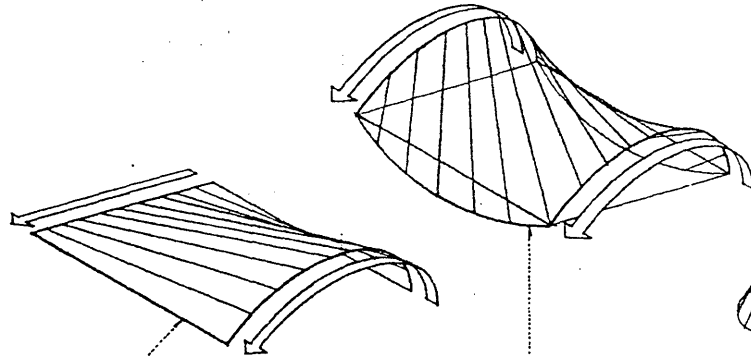


conoid

A ruled surface generated by sliding a straight line with one end on a straight line segment and the other on a plane curve. Depending on the curve, a conoid may be circular, elliptic, or parabolic.


hyperboloid

A surface having a finite center with certain plane sections that are hyperbolas and others that are circles or ellipses.

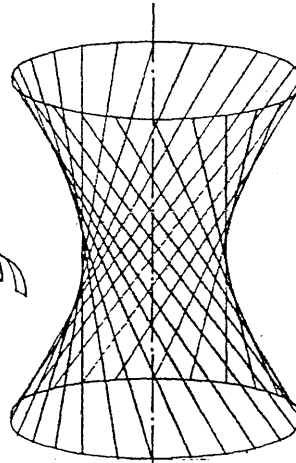

one-sheet hyperboloid

A ruled surface generated by sliding an inclined line segment on two horizontal circles. Its vertical sections are hyperbolas.



rotational surface

A surface generated by rotating a plane curve about an axis.


synclastic

Having similar curvatures at a given point.




spherical surface

A rotational surface generated by the revolution of a circular arc about a vertical axis.






elliptical surface

A rotational surface generated by the revolution of a half ellipse about a vertical axis.



parabolic surface

A rotational surface generated by the revolution of a parabola about a vertical axis.

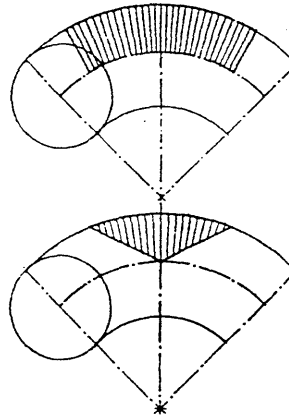

torus

A doughnut-shaped surface generated by the revolution of a circle about an exterior line lying in its plane.

encroachment

The unauthorized extension of a building, or part thereof, on the property or domain of another.

setback


The minimum required distance from every structure to the property lines of a lot, established by a zoning ordinance to provide for air, light, solar access, and privacy.

curb cut

A depression in a curb providing vehicular access from a street to a driveway on private property.

contract limit

A perimeter line established on the drawings or elsewhere in the contract documents defining the boundaries of the site available to the contractor for construction purposes.

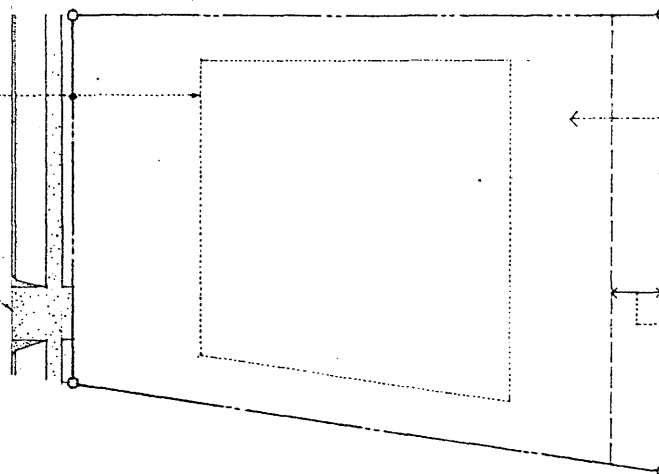

Work done at a site in preparation for a construction project, as excavation, sheeting, shoring, and grading.

site

The geographic location of a construction project, usually defined by legal boundaries.

property line

One of the legally defined and recorded boundaries of a parcel of land. Also called lot line.

easement

A legal right held by specified persons or the public to make limited use of the land of another, as a right-of-way.

overburden


Waste earth and rock overlying a useful mineral deposit, bedrock, or a deposit of sand, gravel, or rock needed for construction. Also called burden.

test pit

A small pit dug to examine the existing soil conditions and determine the depth of the water table at a proposed building site.

batter board

One of a number of boards set horizontally with vertical stakes to support the strings outlining the foundation plan of a proposed building.

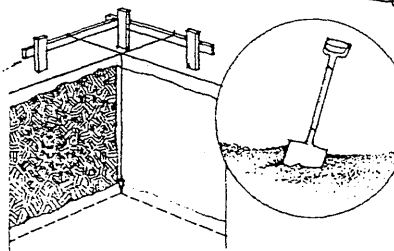

groundbreaking

The act or ceremony of breaking ground for a new construction project.

earthwork

The excavation and embankment of earth in connection with an engineering operation.

shoring

A system of shores for bracing or supporting a wall or other structure.

shore

A temporary supporting strut, esp. one placed obliquely against the side of an excavation, formwork, or structure.

raker


An inclined shore for supporting a wall. Also called raking shore.

flying shore

A horizontal strut fixed between and supporting two walls above ground level.

cofferdam

A watertight enclosure constructed underwater or in water-bearing soil and pumped dry to allow access for construction or repairs.




dewater

To remove water from an excavated job site, usually by draining or pumping.

boil

An unwanted flow of water and solid matter into an excavation, due to excessive outside water pressure. Also called blow.

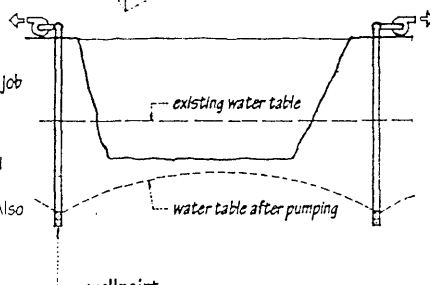

Abyssinian well

A perforated pipe driven into the ground for pumping out collected ground water.

wellpoint

A perforated tube driven into the ground to collect water from the surrounding area so it can be pumped away, as to lower a water table or to prevent an excavation from filling with groundwater.

excavation

The digging and removal of earth from its natural position, or the cavity resulting from such removal.

tieback

A steel rod or tendon attached to a deadman or a rock or soil anchor to prevent lateral movement of a retaining wall or formwork.

sheet pile

Any of a number of timber, steel, or precast concrete planks driven vertically side by side to retain earth or prevent water from seeping into an excavation. Also called sheath pile.

lagging

A number of boards joined together side by side to retain the face of an excavation.

soldier pile


A steel H-section driven vertically into the ground to support horizontal sheeting or lagging. Also called soldier beam.

tremie

A funnellike device with a pipe or tube for depositing concrete underwater.

slurry wall

A concrete wall cast in a trench to serve as sheeting and often as a permanent foundation wall, constructed by excavating a trench in short lengths, filling it with a slurry of bentonite and water to prevent the sidewalls from collapsing, setting reinforcement, and placing concrete in the trench with a tremie to displace the slurry.



SITWORK

fill
To raise an existing grade with earth, stone, or other material, or the quantity of material used in building up the level of an area.

made ground
Ground that has been raised to a higher level by filling with hard rubble, as stone or broken brick. Also called made-up ground.

borrow pit
A pit from which sand, gravel, or other construction material is taken for use as fill in another location.

cut and fill
An excavating operation in which the excavated material is moved to another location and used as fill.

grade
The ground elevation at any specific point on a construction site, esp. where the ground meets the foundation of a building. Also called grade line.

existing grade
The elevation of the original ground surface before excavation or grading begins. Also called natural grade.

finish grade
The elevation of drives, walks, lawns, or other improved surfaces after completion of construction or grading operations. Also, finished grade.

below grade
Occurring or situated below the surface of the ground.

underpinning
A system of supports that enables an existing foundation to be rebuilt, strengthened, or deepened, esp. the additional support required when a new excavation in adjoining property is deeper than the existing foundation.

rough grading
The cutting, filling, and shaping of earth in preparation for finish grading.

fine grading
The precise grading of an area after rough grading to prepare for paving, seeding, or planting.

grade stake
A stake marking the amount of cut or fill required to bring the ground to a specified level.

controlled fill
Fill material that is placed in layers, compacted, and tested after each compaction for moisture content, depth of lift, and bearing capacity before additional layers are placed.

vertical curve
A smooth parabolic curve in the vertical plane for connecting two grades of different slope in order to avoid an abrupt transition.


bench terrace
An embankment constructed across sloping ground with a steep drop on the downside.

backfill
To refill an excavation with earth, stone, or other material, esp. the space around exterior foundation walls.

subgrade
The prepared earth surface upon which a pavement, concrete slab, or foundation is built. A subgrade should be stable, drain well, and be relatively free of frost action.

needle
A short beam passed through a wall as a temporary support while the foundation or part beneath is repaired, altered, or strengthened. Also called needle beam.

dead shore
An upright timber for supporting a dead load during the structural alteration of a building, esp. one of two supports for a needle.

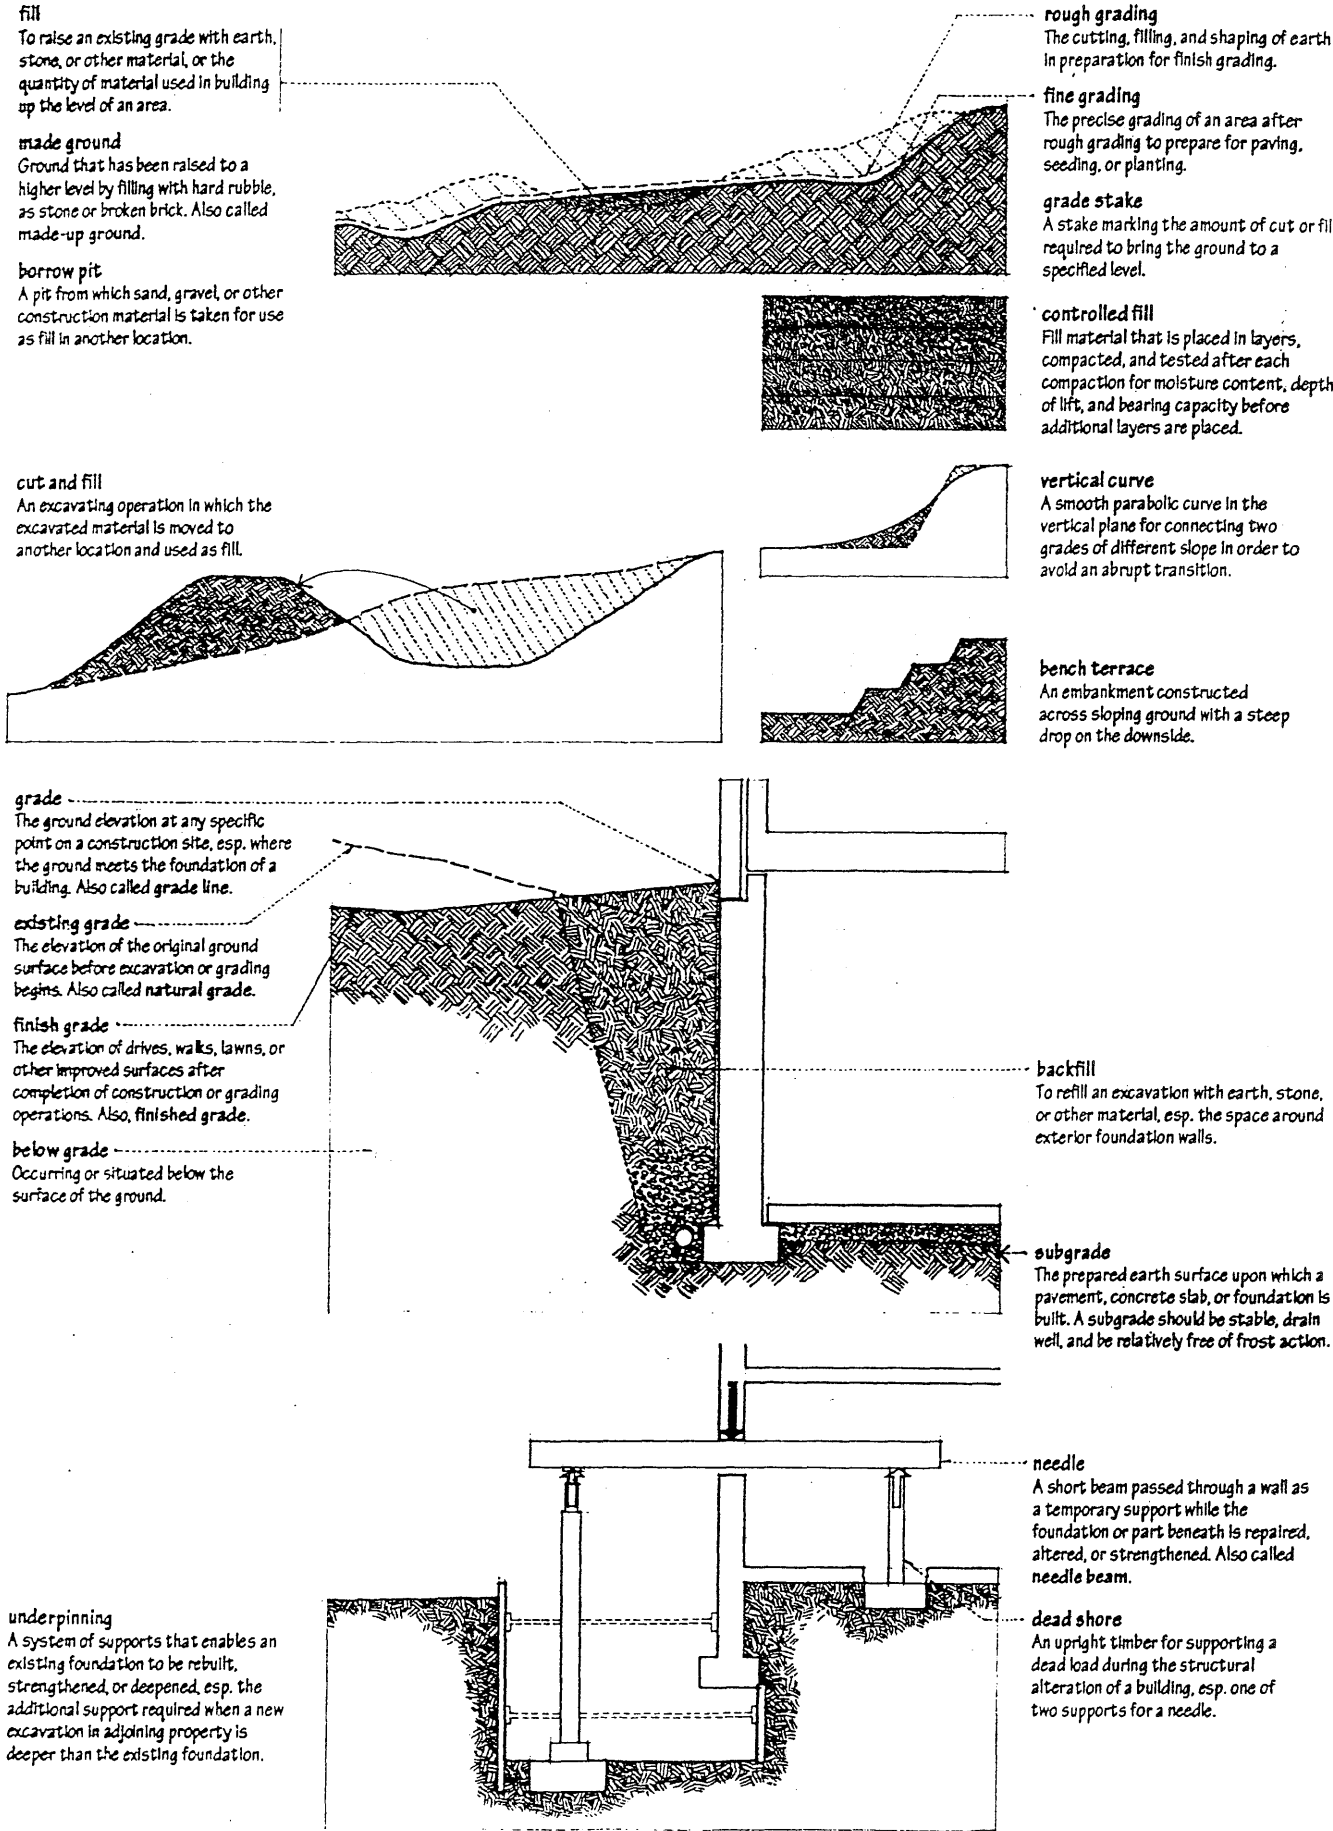

swale
A shallow depression formed by the intersection of two ground slopes, often designed to direct or divert the runoff of surface water.

runoff
Something that drains or flows off, as rain that flows off the land in streams.

groundwater
The water beneath the surface of the ground that supplies wells and springs, consisting largely of surface water that has seeped down.

recharge
The process by which groundwater is absorbed into the water table.

water table
The underground surface beneath which the earth is saturated with water.


perched water table
A water table of limited area, held above the normal water table by an impervious layer.

culvert
A drain or channel passing under a road or sidewalk.

box culvert
A reinforced concrete culvert having a rectangular cross section.

headwall
A concrete or masonry retaining wall at the inlet of a drain or culvert.

endwall
A concrete or masonry retaining wall at the outlet of a drain or culvert.

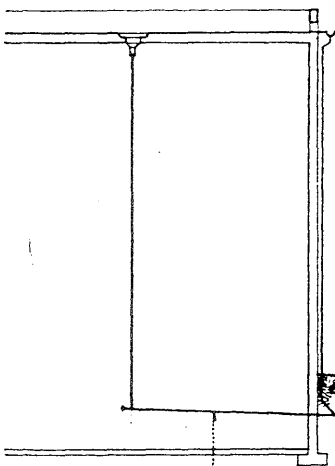

building storm drain
A building drain for conveying rainwater, groundwater, or similar discharge to a building storm sewer or a combined sewer. Also called house storm drain.

building storm sewer
A drain connecting a building storm drain to a storm sewer, combined sewer, or other point of disposal. Also called house storm sewer.

storm sewer
A sewer for conveying rainfall drained from roofs and paved surfaces. Also called storm drain.

combined sewer
A sewer conveying both sewage and rainfall drained from roofs and paved surfaces.

site drainage
The surface and subsurface drainage of a site in order to prevent the collection of excess surface water or groundwater.

surface drainage
The grading and surfacing of a site in order to divert rain and other surface water into natural drainage patterns or a storm sewer system.

cutoff
A wall or other structure intended to eliminate or reduce percolation through porous strata.

curtain drain
A drain placed between the source of water and the area to be protected. Also called intercepting drain.

underdrain
A perforated pipe installed in porous fill to draw off groundwater.

French drain
A drainage trench filled to ground level with loose stones or rock fragments.

subsurface drainage
An underground network of piping for conveying groundwater to a point of disposal, as a storm sewer system. Excess groundwater reduces the load-carrying capacity of a foundation soil and increases the hydrostatic pressure on a building foundation.

area drain
A drain for collecting surface water or rainwater from a basement floor or paved area.

dry well
A drainage pit lined with gravel or rubble to receive surface water and allow it to percolate away to absorbent earth underground. Also called absorbing well.

manhole
A covered hole through which a person may enter a sewer or drain.

catch basin
A receptacle for the runoff of surface water, having a basin which retains heavy sediment before it can pass into an underground drainpipe.

SOIL

The top layer of the earth's surface, consisting of disintegrated rock and decayed organic matter suitable for the growth of plant life.

topsoil
The fertile surface layer of soil, as distinct from the subsoil.


subsoil
The bed or layer of earth immediately beneath the surface soil.

permafrost
Perennially frozen subsoil in arctic or subarctic regions. Also called pergelisol.

bedrock
The unbroken, solid rock that underlies all unconsolidated material on the earth's surface, as soil, clay, sand, or rock fragments.



soil analysis
A process for determining the particle-size distribution in an aggregate, soil, or sediment.

soil class
A numerical classification of soil by texture, used by the U.S. Department of Agriculture: (1) gravel, (2) sand, (3) clay, (4) loam, (5) loam with some sand, (6) silt-loam, and (7) clay-loam.

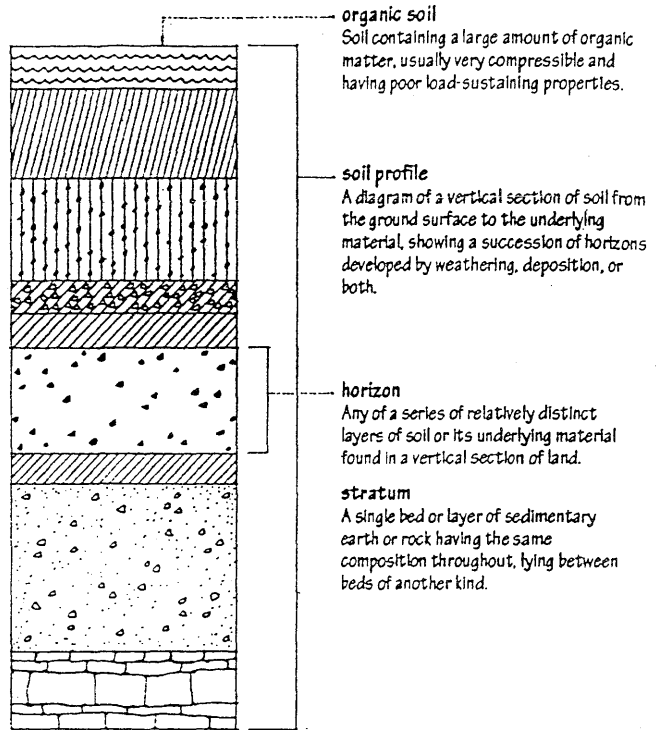

boulder
A large, naturally rounded rock, lying on the surface of the ground or partially embedded in it.

cobble
A naturally rounded stone, smaller than a boulder and larger than a pebble, used for rough paving, walls, and foundations. Also called cobblestone.




gravel
Small pebbles and stones, or a mixture of these with sand, formed either naturally or by crushing rock, esp. such material that will pass a 3-in. (76 mm) sieve and be retained on a No. 4 (4.8 mm) sieve.

crushed gravel
Gravel having one or more fractured faces produced by mechanical crushing.

crushed stone
Stone having well-defined edges produced by the mechanical crushing of rocks or boulders. Also called crushed rock.

pea gravel
A small-diameter, natural gravel, usually 1/4 to 3/8 in. (6.4 to 9.5 mm) in size, screened to specification.


pebble
A small, rounded stone, especially one worn smooth by the action of water.



sand
A loose, granular material resulting from the disintegration of rocks, consisting of grains smaller than gravel but coarser than silt.

sand clay
A well-graded, naturally occurring sand often used as a base or subbase material, having about 10% clay or just enough to make the mixture bind tightly when compacted.

silt
Loose sedimentary material consisting of fine mineral particles between 0.002 mm and 0.05 mm in diameter.



clay
A natural, earthy material that is plastic when moist but hard when fired and is used for making brick, tile, and pottery, composed mainly of fine particles of hydrous aluminum silicates less than 0.002 mm in diameter.

clay loam
Soil containing 27% to 40% clay and 20% to 45% sand.

bentonite
A clay formed by the decomposition of volcanic ash, having the ability to absorb large amounts of water and to expand to several times its natural volume.

loam
A rich soil containing a relatively equal mixture of sand and silt and a smaller proportion of clay and organic matter.

loess
An unstratified, cohesive, loamy deposit deposited by wind.

Atterberg limits

The levels of water content defining the boundaries between the different states of consistency of a plastic or cohesive soil, as determined by standard tests.

liquid limit

The water content, expressed as a percentage of dry weight, at which a soil passes from a plastic to a liquid state.

plasticity index

The numerical difference between the liquid limit and the plastic limit of a soil.

plastic limit

The water content, expressed as a percentage of dry weight, at which a soil loses its plasticity and begins to behave as a solid.

plastic soil

A soil that can be rolled into $\frac{1}{8}$ in. (3.2-mm) diameter threads without crumbling.

shrinkage limit

The water content, expressed as a percentage of dry weight, at which a reduction in water content will not cause a further decrease in the volume of a soil mass.

granular material

Any gravel, sand, or silt that exhibits no cohesiveness or plasticity.

permeability

The property of a porous material that allows a gas or liquid to pass through its pore spaces.

void ratio

The ratio of the volume of void spaces to the volume of solid particles in a soil mass.

critical void ratio

The void ratio corresponding to the critical density of a soil mass.

critical density




The unit weight of a saturated granular material above which it will gain strength and below which it will lose strength when subjected to rapid deformation.

pervious soil

Any permeable soil that allows the relatively free movement of water.

impervious soil





Any fine-grained soil, as clay, having pores too small to permit water to pass except by slow capillary action.

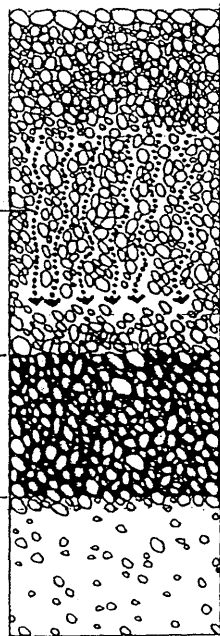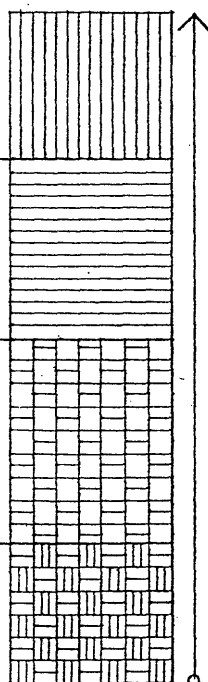**geotechnical**

Of or pertaining to the practical applications of geological science in civil engineering.

foundation investigation

The investigation and classification of a foundation soil based on observation and tests of material disclosed by borings or excavations to obtain the information necessary for the design of a foundation system, including the shearing strength, compressibility, cohesion, expansiveness, permeability, and moisture content of the soil, the elevation of the water table, and the anticipated total and differential settlement. Also called subsurface investigation.

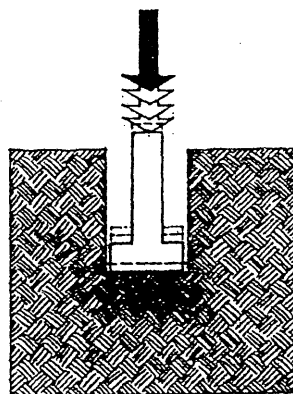**soil mechanics**

The branch of civil engineering that deals with the mechanical behavior of soil when compressed or sheared, or when water flows through it.

soil structure

The arrangement and aggregation of soil particles in a soil mass.

core

An undisturbed, cylindrical sample of earth or rock obtained by means of a core drill and used for analysis and testing of bearing capacity. Also called boring.

cohesive soil

Soil that has considerable strength when unconfined and air-dried, and significant cohesion when submerged.

cohesionless soil

Soil that has little or no strength when unconfined and air-dried, and little or no cohesion when submerged.

compaction

The consolidation of sediment by the weight of overlying deposits, or a similar compression of soil, aggregate, or cementitious material by rolling, tamping, or soaking.

optimum moisture content

The water content of a soil at which maximum density can be attained through compaction.

penetration test

A test for measuring the density of granular soils and the consistency of some clays at the bottom of a borehole, recording the number of blows required by a hammer to advance a standard soil sampler.

penetration resistance


The unit load required to produce a specified penetration into a soil at a specified rate of penetration.


shearing strength

The property of a soil that enables its particles to resist displacement with respect to one another when an external force is applied, due largely to the combined effects of cohesion and internal friction. Also called shearing resistance.


SOLAR ENERGY

Energy derived from the sun in the form of solar radiation.

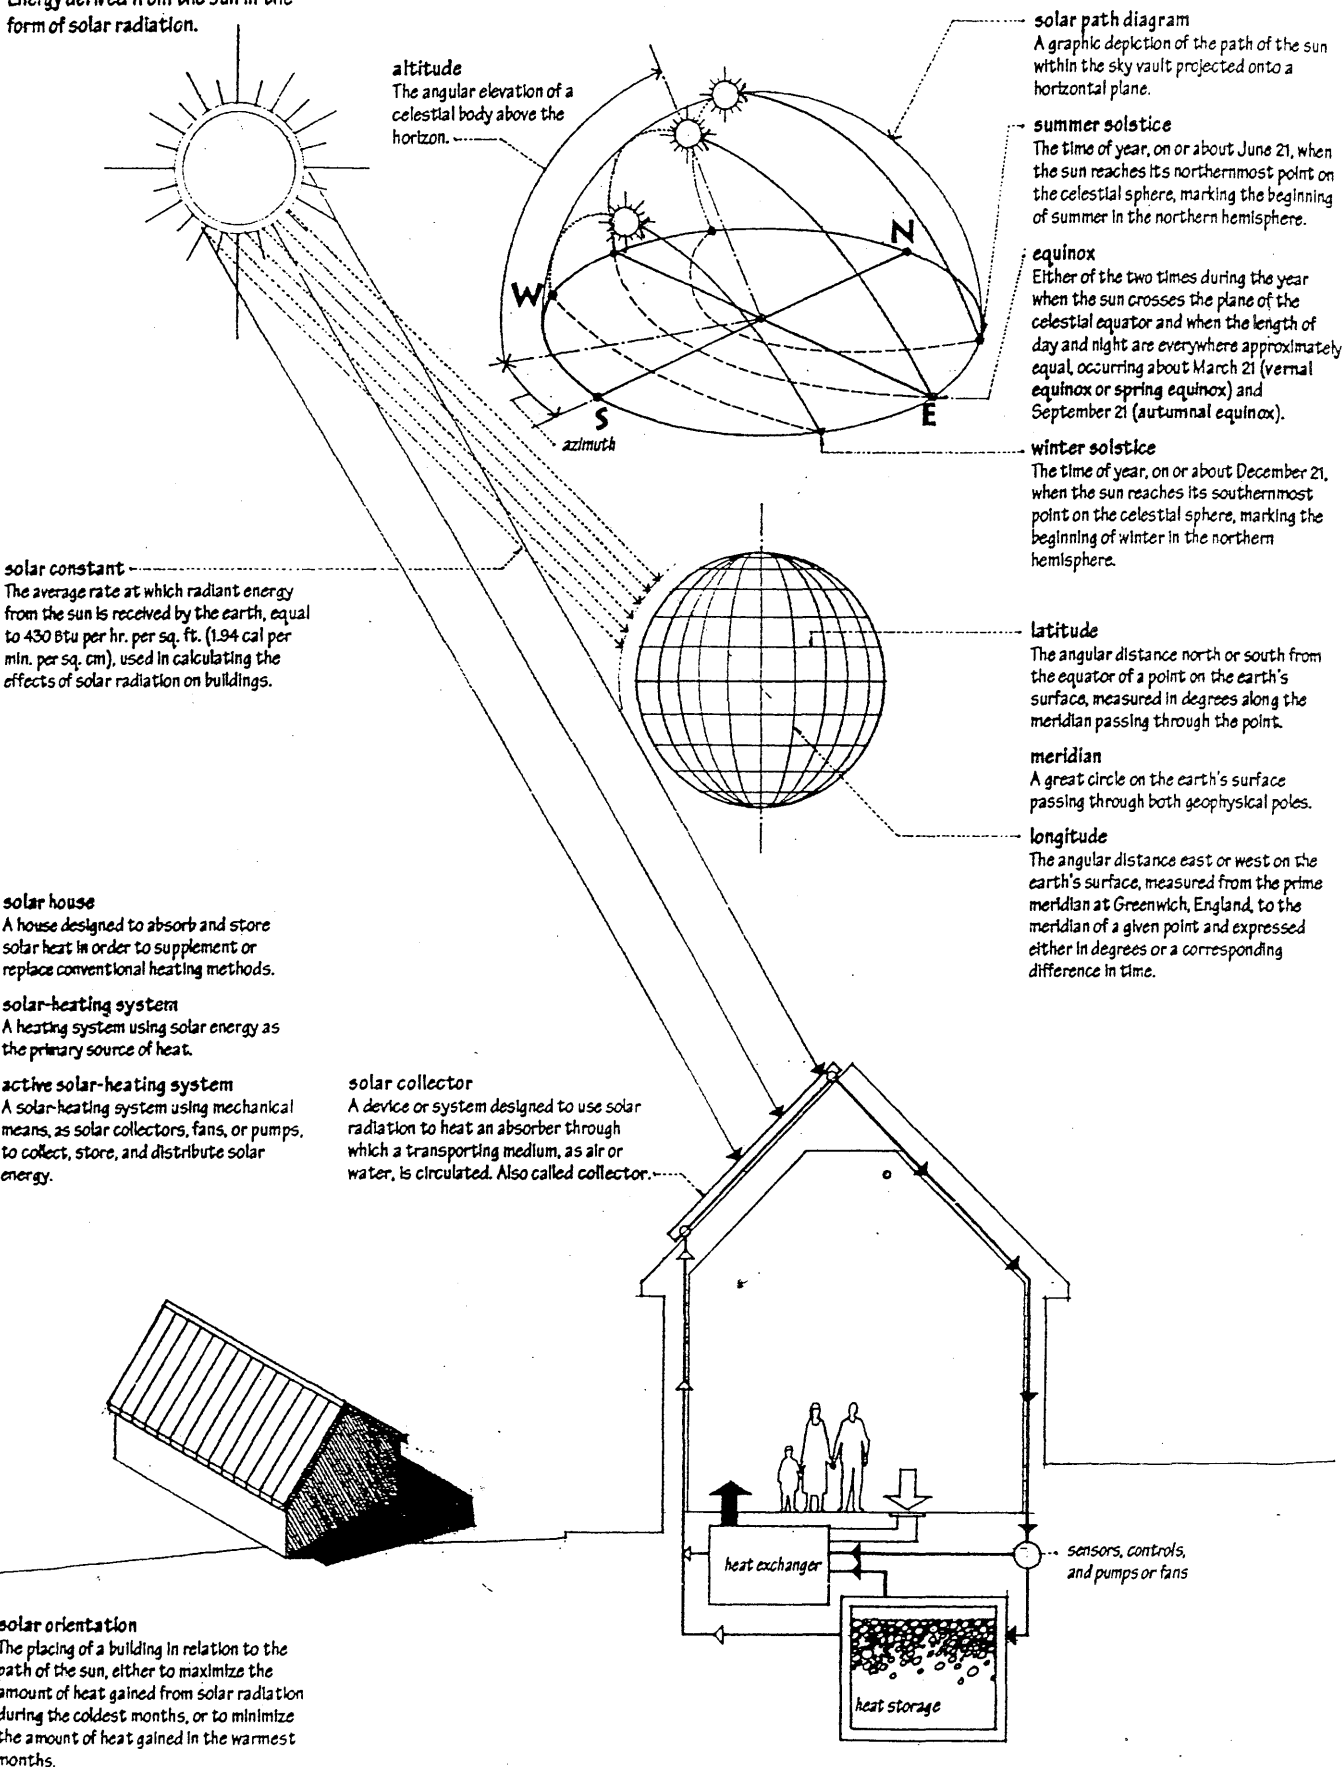


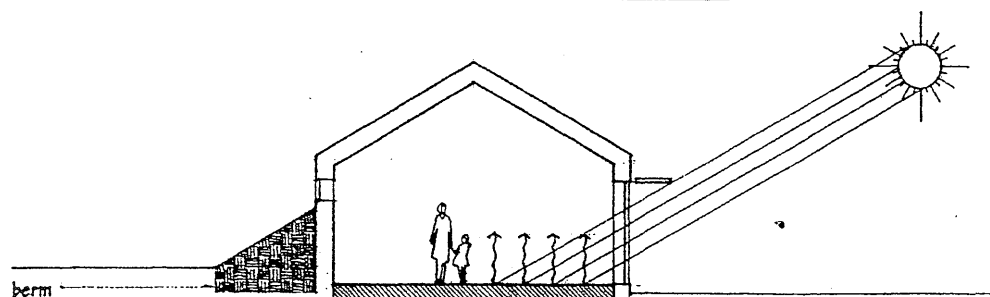


berm
A bank of earth placed against one or more exterior walls of a building as protection against extremes in temperature.




drumwall
A stack of black, water-filled drums placed on the inside of a window wall to absorb solar heat and then release it slowly into the interior of a building.

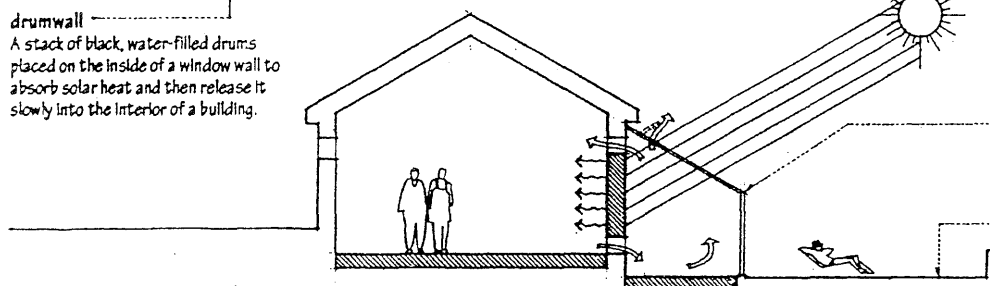


Trombe wall
A glass-fronted exterior masonry wall that absorbs solar heat for radiation into the interior of a building, usually after a time-lag of several hours.

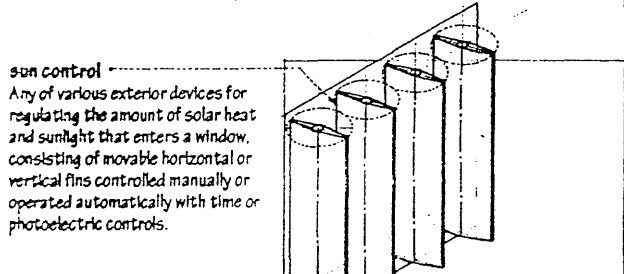


sun control
Any of various exterior devices for regulating the amount of solar heat and sunlight that enters a window, consisting of movable horizontal or vertical fins controlled manually or operated automatically with time or photoelectric controls.

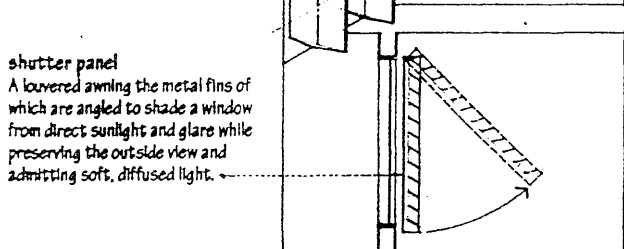


shutter panel
A lowered awning the metal fins of which are angled to shade a window from direct sunlight and glare while preserving the outside view and admitting soft, diffused light.

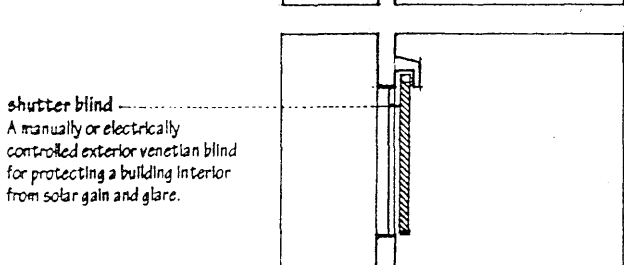


shutter blind
A manually or electrically controlled exterior venetian blind for protecting a building interior from solar gain and glare.



sunshade
Any of various exterior devices consisting of fixed horizontal or vertical fins angled to shield a window from direct sunlight.



brise-soleil
A screen, usually of louvers, placed on the outside of a building to shield the windows from direct sunlight.



solar screen
A panel of miniature external louvers for shading a window from direct sunlight and glare while allowing a high degree of visibility, daylighting, ventilation, visual daytime privacy, and insect protection.

passive solar-heating

A solar-heating system using a building's design and construction and the natural flow of heat to collect, store, and distribute solar energy, with minimal use of fans or pumps.

SOUND

The sensation stimulated in the organs of hearing by mechanical radiant energy transmitted as longitudinal pressure waves through the air or other medium.


sound wave
A longitudinal pressure wave in air or an elastic medium, esp. one producing an audible sensation.

wave
A disturbance or oscillation that transfers energy progressively from point to point in a medium or space without advance by the points themselves, as in the transmission of sound or light.

waveform
A graphic representation of the shape of a wave, obtained by plotting deviation at a fixed point versus time.

wavelength
The distance, measured in the direction of propagation of a wave, from any one point to the next point of corresponding phase.

phase
A particular point or stage in a periodic cycle or process.

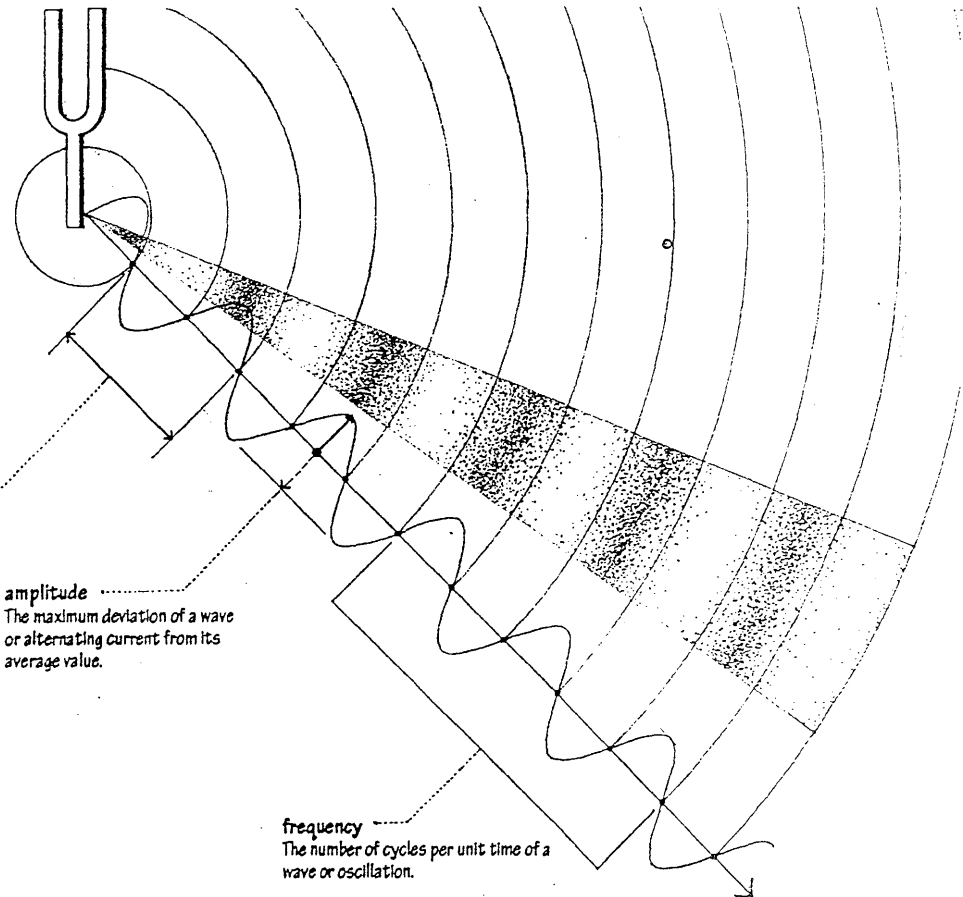

amplitude
The maximum deviation of a wave or alternating current from its average value.

frequency
The number of cycles per unit time of a wave or oscillation.


hertz
The SI unit of frequency, equal to one cycle per second. Abbr.: Hz

wave front
A surface of a propagating wave composed at any instant of all points having identical phase; usually perpendicular to the direction of propagation.

fundamental
The lowest frequency at which a vibrating element or system will freely oscillate. Also called fundamental frequency.


harmonic
A vibration having a frequency that is an integral multiple of that of the fundamental.

band
A range of wavelengths or frequencies between two defined limits.




pitch
The predominant frequency of a sound as perceived by the human ear.

octave
The interval between two frequencies having a ratio of 2:1.

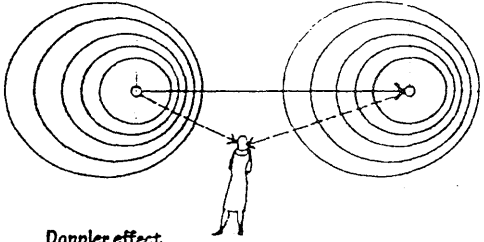

Doppler effect
An apparent shift in frequency occurring when an acoustic source and listener are in motion relative to each other, the frequency increasing when the source and listener approach each other and decreasing when they move apart.

speed of sound
The velocity of sound traveling through air at approximately 1087 ft. (0.3 km) per second at sea level, through water at approximately 4500 ft. (1.4 km) per second, through wood at approximately 11,700 ft. (3.6 km) per second, and through steel at approximately 18,000 ft. (5.5 km) per second.

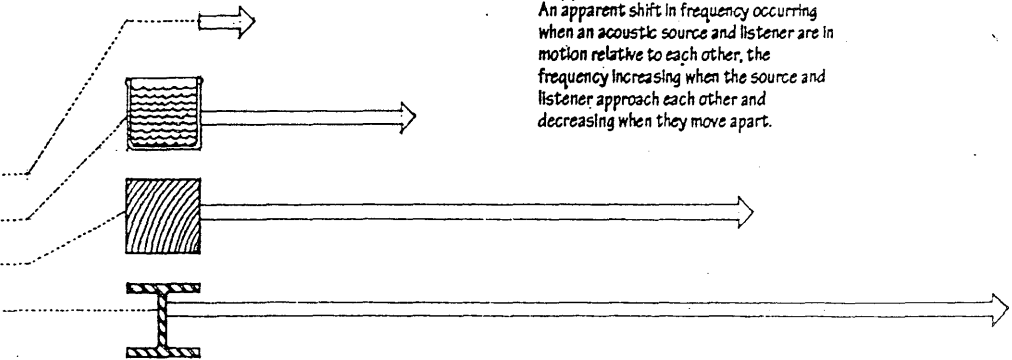

loudness

A subjective response to sound indicating the magnitude of the auditory sensation produced by the amplitude of a sound wave.

phon

A unit for measuring the apparent loudness of a sound, equal in number to the decibels of a 1000-Hz reference sound judged by a group of listeners to be equal in loudness to the given sound.

sone

A unit for measuring the apparent loudness of a sound, judged by a group of listeners to be equal to the loudness of a 1000-Hz reference sound having an intensity of 40 decibels.



decibel

A unit for expressing the relative pressure or intensity of sounds on a uniform scale from 0 for the least perceptible sound to about 130 for the average threshold of pain. Abbr.: dB

Decibel measurement is based on a logarithmic scale since increments of sound pressure or intensity are perceived as equal when the ratio between successive changes in intensity remain constant. The decibel levels of two sound sources, therefore, cannot be added mathematically:
e.g., 60 dB + 60 dB = 63 dB, not 120 dB.

hearing

The sense by which sound is perceived, involving the entire mechanism of the internal, middle, and external ear and including the nervous and cerebral operations that translate the physical operations into meaningful signals.

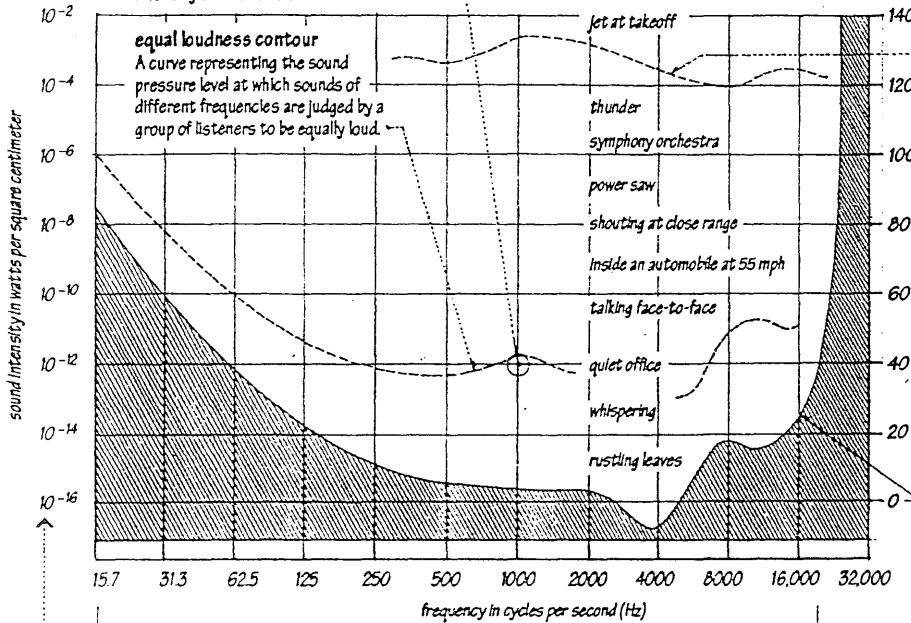

equal loudness contour

A curve representing the sound pressure level at which sounds of different frequencies are judged by a group of listeners to be equally loud.

jet at takeoff

thunder

symphony orchestra

power saw

shouting at close range

inside an automobile at 55 mph

talking face-to-face

quiet office

whispering

rustling leaves

threshold of pain

The level of sound intensity high enough to produce the sensation of pain in the human ear, usually around 130 dB.

auditory fatigue

Physical or mental weariness caused by prolonged exposure to loud noises.

hearing loss

An increase in the threshold of audibility, at specific frequencies, caused by normal aging, disease, or injury to the hearing organs.

threshold of hearing

The minimum sound pressure capable of stimulating an auditory sensation, usually 20 micropascals or zero dB.

audio frequency

A range of frequencies from 15 Hz to 20,000 Hz audible to the normal human ear.

sound intensity

The rate at which acoustic energy flows through a medium, expressed in watts per square meter.

sound intensity level

Sound intensity measured on the decibel scale, equal to 10 times the common logarithm of the ratio of the sound intensity to a reference intensity, usually 10^{-12} watts per square meter (10^{-16} watts per square centimeter.)

sound pressure

The difference between the actual pressure at any point in the field of a sound wave and the static pressure at that point, expressed in pascals.

sound pressure level

Sound pressure measured on the decibel scale, equal to 10 times the common logarithm of the ratio of the sound pressure to a reference pressure, usually 20 micropascals.

micropascal

One-millionth (10^{-6}) part of a pascal. Symbol μPa

sound power

The amount of acoustic energy radiated by a source per unit time, expressed in watts.

sound power level

The acoustic power of a source, measured on the decibel scale, equal to 10 times the common logarithm of the ratio of the acoustic power to a reference power, usually 10^{-12} watts.

logarithm

The exponent indicating the power to which a base number must be raised to arrive at a given number.

common logarithm

A logarithm having a base of 10.

sound level meter

An electrical instrument for measuring sound pressure levels. To compensate for the way we perceive the relative loudness of different frequencies of sound, there are three networks: A, B, and C. These networks weight the recordings for different frequencies and combine the results in a single reading. The A-network scale, in dBA units, is most commonly used since it discriminates against the lower frequencies, as does the human ear at moderate sound levels.

SOUND

acoustics

The branch of physics that deals with the production, control, transmission, reception, and effects of sound.

room acoustics

The qualities or characteristics of a room, auditorium, or concert hall that determine the audibility of speech or fidelity of musical sounds in it.

sounding board

A structure over or behind and above a speaker or orchestra to reflect the sound toward the audience.

reflecting surface

A nonabsorptive surface from which incident sound is reflected, used esp. to redirect sound in a space. To be effective, a reflecting surface should have a least dimension equal to or greater than the wavelength of the lowest frequency of the sound being reflected.

acoustical cloud

One of a number of acoustic panels installed near the ceiling of a concert hall to reflect sound for improving the acoustic quality of music.

acoustical analysis

A detailed study of the use of a building, the location and orientation of its spaces, possible sources of noise, and the desirable acoustical environment in each usable area.

acoustical design

The planning, shaping, finishing, and furnishing of an enclosed space to establish the acoustical environment necessary for distinct hearing.

acoustical treatment

The application of absorbent or reflecting materials to the walls, ceiling, and floor of an enclosed space to alter or improve its acoustic properties.

diffracted sound

Airborne sound waves bent by diffraction around an obstacle in their path.

reflected sound

The return of unabsorbed airborne sound after striking a surface, at an angle equal to the angle of incidence.

airborne sound

Sound radiated directly into and transmitted through the air.

live

Highly reverberant or resonant, as an auditorium or concert hall.

dead

Without resonance, as a room free from echoes and reverberation.

soundproof

Impervious to audible sound.

resonance

The intensification and prolongation of sound produced by sympathetic vibration.

sympathetic vibration




A vibration induced in one body by the vibrations of exactly the same period in a neighboring body.

direct sound

Airborne sound traveling directly from a source to the listener. In a room, the human ear always hears direct sound before it hears reflected sound. As direct sound loses intensity, the importance of reflected sound increases.

attenuation

A decrease in energy or pressure per unit area of a sound wave, occurring as the distance from the source increases as a result of absorption, scattering, or spreading in three dimensions.

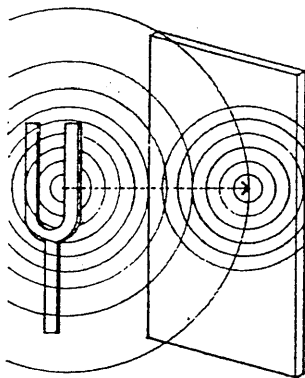

echo


The repetition of a sound produced by the reflection of sound waves from an obstructing surface, loud enough and received late enough to be perceived as distinct from the source.

flutter

A rapid succession of echoes caused by the reflection of sound waves back and forth between two parallel surfaces, with sufficient time between each reflection to cause the listener to be aware of separate, discrete signals.

reverberation

The persistence of a sound within an enclosed space, caused by multiple reflection of the sound after its source has stopped.

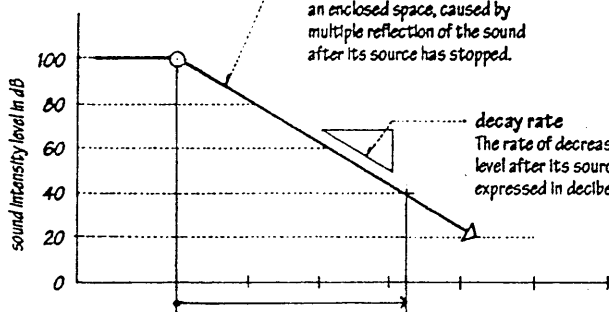


decay rate

The rate of decrease of sound pressure level after its source has stopped, usually expressed in decibels per second.


reverberation time

The time in seconds required for a sound made in an enclosed space to diminish by 60 decibels.



focusing


The convergence of sound waves reflected from a concave surface.

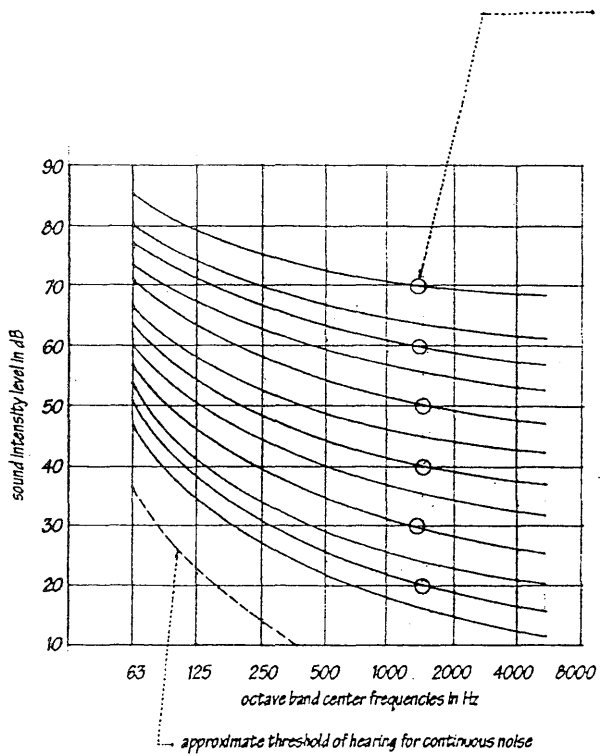

noise criteria curve
One of a series of curves representing the sound pressure level across the frequency spectrum for background noise that should not be exceeded in various environments. Higher noise levels are permitted at the lower frequencies since the human ear is less sensitive to sounds in this frequency region. Also called NC curves.

noise
Any sound that is unwanted, annoying, or discordant, or that interferes with one's hearing of something.


noise reduction
The perceived difference in sound pressure levels between two enclosed spaces, due to the sound-isolating qualities of the separating barrier as well as the absorption present in the receiving room: expressed in decibels.

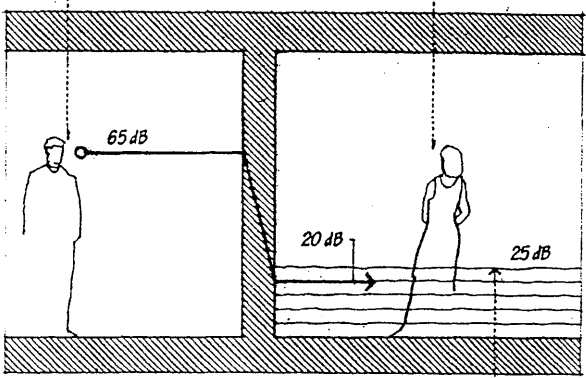

very noisy
noisy
moderately noisy
quiet
very quiet


background noise level
The level of ambient sound normally present in a space, above which speech, music, or other sounds must be presented to be heard.

standing wave
A wave in which the amplitude of the resultant of a transmitted and a reflected wave is fixed in time and ranges from zero at the nodes to a maximum at the antinodes.



white noise
An unvarying, unobtrusive sound having the same intensity for all frequencies of a given band, used to mask or obliterate unwanted sound. Also called white sound.

interference
The phenomenon in which two or more light or sound waves of the same frequency combine to reinforce or cancel each other, the amplitude of the resulting wave being equal to the algebraic or vector sum of the amplitudes of the combining waves.

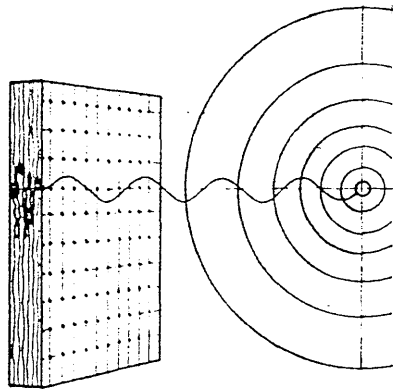

background noise
The sound normally present in an environment, usually a composite of sounds from both exterior and interior sources, none of which are distinctly identifiable by the listener. Also called ambient sound.


absorption
The interception and conversion of sound energy into heat or other form of energy by the structure of a material, measured in sabins or absorption units.

sabin
A unit of sound absorption, equal to one sq. ft. (0.09 sq. m) of a perfectly absorptive surface.

metric sabin
A unit of sound absorption, equal to 1 square meter of perfectly absorptive surface. Also called absorption unit.

absorption coefficient
A measure of the efficiency of a material in absorbing sound at a specified frequency, equal to the fractional part of the incident sound energy at that frequency absorbed by the material.

noise reduction coefficient
A measure of the sound-absorbing efficiency of a material, equal to the average of the absorption coefficients of the material, computed to the nearest 0.05 at four frequencies: 250, 500, 1000, and 2000 Hz.

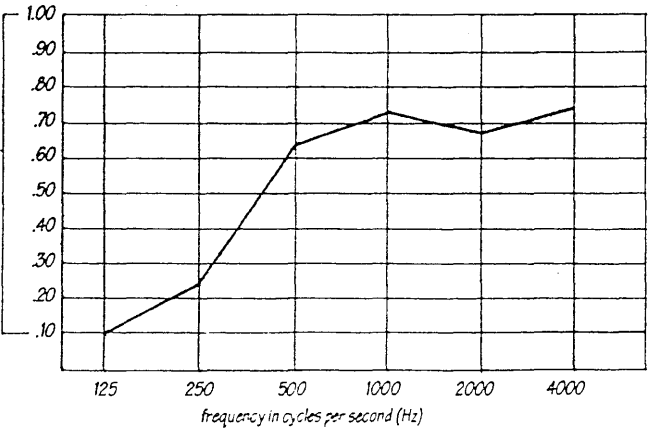

SOUND

sound isolation

The use of building materials and construction assemblies designed to reduce the transmission of airborne and structure-borne sound from one room to another or from the exterior to the interior of a building. Also called sound insulation.

airborne sound transmission

Sound transmitted when a surface is set into vibration by the alternating air pressures of incident sound waves.

structure-borne sound transmission

Sound transmitted through the solid media of a building's structure as a result of direct physical contact or impact, as by vibrating equipment or footsteps.

transmission loss

A measure of the performance of a building material or construction assembly in preventing the transmission of airborne sound, equal to the reduction in sound intensity as it passes through the material or assembly when tested at all one-third octave band center frequencies from 125 to 4000 Hz expressed in decibels. Abbr.: TL

Three factors enhance the TL rating of a construction assembly: mass, separation into layers, and absorptive capacity.

average transmission loss

A single-number rating of the performance of a building material or construction assembly in preventing the transmission of airborne sound, equal to the average of its TL values at nine test frequencies.

sound transmission class

A single-number rating of the performance of a building material or construction assembly in preventing the transmission of airborne sound, derived by comparing the laboratory TL test curve for the material or assembly to a standard frequency curve. Abbr.: STC

The higher the STC rating, the greater the sound-isolating value of the material or construction. An open doorway has an STC rating of 10; normal construction has STC ratings from 30 to 60; special construction is required for STC ratings above 60.

impact noise

Structure-borne sound generated by physical impact, as by footsteps or the moving of furniture.

impact insulation class

A single-number rating of the performance of a floor-ceiling construction in preventing the transmission of impact noise. Abbr.: IIC


The higher the IC rating, the more effective is the construction in isolating impact noise. The IC rating replaces the previously used Impact Noise Rating (INR) and is approximately equal to the INR rating +51 dB for a given construction.

flanking path

A path for the transmission of sound other than through a floor, wall, or ceiling assembly, as along such interconnecting structures as ductwork or piping.

plenum barrier

An acoustic barrier erected in a plenum over a partition to reduce sound transmission between adjoining rooms.

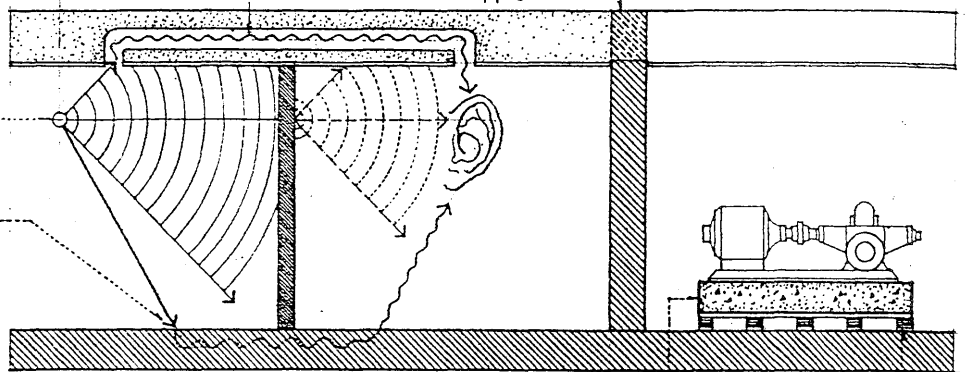

acoustic mass


Resistance to the transmission of sound caused by the inertia and elasticity of the transmitting medium. In general, the heavier and more dense a body, the greater its resistance to sound transmission.

vibration isolator

A resilient base for mechanical equipment, installed to reduce the transmission of vibration and noise to the supporting structure. Also called isolation mount.

inertia block

A heavy concrete base for vibrating mechanical equipment, used in conjunction with vibration isolators to increase the mass of the equipment and decrease the potential for vibratory movement.

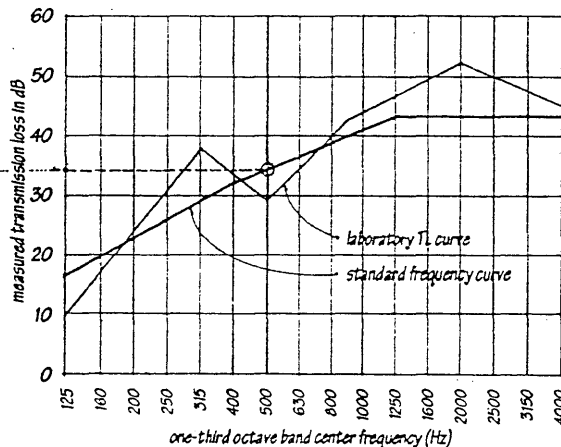

discontinuous construction

Any of several construction methods, as the use of staggered studs or resilient mountings, for breaking the continuity of a path through which structure-borne sound may be transmitted from one space to another.

staggered-stud partition

A partition for reducing sound transmission between rooms, framed with two separate rows of studs arranged in zigzag fashion and supporting opposite faces of the partition, sometimes with a fiberglass blanket between.

resilient mounting





A system of flexible attachments or supports that permits room surfaces to vibrate normally without transmitting the vibratory motions and associated noise to the supporting structure.

resilient channel


A metal channel for the resilient mounting of wallboard to studs or joists, used in sound-isolating construction to reduce the transmission of vibrations and noise.

resilient clip

A flexible metal device for the resilient mounting of wallboard or metal lath to studs or joists, used in sound-isolating construction to reduce the transmission of vibrations and noise.

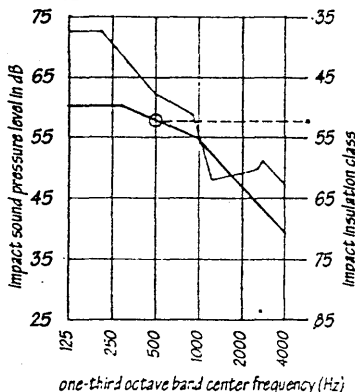

One of a flight or series of steps for going from one level to another, as in a building.

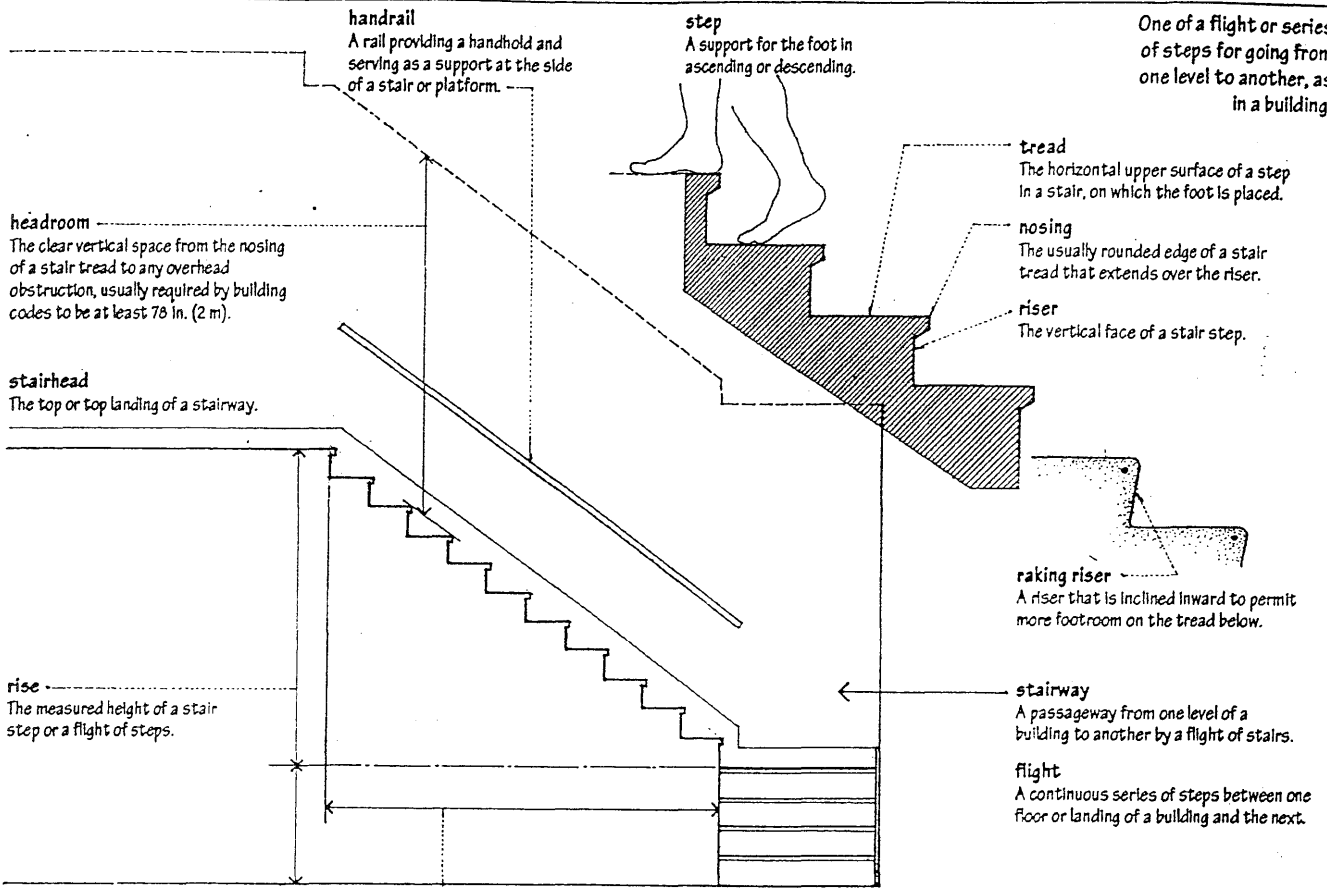

ladder
A structure of wood, metal, or rope, usually consisting of two sidepieces joined at suitable intervals by bars or rungs, forming a means of climbing up or down at an angle of pitch between 75° and 90°.

rung
One of the crosspieces, usually rounded, forming the steps of a ladder.

ship's ladder
A fixed stepladder having an angle of pitch between 55° and 70°, usually equipped with handrails.

critical angle
The angle of pitch above which a stair is considered to be uncomfortable or unsafe, usually 50°.


riser:tread ratio
The preferred ratio between the riser and tread of a stairstep, specified by either of two formulas:
 $R + 2T = 24 \text{ to } 25$;
 $R \times T = 72 \text{ to } 75$.

preferred angle
For a flight of stairs, any angle of pitch between 28° and 36°; or, for a ramp, an angle of pitch less than 5°.

ramp
A sloping floor, walk, or roadway connecting two levels.

stepped ramp
A series of ramps connected by steps.

helicline
A curved ramp.



STAIR

straight-run stair

A stair extending from one level to another without turns or winders.

flier

One of the steps in a straight flight of stairs.

quarter-turn stair

A stair making a right-angled turn, consisting of two straight flights connected by an intervening landing or a series of winders. Also called L stair.

pace

A raised step or platform, esp. one serving as a landing or resting place at the end of a short flight of steps. Also called footpace.

half-turn stair

A stair that turns 180° or through two right angles at an intervening landing.

dog-leg stair

A half-return stair consisting of two straight flights immediately side by side and connected by an intervening landing.

double-L stair

A half-turn stair having two intermediate landings, each offering a 90° change of direction.

three-quarter-turn stair

A stair requiring a three-quarter turn for continued ascent or descent.

winding stair

Any stair constructed chiefly with winders, as a geometrical or spiral stair.

circular stair

A winding stair having a circular plan.

spiral stair

A circular stair having wedge-shaped treads winding around and supported by a central post.

newel

A central post from which the winders of a spiral stair radiate.

straight flight

A flight of stairs having no turns or winders.

landing

A platform between flights of stairs or the floor at the foot or head of a flight of stairs.

quarterspace landing

A square landing connecting two flights of a stair. Also, quarterspace landing.

walking line

A line 18 in. (457 mm) in from the centerline of a handrail, along which the run of a winder is the same as a flier. Also called line of travel.

halfspace landing

A landing connecting two flights of a half-turn stair. Also, halfspace landing.

winder

A more or less wedge-shaped stair step for changing direction.

kite winder

The central of three stair winders making a 90° turn.

balanced step

Any of a series of winders so arranged that they are nearly as wide at the inside of the stair as the adjacent fliers. Also called dancing step, dancing winder.

elliptical stair

A winding stair having an elliptically shaped well.

geometrical stair











A winding stair constructed around a circular or elliptical well without the use of newels and often no landings between floors.

wreath

A curved section of handrail.

wreath piece

A curved section of a staircase string.

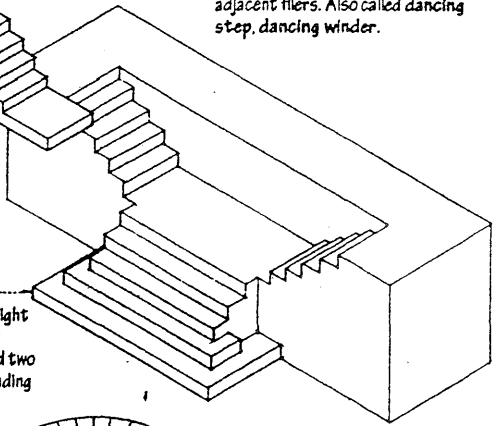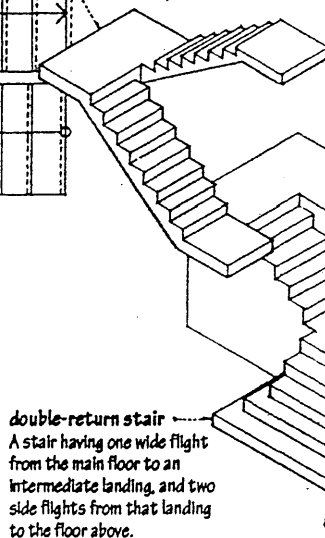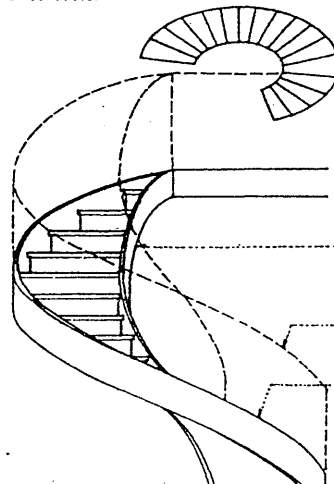

string
One of the sloping boards running alongside a staircase to support or cover the ends of the treads and risers. Also called stringboard, stringer.

wall string
A stair string set against a wall, usually notched or housed.

carriage
An inclined beam for supporting the steps of a stair. Also called horse, rough stringer.

box stair
A stair having a housed string on both sides so that it may be more or less completely finished before being set in its final location.

housed string
A stair string receiving the ends of risers and treads in a series of housings. Also called closed string.

apron piece
A header receiving the ends of stair carriages, strings, and the joists of landings. Also called pitching piece.

kick plate
A plate for anchoring and absorbing the thrust of an inclined member, as a stair carriage.

railing
A barrier composed of one or more horizontal rails supported by spaced uprights or balusters.

stanchion
An upright post or support, as in a window or railing.

balustrade
A railing with supporting balusters.

baluster
Any of a number of closely spaced supports for a railing. Also called banister.

newel drop
An ornamental, downward projection of a newel post, often through a soffit.

safety nosing
A nosing having an abrasive, nonslip surface flush with the tread surface.

safety tread
A tread having a roughened surface to prevent slipping.

waist
The least thickness of a reinforced-concrete stair slab.

hanging step
A step projecting from a wall with no real or apparent support at its outer end. Also called cantilevered step.

landing tread
A board directly over the uppermost riser in a flight of stairs, having an edge matching that of the nosings on the stair treads.

stair rod
A metal rod for holding a stair carpet in place against the bottom of a riser.

staircase
A flight or series of flights of stairs, including its supporting framework, casing, and handrails.

open-string stair
A stair having an open string on one or both sides.

open string
A staircase string having its upper edge cut to the profile of the treads and risers. Also called cut string.

face string
The outer string of a staircase, usually of better material or finish than the carriage which it covers. Also called finish string.

tread return
A continuation of the rounded nosing of a tread beyond the face of an open string.

bracket
An ornamental piece filling the angle between a riser and the overhanging edge of its tread.

cut-and-mitered string
An open string having the vertical edges of the notches mitered with the ends of the stair risers.

curtail
A horizontal, spiral termination to the lower end of a stair rail. Also called volute.

curtail step
A starting step having a scroll termination to one or both ends of the tread.

newel cap
The terminal feature of a newel post, often molded or turned in a decorative manner.






newel
A post supporting one end of a handrail at the top or bottom of a flight of stairs. Also called newel post.

open-riser stair
A stair having open spaces between successive treads, allowing light to pass from above.

open riser
An open space between two successive treads.

pan tread
A steel pan receiving a concrete fill and serving as a tread or as a combined tread and riser.

plate tread
A tread fabricated from metal plate, usually having a raised pattern to provide a nonslip surface.

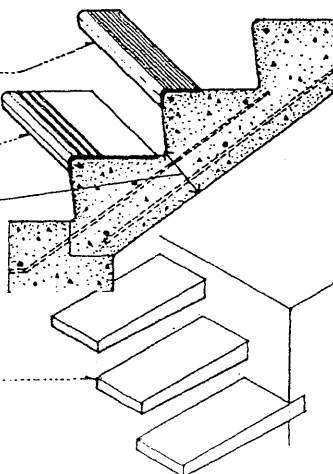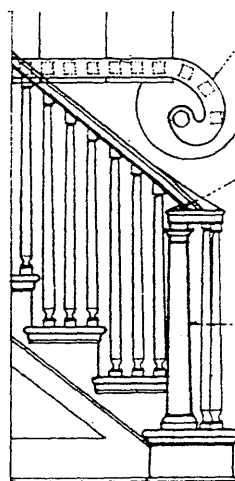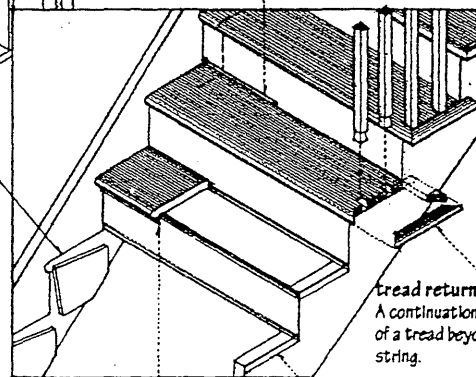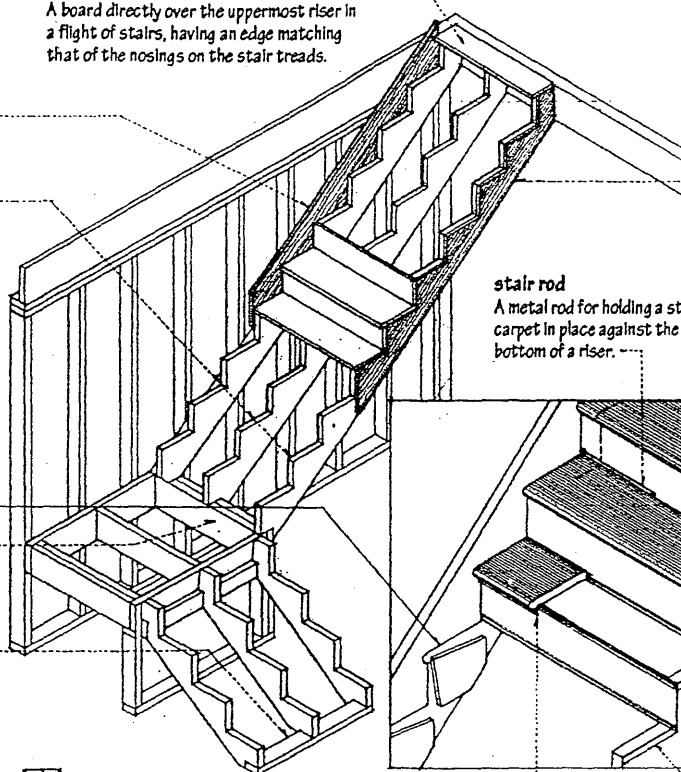


STONE

Rock or a piece of rock quarried and worked into a specific size and shape for a particular purpose.

rock

Solid mineral matter, naturally formed by the action of heat or water and occurring in fragments or large masses.

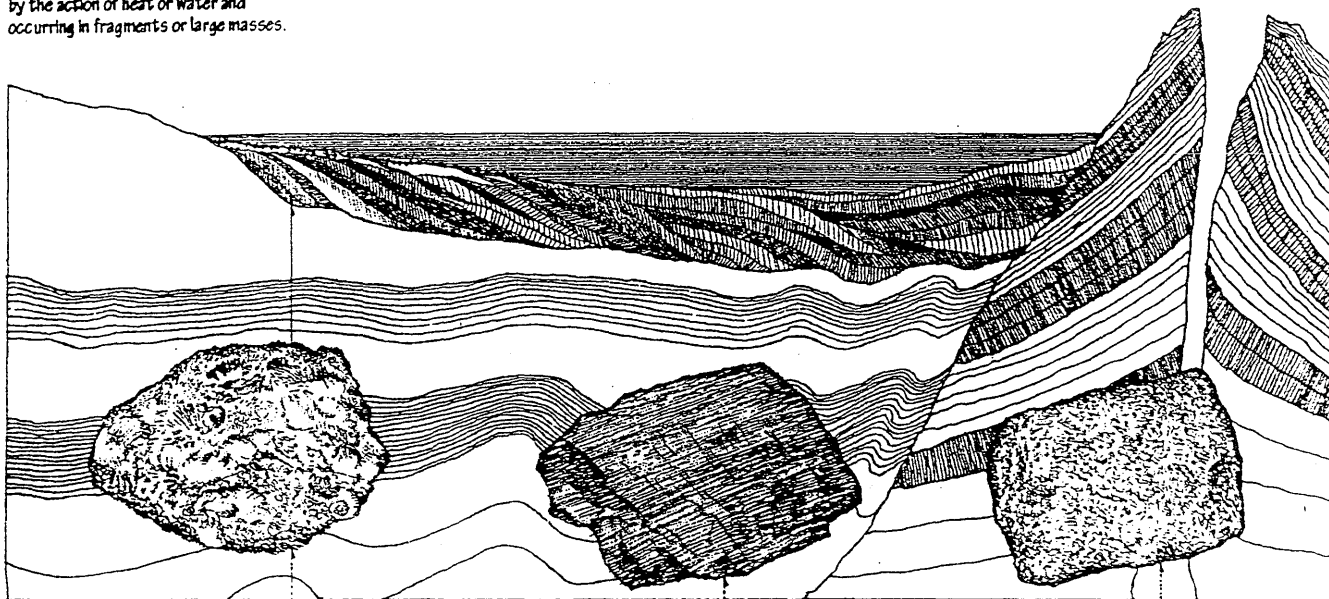

sedimentary rock

A class of rock formed by the deposition of sediment, as limestone, sandstone or shale.

limestone

A sedimentary rock formed chiefly by the accumulation of organic remains, as shells and coral, consisting mainly of calcium carbonate, and used as a building stone and in the manufacture of lime.

travertine

A variety of limestone deposited by spring waters, esp. hot springs, sold as marble in the building trade.

dolomite

A limestone rich in magnesium carbonate.

oolite

A limestone composed of small, round, calcareous grains resembling fish roe. Also called egg stone.

sandstone

A sedimentary rock consisting of sand, usually quartz, cemented together by various substances, as silica, clay, or calcium carbonate.

bluestone

A dense, fine-grained, argillaceous sandstone that splits easily along bedding planes to form thin slabs.

brownstone

A reddish-brown sandstone quarried and used extensively as a building material.

soapstone

A massive, soft rock containing a high proportion of talc, used as dimension stone for hearths, table tops, and carved ornaments. Also called steatite.



metamorphic rock

A class of rock that has undergone a change in structure, texture, or composition due to natural agencies, as heat and pressure, esp. when the rock becomes harder and more crystalline.

marble

A metamorphic rock of crystallized limestone, consisting mainly of calcite or dolomite, capable of taking a high polish, and used esp. in architecture and sculpture. The presence and distribution of numerous minerals account for the distinctive variegated appearance that many marbles have. The commercial term includes many dense limestones and some coarse-grained dolomites.

verd antique

A dark-green, mottled serpentine that takes a high polish and is sold as a marble. Also, verde antique.

slate

A dense, fine-grained metamorphic rock formed by the compression of various sediments, as clay or shale, having good cleavage along parallel planes.

quartzite

A compact, granular metamorphic rock consisting essentially of quartz, derived from sandstone.

gneiss

A banded or foliated metamorphic rock corresponding in composition to granite, in which the minerals are arranged in layers.



granite

A very hard, coarse-grained igneous rock composed mainly of quartz, feldspar, and mica or other colored minerals.

obsidian


A volcanic glass similar in composition to granite, usually black with a bright luster, and transparent in thin pieces.

malachite

A green to nearly black mineral, copper carbonate, used as a highly polished veneer and for making ornamental articles.

serpentine

A mineral or rock consisting of hydrous magnesium silicate, usually green in color and having a mottled appearance.



grain
The granular texture or appearance of a stone.

bedding plane
The surface that separates one stratum or layer of stratified rock from another.

cleavage plane
A relatively smooth surface along which certain rocks will tend to split.

split-faced
Noting a rough stone finish produced by splitting to expose the bedding planes.

freestone
Any fine-grained stone, as limestone or sandstone, that can be quarried or worked easily, esp. one that cuts well in all directions.

carved work
Hand-cut ornamental features in brick or stone masonry.

cast stone
A hardened mix of concrete with a fine stone aggregate, having a surface ground, polished, or molded to simulate natural stone.

cut stone
Building stone cut or machined to a relatively fine finish.








chat-sawn
Noting a coarse, pebbled stone finish produced by using a slurry of a loose abrasive and water in the sawing process.

shot-sawn
Noting a pebbled or rippled stone finish produced by using a slurry of water and hardened steel pellets in the sawing process.

flame finish
A textured stone finish produced by superheating the surface so as to cause small chips to split off. Also called thermal finish.

honed finish
A smooth stone finish having little or no gloss, obtained by rubbing with an abrasive.

polished work
A stone face of crystalline texture, as of marble or granite, ground and buffed to form a glasslike surface. Also called glassed surface.

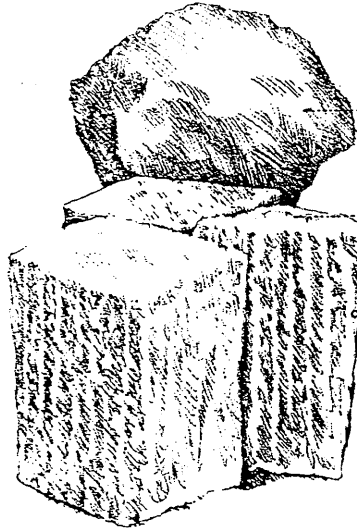

building stone
Any stone suitable for use in building construction, as limestone, marble, or granite.

fieldstone
Loose, unfinished stone found on the surface or in the soil, esp. when used for building, as in dry masonry.

dimension stone
Quarried and squared stone 2 ft. (610 mm) or more in length and width and of specified thickness.

dressed stone
Stone worked to desired shape and smoothed on the face.

pitch-faced
Noting a stone having all arrises cut in the same plane and the faces roughly dressed with a pick.

draft
A line or border chiseled at the edge of a stone to guide the stonecutter in leveling the surfaces.



drafted margin
A smooth, uniform margin worked around a stone face.

sunk draft
A margin of a stone set below the rest of the face.

quarry-faced
Of or pertaining to a stone or stonework the visible face of which is dressed with a hammer. Also, rock-faced.

boasted surface
A stone finish obtained by chiselling roughly parallel grooves across the face.

batted surface
A scored stone surface made with a mason's chisel after the surface has been rubbed smooth. Also called tooled surface.



STRUCTURE

A stable assembly of structural elements designed and constructed to function as a whole in supporting and transmitting applied loads safely to the ground without exceeding the allowable stresses in the members.

linear structure

A structural member having a length that dominates its other two dimensions.

surface structure

A structural member having a length and width that dominates its thickness.

rigid

Of or pertaining to a structure or structural member having a shape that does not change appreciably under the action of an applied load or changing loads.

bulk-active structure



A structure or structural member that redirects external forces primarily through the bulk and continuity of its material, as a beam or column.

vector-active structure

A structure that redirects external forces primarily through the composition of tension and compression members, as a truss.

surface-active structure

A structure that redirects external forces primarily along the continuity of a surface, as a plate or shell.

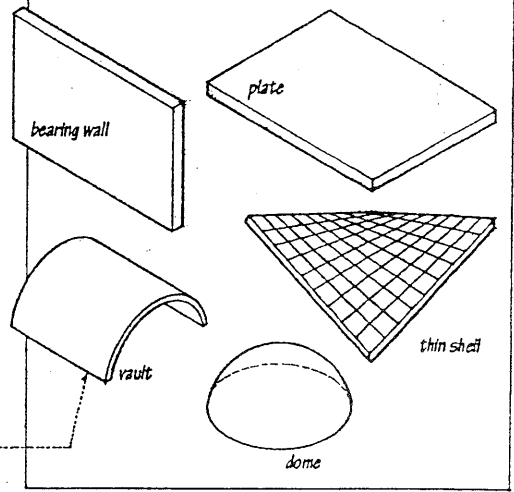
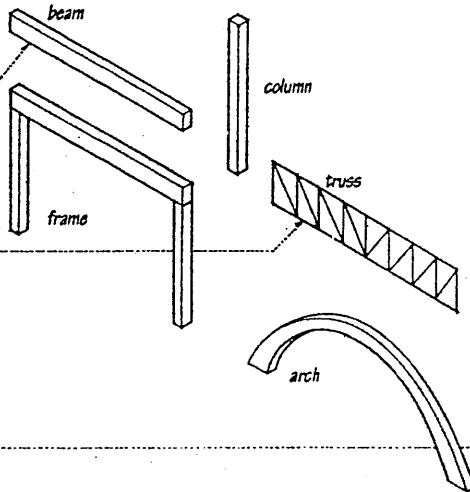


flexible

Of or pertaining to a structure or structural member characterized by a lack of stiffness and having a shape that responds to changes in loading.

form-active structure

A structure or structural member that redirects external forces primarily through the form of its material, as an arch or cable.

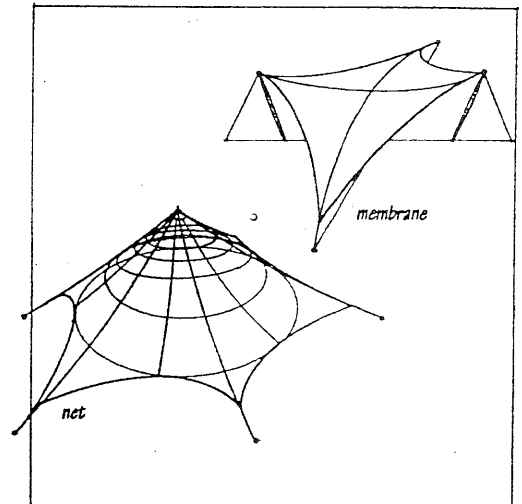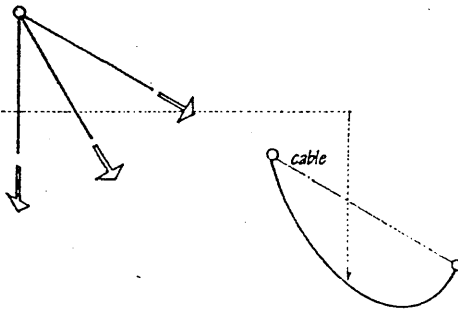


structural member

One of the constituent parts into which a structure may be resolved by analysis, having a unitary character and exhibiting a unique behavior under an applied load.

compression member

A structural member subject primarily to compressive forces.




strut

A structural member designed primarily to resist longitudinal compression.

tension member

A structural member subject primarily to tensile forces.




tie

A tension member designed to keep two structural members from spreading or separating.

bending member

A structural member subject primarily to transverse forces.






one-way

Of or pertaining to a structure or structural member having a load-carrying mechanism that acts in one direction only.


two-way

Of or pertaining to a structure or structural member having a load-carrying mechanism that acts in two or more directions.







structural unit
A discrete structure or assembly of structural members forming a spatial volume.




bay
A major spatial division, usually one of a series, marked or partitioned off by the principal vertical supports of a structure.




structural grid
A grid defining the principal points or lines of support for a structural system.

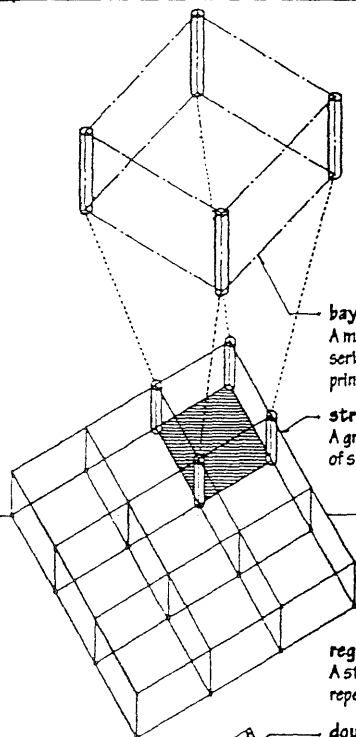


regular grid
A structural grid having regularly repeating bays in two directions.



double grid
A structural pattern consisting of two grids offset from each other and creating interstitial spaces between the bays.

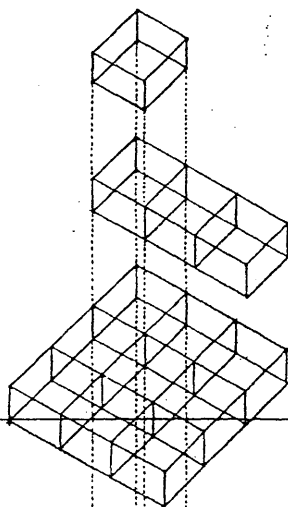


interstitial
Forming an intervening space.




slipped grid
A structural grid having points or lines of supports spaced uniformly in one direction but varying in the other.


structural pattern
The arrangement of principal vertical supports for a structure, which influences the selection of an appropriate spanning system and establishes the possibilities for the ordering of spaces and functions.

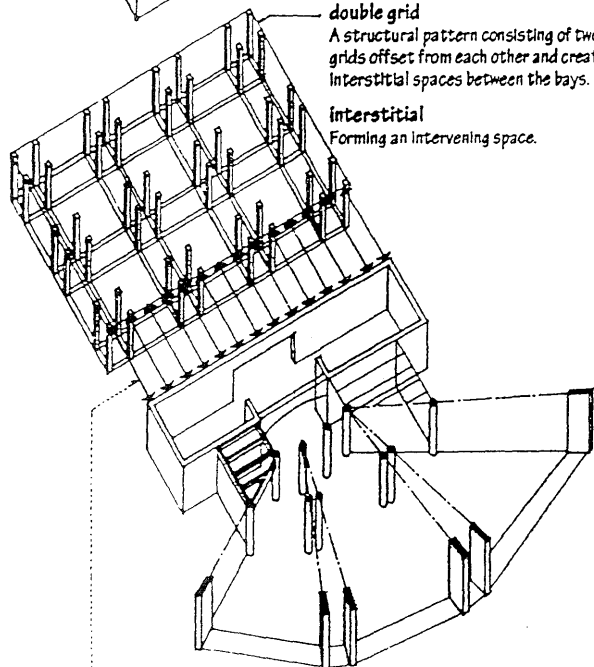

transition structure
A structure mediating between two or more different structural patterns.


irregular grid
A structural grid having irregularly shaped bays in one or more directions.

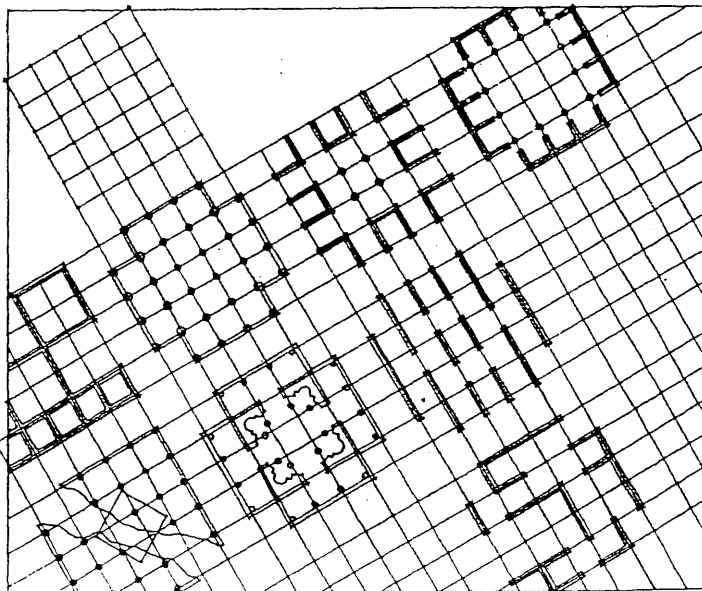


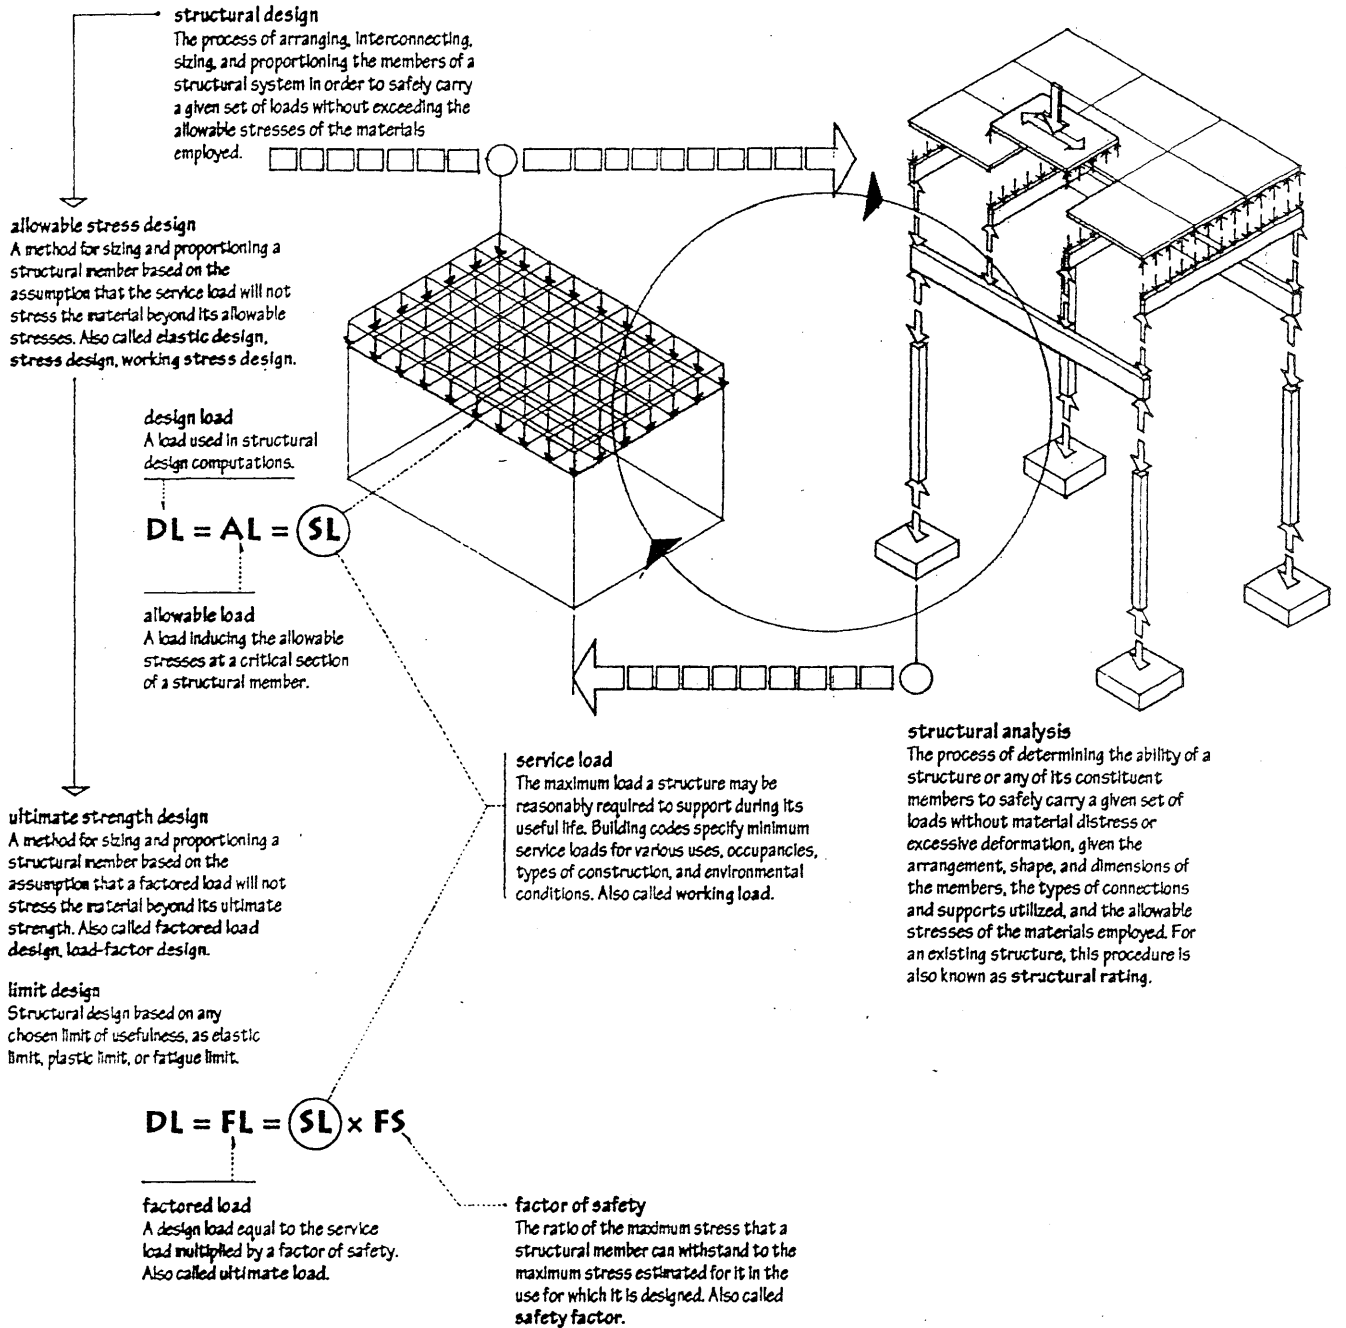


structural failure

Any condition, as fracturing, buckling, or plastic deformation, that renders a structural assembly, element, or joint incapable of sustaining the load-carrying function for which it was designed.

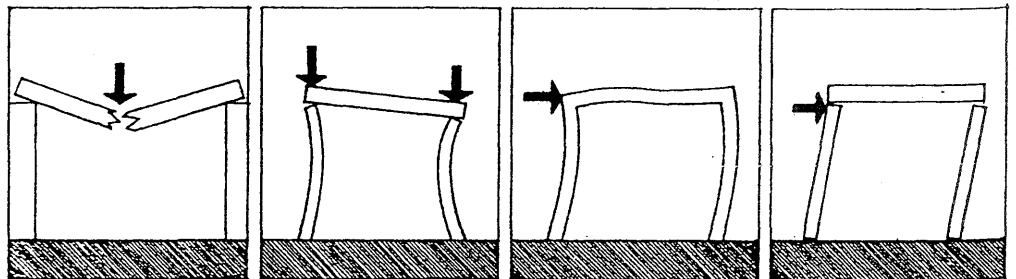

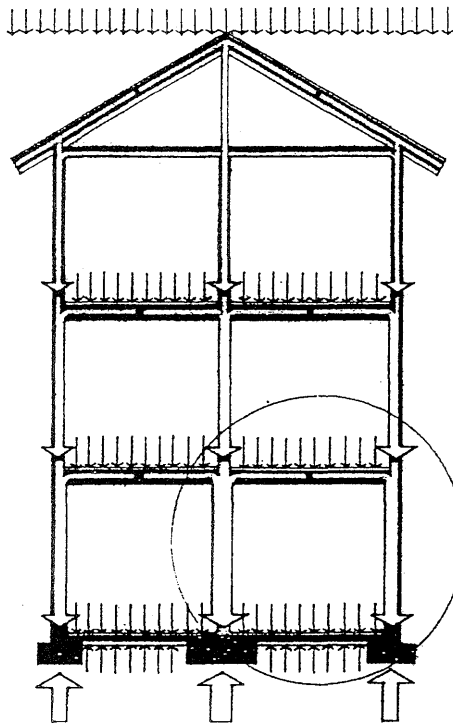

load trace
The process of modeling how a structure collects, channels, and redirects the loads resulting from external forces through the hierarchy of its members to the foundation and underlying soil. The analysis usually starts at the roof level with the smallest members actually picking up the loading and proceeds by tracing the loads through each collecting member. The reactions of each member to its loading becomes forces on the members supporting it. Also called load flow.

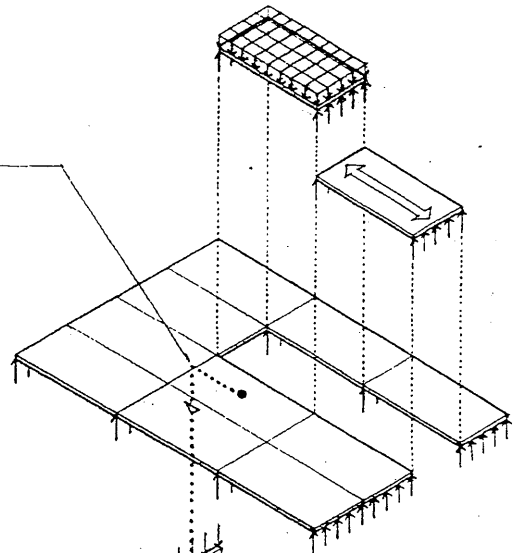


tributary area
The portion of a structure contributing to the load on a structural element or member. Also called contributory area.

tributary
Channeling into something more inclusive.

tributary load
The load on a structural element or member collected from its tributary area.

load strip
The tributary area per unit length of a supporting structural member.

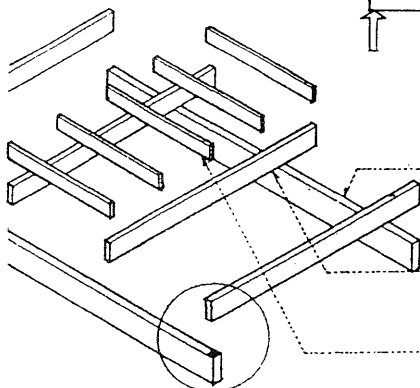


primary member
A structural member essential to the stability of a structural whole. Also called main member.

secondary member
Any structural member supported by a primary member.

tertiary member
Any structural member supported by a secondary member.


bearing
A point, surface, or mass that supports weight, esp. the area of contact between a bearing member, as a beam or truss, and a column, wall, or other underlying support.

bearing stress
The stress developed between a bearing member and an underlying support, equal to the quotient of the magnitude of the forces transmitted and the area of contact between the two elements.

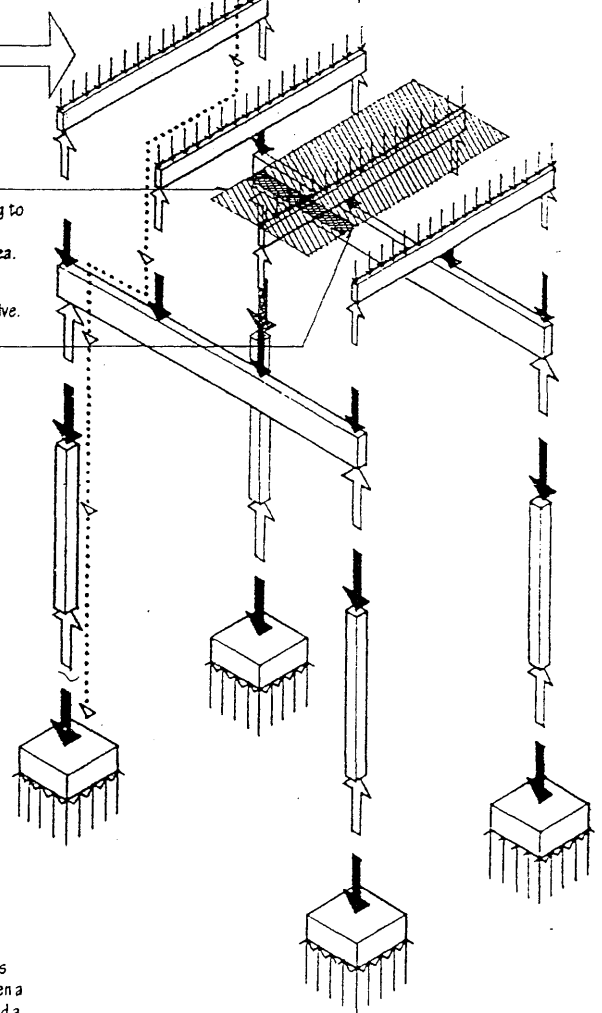


STRUCTURE

support condition
The manner in which a structural member is supported and connected to other members, affecting the nature of the reactive forces developed on the loaded member.

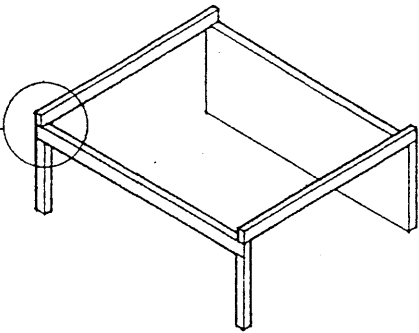


point of support
A point on a structural member at which its reaction to a load is transmitted as a force to a supporting member.


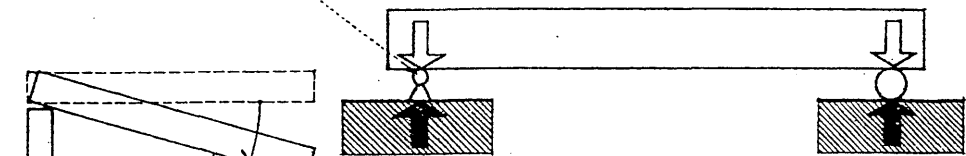


unrestrained member
A structural member permitted to rotate freely about a point of support.

roller support
A structural support that allows rotation but resists translation in a direction perpendicular into or away from its face. Also called roller joint.






cable support
A cable anchorage that allows rotation but resists translation only in the direction of the cable.

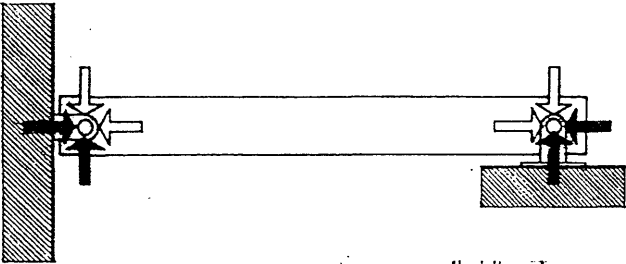
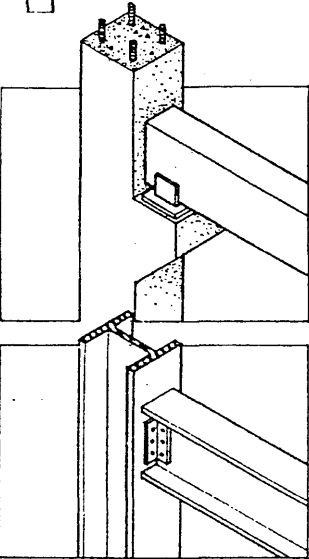


pin joint
A structural connection that allows rotation but resists translation in any direction. Also called hinge joint, pinned connection.

pin
A slender rod driven through holes in adjacent parts to keep the parts together or to permit them to move in one plane relative to each other.

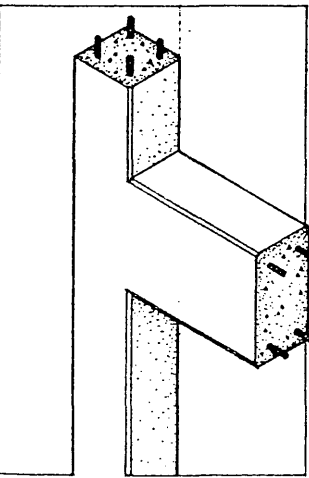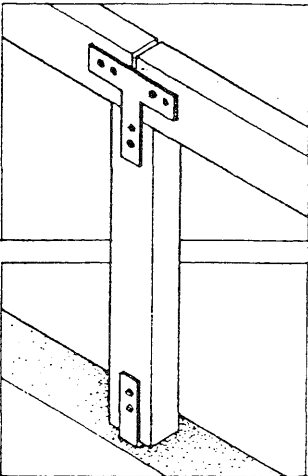


rigid joint
A structural connection that maintains the angular relationship between the joined elements, restrains rotation and translation in any direction, and provides both force and moment resistance. Also called fixed connection, fixed joint, rigid connection.

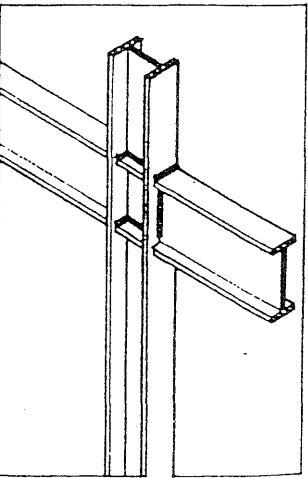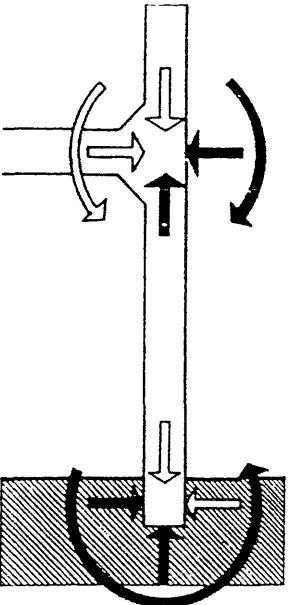

fixed-end connection
A rigid joint connecting the end of a structural member to a support.

anchorage
A means for binding a structural member to another or to its foundation, often to resist uplifting and horizontal forces.

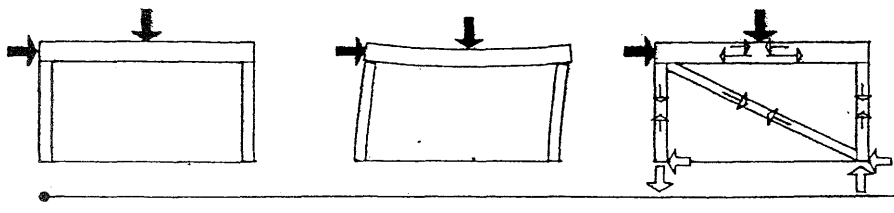

stability
The ability of a structure, when disturbed from a condition of equilibrium by an applied load, to develop internal forces or moments that restore the original condition.

lateral stability
The ability of a structure to resist lateral forces without sliding, overturning, buckling, or collapsing.

racking
The straining and distortion of a structural frame by lateral forces.

collapse mechanism
An unstable configuration of structural members susceptible to falling or breaking down under an applied load without a change in length of any individual member.

lateral bracing
Stabilizing a structural system against lateral forces by means of diagonal or cross bracing.

brace
A structural element for positioning, supporting, strengthening, or restraining the members of a structural frame.

diagonal bracing
A system of inclined members for bracing the angles between the members of a structural frame and ensuring the lateral stability of the whole.








sway brace
A diagonal member for bracing a structure against lateral forces.

cross bracing
A pair of transverse braces for stabilizing a structural frame against lateral forces. When using cables, two are necessary to stabilize the structure against lateral forces from either direction. For each direction, one cable will operate effectively in tension while the other would simply buckle. If rigid braces are used, a certain degree of redundancy is involved since a single member is capable of stabilizing the structure. Also, X-bracing.



K-brace
A pair of diagonal braces for stabilizing a structural frame against lateral forces, meeting at some point along the length of a member of the frame.

knee brace
A diagonal member for bracing the angle between two joined members, being joined to each partway along its length.

braced frame
A structural frame of linear members made rigid by a system of diagonal members.

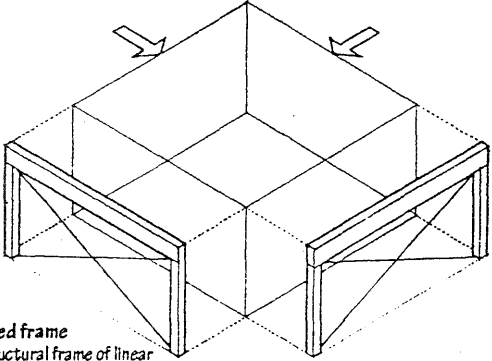

diaphragm
A relatively thin, rigid structural member capable of withstanding shear when loaded in a direction parallel to its plane.

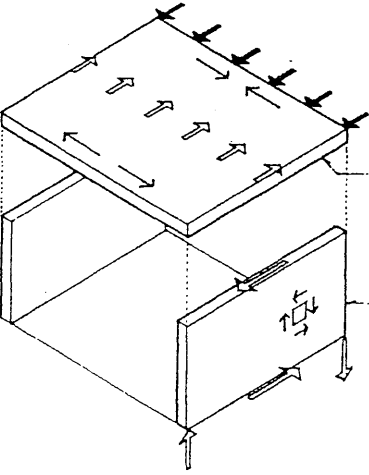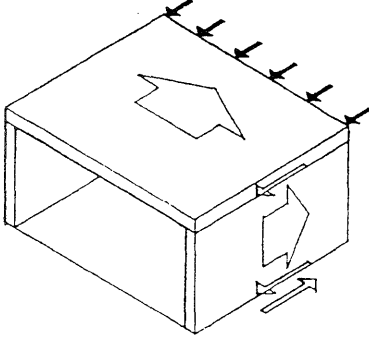


horizontal diaphragm
A rigid floor or roof plane acting as a thin, deep beam in transferring lateral forces to vertical shear walls, braced frames, or rigid frames.

shear wall
A vertical diaphragm acting as a thin, deep cantilever beam in transferring lateral loads to the ground foundation.

STRUCTURE


regular structure

A structural system characterized by the symmetrical configuration of mass and lateral force-resisting elements and having no significant discontinuities of stiffness or strength. The effects of lateral forces on regular structures may be determined by static methods.

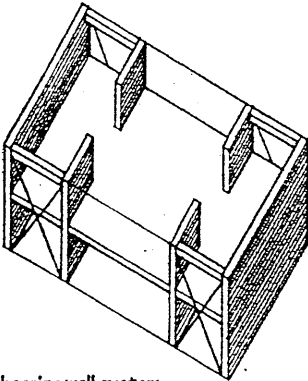


bearing wall system

A structural system consisting of vertical planar elements for supporting gravity loads and shear walls or braced frames for resisting lateral forces.

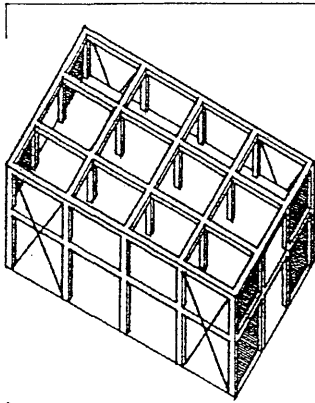

frame system

A structural system consisting of a three-dimensional array of interconnected linear members that functions as a complete, self-contained unit in supporting gravity loads and shear walls or braced frames for resisting lateral forces.

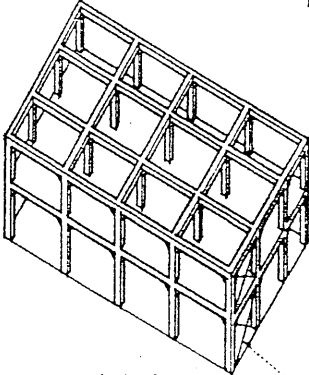

moment-resisting frame

A frame system designed to resist lateral forces primarily by flexure in the members and joints.

dual system

A structural system for resisting lateral forces, combining the ductility of a moment-resisting frame with the rigidity of a shear wall.

eccentric bracing



A structural system for resisting lateral forces, combining the ductility of a moment-resisting frame with the rigidity of a braced frame.

irregular structure

A structural system characterized by any of various plan or vertical irregularities, as a soft or weak story, a discontinuous shear wall or diaphragm, or the asymmetrical layout of mass or lateral force resisting elements. Irregular structures generally require dynamic analysis in order to determine the torsional effects of lateral forces.

center of resistance

The centroid of the vertical elements of a lateral force-resisting system, through which the shear reaction to lateral forces acts. Also called center of rigidity.




discontinuous diaphragm

A horizontal diaphragm having a large cutout or open area, or a stiffness significantly less than that of the story above or below.

torsional irregularity

The asymmetrical layout of mass or lateral force-resisting elements, resulting in noncoincident centers of mass and resistance and causing the story drift at one end of the structure to be more than the average of the story drifts at both ends.





nonparallel system

A structural system having lateral force-resisting elements neither parallel nor symmetrical about the major orthogonal axes of the system.

reentrant corner

The plan configuration of a structure and its lateral force-resisting system having projections beyond a corner significantly greater than the plan dimension in the given direction. A reentrant corner tends to produce differential motions between different portions of the structure, resulting in local stress concentrations at the corner. Solutions include providing a seismic joint to separate the building into simpler shapes, tying the building together more strongly at the corner, or splaying the corner.



seismic joint

A joint that physically separates two adjacent building masses so that free vibratory movement in each can occur independently of the other.

soft story

A story having a lateral stiffness significantly less than that of the stories above.

weak story


A story having lateral strength significantly less than that of the stories above.

irregular mass

A story having an effective mass significantly greater than that of an adjacent story.

discontinuous shear wall

A shear wall having a large offset or a significant change in horizontal dimension.

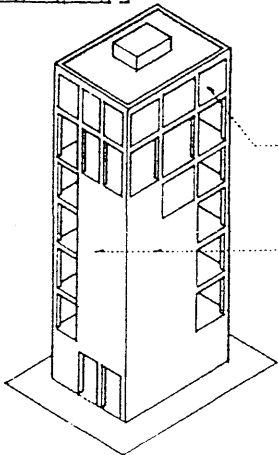

perforated shell tube

A tube structure having perimeter shear walls with less than 30% of the surface area perforated by openings.

framed tube

A tube structure having closely spaced perimeter columns rigidly connected by deep spandrel beams.

braced tube

A framed tube structure tied together by a system of diagonal braces.

trussed tube

A braced tube structure having trussed wall frames of widely spaced columns tied together by diagonal or cross bracing.

latticed truss tube

A braced tube structure having perimeter frames of closely spaced diagonals with no vertical columns.

bundled tubes

An assembly of narrow tubes tied directly to each other to form a modular structure that behaves like a multicellular box girder cantilevering out of the ground. More tubes are sometimes provided in the lower portion of a tall structure where greater lateral force resistance is needed.

tube-in-tube structure

A tube structure having an inner braced tube added to the perimeter tube to improve its shear stiffness in resisting lateral forces.

braced core

An interior service core braced to provide additional stiffness in resisting lateral forces.

internal damping

The damping that naturally occurs as a building undergoes elastic or plastic deformation, as from the internal friction of a stressed material (hysteresis damping), from the friction between two moving parts (frictional damping), or from the viscous resistance of a fluid such as air (viscous damping).

aerodynamic damping

The shaping of a tall building to create turbulence which generates cross-wind lift to oppose cross-wind deflections during high winds.

turbulence

Irregular motion of the atmosphere characterized by up-and-down currents.

tube structure

A high-rise structure having perimeter lateral force-resisting systems internally braced by rigid floor diaphragms. A tube structure acts as a cantilevered box beam in resisting lateral forces.

damp

To cause a decrease in amplitude of successive oscillations or waves.

damping mechanism


Any of various viscoelastic devices typically installed at structural joints to absorb the energy generated by wind or earthquake forces, progressively diminish or eliminate vibratory or oscillatory motions, and prevent destructive resonances from occurring.

tuned mass damper

A heavy mass mounted on rollers and attached to the upper portion of a tall building with spring damping mechanisms, having an inertial tendency to remain at rest and thus counteracting and dissipating any building movements.

base isolation

Isolating the base of a building from the ground with damping mechanisms to allow the superstructure to float as a rigid body and alter the natural period of vibration of the structure so that it is different from that of the ground, thus preventing destructive resonances from occurring.

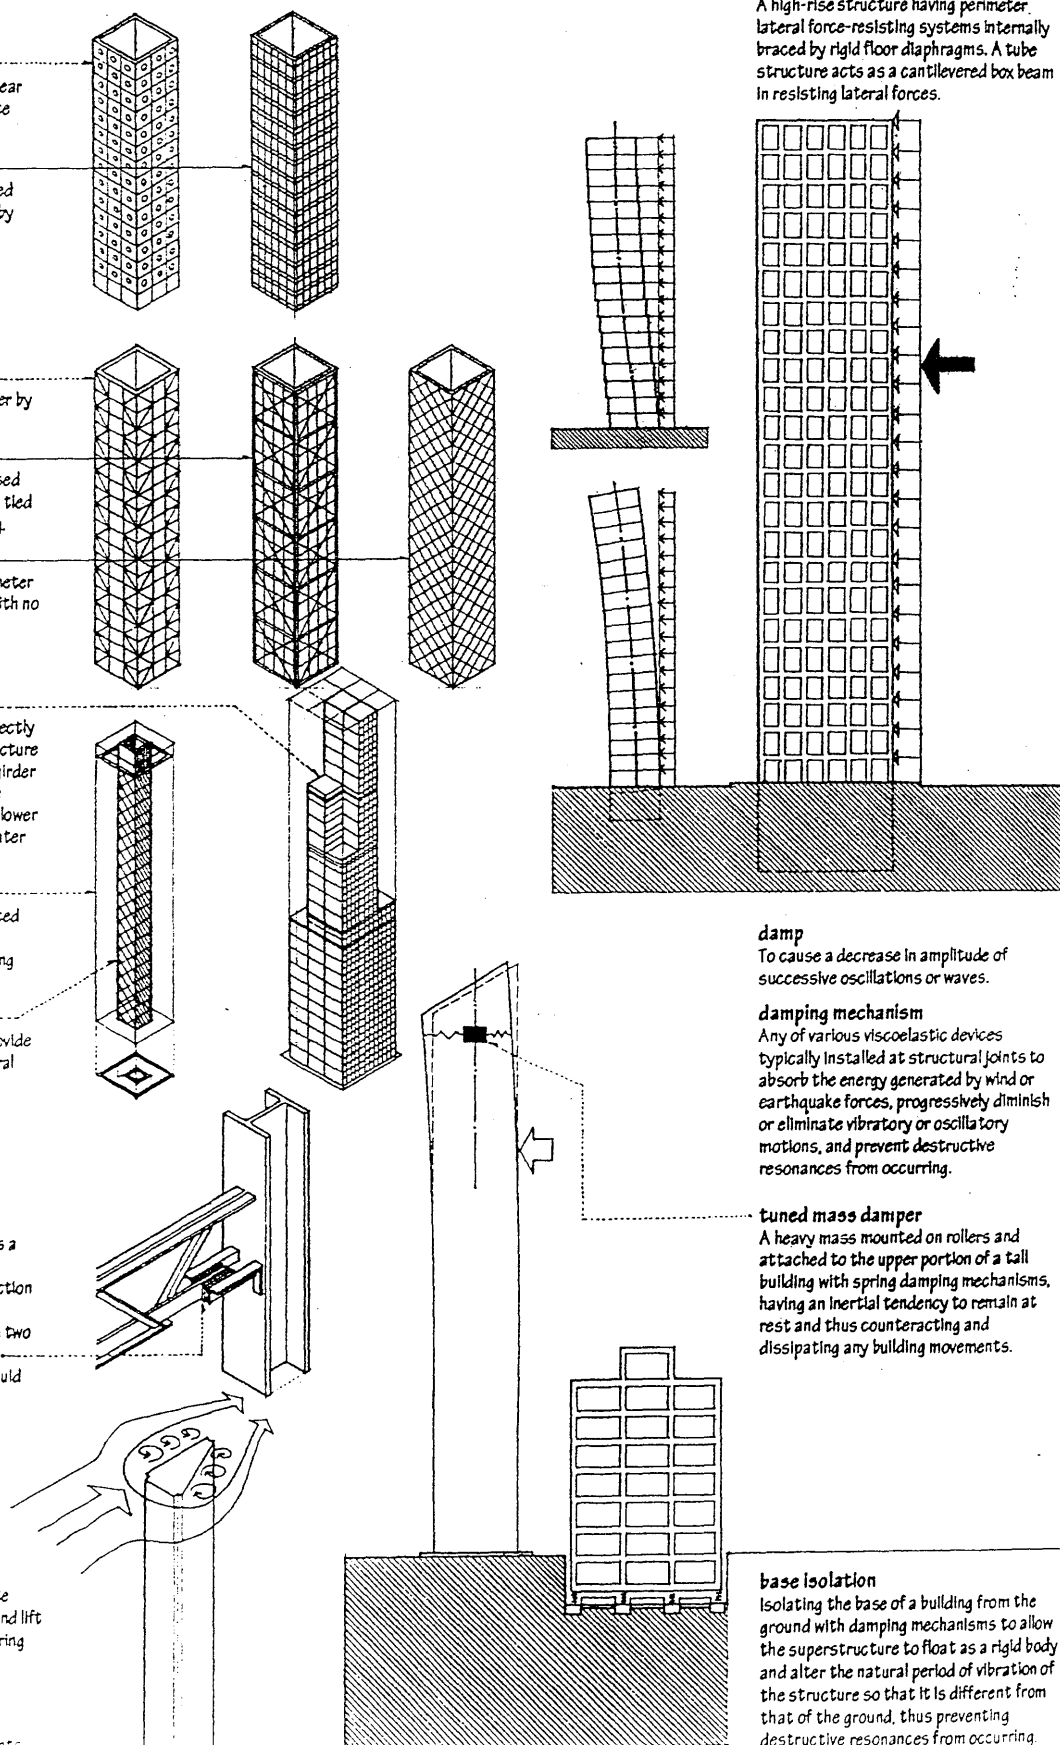

SURVEY

To determine the exact form, boundaries, extent, and position of a tract of land by linear and angular measurements and the application of the principles of geometry and trigonometry.

true north
The direction of the north pole from a given point.


magnetic north
North as indicated by the north-seeking pole of the magnetic needle in a compass.

bearing
A horizontal direction expressed in degrees east or west of a true or magnetic north or south direction.

azimuth
The angle of horizontal deviation, measured clockwise, of a bearing from a standard direction, as from north or south.

traverse
A sequence of intersecting surveyed lines whose lengths and angles of intersection are recorded graphically on a map and as data in a table.

place of beginning
The starting point for a metes-and-bounds survey.



plane survey
A survey in which curvature of the earth's surface is ignored, and all distances and horizontal angles are assumed to be projected onto a horizontal plane.

land survey
A survey made to establish the length and bearing of boundary lines and the area of the tract bounded by these lines.

cadastral survey
A survey showing boundaries and property lines, usually made to create land units suitable for transfer of title.

butts and bounds
A legal term for the boundary lines of a parcel of land as used in deeds and titles.

plat
A plan or map of land in a city, town, section, or subdivision, indicating the location and boundaries of individual properties.

survey plat
A legal document describing the location, boundaries, and dimensions of a tract or parcel of land, including zoning and planning commission approvals, easements and restrictions, and, for a subdivision, the dividing lines of streets, blocks, and lots, and the numbering and dimensions of each lot.

legal description
A written description of the location and boundaries of a specific parcel of land, based on a metes-and-bounds survey or a rectangular system of survey, or made with reference to a recorded plat.

metes and bounds
The property lines or boundaries of a parcel of line.

metes-and-bounds survey
A system of land survey in which the course and length of each boundary line of a parcel of land are called out starting at a known reference point and working around the periphery of the plat until returning to the place of beginning.


course
The compass direction from one reference point to the next for each leg of a metes-and-bounds survey, stated in degrees, minutes, and seconds as an angular deviation east or west of due north or south.

rectangular system
A system of land survey based on a modified grid of north-south principal meridians and east-west baselines. Also called government system.

range
One of a series of divisions numbered east or west from a guide meridian in the rectangular system of survey and consisting of a row of townships that are numbered north or south from a baseline.

township
A unit of land area in the rectangular system of survey, approximately 36 sq. mi. (93.2 sq. km) containing 36 sections.

section
One of the 36 numbered subdivisions of a township, each approximately one square mile (2.59 sq. km or 640 acres) and further subdivided into halves, quarters, and quarter quarters.

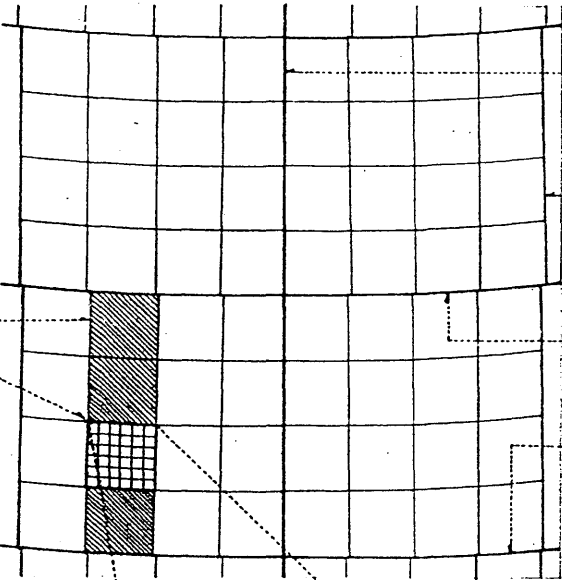



principal meridian
In the rectangular system of survey, a north-south reference line established at a substantial landmark for a large area of land.


guide meridian
In the rectangular system of survey, a north-south reference line located between correction lines at 24-mile intervals to the east and west of principal meridians.

baseline
The principal east-west reference line for an area in the rectangular system of survey.

correction line
An east-west reference line located at 24-mile intervals to the north and south of a baseline in the rectangular system of survey, established to correct for the convergence of meridians and equalize east-west distances.

range line
In the rectangular system of survey, a north-south reference line located at 6-mile intervals between guide meridians.



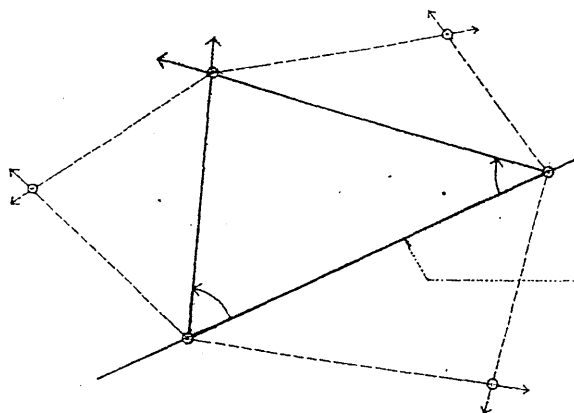

trilateration

A method for determining the relative positions of three or more points by treating these points as vertices of a triangle or triangles of which the sides and angles can be measured.

triangulation

A trigonometric method for determining the position of a point by taking bearings from the end points of a baseline of known or measurable length.

baseline


A line of known length and position from which points or other lines may be established, as a corner of a building structure or a property line.

level

A device for determining true horizontal or vertical directions by the centering of a bubble in a slightly bowed glass tube filled with alcohol or ether. Also called spirit level.

artificial horizon

A level, as a surface of mercury.



stadia

A method of surveying in which distances are read by noting the interval on a graduated rod intercepted by two horizontal cross hairs mounted in the telescope of a surveying instrument.

target

A red and white disk on a leveling rod that facilitates the sighting and reading of the rod.

rod

A straight pole or bar, conspicuously marked with graduations, and used in measuring the vertical distance between a point on the ground and the line of sight of a surveyor's level. Also called leveling rod, stadia rod.

chain



A distance-measuring device consisting of 100 metal links of equal length.

Gunter's chain

A distance-measuring device consisting of 100 metal links and a total length of 66 ft. (20 m). Also called surveyor's chain.

engineer's chain

A distance-measuring device consisting of 100 metal links and a total length of 100 ft. (30 m).

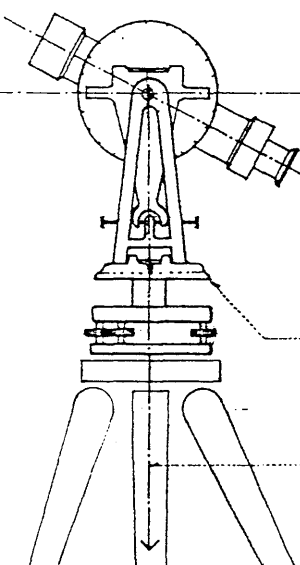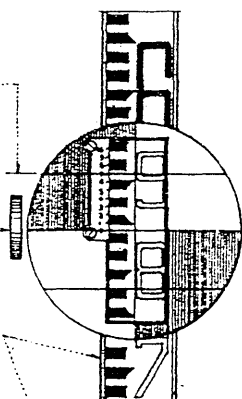

transit

A surveying instrument, as a theodolite, having a telescope that can be reversed by turning in a vertical plane, used for measuring horizontal and sometimes vertical angles.

theodolite

A precision instrument having a telescopic sight for establishing horizontal and sometimes vertical angles.

alidade

The entire upper part of a transit or theodolite, including the telescope, its supports, spirit level, horizontal circle, leveling devices, and the spindle.

horizontal circle

A circular plate, graduated in degrees, minutes, and seconds, and fixed to the base of a transit for measuring horizontal angles.

optical plummet

A device for centering a transit or theodolite over a reference point, used in place of a plumb bob in a strong wind.

leveling

A procedure for determining the difference in elevation between two points by means of a level or transit and a rod. Also called differential leveling.

elevation

The vertical distance above or below a datum.

spot elevation

The elevation of a certain point relative to a specified datum.

profile

A vertical section of the ground surface taken parallel to a survey line.

datum

Any level surface, line, or point used as a reference from which elevations are measured.

turning point


A point temporarily located and marked in order to establish the elevation or position of a surveying instrument at a new station.

station

A precisely located reference point over which a surveying instrument is centered. Also called instrument station, set-up.

bench mark

A marked point of known or assumed elevation, usually on a permanent object, from which other elevations may be established.

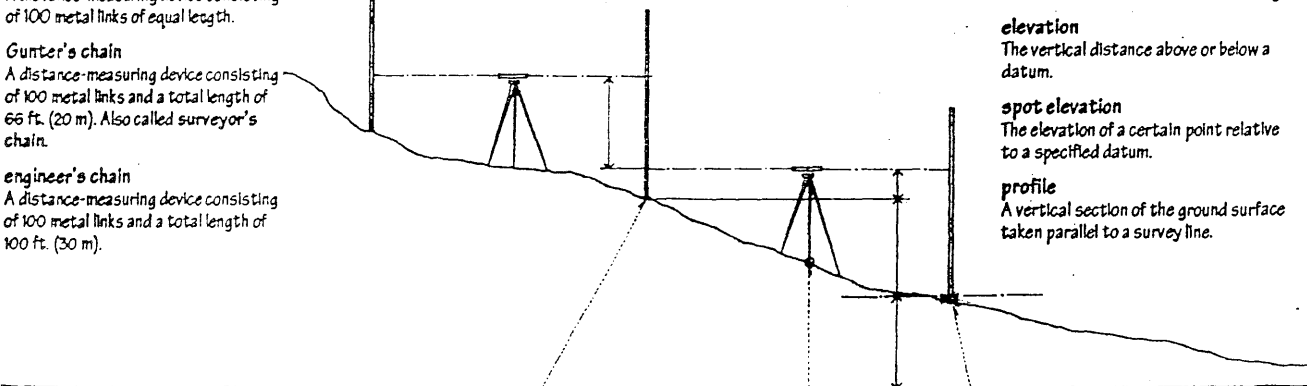

TEMPLE


An edifice or place dedicated to the worship or presence of a deity.

sacred

Of or pertaining to religious objects, rites, or practices, as opposed to the secular or profane.

secular

Of or pertaining to the temporal or worldly rather than the sacred or spiritual. Also, profane.

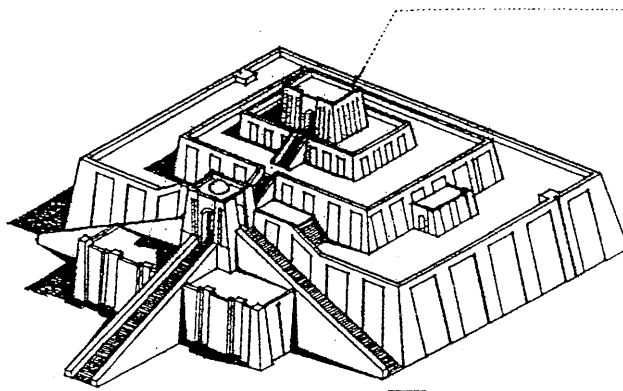

ziggurat

A temple-tower in Sumerian and Assyrian architecture, built in diminishing stages of mud brick with buttressed walls faced with burnt brick, culminating in a summit shrine or temple reached by a series of ramps; thought to be of Sumerian origin, dating from the end of the 3rd millennium B.C. Also, zikkurat.

Tower of Babel

A temple-tower presumed to be the great ziggurat at Babylon, which no longer survives, though it was seen and described by the Greek historian, Herodotus, in the 5th century B.C.:

"And they said to one another, Let us make brick, and burn it thoroughly. And they had brick for stone, and slime for mortar. And they said, Let us build a city and a tower, whose top may reach unto heaven; and let us make a name, lest we be scattered abroad upon the face of the whole earth."
—Genesis 11:4

Lamassu

The monumental stone sculptures of human-headed, winged bulls or lions that guarded the entrances to Mesopotamian palaces and temples.



menhir


A prehistoric monument consisting of an upright megalith, usually standing alone but sometimes aligned with others.

megalith

A very large stone used as found or roughly dressed, esp. in ancient construction work.

monolith

A single block of stone of considerable size, often in the form of an obelisk or column.




cairn

A heap of stones piled up as a monument, tombstone, or landmark. Also, cairn.

passage grave

A megalithic tomb of the Neolithic and early Bronze Ages found in the British Isles and Europe, consisting of a roofed burial chamber and narrow entrance passage, covered by a tumulus; believed to have been used for successive family or clan burials spanning a number of generations. Also called chamber grave.

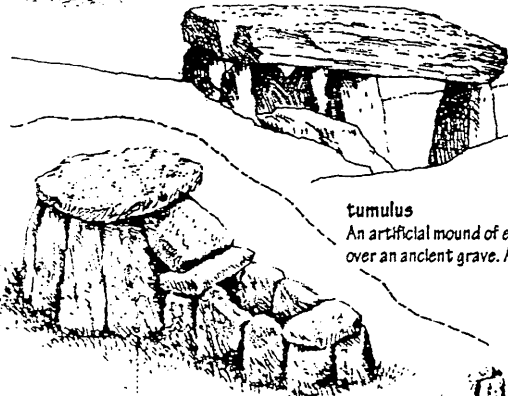

tumulus

An artificial mound of earth or stone, esp. over an ancient grave. Also called barrow.

dolmen

A prehistoric monument consisting of two or more large upright stones supporting a horizontal stone slab, found esp. in Britain and France and usually regarded as a tomb.


trilithon

Two upright megaliths supporting a horizontal stone. Also called trilith.



cromlech

A circular arrangement of megaliths enclosing a dolmen or burial mound.

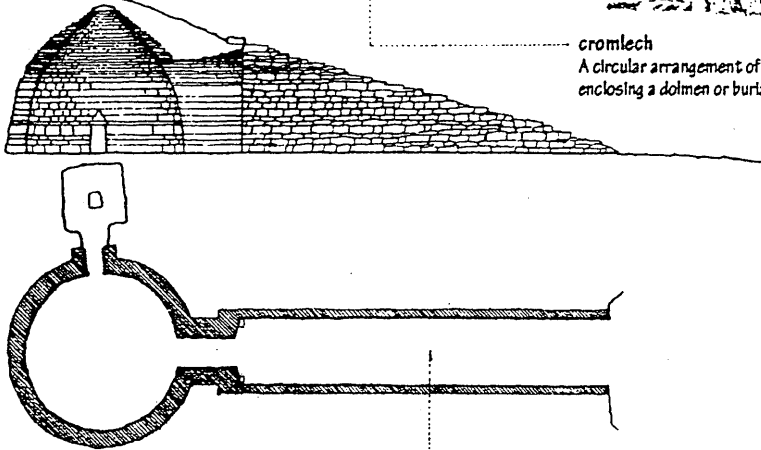

shaft grave


A tomb of the Aegean civilizations consisting of a deep rectangular cut into sloping rock and a roof of timber or stone.

beehive tomb

A stone-built subterranean tomb of the Mycenaean civilization consisting of a circular chamber covered by a corbeled dome and entered by a walled passage through a hillside. Also called tholos.

dromos

A long, deep passageway into an ancient subterranean tomb.

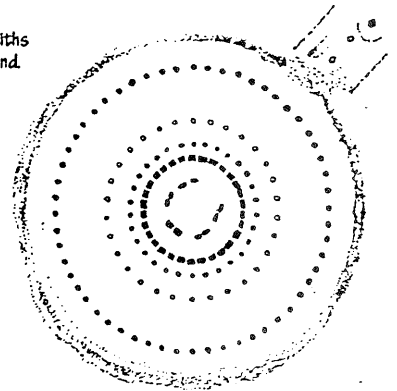

Stonehenge

A megalithic monument erected in the early Bronze Age c2700 B.C. on Salisbury Plain, Wiltshire, England, consisting of four concentric rings of trilithons and menhirs centered around an altar stone; believed to have been used by a sun cult or for astronomical observations.

mastaba

An ancient Egyptian tomb made of mud brick, rectangular in plan with a flat roof and sloping sides, from which a shaft leads to underground burial and offering chambers.

serdab

A small chamber inside a mastaba containing a statue of the deceased.


uraeus

The figure of the sacred asp, depicted on the headdress of ancient Egyptian rulers and deities as an emblem of supreme power.



pharaoh

Any of the rulers of ancient Egypt who were believed to be divine and had absolute power.



rock-cut tomb

A tomb hewn out of native rock, presenting only an architectural front with dark interior chambers, of which the sections are supported by masses of stone left in the form of solid pillars.


obelisk

A tall, four-sided shaft of stone that tapers as it rises to a pyramidal point, originating in ancient Egypt as a sacred symbol of the sun-god Ra and usually standing in pairs astride temple entrances.



Osirian column

An ancient Egyptian column incorporating the sculptured figure of Osiris, the Egyptian god of death and resurrection.

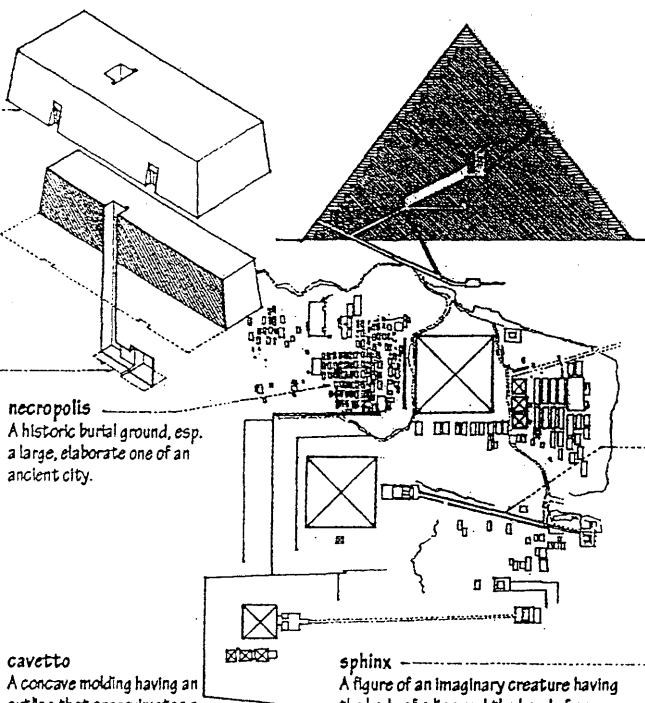

necropolis

A historic burial ground, esp. a large, elaborate one of an ancient city.

cavetto

A concave molding having an outline that approximates a quarter circle.

cavetto cornice

A characteristic cornice of Egyptian buildings, consisting of a large cavetto decorated with vertical leaves and a roll molding below. Also called Egyptian gorge.

sphinx

A figure of an imaginary creature having the body of a lion and the head of a man, ram, or hawk, commonly placed along avenues leading to ancient Egyptian temples or tombs.

pyramid

A massive masonry structure having a rectangular base and four smooth, steeply sloping sides facing the cardinal points and meeting at an apex, used in ancient Egypt as a tomb to contain the burial chamber and the mummy of the pharaoh. The pyramid was usually part of a complex of buildings within a walled enclosure, including mastabas for members of the royal family, an offering chapel and a mortuary temple. A raised causeway led from the enclosure down to a valley temple on the Nile, where purification rites and mummification were performed.

syrinx

A narrow rock-cut corridor in an ancient Egyptian tomb.

causeway

A raised passageway ceremonially connecting the valley temple with an ancient Egyptian pyramid.



cult temple

An ancient Egyptian temple for the worship of a deity, as distinguished from a mortuary temple.

mortuary temple

An ancient Egyptian temple for offerings and worship of a deceased person, usually a deified king. In the New Kingdom, cult and funerary temples had many features in common: an avenue of sphinxes leading to a tall portal guarded by a towering pylon, an axial plan with a colonnaded forecourt and a hypostyle hall set before a dark, narrow sanctuary in which stood a statue of the deity, and walls lavishly decorated with pictographic carvings in low or sunken relief. Many of the major temples grew by accretion due to the pious ambitions of successive pharaohs, who believed in the afterlife and were determined to create an enduring reputation through their buildings.

New Kingdom

The period in the history of ancient Egypt, c1550–1200 B.C., comprising the 18th to 20th dynasties; characterized by the dominance of its capital at Thebes.

pylon


A monumental gateway to an ancient Egyptian temple, consisting either of a pair of tall truncated pyramids and a doorway between them or of one such masonry mass pierced with a doorway, often decorated with painted reliefs.

propylon

A freestanding gateway having the form of a pylon and preceding the main gateway to an ancient Egyptian temple or sacred enclosure.

hypostyle hall

A large hall having many columns in rows supporting a flat roof, and sometimes a clerestory; prevalent in ancient Egyptian and Achaemenid architecture.



palm capital

An ancient Egyptian capital shaped like the crown of a palm tree.

lotus capital

An ancient Egyptian capital having the shape of a lotus bud.

Hathor-headed

Noting an ancient Egyptian column having as its capital the head of Hathor, the Egyptian goddess of love and happiness, often represented with the head or horns of a cow. Also, Hathoric.

TEMPLE

megaron

A building or semi-independent unit of a building, typically having a rectangular principal chamber with a center hearth and a porch, often of columns in antis: traditional in Greece since Mycenaean times and believed to be the ancestor of the Doric temple.

Greek temple

A temple built as a shrine to the ancient Greek god or goddess to whom it was dedicated. Since the temple was not intended for internal worship, it was built with special regard for external effect. It stood on a stylobate of three or more steps, with a cella containing the statue of the deity and front and rear porticoes, the whole being surmounted by a low gable roof of timber, covered in terracotta or marble tiles.

altar

An elevated place or structure upon which sacrifices are offered or incense burned in worship, or before which religious rites are performed.

cella

The principal chamber or enclosed part of a classical temple, where the cult image was kept. Also called naos.

pediment

A wide, low-pitched gable surmounting a colonnade or a major division of a facade.

tympanum

The triangular space enclosed by the horizontal and raking cornices of a pediment, often recessed and decorated with sculpture.

stylobate

A course of masonry forming the foundation for a row of columns, esp. the outermost colonnade of a classical temple.

stereobate

A solid mass of masonry visible above ground level and serving as the foundation of a building, esp. the platform forming the floor and substructure of a classical temple. Also called crepidoma, podium.

tabernacle






The portable sanctuary in which the Hebrews carried the ark of the covenant through the desert until the building of the Temple of Jerusalem by Solomon.

holy of holies

The innermost chamber in the biblical Tabernacle and the Temple in Jerusalem where the ark of the covenant was kept. Also called sanctum sanctorum.

Ark of the Covenant

The chest containing two stone tablets inscribed with the Ten Commandments, carried by the Hebrews during their desert wanderings after the Exodus.

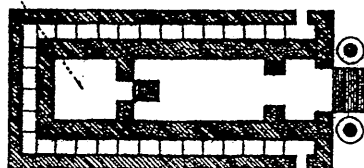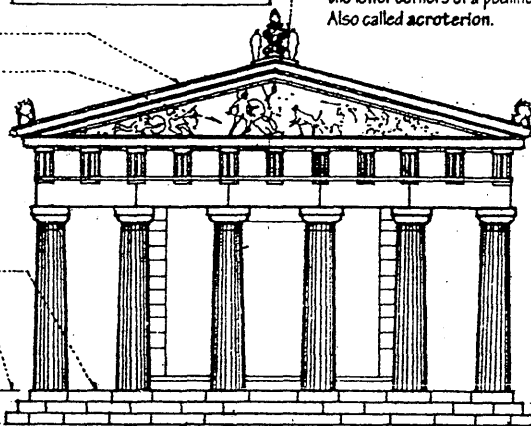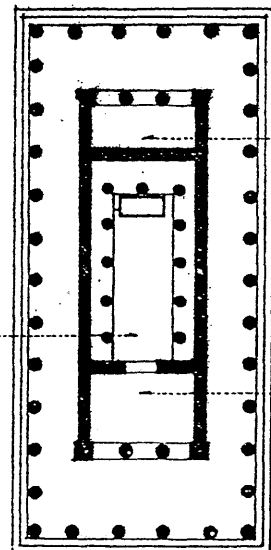

epinaos

The rear vestibule of a classical temple. Also called opisthodomos, posticum.



pronaos

An open vestibule before the cella of a classical temple. Also called anticum.

acroterium

A pedestal for a sculpture or ornament at the apex or at each of the lower corners of a pediment. Also called acroterion.

agora

A marketplace or public square in an ancient Greek city, usually surrounded with public buildings and porticoes and commonly used as a place for popular or political assembly.

stoa

An ancient Greek portico, usually detached and of considerable length, used as a promenade or meeting place around public places.

temenos

In ancient Greece, a piece of ground specially reserved and enclosed as a sacred place.



stela

An upright stone slab or pillar with a carved or inscribed surface, used as a monument or marker, or as a commemorative tablet in the face of a building. Also, stela.

acropolis

The fortified high area or citadel of an ancient Greek city.

antefix

An upright ornament at the eaves of a tile roof concealing the foot of a row of convex tiles that cover the joints of the flat tiles.

atlas

A sculptured figure of a man used as a column. Also called telamon.

caryatid

A sculptured female figure used as a column. Also called canephora.

Temple of Solomon

The first Temple of Jerusalem, completed c950 B.C. by Phoenician artisans under the direction of King Solomon and destroyed by Nebuchadnezzar II in 586 B.C. Based on Canaanite and Phoenician prototypes, it was oblong in shape, and consisted of three main parts: an outer hall (ulam), the main sanctuary (hekhal), and the holy of holies (debir), all decorated with massive carvings in ivory, gold, and cedar.

synagogue

A building or place of assembly for Jewish worship and religious instruction.

bimah


The platform in a synagogue from which services are conducted. Also called almemar, bema.

Holy Ark

The cabinet in a synagogue in which the scrolls of the Torah are kept, set into or against the wall that faces toward Jerusalem.

basilica
A large oblong building used as a hall of justice and public meeting place in ancient Rome, typically having a high central space lit by a clerestory and covered by timber trusses, and a raised dais in a semicircular apse for the tribunal. The Roman basilica served as a model for early Christian basilicas.

tribunal
A raised platform in an ancient Roman basilica for the seats of magistrates. Also, tribune.



triumphal arch
A monumental memorial arch erected astride the line of march of a victorious army during its triumphal procession.

arch order
The engaged columns and entablature framing an arch, as in a triumphal arch.


clithral
Of or pertaining to a classical temple that is roofed over.

hypethral
Of or pertaining to a classical temple that is wholly or partly open to the sky. Also, hypaethral.

pseudoperipteral
Having engaged columns at the sides.

dipteral
Having two rows of columns on all sides.

pseudodipteral
Having an arrangement of columns suggesting a dipteral structure but without the inner colonnade.

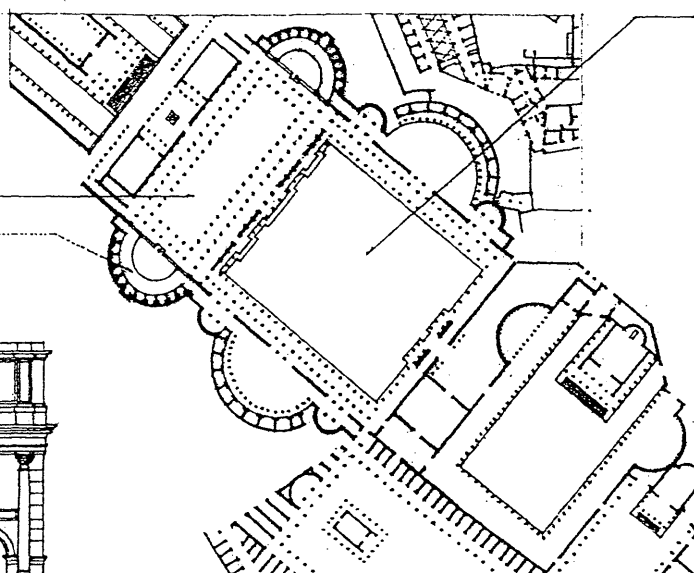

forum
The public square or marketplace of an ancient Roman city, the center of judicial and business affairs, and a place of assembly for the people, usually including a basilica and a temple.


pantheon
A temple dedicated to all the gods of a people.

cenotaph
A monument erected in memory of a deceased person whose remains are buried elsewhere.

cyrtostyle
A convex, usually semicircular portico.

cyclostyle
A circular colonnade or peristyle open at the center.

monopteron
A circular building having a single row of columns surrounding a central structure or a courtyard. Also, monopteros.








distyle in antis
Having two columns in front between antae.

anta
A rectangular pier or pilaster formed by thickening the end of a projecting wall.

prostyle
Having a portico on the front only.

apteral
Without a colonnade along the sides.

amphiprostyle
Prostyle on both fronts.

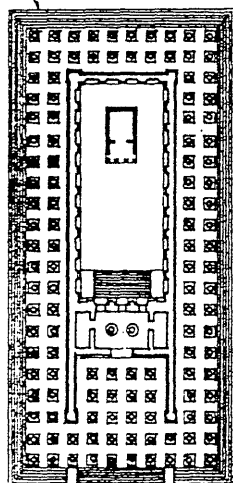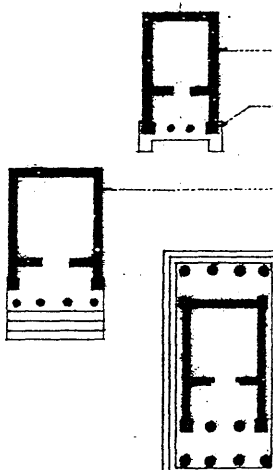

peripteral
Having a single row of columns on all sides.

pteron
A colonnade parallel to, but apart from the cella.

pteroia
The passage between the pteron and the cella.

TEMPLE

mosque

A Muslim building or place of public worship. Also called *masjid*, *musjid*.

madrasah


A Muslim theological school arranged around a courtyard and attached to a mosque, found from the 11th century on in Egypt, Anatolia, and Persia. Also, *madrasa*.

maidaan

The large open square of a city, used as a marketplace or parade ground, esp. in India. Also, *meidan*, *meidan*.

ziyada

A court or series of courts serving to shelter a mosque from immediate contact with secular buildings.

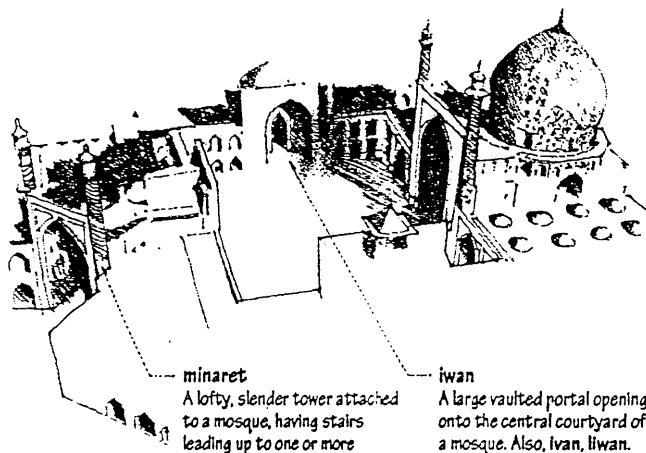

minaret

A lofty, slender tower attached to a mosque, having stairs leading up to one or more projecting balconies from which the muezzin calls the Muslim people to prayer.

iwan

A large vaulted portal opening onto the central courtyard of a mosque. Also, *ivan*, *liwan*.

Islam

The religious faith of Muslims, based on the teachings of the prophet Muhammad, the central themes of which are belief in the one God, Allah, the existence of Paradise and Hell, and the universal Judgment Day to come. Also called *Muhammadanism*.

Muslim

Of or pertaining to the law, religion, or civilization of Islam; a believer in Islam. Also, *Moslem*, *Muslem*.

Muhammad

Arab prophet and founder of Islam, A.D. 570–632. Also, *Mohammed*.

Koran

The sacred text of Islam, revered as the revelations made by Allah to Muhammad through the angel Gabriel and accepted as the foundation of Islamic law, religion, culture, and politics.

minbar

A pulpit in a mosque, recalling the three steps from which Muhammad addressed his followers.

qibla

The wall in a mosque in which the mihrab is set, oriented to Mecca. Also, *qiblah*, *kibla*, *lilah*.

mihrab

A niche or decorative panel in a mosque designating the qibla.

Mecca


A city in Saudi Arabia, birthplace of Muhammad and spiritual center of Islam.

Ka'ba

A small, cubical stone building in the courtyard of the Great Mosque at Mecca containing a sacred black stone and regarded by Muslims as the House of God, the objective of their pilgrimages, and the point toward which they turn in praying. Also, *Ka'aba*, *Ka'abah*.

caravansary

An inn in the Near East for the overnight accommodation of caravans, usually having a large courtyard enclosed by a solid wall and entered through an imposing gateway. Also, *caravanserai*.

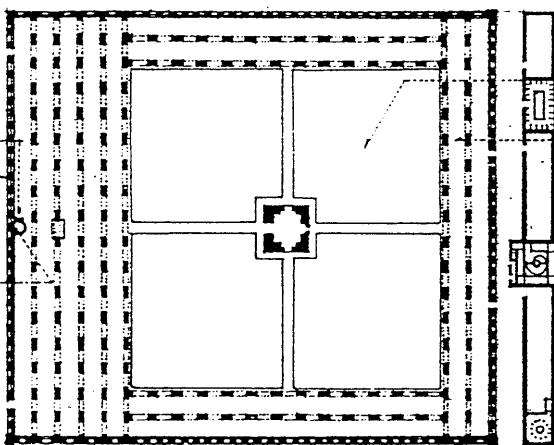


sahn

The central courtyard of a mosque.

riwaq

An arcaded hall of a mosque.



melon dome

A bulbous ribbed dome, found esp. in Islamic architecture.

stalactite work

A system of decoration in Islamic architecture, formed by the intricate corbeling of brackets, squinches, and inverted pyramids; sometimes wrought in stone but more often in plaster. Also called *honeycomb work*, *muqarna*.

pendentive bracketing

Corbeling having the general form of a pendentive, commonly found in Moorish architecture.

maksoorah

An openwork screen or partition enclosing an area for prayer or a tomb in a mosque.

tablero


A rectangular, strongly framed panel that overhangs a talud. An original contribution of Teotihuacán architecture, this tablero-talud combination was introduced c.A.D. 150 to differentiate the stages of stepped pyramids and altar platforms. It is widely copied throughout Mesoamerica, with regional variations.

talud

In Mesoamerican architecture, an outer wall that slopes inward as it rises. The talud first appeared c.800 B.C. at the Olmec site of La Venta, in Tabasco state, Mexico.

pyramid

A masonry mass having a rectangular base and four stepped and sloping faces culminating in a single apex, used in ancient Egypt and pre-Columbian Central America as a tomb or a platform for a temple.

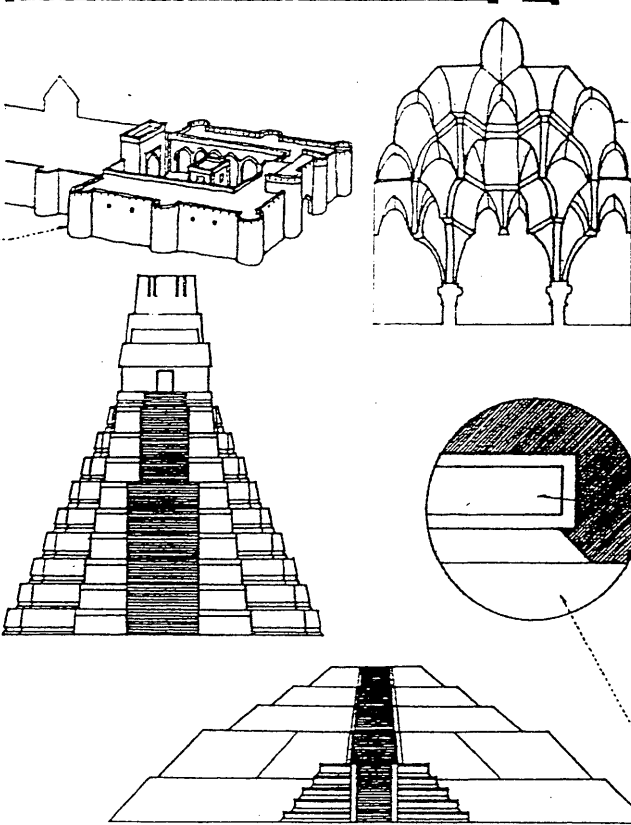

Hinduism


The dominant religion of India, based upon the religion of the original Aryan settlers as expounded and evolved in the Vedas, having a diverse body of philosophy and cultural practices, many popular cults, and a large pantheon symbolizing a supreme being of many forms and natures. Buddhism is outside the Hindu tradition but is regarded as a related religion.

pantheon

The officially recognized gods of a people.

Vedas

The oldest sacred writings of Hinduism, composed between 1500 and 800 B.C., incorporating four collections hymns, prayers, and liturgical formulas: Rig-Veda, Yajur-Veda, Sama-Veda, and Atharva-Veda.




stamba

A freestanding memorial pillar in Indian architecture, bearing carved inscriptions, religious emblems, or a statue. Also, *stambha*.

lit

A monolithic stamba, as distinguished from one built up of stone courses.



viihara

A Buddhist monastery in Indian architecture often excavated from solid rock, consisting of a central pillared chamber surrounded by a verandah onto which open small sleeping cells. Adjacent to this cloister was a courtyard containing the main stupa.

chaitya


A Buddhist shrine in India, usually carved out of solid rock on a hillside, having the form of an aisled basilica with a stupa at one end.

wat

A Buddhist monastery or temple in Thailand or Cambodia.


Khmer

A people of Cambodia who established an empire in the 5th century A.D. and dominated most of Indochina from the 9th to the 12th centuries.

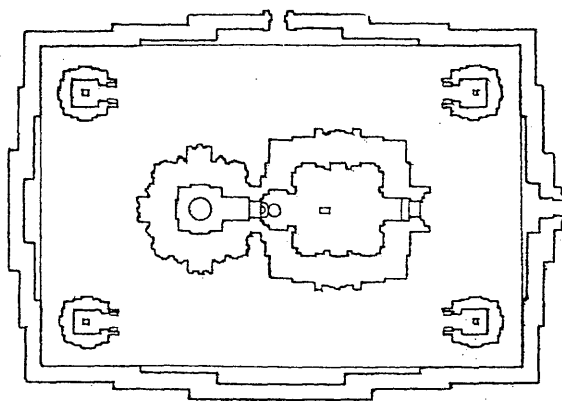

mandira

A Hindu temple.



rath

A Hindu temple cut out of solid rock to resemble a chariot. Also, *ratha*.

vimana

The sanctuary of a Hindu temple in which a deity is enshrined.

amalaka

The bulbous stone finial of a *sikhara*.

sikhara


A tower of a Hindu temple, usually tapered convexly and capped by an *amalaka*. Also, *sikra*.

mandapa

A large, porchlike hall leading to a Hindu temple and used for religious dancing and music.

gopuram

A monumental, usually ornate gateway tower to a Hindu temple enclosure, esp. in southern India. Also, *gopura*.

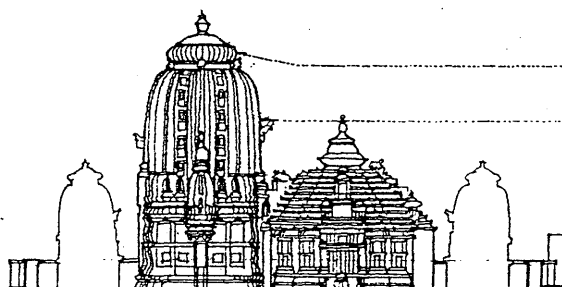

tee

A finial in the form of a conventionalized umbrella, used on stupas, totes, and pagodas.

chattri


An umbrella-shaped finial symbolizing dignity, composed of a stone disk on a vertical pole.

torana

An elaborately carved, ceremonial gateway in Indian Buddhist and Hindu architecture, having two or three lintels between two posts.

vedika

A railing enclosing a sacred area, as a stupa.

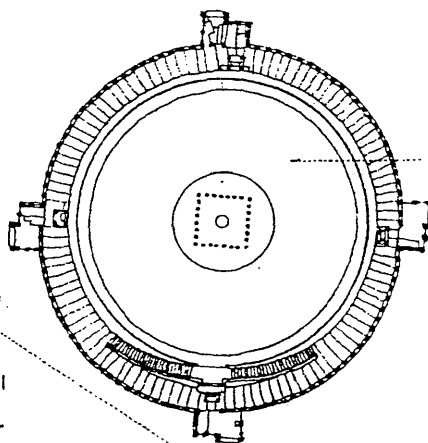

stupa

A Buddhist memorial mound erected to enshrine a relic of Buddha and to commemorate some event or mark a sacred spot. Modeled on a funerary tumulus, it consists of an artificial dome-shaped mound raised on a platform, surrounded by an outer ambulatory with a stone *vedika* and four *toranas*, and crowned by a *chattri*. The name for the stupa in Ceylon is *dagoba*, and in Tibet and Nepal, *chorten*. Also called *tope*.

Buddhism


A religion based on the Four Noble Truths, originated in India by Gautama Buddha and later spreading to China, Burma, Japan, Tibet, and parts of Southeast Asia.


Four Noble Truths

The doctrines of Buddha: all life is suffering; the cause of suffering is desire; cessation of suffering is possible through Nirvana – the extinction of craving; Nirvana can be reached through mental and moral self-purification.

Buddha


Title of Gautama Siddhartha c563–c483 B.C., Indian philosopher, religious leader, and founder of Buddhism. Also called Gautama Buddha.

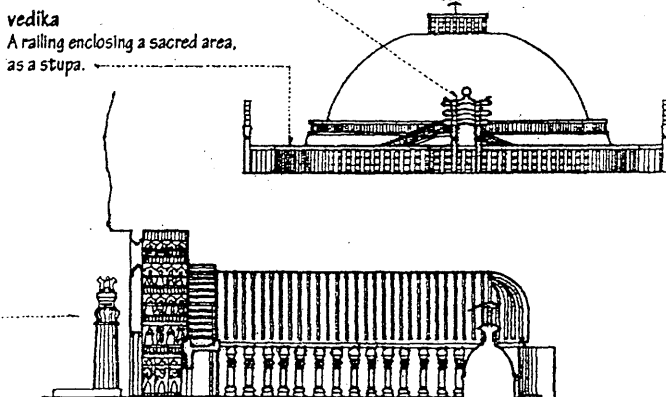

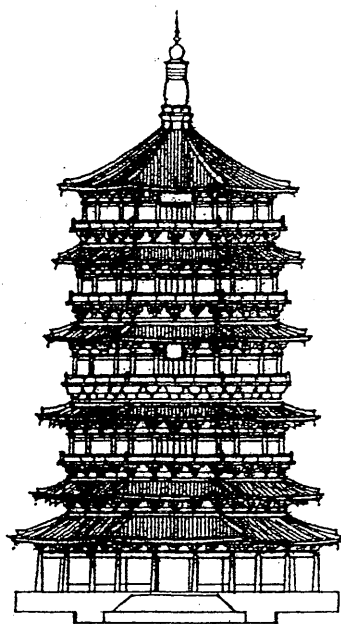

pagoda

A Buddhist temple in the form of a square or polygonal tower with roofs projecting from each of its many stories, erected as a memorial or to hold relics. From the stupa, the Indian prototype, the pagoda gradually changed in form to resemble the traditional multistoried watch tower as it spread with Buddhism to China and Japan. Pagodas were initially of timber, but from the 6th century on, were more frequently of brick or stone, possibly due to Indian influence.

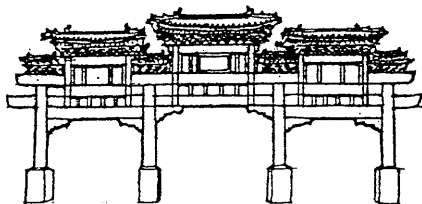

pailou


A monumental gateway in Chinese architecture, having a trabeated form of stone or wood construction with one, three, or five openings and often bold projecting roofs, erected as a memorial at the entrance to a palace, tomb, or sacred place; related to the Indian toranas and the Japanese torii. Also, paifoo.

zhonglou

A bell tower or pavilion in Chinese architecture, located at the right side of a city gate, palace entrance, or forecourt of a temple.

gulou

A large drum tower or pavilion in Chinese architecture, located at the left side of a city gate, palace entrance, or forecourt of a temple.

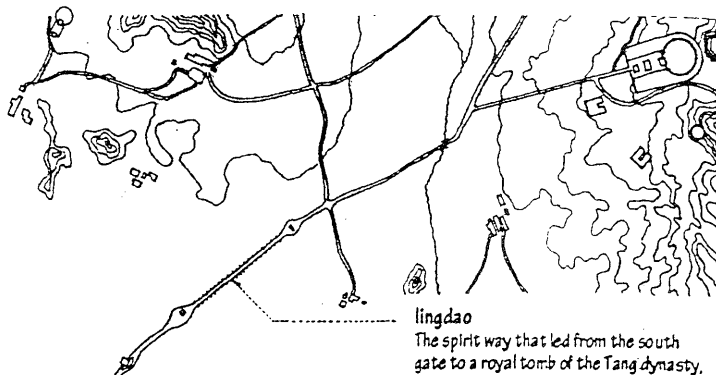


lingdao

The spirit way that led from the south gate to a royal tomb of the Tang dynasty, lined with stone pillars and sculptured animal and human figures.

Tang

A dynasty in China, A.D. 618–907, marked by territorial expansion, the invention of printing, prosperous trade, and the development of poetry. Also, Tang.



Yungang


A large Buddhist monastic center in northwest China, begun in A.D. 460, where there are numerous cave temples, each having a shallow, oval-shaped interior with a massive central image of Buddha flanked by two smaller Buddhas; the concept of carving into cliffs is believed to have come to China from India. Also, Yün-kang.

dougong

A bracket system used in traditional Chinese construction to support roof beams, project the eaves outward, and support the interior ceiling. The absence of a triangular tied frame in Chinese architecture made it necessary to multiply the number of supports under the rafters. In order to reduce the number of pillars this would normally require, the area of support afforded by each pillar was increased by the dougong. Also, tou-kung.

ang

A lever arm in traditional Chinese construction, placed parallel to the rafters and raked at an angle to counterbalance the forces applied by the inner and outer purlins. The ang supports the outermost purlin by means of a bracket or cross-beam and is pinned at the inner end against a purlin.

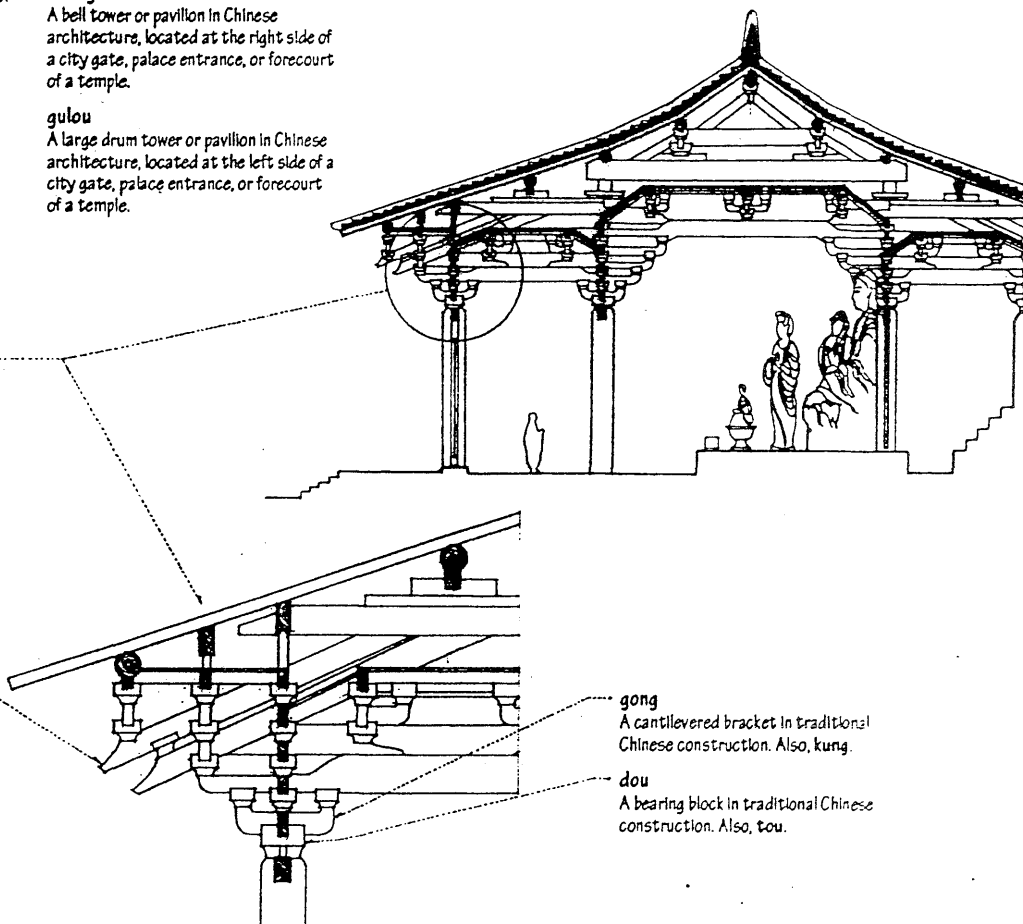

gong

A cantilevered bracket in traditional Chinese construction. Also, kung.

dou

A bearing block in traditional Chinese construction. Also, tou.

katsuogi
The short wooden billets placed at right angles to the ridge of a Shinto shrine.

chigi
The crossed finial formed by the projecting barge boards at each end of the ridge of a Shinto shrine.

hashira
A sacred post in Shinto architecture, shaped by human hands.

Nagare-zukuri
A style of Shinto shrine, based on the Ise prototype, but with the front slope of the roof extending to form a canopy over the entrance stair; this space eventually developed into a prayer room for worshippers.

Kasuga-zukuri
A style of Shinto shrine, characterized by a hipped roof extending from the main roof, over a centrally placed entrance stair at one gable end.

haiden
The hall of worship of a Shinto shrine, usually in front of the honden.

honden
The main sanctuary of a Shinto shrine.

bent approach
An approach through two gateways that are not aligned, so that it is necessary to make a sharp turn to pass from the first through the second, used for privacy in houses or temples, or for security in fortifications.

torii
A monumental, freestanding gateway on the approach to a Shinto shrine, consisting of two pillars connected at the top by a horizontal crosspiece and a lintel above it, usually curving upward.

Shinto
The indigenous religion of Japan, marked by a cultic devotion to deities of natural forces, ancestor worship, and veneration of the emperor as a descendant of the Sun-Goddess, Amaterasu.

Shimmi-zukuri
A style of Shinto shrine embodying the original style of Japanese building, before the introduction of Buddhism. It consists essentially of a small unpainted rectangular structure raised above ground level on posts inserted directly into the earth. A railed veranda surrounds the structure at floor level, a freestanding post at each gable end supports the ridge, and the bargeboards extend outward from the thickly thatched roof, forming chigi at each end.

kodo
An assembly hall for monks in a Japanese Buddhist temple, in which sacred texts are read.

to
A Japanese pagoda enshrining Buddhist holy relics.

sorin
The crowning spire on a Japanese pagoda.

kondo
Golden Hall: the sanctuary where the main image of worship is kept in a Japanese Buddhist temple. The Jodo, Shinshu, and Nichiren sects of Buddhism use the term hondo for this sanctuary, the Shingon and Tendai sects use chudo, and the Zen sect uses butsuden.



nandaimon
The principal south gateway to a Japanese temple or shrine.

chumon
The inner gateway to the precinct of a Japanese Buddhist temple.

shoro
A structure from which the temple bell is hung, as one of a pair of small, identical, symmetrically placed pavilions in a Japanese Buddhist temple.

butsu
A representation of Buddha.

daibutsu
A large representation of Buddha.

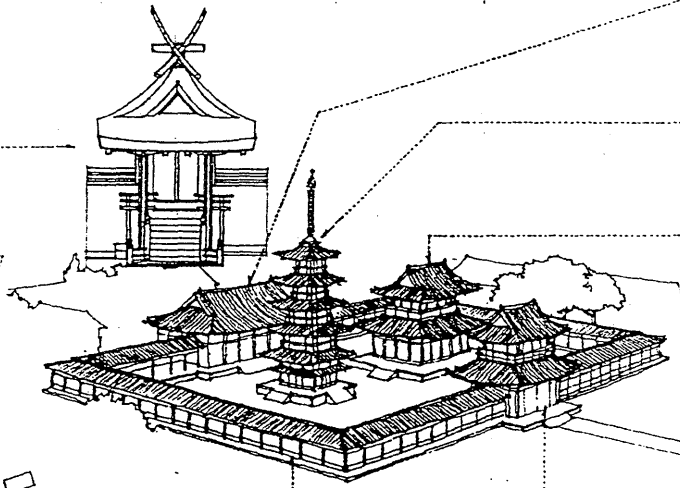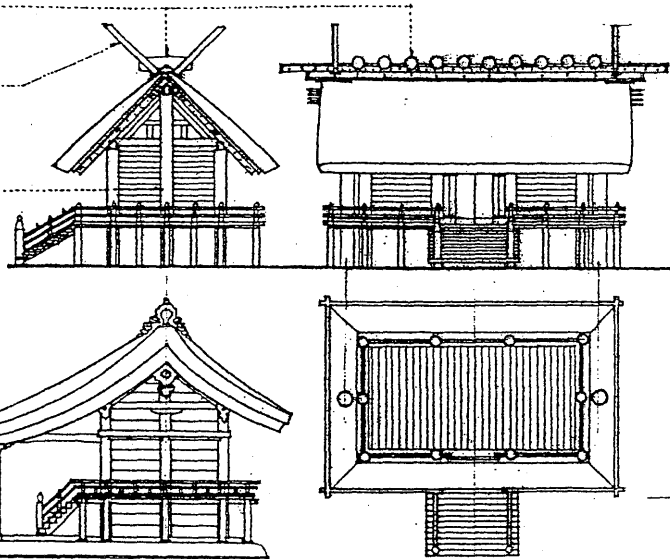

THEATER

A building, part of a building, or an outdoor area for housing dramatic presentations, stage entertainment, or motion-picture shows.

Greek theater

An open-air theater, usually hollowed out of the slope of a hillside with a tiered seating area around and facing a circular orchestra backed by the skene, a building for the actors' use.

orchestra

The circular space in front of the stage in the ancient Greek theater, reserved for the chorus.

chorus


The group of actors in ancient Greece that served as major participants in or commentators on the main action of the drama.

skene

A structure facing the audience in an ancient Greek theater, forming the background before which performances were given.

proscenium

The front part of the stage of an ancient Greek or Roman theater upon which the actors performed.

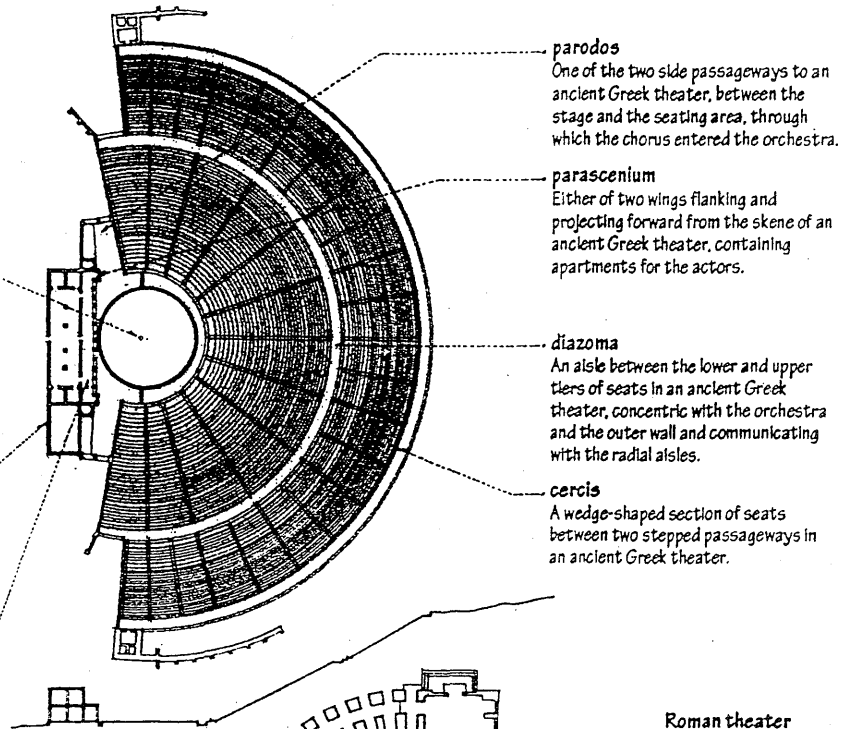

parodos

One of the two side passageways to an ancient Greek theater, between the stage and the seating area, through which the chorus entered the orchestra.

parascenium

Either of two wings flanking and projecting forward from the skene of an ancient Greek theater, containing apartments for the actors.

diazoma


An aisle between the lower and upper tiers of seats in an ancient Greek theater, concentric with the orchestra and the outer wall and communicating with the radial aisles.

cercis

A wedge-shaped section of seats between two stepped passageways in an ancient Greek theater.

gradin

One of a series of steps or tiered seats, as in an amphitheater. Also, gradine.

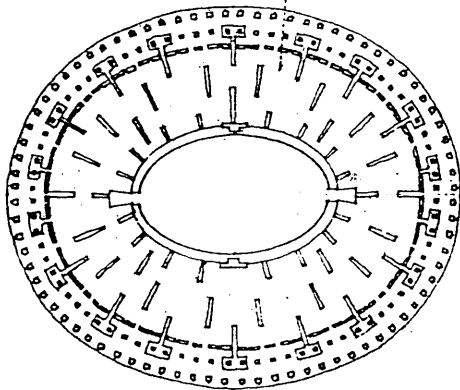


amphitheater

An oval or round building with tiers of seats around a central arena, as those used in ancient Rome for gladiatorial contests and spectacles.

podium

A raised platform encircling the arena of an ancient Roman amphitheater, having on it the seats of privileged spectators.

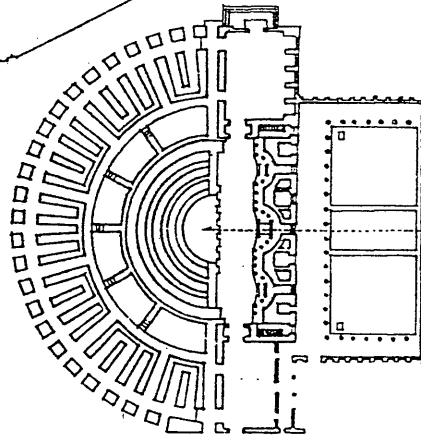

Roman theater


An open-air theater modeled upon that of the ancient Greeks, but often built on level ground with colonnaded galleries, a semicircular orchestra, and a raised stage backed by an elaborate architectural structure.

orchestra

A semicircular space in the front of the stage of an ancient Roman theater, reserved for senators and other distinguished spectators.


velarium

A canvas awning drawn over an ancient Roman amphitheater to protect the audience from rain or sun.

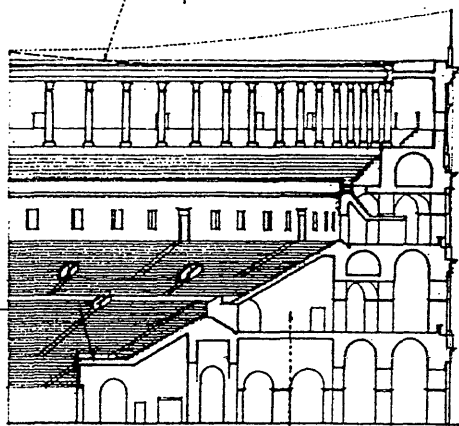

vomitory

A large opening, as in an ancient Roman amphitheater or stadium, permitting large numbers of people to enter or leave. Also, vomitorium.

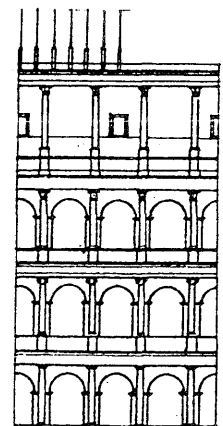

supercolumniation

The placing of one order of columns above another, usually with the more elaborate orders at the top.

proscenium stage
A stage that is framed by a proscenium arch.

proscenium arch
The arch that separates the stage from the auditorium. Also called *proscenium*.

seating
The arrangement of seats in a theater, stadium, or other place of assembly.

continental seating
A theater seating plan in which there is no center aisle, but with wide spacing between each row of seats to permit ease of passage.

aisle
A walkway between or along sections of seats in a theater, auditorium, church, or other place of assembly.

blind row
A row of seats having its first seat at a side aisle and its last seat at a side wall.

stagehouse
The part of a theater on the stage side of the proscenium, including the stage, wings, and storage area.

gridiron
A steel structure above the stage of a theater, from which hung scenery and equipment are manipulated. Also called *grid*.

flies
The space above the stage used chiefly for storing and hanging scenery and equipment. Also called *fly loft*.

bridge
A gallery or platform that can be raised or lowered over a stage and is used by technicians and stagehands.


batten
A length of metal pipe hung from the gridiron, for suspending scenery or equipment, as drop scenes, flats, or lighting units. Also called *pipe batten*.

flat
A piece of scenery consisting of a wooden frame, usually rectangular, covered with lightweight board or fabric.


orchestra shell
A sound-reflecting structure that closes off the flies and wings of a stage to form a performing area for music.

stage
The platform, usually raised, on which the actors perform in a theater. Also, the platform and all the parts of a theater back of the proscenium.

drop stage
A stage floor that moves vertically on an elevator, usually so that one set can quickly replace another. Also called *lift stage*.



surround theater
A theater or concert hall in which the seating is arranged around or on all four sides of a central stage.



arena theater
A theater with seats arranged on at least three sides around a central stage. Also called *theater-in-the-round*.

thrust stage
A stage that extends beyond the proscenium arch and is usually surrounded on three sides by seats.

spotlight
A strong, focused beam of light for calling attention to an object, person, or group on a stage. Also called *spot*.

houselights
The lamps providing illumination of an auditorium or the seating area of a theater.

fire curtain
A curtain of asbestos or other fireproof material that can be lowered just inside the proscenium arch in case of fire, sealing off the backstage area from the auditorium. Also called *safety curtain*.

border
A narrow curtain or strip of painted canvas hung above the stage to mask the flies and form the top of the stage set.

teaser
A drapery or flat piece hung across the top of the proscenium arch to mask the flies and, together with the tormentors, frame the stage opening.


tormentor
A curtain or framed structure used directly behind the proscenium at each side of the stage to screen the wings and sidelights from the audience.

act curtain
A curtain for closing the proscenium opening between acts or scenes. Also called *act drop*, *house curtain*.

orchestra pit
The space reserved for musicians, usually the front part of the main floor, sometimes wholly or partly under the forward part of the stage.

footlights
The row of lights on the front of a stage, usually set in a trough, nearly on a level with the feet of the performers.

apron
The part of a stage floor in front of the curtain line.

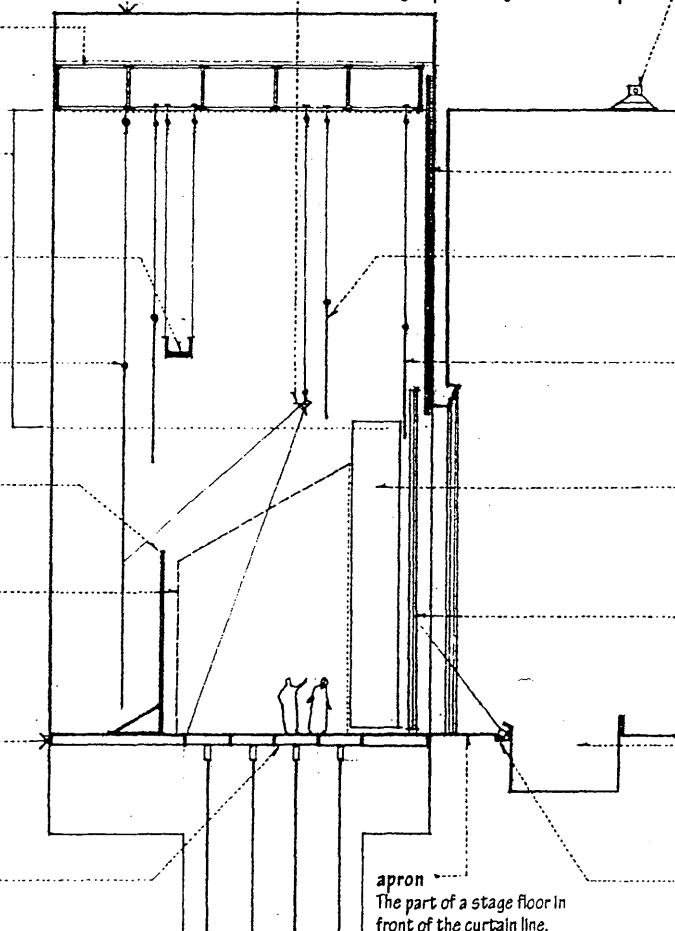

THEATER

opera house
A theater devoted chiefly to the public performance of operas.

front of the house
The parts of a theater that are on the audience side of the fire wall.

balcony
A gallery that projects over the main floor of a theater to accommodate additional people.

gallery
An upper floor projecting over the main floor of a theater or hall.

wing balcony
The part of a balcony that extends along the sidewalls of an auditorium.

loge
A private seating area for a small group of spectators in a theater or opera house.

peanut gallery
The rearmost and cheapest section of seats in the uppermost balcony of a theater.

sight line
Any of the lines of sight between the spectators and the stage or playing area of a theater or stadium.

dress circle
A curved or circular division of seats in a theater, opera house, or the like, usually the first gallery, originally set apart for spectators in evening dress.

mezzanine
The lowest balcony or forward part of such a balcony in a theater.

grand tier
The first tier of boxes immediately above the parterre in a large opera house or theater.

tier
One of a number of galleries, as in a theater.

orchestra
The entire main-floor space for spectators in a theater or auditorium.

parterre
The rear section of seats, and sometimes also the side sections, of the main floor of a theater, opera house, or concert hall. Also called **parquet circle**.

backstage
The area behind the proscenium in a theater, esp. in the wings and dressing rooms.

auditorium
The space set apart for the audience in a theater or meeting hall.

lobby
A hall serving as a passageway or waiting room at or near the entrance to a theater, hotel, or apartment house. Also called **foyer**.

lounge
A large public waiting room, as in a theater, hotel, or air terminal, often having adjoining washrooms.

box office
The office of a theater or stadium at which tickets are sold.



marquee
A tall rooflike projection above a theater entrance, usually containing the name of a currently featured play or film and its stars.

dressing room
A room for use in getting dressed, esp. one for performers backstage in a theater or television studio.


wing
The platform or space to the right or left of the stage proper.

runway
A narrow platform or ramp extending from a stage into the orchestra pit or into an aisle of an auditorium.

green room
A lounge in a theater, concert hall, or broadcasting studio, for use by performers when they are not on stage.

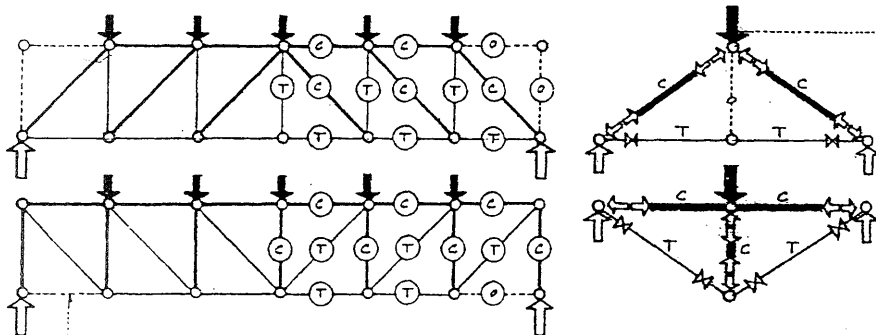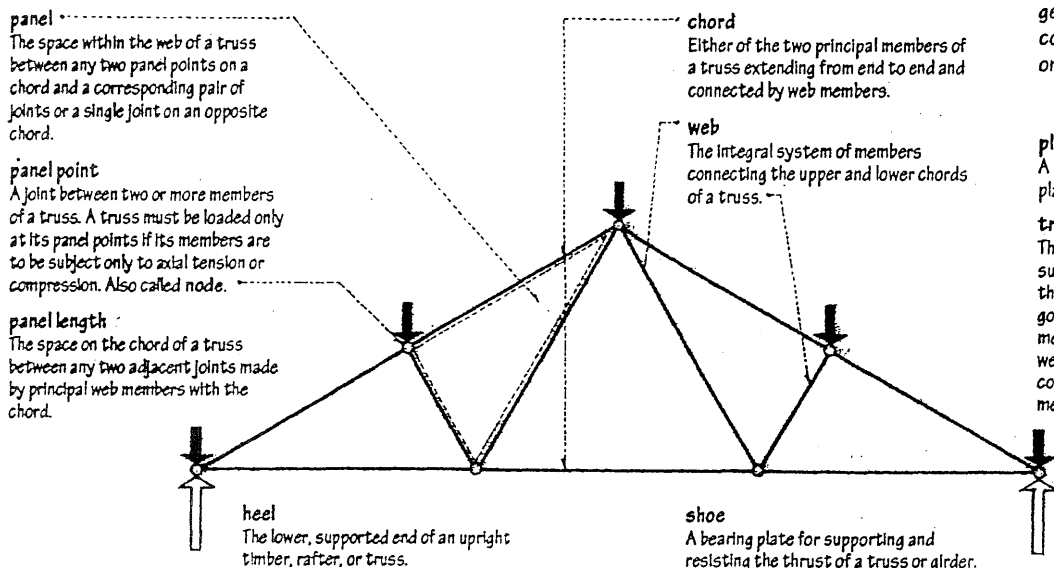




zero-force member
A truss member that theoretically carries no direct load and whose omission would not alter the stability of the truss configuration.

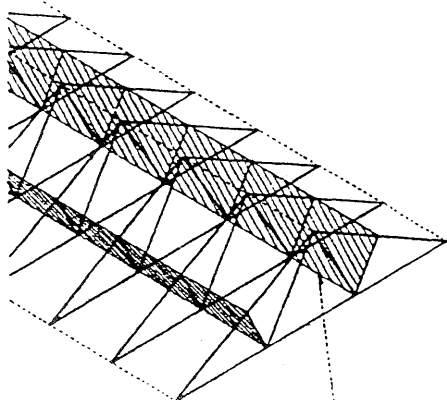

trussing
A structure formed by trusses. While rigid in its own plane, a truss must be braced in a perpendicular direction to prevent lateral buckling.

local buckling
The buckling of a thin compressed element of a structural member, leading to failure of the whole.

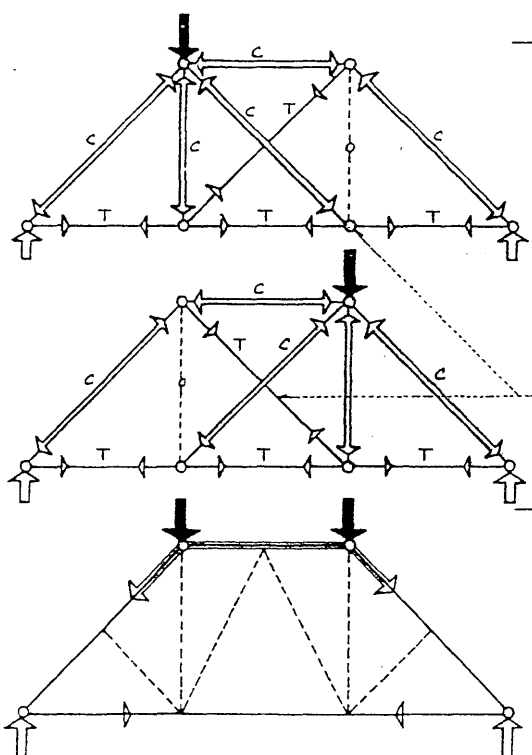

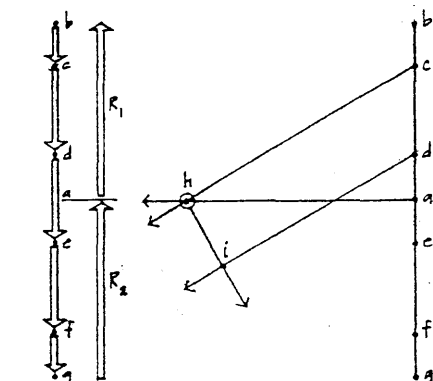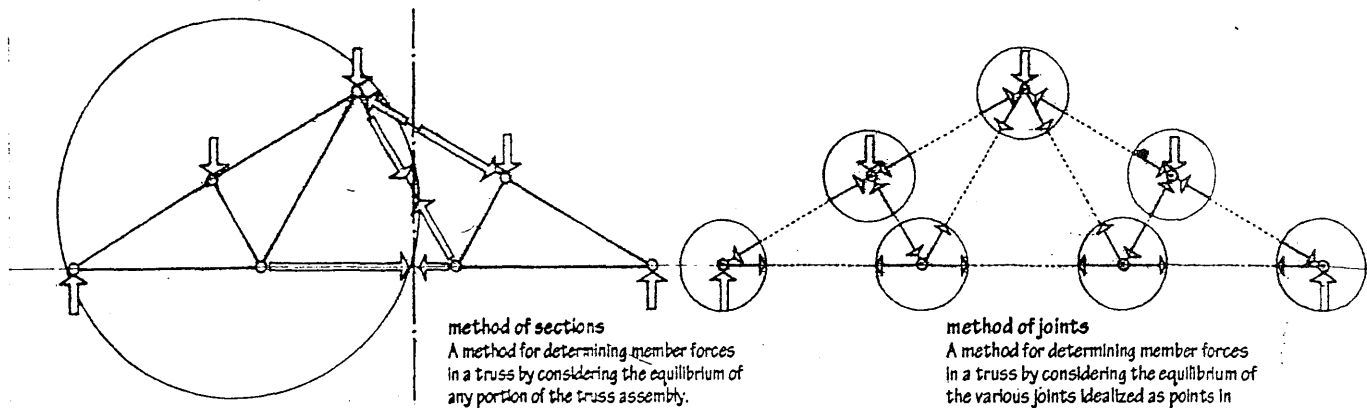


Since theoretically only axial forces are transmitted from one member to another at the joints, the direction of member forces can be drawn parallel to the truss members. Working from two known points, a third point of intersection can be found by projecting force lines of known direction.





Maxwell diagram
A graphic method for determining the magnitude and character of the stresses in the members of a truss.

Capital letters designate panel spaces, while lowercase letters designate ends of the force vectors.


Member forces are inversely proportional to the rise of a truss.

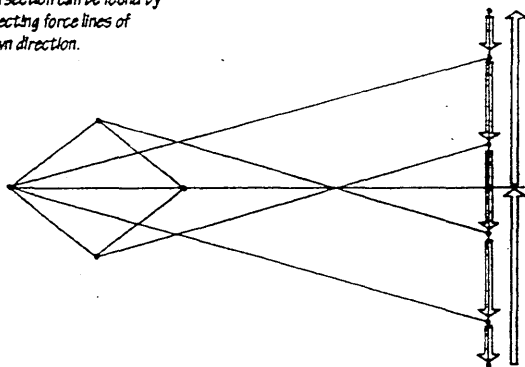

Member forces are inversely proportional to the rise of a truss.

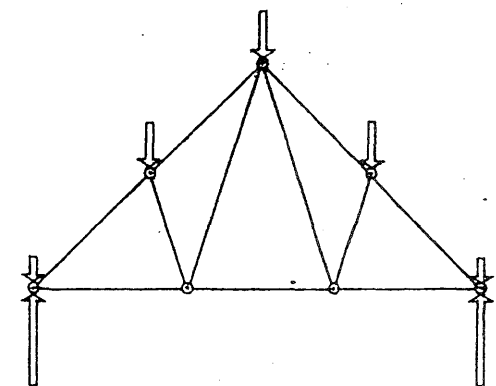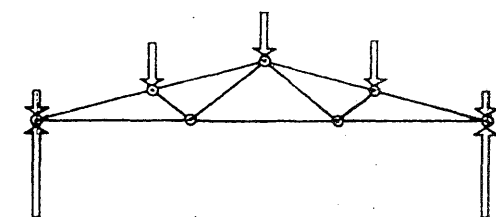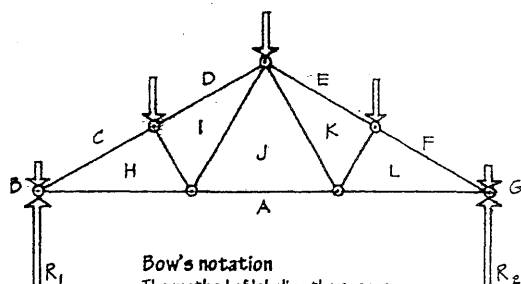


pitched truss
A truss having inclined top chords.

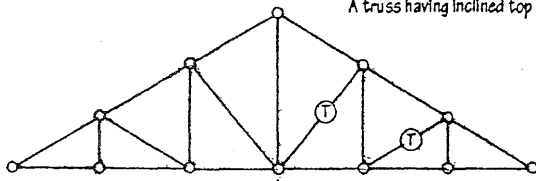

flat truss
A truss having parallel top and bottom chords. Flat trusses are generally not as efficient as pitched or bowstring trusses. Also called parallel-chord truss.



trussed rafter
A lightweight wood truss used in framing a roof, usually prefabricated of 2x4s and 2x6s joined with toothed plate connectors.

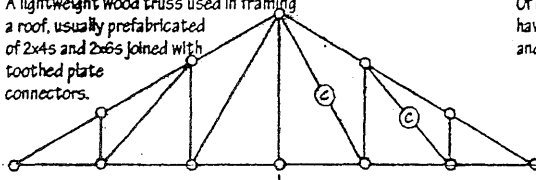



Pratt
Of or pertaining to a flat or pitched truss having vertical web members in compression and diagonal web members in tension.



trussed joist
A lightweight, flat wood truss used in framing a floor, usually prefabricated of 2x4s and 2x6s joined with toothed plate connectors.

crown post
Any vertical member in a pitched truss, esp. a king post.


Howe
Of or pertaining to a flat or pitched truss having vertical web members in tension and diagonal web members in compression.

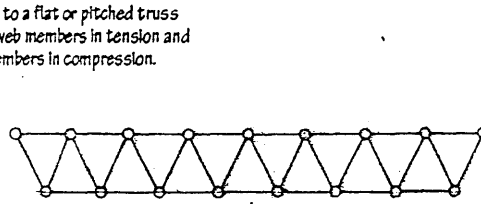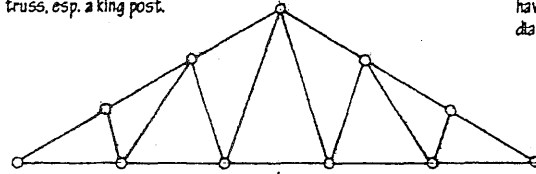


Belgian
Of or pertaining to a pitched truss having only inclined web members.

diagonal
An inclined web member joining the top and bottom chords of a truss.

subdiagonal
An inclined web member joining a chord with a main diagonal.




Warren
Of or pertaining to a flat or bowstring truss having inclined web members forming a series of equilateral triangles. Vertical web members are sometimes introduced to reduce the panel lengths of the top chord which is in compression.

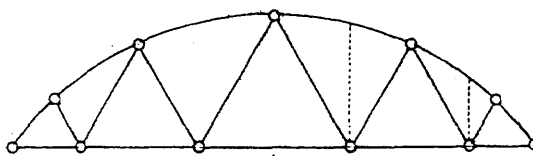


fan truss
A truss having more than two web members radiating from a common point on the bottom chord.

Fink truss
A Belgian truss having subdiagonals to reduce the length of compression web members toward the centerline of the span.

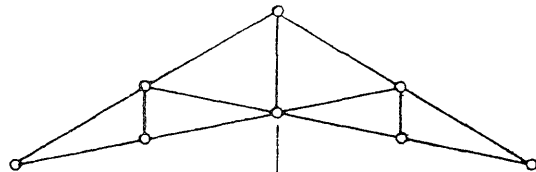


bowstring truss
A truss having a curved top chord meeting a straight bottom chord at each end.

Belfast truss
A timber bowstring truss.

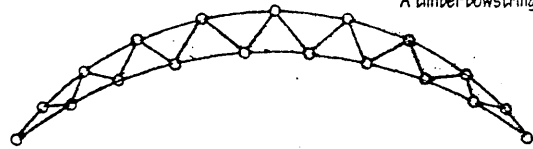


raised-chord truss
A truss having a bottom chord raised substantially above the level of the supports.

scissors truss
A pitched truss having tension members extending from the foot of each top chord to an intermediate point on the opposite top chord.

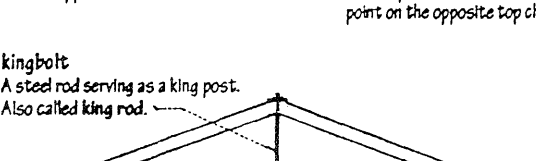


crescent truss
A truss having both top and bottom chords curving upward from a common point at each side. Also called camelback truss.

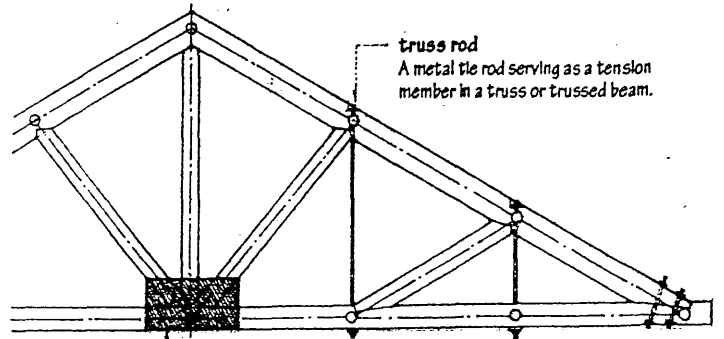

kingbolt
A steel rod serving as a king post. Also called king rod.

truss rod
A metal tie rod serving as a tension member in a truss or trussed beam.

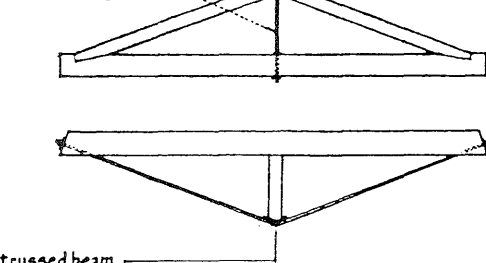

gusset
A plate for uniting structural members meeting in a single plane. Also called gusset plate.

composite truss
A truss having timber compression members and steel tension members.

trussed beam
A timber beam stiffened by a combination of diagonal truss rods and either compression struts or suspension rods.

VAULT

An arched structure of stone, brick, or reinforced concrete, forming a ceiling or roof over a hall, room, or other wholly or partially enclosed space.

key course

A course of keystones in the crown of a masonry vault.

vaulting course

A horizontal course forming the abutments or springers of a masonry vault.

transverse arch

An arch for stiffening a barrel vault or supporting a groin vault.


severy

A bay between two transverse arches in a vaulted structure.

Since it behaves as an arch extended in a third dimension, the longitudinal supporting walls must be buttressed to counteract the thrusts of the arching action.

buttress

An external support built to stabilize a structure by opposing its outward thrusts, esp. a projecting support built into or against the outside of a masonry wall.



corbel vault

A vault constructed by corbeling courses of stone masonry. The resulting stepped surface can be smoothed or curved, but no arch action is incurred.

flying buttress

An inclined bar of masonry carried on a segmental arch and transmitting an outward and downward thrust from a roof or vault to a solid buttress that through its mass transforms the thrust into a vertical one. Also called arc-boutant.

pinnacle

A subordinate vertical structure terminating in a pyramid or spire, used esp. in Gothic architecture to add weight to a buttress pier.

buttress pier

The part of a pier that rises to take the thrust of a flying buttress.

amortizement

A sloping top on a buttress or projecting pier to shed rainwater.

nosing


A projecting edge of a buttress.


shaft

A distinct, slender, vertical masonry feature engaged in a wall or pier and supporting or feigning to support an arch or a ribbed vault.

vaulting shaft


A shaft that leads to the springer of a rib or group of ribs, either rising from the ground or from a corbel at a greater height in the face of the masonry.

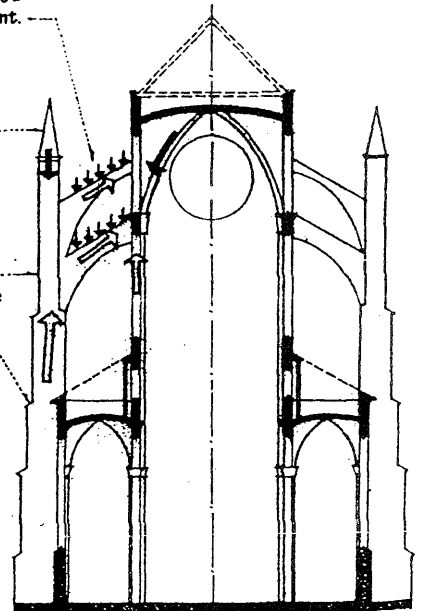




barrel vault

A vault having a semicircular cross section. Also called *cradle vault*, *tunnel vault*, *wagon vault*.




conical vault

A vault having a circular cross section that is larger at one end than the other.




rampant vault

A vault springing from an abutment higher at one side than at the other.



annular vault

A barrel vault having a circular plan in the shape of a ring.




groin vault

A compound vault formed by the perpendicular intersection of two vaults, forming arched *diagonal arrises* called *groins*. Also called *cross vault*.


groin

One of the curved lines or edges along which two intersecting vaults meet.




underpitch vault

A compound vault having a central vault intersected by vaults of lower pitch. Also called *Welsh vault*.



tripartite vault

A compound vault for covering a triangular space, formed by the intersection of three barrel vaults.




cloister vault

A compound vault formed by four coxes meeting along diagonal vertical planes. Also called *coved vault*.

web

A surface framed by the ribs of a ribbed vault.

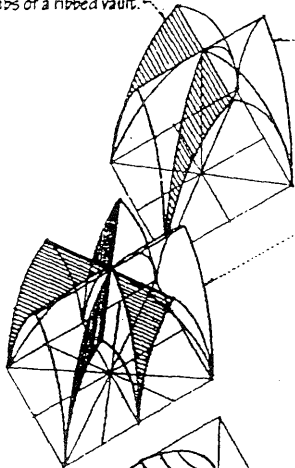

rib vault

A vault supported by or decorated with arched diagonal ribs. Also, *ribbed vault*.

quadrupartite vault

A rib vault divided into four parts by intersecting diagonal ribs.

sexpartite vault

A rib vault divided into six compartments by two diagonal ribs and three transverse ribs.

rib

Any of several archlike members supporting a vault at the groins, defining its distinct surfaces or dividing these surfaces into panels.

arc doubleau

A rib spanning the longitudinal axis of a rib vault and dividing it into bays or compartments. Also called *transverse rib*.

tierceron

A rib springing from a point of support on either side of the ogives or transverse ribs of a rib vault. Also called *intermediate rib*.

formeret

A rib against a wall, parallel to the longitudinal axis of a rib vault. Also called *wall rib*.

boss

An ornamental, knoblike projection, as a carved keystone at the intersection of ogives.

pendant


A sculptured ornament suspended from a roof truss, vault, or ceiling. Also called *drop*.

key

The keystone at the crown of an arch or at the intersection of two or more vaulting ribs.

ridge rib

A horizontal rib marking the crown of a vaulting compartment.

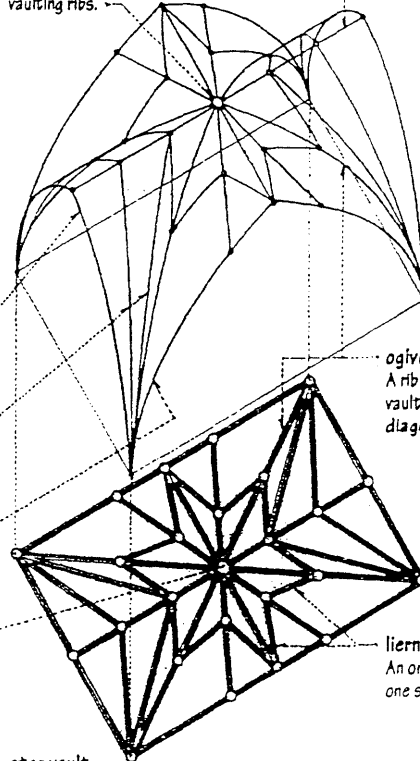

ogive

A rib crossing a compartment of a rib vault on a diagonal. Also called *diagonal rib*, *groin rib*.

lierne

An ornamental vaulting rib other than one springing from a pier or a ridge rib.


fan vault

A vault composed of a number of concave conoidal sections, usually four, springing from the corners of the vaulting compartment, often decorated with ribs that radiate from the springing like the framework of a fan.

VISION

Sight: the act or power of sensing with the eyes.


see
To perceive with the eyes. The act of seeing is a dynamic and creative process. It is capable of delivering a stable, three-dimensional perception of the moving, changing images which make up our visual world. There are three steps in the swift and sophisticated processing which results in the images we see.

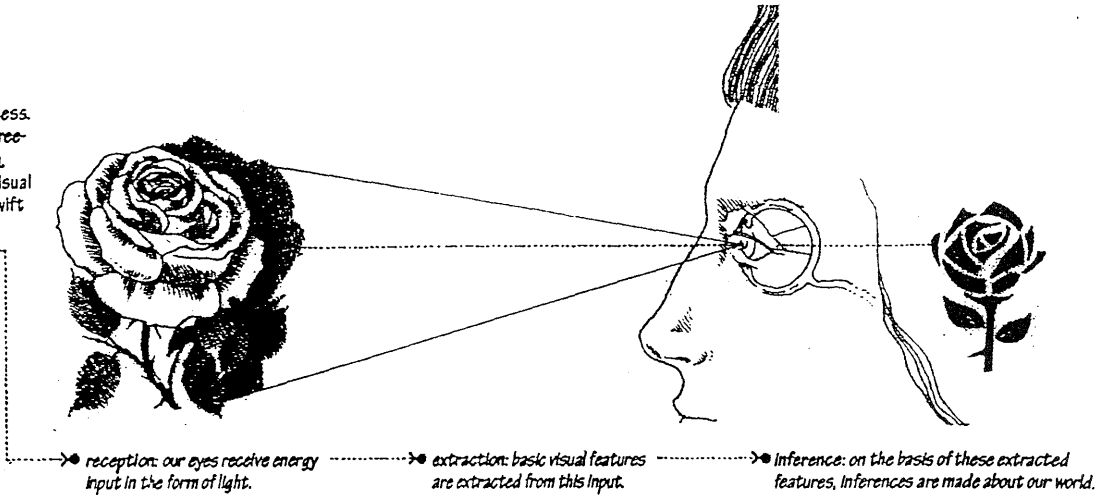

binocular vision
The three-dimensional, stereoscopic vision resulting from the use of both eyes at the same time.

convergence
The coordinated turning of the eyes inward to focus on a nearby point.

accommodation
The process by which the human eye changes focus for objects at various distances, involving changes in the shape of the crystalline lens.

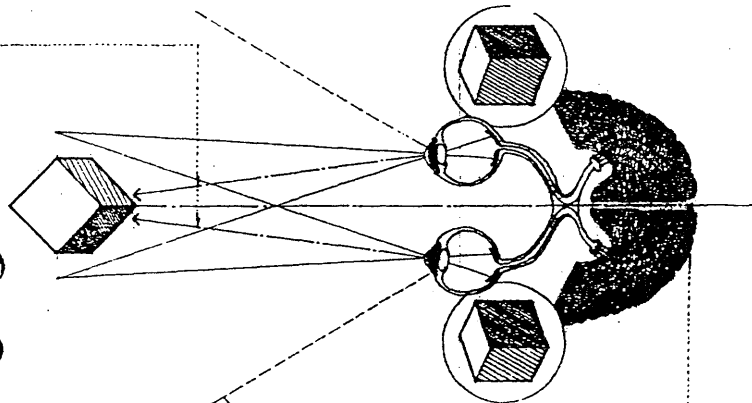

parallax
The apparent displacement or change in direction of an observed object caused by a change in the position of the observer that provides a new line of sight.



visuospatial
Pertaining to perception of the spatial relationships among objects within the field of vision.

orientation
The ability to locate oneself in one's environment with reference to time, place, and people.

visual literacy
The ability to apprehend and interpret pictures, drawings, or other visual images.


eye
Appreciative or discriminating visual perception.

optical illusion
A perception of visual stimuli that represents what is perceived in a way different from the way it is in reality.

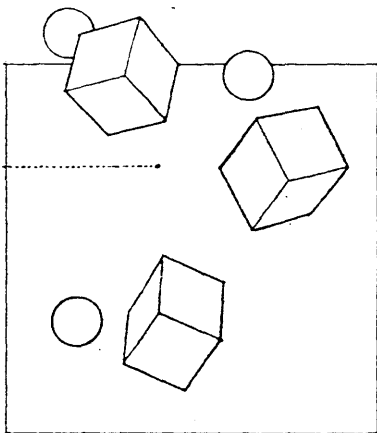

field of vision
The entire field encompassed by the human eye when it is trained in any particular direction. Also called visual field.

visual angle
The angle that an object or detail subtends at the point of observation, usually measured in minutes of arc.




visual cortex
The portion of the cerebral cortex of the brain that receives and processes impulses from the optic nerves.

visual acuity
Acuteness of vision as determined by a comparison with the normal ability to define certain letters at a given distance, usually 20 ft. (6 m).

discrimination
The ability or power to see or make fine distinctions.

aspect
Appearance to the human eye or mind.




camouflage

The obscuring of a form or figure that occurs when its shape, pattern, texture, or coloration is similar to that of its surrounding field or background.



projection

A property of perception in which the mind's eye searches for meaning by imagining and projecting known or familiar images onto the seemingly amorphous shapes of a pattern until it finds a match which makes sense. This attempt to complete an incomplete pattern, or find a meaningful pattern embedded in a larger one, is in accordance with what we already know or expect to see. Once seen and understood, it is difficult to not see the image.



similarity


A property of perception in which there is a tendency to group things which have some visual characteristic in common, as a similarity of shape, size, color, orientation or detail.

proximity

A property of perception in which there is a tendency to group elements which are close together, to the exclusion of those which are further away.

continuity

A property of perception in which there is a tendency to group elements which continue along the same line or in the same direction. This search for continuity of line and direction can also lead to our perception of the simpler, more regular figures or patterns in a composition.






constancy

A perceptual phenomenon in which apparent differences in size are ignored in order to identify and categorize things, regardless of how distant they are, leading to the perception of a class of objects as having uniform size and constant color and texture.

closure

A property of perception in which there is a tendency for an open or incomplete figure to be seen as if it were a closed or complete and stable form.



perception

The act or faculty of apprehending by means of the senses or of the mind.

visual perception

An awareness derived by the visual system in response to an external stimulus.

figure-ground

A property of perception in which there is a tendency to see parts of a visual field as solid, well-defined objects standing out against a less distinct background.

figure

A shape or form, as determined by outlines or exterior surfaces.

ground


The receding part of a visual field against which a figure is perceived. Also called background.

background

The parts or portion of a scene, situated in the rear, as opposed to foreground.

foreground

The parts or portion of a scene situated in the front, nearest to the viewer.

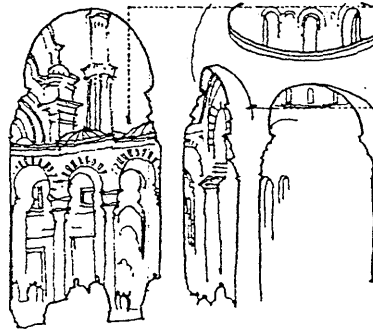

Gestalt psychology





The theory or doctrine that physiological or psychological phenomena do not occur through the summation of individual elements, as reflexes or sensations, but through gestalts functioning separately or interrelatedly. Also called configurationism.

gestalt

A unified configuration, pattern, or field of specific properties that cannot be derived from the summation of the component parts.

pattern

A consistent, characteristic, or coherent arrangement based on the interrelation of component parts.

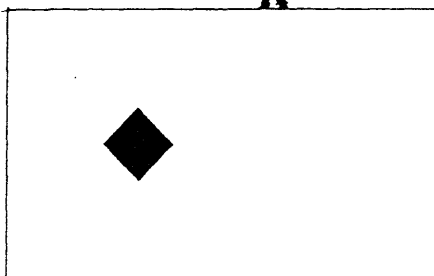

successive contrast

A phenomenon of visual perception in which intense exposure to one color or value leads to the sensation of its complement, which is projected as an afterimage on another color or surface viewed immediately thereafter.

afterimage

A visual sensation that persists after the stimulus that caused it is no longer operative or present.

simultaneous contrast

A phenomenon of visual perception in which the stimulation of one color or value leads to the sensation of its complement, which is projected instantaneously on a juxtaposed color or value. Simultaneous contrast intensifies complementary colors and shifts analogous colors toward each other's complementary hue, esp. when the juxtaposed colors are similar in value. When two colors of contrasting value are juxtaposed, the lighter color will deepen the darker color while the darker color will lighten the lighter one.

WALL

Any of various upright constructions presenting a continuous surface and serving to enclose, divide, or protect an area.

bearing wall
A wall capable of supporting an imposed load, as from a floor or roof of a building. Also called **load-bearing wall**.

nonbearing wall
A wall supporting no load other than its own weight. Also called **non-load-bearing wall**.

canton
A pilaster or similar feature projecting from a corner of a building.

pilaster
A shallow rectangular feature projecting from a wall, having a capital and a base and architecturally treated as a column.

engaged column
A column built so as to be truly or seemingly bonded to the wall before which it stands.

return wall
A short wall perpendicular to the end of a longer wall.

pier
A vertical supporting structure, as a section of wall between two openings or one supporting the end of an arch or lintel.

discharging arch
An arch built above another structural member to relieve its load. Also called **relieving arch**.

lintel
A beam supporting the weight above a door or window opening.

template
A horizontal timber or stone set in a wall to receive and distribute the pressure of a girder or beam, as over an opening. Also, **templet**.

exterior wall
A wall forming part of the envelope of a building, having one face exposed to the weather or to earth. Also called **external wall**.

interior wall
Any wall within a building, entirely surrounded by exterior walls.

partition
An interior wall dividing a room or part of a building into separate areas.

bearing partition
An interior wall carrying a structural load. Also called **load-bearing partition**.

nonbearing partition
An interior wall supporting no load other than its own weight. Also called **non-load-bearing partition**.

screen
A movable or fixed device, esp. a framed construction, designed to divide, conceal, or protect.

movable partition
A partition capable of being moved to different locations. Also called **demountable partition**.

coping
A finishing or protective cap or course to an exterior wall, usually sloped or curved to shed water.

splayed coping
A coping that slopes only in one direction. Also called **wedge coping**.

saddle coping
A coping that slopes to either side of a center ridge. Also called **saddleback coping**.

parapet
A low, protective wall at the edge of a terrace, balcony, or roof, esp. that part of an exterior wall, fire wall, or party wall that rises above the roof.

gable wall
A wall bearing or crowned by a gable.


basement wall
A foundation wall that encloses a usable area under a building.

party wall
A wall used jointly by contiguous structures, erected upon a line dividing two parcels of land, each of which is a separate real estate entity.

blind wall
A wall having no windows, doorways, or other openings.

frame house

A house constructed with a skeletal framework of timber, usually sheathed with siding or shingles.

**corner brace**

A diagonal brace let into studding to reinforce the corner of a frame structure.

let in

To insert into the surface of a stud, wall, or the like as a permanent addition.

corner post

An assembly of two or three studs spiked together at the intersection of two framed walls to provide a nailing surface for finish materials.

backing

A narrow wood strip fixed to the corner of a framed partition to provide a nailing surface for finish materials.

firestop

A material or member built into a building frame to block a concealed hollow space through which a fire might spread from one part of the building to another.

ledger strip

A piece attached to the face of a beam at the bottom as a support for the ends of joists.

ribbon

A thin, horizontal board let into studding to carry the ends of joists. Also called ledger, ribband, ribbon strip.

balloon frame

A wooden building frame having studs that rise the full height of the frame from the sill plate to the roof plate, with joists nailed to the studs and supported by sills or by ribbons let into the studs.

plate

Any of various horizontal timbers laid flat across the heads of studding or upon floors to support joists, rafters, or studs at or near their ends.

wall plate

A horizontal member built into or laid along the top of a wall to support and distribute the load from joists or rafters. Also called raising plate.

top plate

The uppermost horizontal member of a framed wall on which joists or rafters rest.

blocking

A number of small wood pieces inserted to space, join, or reinforce members of a building frame, fill the spaces between them, or provide a nailing surface for finish materials.

stud wall

A wall or partition framed with studs and faced with sheathing, siding, wallboard, or plasterwork. Also called stud partition.

stud

Any of a series of slender, upright members of wood or metal forming the structural frame of a wall or partition.

cripple

Any framing member that is shorter than usual, as a stud above a door opening or below a window sill.

center-to-center

From the centerline of one element, member, or part to the centerline of the next. Also called on center.

soleplate

The bottom horizontal member of a framed wall upon which a row of studs is erected. Also called shoe, sole, solepiece.

platform frame

A wooden building frame having studs only one story high, regardless of the stories built, each story resting on the top plates of the story below or on the sill plates of the foundation wall. Also called western frame.

pony wall

A dwarf wall for supporting floor joists.

dwarf wall

A wall less than a full story in height.

anchor bolt

Any of various rods or bolts embedded in masonry or concrete to hold, secure, or support a structural member.

sill sealer

A resilient, fibrous material placed between a sill and a foundation wall to reduce air infiltration.

termite shield

Sheet metal installed atop a foundation wall or around pipes to prevent the passage of termites.

sill

The lowest horizontal member of a frame structure, resting on and anchored to a foundation wall. Also called mudsill, sill plate.

box sill

A sill for a building frame, composed of a plate resting on a foundation wall and a joist or header at the outer edge of the plate, as well as a soleplate for studs resting either directly on the joists or on the rough flooring.

L sill

A sill for a building frame, composed of a plate resting on a foundation wall and a joist or header at the outer edge of the plate.

WALL

siding


A weatherproof material, as shingles, boards, or units of sheet metal, used for surfacing the exterior walls of a frame building.

corner board

A board against which siding is fitted at the corner of a frame structure.


batten

A small board or strip of wood used for various building purposes, as to cover joints between boards, support shingles or roofing tiles, or provide a base for lathing.




board and batten

Siding consisting of wide boards or plywood sheets set vertically with butt joints covered by battens.



colonial siding

Siding composed of plain, square-edged boards laid horizontally so that the upper overlaps the one below.



wainscot

A facing of wood paneling, esp. when covering the lower portion of an interior wall.

nullion


A vertical member dividing the panels in wainscoting.

ado

The lower portion of an interior wall when faced or treated differently from the upper section, as with paneling or wallpaper.


rake

A board or molding placed along the sloping sides of a gable to cover the ends of the siding.

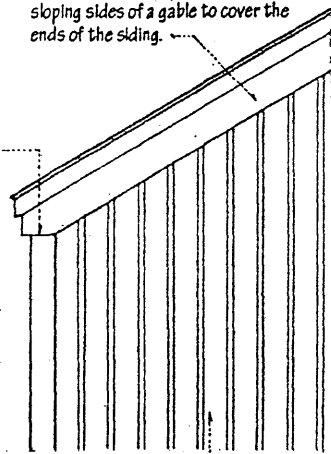


vertical siding

Siding consisting of matched boards applied vertically.





bevel siding

Siding composed of tapered boards, as clapboards, laid horizontally with the thicker lower edge of each board overlapping the thinner upper edge of the board below it. Also called lap siding.

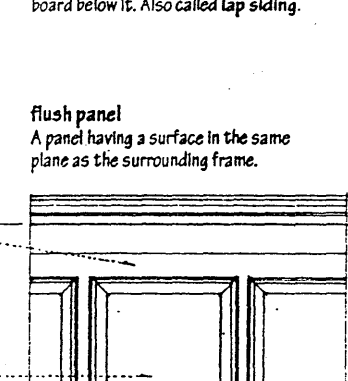

flush panel

A panel having a surface in the same plane as the surrounding frame.

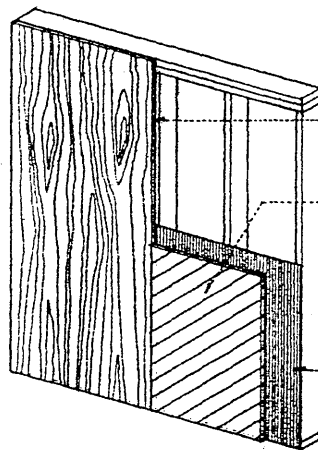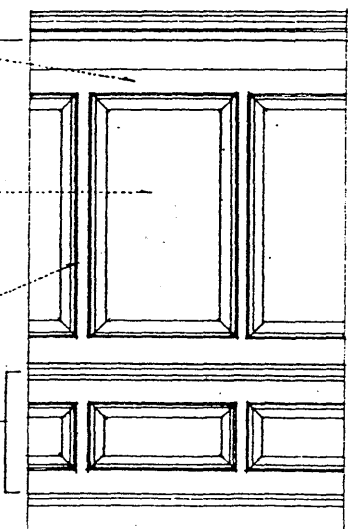

sheathing

A rough covering of boards, plywood, or other panel materials applied to a frame structure to serve as a base for siding, flooring, or roofing.

structural sheathing

Sheathing capable of bracing the plane of a framed wall or roof.

diagonal sheathing

A sheathing of boards applied diagonally for lateral strength.

boarding


A structure of boards, as for sheathing or subflooring.

building paper

Any of various papers, felts, or similar sheet material used in construction to prevent the passage of air or moisture.


clapboard

A long, thin board with one edge thicker than the other, laid horizontally as bevel siding.

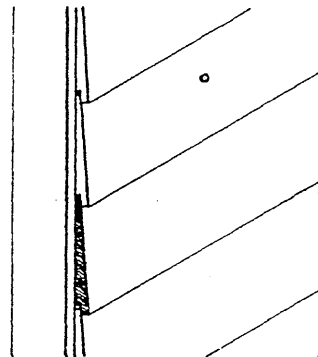


Dolly Varden siding

Bevel siding rabbeted along the lower edge to receive the upper edge of the board below it.

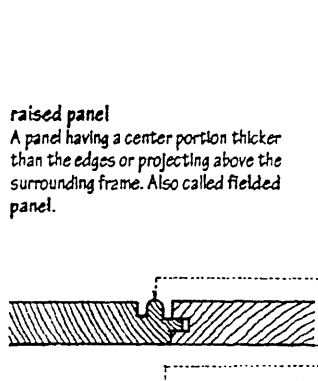


shiplap

A flush, overlapping joint, as a rabbet, between two boards joined edge to edge. Also, the boarding joined with such overlapping joints.




drop siding

Siding composed of boards narrowed along the upper edges to fit into rabbets or grooves in the lower edges, laid horizontally with their backs flat against the sheathing or studs of the wall. Also called novelty siding, rustic siding.



raised panel

A panel having a center portion thicker than the edges or projecting above the surrounding frame. Also called fielded panel.



sunk panel

A panel having a surface recessed below the surrounding frame or surface.

flush bead

A bead having its outer surface at the same level as the adjoining surfaces.

cock bead


A bead that projects above or beyond the adjoining surfaces.






quirk

A groove or acute angle dividing a bead or other molding from adjoining members or surfaces.

bolection

A raised molding for framing a panel, doorway, or fireplace, esp. when the meeting surfaces are at different levels. Also, bilection.



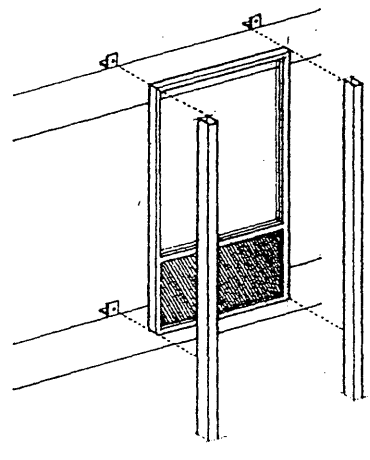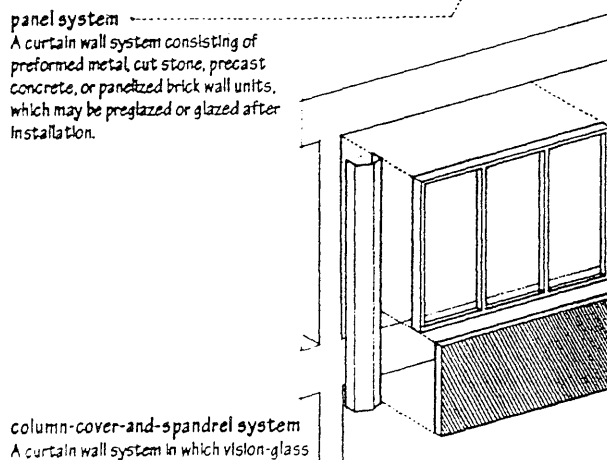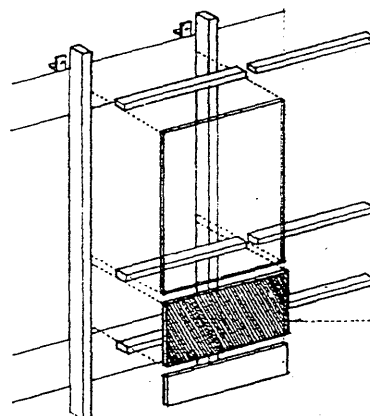
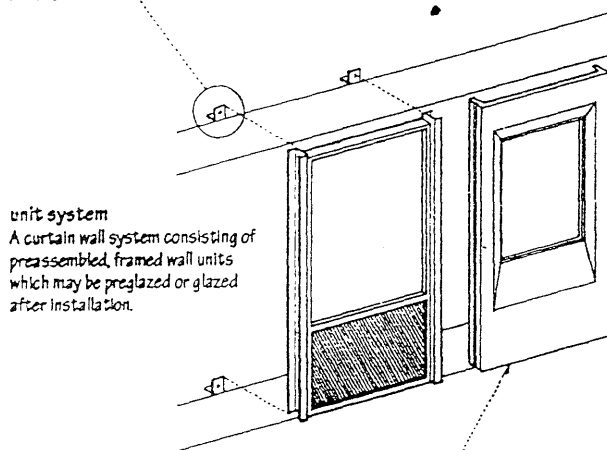
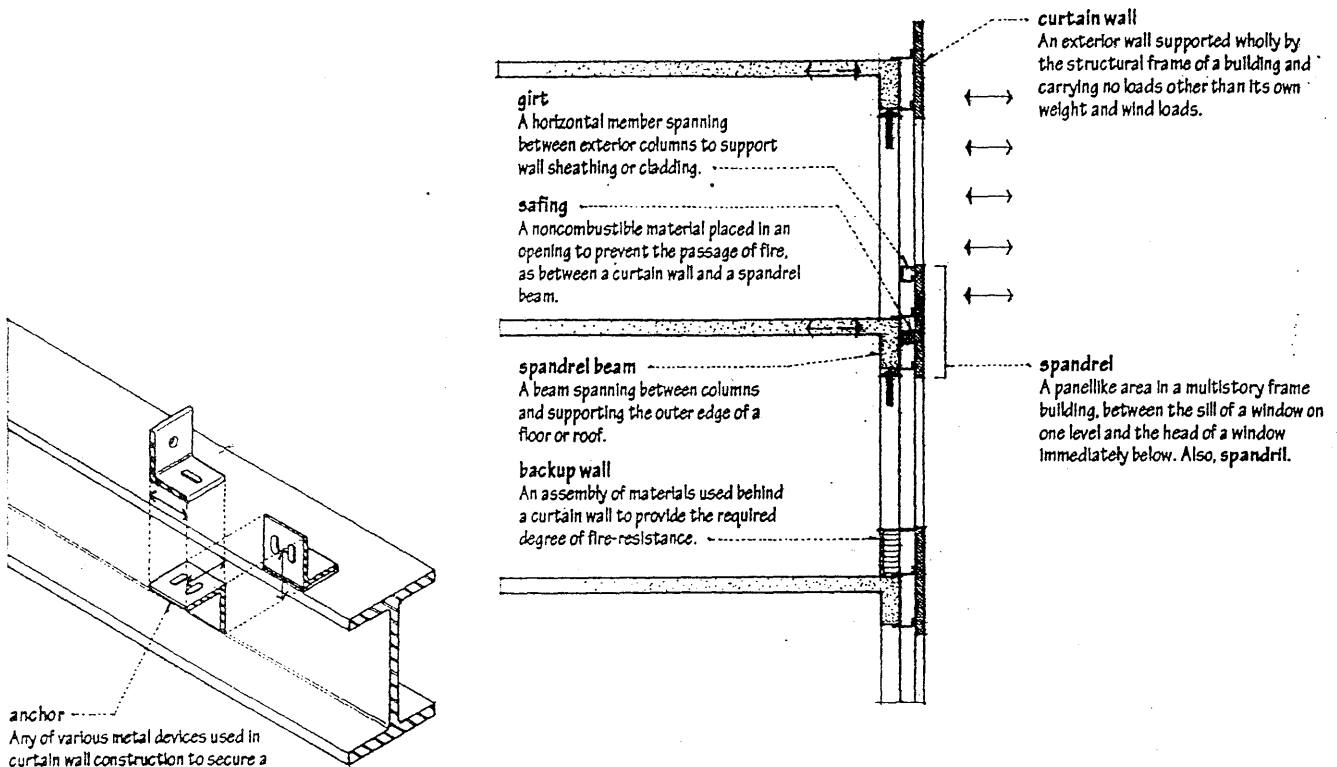


column-cover-and-spandrel system
A curtain wall system in which vision-glass assemblies and spandrel units are supported by spandrel beams between exterior columns clad with cover sections.

WALL

retaining wall

A wall of treated timber, masonry, or concrete for holding in place a mass of earth. A retaining wall can fail by overturning, sliding, or settling. Also called breast wall.



surcharge

An additional or excessive load or burden, as that of the earth above the level of the top of a retaining wall.

toe



The forward, lower tip of the base of a footing or retaining wall, extended to give broader bearing and greater stability.

counterfort

A triangular-shaped cross wall tying a concrete retaining wall to its base at regular intervals, built on the side of the material to be retained in order to stiffen the vertical slab and add weight to the base.


cantilever wall

A retaining wall of reinforced concrete or reinforced concrete masonry, cantilevered from and securely tied to a spread footing that is shaped to resist overturning and sliding.





batter

A backward slope of the face of a wall as it rises.



deadman

A log, concrete block, or similar mass buried in the ground as an anchor.



gravity wall

A masonry or concrete retaining wall that resists overturning and sliding by the sheer weight and volume of its mass.

bin wall


A type of gravity retaining wall formed by stacking modular, interlocking precast concrete units and filling the voids with crushed stone or gravel. Also called cellular wall.

cribbing

A system of cribs for retaining earth or for a building being moved or having its foundation rebuilt. Also called cribwork.


crib

A cellular framework of squared timbers, or steel or concrete members of similar form, assembled in layers at right angles, often filled with earth or stones and used in the construction of foundations and retaining walls.

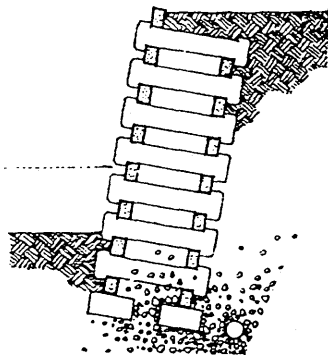

earth tieback wall

A retaining wall consisting of precast concrete panels fastened to long galvanized steel straps extending into a compacted soil backfill.



critical height

The maximum height at which a vertical cut in a cohesive soil will stand without shoring.

angle of repose


The maximum slope, measured in degrees from the horizontal, at which loose solid material will remain in place without sliding.

angle of slide

The minimum slope, measured in degrees from the horizontal, at which loose solid material will begin to slide or flow.

riprap

A layer of broken stones thrown together irregularly on an embankment slope to prevent erosion.



gabion

Galvanized wire basket filled with stones and used in constructing an abutment or retaining structure.

revet

To face a sloping surface or embankment with stone or other material.

revetment


A facing of masonry or other suitable material for protecting an embankment against erosion.

soil binder

A plant that prevents or inhibits erosion by providing a ground cover and forming a dense network of roots that hold the soil.

soil stabilizer

A chemical admixture for maintaining or increasing the stability of a soil mass.

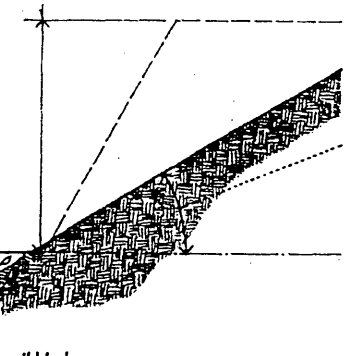

window unit

A manufactured assembly of a frame, sash, glazing, and necessary hardware, made to fit a window opening.

sash

The fixed or movable framework of a window or door in which panes of glass are set.


window frame

The fixed frame of a window, consisting of two jambs, a head, and a sill.

dressing

The ornamental detail of a building, esp. the molded framework around door and window openings.

An opening in the wall of a building for admitting light and air, usually fitted with a frame in which are set operable sashes containing panes of glass.



brick molding

A wood molding covering the gap between a doorframe or window frame and the masonry reveal into which the frame is set. Also called staff bead.

head flashing

The flashing over a window opening or a projection in a masonry wall.

drip

Any of various devices for shedding rainwater so as to keep it from running down a wall or falling onto the sill of an opening.

drip cap

A projecting molding over an exterior door or window opening for catching and shedding rainwater.

backband

A molding surrounding the trim at the top and sides of a door or window.

windowsill

The horizontal member at the base of a window opening, esp. the ledge formed by such a member.

wash





The upper surface of a building member, as a windowsill or coping, sloped to shed rainwater. Also called weathering.

check throat

A groove cut or formed on the underside of a sill or other exterior horizontal member to prevent the capillary flow of rainwater to a wall.

subsill

An additional sill fitted to a window frame to cause rainwater to drip farther away from a wall surface. Also called sill drip molding.

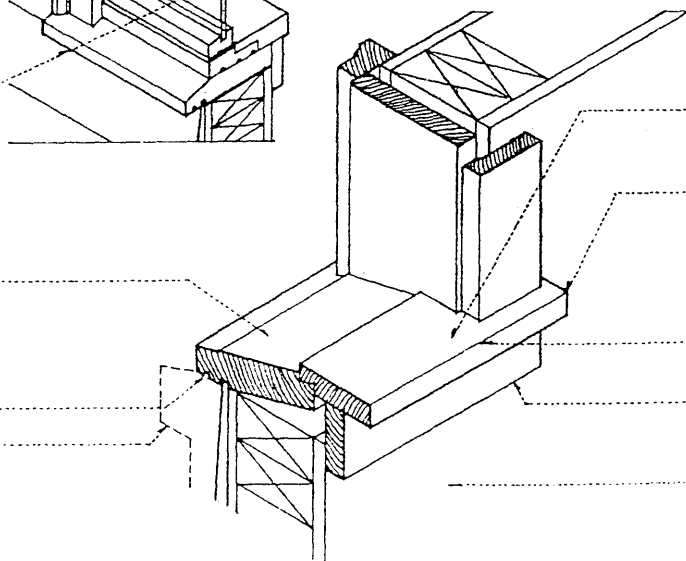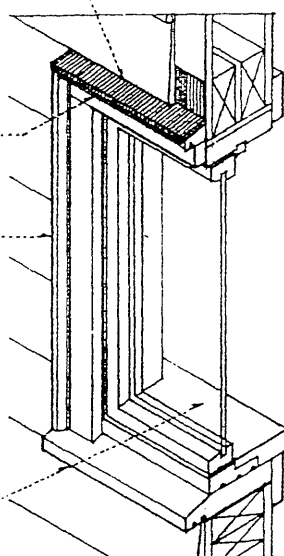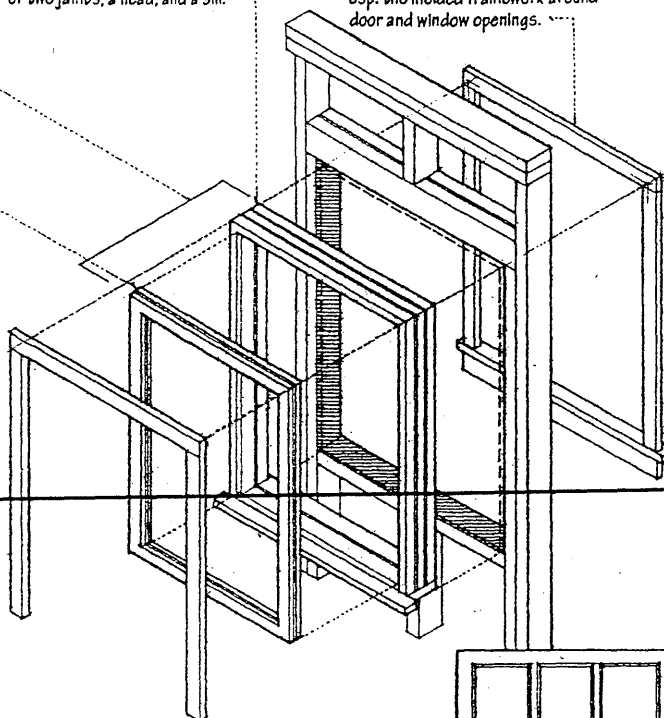

pane



One of the divisions of a window or door, consisting of a single unit of glass set in a frame.

windowpane

A pane of glass fitting a window sash.

muntin

A rabbeted member for holding the edges of windowpanes within a sash. Also called glazing bar, sash bar.



mullion

A vertical member between the lights of a window.

light

A medium for admitting light, as one compartment of a window or window sash. Also called day.

slip sill

A sill cut to fit between the jambs of a window or door opening.

lug sill

A sill extending beyond a window or door opening and built into the jambs.

horn

That part of a jamb extending above the head of a door or window frame, or the horizontal extension of a windowsill beyond the jamb.

stool

The interior sill of a window.

apron

A flat piece of trim immediately beneath the stool of a window. Also called skirt.

back

The area of interior wall, usually paneled, between a windowsill and the floor.

WINDOW

double-hung window

A window having two vertically sliding sashes, each in separate grooves or tracks and closing a different part of the window.

hung sash

A vertically sliding window sash balanced by a counterweight or a pretensioned spring on each side so that it can be raised or lowered with relatively little effort. Also called **balanced sash**.

meeting rail

The rail of each sash in a double-hung window that meets at the rail of the other when the window is closed.

sash fast

A fastener on the meeting rail of one sash which swings across to the meeting rail of another sash and engages with a spur on it. Also called **sash fastener**.

check rail

A meeting rail, esp. one closing against a corresponding rail with a diagonal or rabbeted overlap.

plain rail

A meeting rail equal in thickness to the other members of the frame.

box-head window

A double-hung window constructed with a pocket in the head, into which one or both sashes can pass to increase the opening available for ventilation.

drop window


A window constructed with a pocket below the sill, into which a sash can slide to increase the opening available for ventilation.

horizontally sliding window

A window having two or more sashes, of which at least one slides along horizontal grooves or tracks.

sliding sash

A sash that opens by moving horizontally along grooves or tracks at the top and bottom of the window frame.

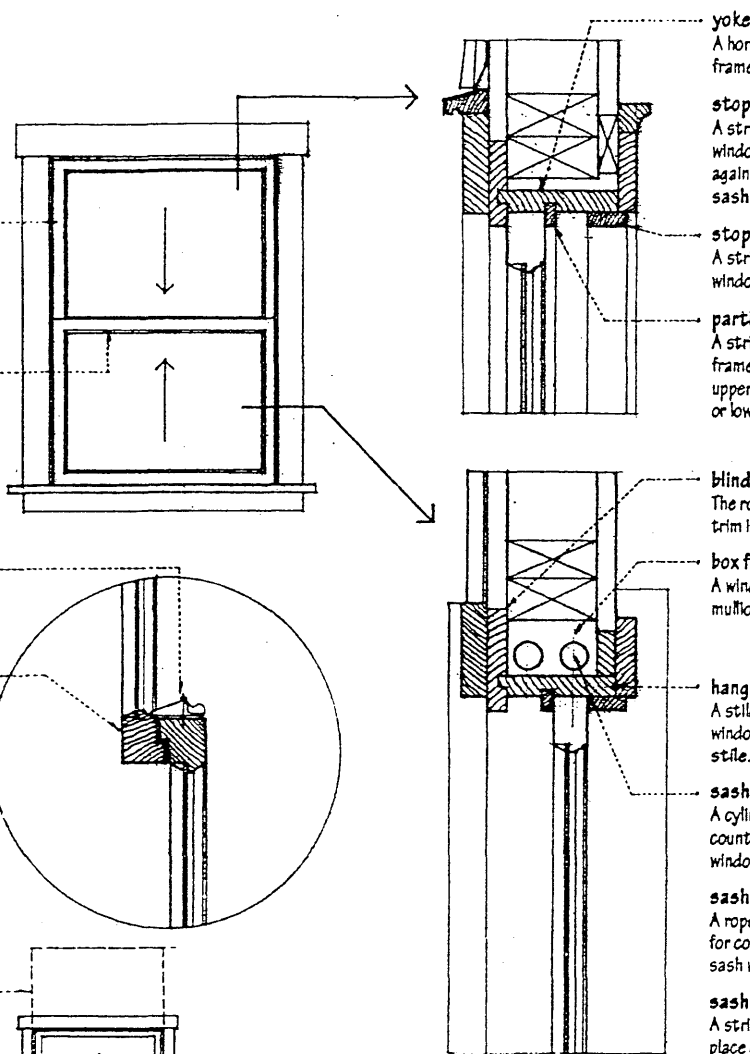

yoke
A horizontal piece forming the top of a frame for a double-hung window.

stop
A strip of molding along the inside of window frame for holding a sliding sash, or against which a sash closes. Also called **sash stop**, **window stop**.

stop bead
A strip of molding along the inside of a window frame for holding a sliding sash.

parting bead
A strip of molding used on each side of a frame of a double-hung window to keep the upper and lower sashes apart when raised or lowered. Also called **parting strip**.

blind casing
The rough casing of a box frame to which trim is secured.

box frame
A window frame having hollow jambs or mullions for sash weights.

hanging stile
A stile in a window frame against which a window sash slides. Also called **pulley stile**.

sash weight
A cylindrical casing of iron or lead used as a counterweight to balance a vertically sliding window sash.

sash line
A rope (sash cord) or chain (sash chain) for connecting a vertically sliding window sash with a counterweight.

sash ribbon
A strip of steel or aluminum alloy used in place of a sash cord to connect a vertically sliding window sash with a counterweight.

pocket piece
A removable part of a hanging stile permitting access to insert a sash weight or to replace the sash line.

single-hung window
A window having two sashes, of which only one is movable.

vertically sliding window
A window having one or more sashes which move vertically and are held in various open positions by means of friction or a ratchet device instead of by sash balances or counterweights.

sash balance
A spring-loaded device used in place of sash weights to counterbalance a vertically sliding window sash. Also called **spring balance**.

extension casement hinge

A hinge for an outward-swinging casement window, located to allow cleaning from the inside when the window is open.

casement stay

A bar for holding a casement in any of several open positions.

lever operator

A gearless device for operating a casement and holding it in an open position.

cam handle

A handle that locks a hinged sash in a closed position by wedging it against a keeper plate. Also called locking handle.

roto operator

A crank-driven worm drive for opening and closing awning windows, casement windows, and jalousies.

wicket screen

A small sliding or hinged portion of a larger screen providing access for operating a window sash.

pivoted window

A window having a sash that rotates 90° or 180° about a vertical or horizontal axis at or near its center, used in air-conditioned multistory or high-rise buildings and operated only for cleaning, maintenance, or emergency ventilation.

jalousie window

A window having horizontal glass or wood louvers which pivot simultaneously in a common frame, used primarily in mild climates to control ventilation and to cut off visibility from the outside.

jalousie

A blind or shutter having horizontal slats that can be adjusted to admit light and air but exclude sun and rain.

shielding angle

The angle below which something can be seen when viewed through a louver.

fixed light

A window or sash of a window that does not open for ventilation. Also called fixed sash.

operable window

A window having a sash that may be opened for ventilation.

casement window

A window having at least one casement, often used in combination with fixed lights.

casement

A window sash opening on hinges generally attached to the upright side of its frame.

folding casement

A pair of casements with rabbeted meeting stiles, hung in a frame having no mullion.

hanging stile

The stile of a window frame from which a casement is hung.

meeting stile

One of the abutting stiles in a pair of casement.

French window

A pair of casement windows extending to the floor and serving as a doorway, esp. from a room to an outside porch or terrace.

cremorne bolt

A vertical bolt used on a French window or the like, consisting of two rods moved by a knob mechanism and extending into pockets in the head and sill of the opening to provide a secure fastening. Also, cremone bolt.

balconet

A railing or balustrade projecting slightly beyond the plane of a window and reaching to the floor, having the appearance of a balcony when the window is fully open. Also, balconette.

awning window

A window having one or more sashes swinging outward on hinges generally attached to the top of the frame.

projected window

A casement or awning window in which the inner end of the sash slides along a track on the sill or jamb as the sash swings outward.

hopper window

A window having one or more sashes swinging inward on hinges generally attached on the bottom. Also called hospital window.


hopper light

A window light hinged on the bottom and swinging inward. Also called hospital light.

hopper

One of the triangular draft barriers on each side of a hopper light.

WINDOW

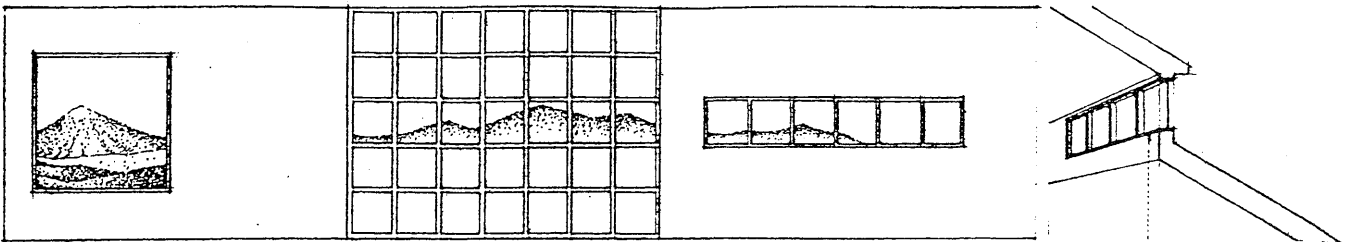

picture window
A large, usually fixed single-pane window, placed to frame an attractive exterior view.

window wall
A nonbearing wall composed primarily of vertical and horizontal framing members containing a combination of fixed lights and operating sashes.

ribbon window
A horizontal band of windows, separated only by mullions.

clerestory
A portion of an interior rising above adjacent rooftops and having windows admitting daylight to the interior. Also, clearstory.

bay window
A window or series of windows projecting outward from the main wall of a building and forming a bay or alcove in a room within, esp. one having its own foundation.

window seat
A seat built into a recess of a window between the jambs.

cant bay window
A bay window having canted slides.

bow window
A bay window having a rounded projection.


dormer window
A vertical window in a projection built out from a sloping roof. Also called luthern.

internal dormer
A vertical window set below the line of a sloped roof.



lucarne
A dormer window in a roof or spire.

oxeye
A comparatively small round or oval window, as in a frieze or dormer. Also called oeil-de-boeuf.

hood mold
A projecting molding over the arch of a window or door, esp. in interior work. Also, hood molding.




Palladian motif
A window or doorway in the form of a round-headed archway flanked on either side by narrower compartments, the side compartments being capped with entablatures on which the arch of the central compartment rests. Also called Serlian motif, Venetian motif.

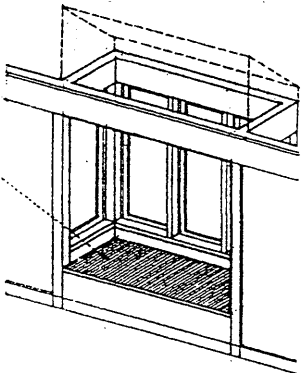

borrowed light
A window opening in an interior partition allowing light to be transmitted from one space to another.

pass-through
A windowlike opening in a wall or partition through which things may be passed, as between a kitchen and a dining room.




gable window
A window in or under a gable.

oriel
A bay window supported from below by corbels or brackets.

meshrebeeyeh
An oriel screened by latticework, through which the air may draw freely while the interior is concealed from view, found along the streets of Cairo and other towns of the Levant. Also, mashrebeeyeh, mashrebeeyah.

lychnoscope
A small window set low in the wall of a medieval church, permitting the interior to be seen from the outside. Also called lowside window.

awning
A rooflike cover of canvas or other material extending in front of a doorway or window, or over a deck, to provide protection from the sun or rain.



screen
A frame holding a fine mesh of metal or fiberglass, placed in a window or doorway, or around a porch to admit air but exclude insects.

storm window
A supplementary sash placed outside an existing window as additional protection against severe weather. Also called storm sash.

combination window
A window equipped with interchangeable screen and glass sections for summer and winter use.

window box
A box designed to hold soil for growing plants at or on a windowsill.

tracery

Ornamental work of branchlike lines, esp. the lacy openwork in the upper part of a Gothic window.






plate tracery

Early Gothic tracery formed of pierced slabs of stone set on edge, the design being in the shape and disposition of the openings. Also called perforated tracery.

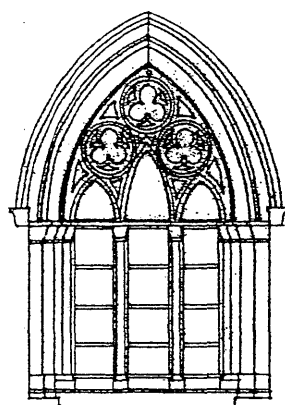


geometric tracery

Gothic tracery characterized by a pattern of geometric shapes, as circles and foils.



mouchette

A daggerlike motif found esp. in Gothic tracery, formed by elliptical and ogee curves.

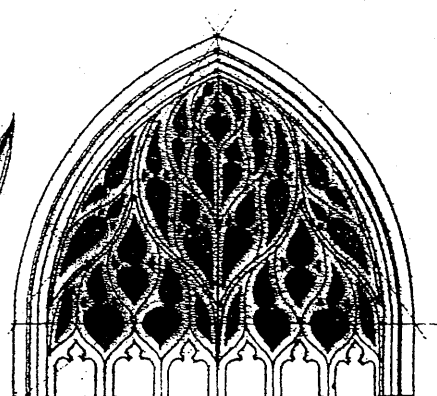


curvilinear tracery

Gothic tracery characterized by a pattern of irregular, boldly curved forms. Also called flowing tracery.

bar tracery

Gothic tracery that succeeded plate tracery, consisting of molded stone mullions that divide into various branching elements which fill the window head.

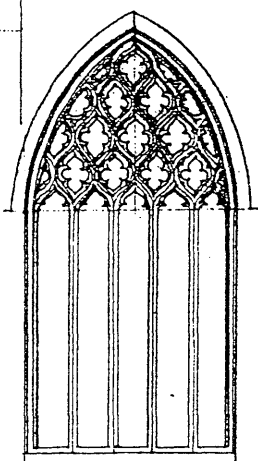


reticulated tracery

Gothic tracery consisting mainly of a netlike arrangement of repeated geometrical figures. Also called net tracery.

angel light

A triangular light in a Gothic window, formed by the arch of the window, an arch of a lower tier of tracery, and a mullion of an upper tier of tracery.

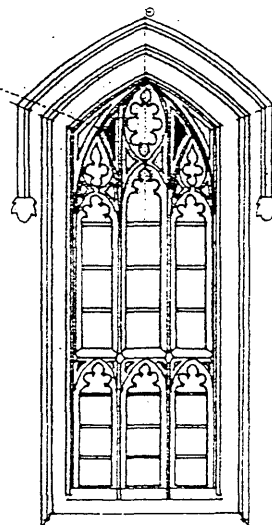

perpendicular tracery

Predominantly vertical Gothic tracery having mullions rising to the curve of the arch, crossed at intervals by horizontal transoms. Also called rectilinear tracery.

foil

Any of several arcs or rounded spaces divided by cusps and tangent to the interior of a larger arc, as of an arch or circle.

foliation


Ornamentation of an archway, window, or other opening with foils or representations of foliage.

cusped

A pointed projection formed by two intersecting arcs, used esp. to vary the outlines of intradoses or to form foils.


cuspidation

Decoration with cusps.

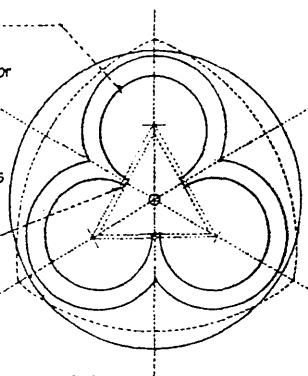


trefoil

An arrangement of three foils divided by cusps and radiating from a common center.



quatrefoil

An ornament composed of four foils, divided by cusps and radiating from a common center.



cinquefoil


A design composed of five foils, divided by cusps and radiating from a common center.

multifoil

Having more than five foils.

WOOD

The tough, fibrous cellular substance that makes up most of the stems and branches of trees beneath the bark.

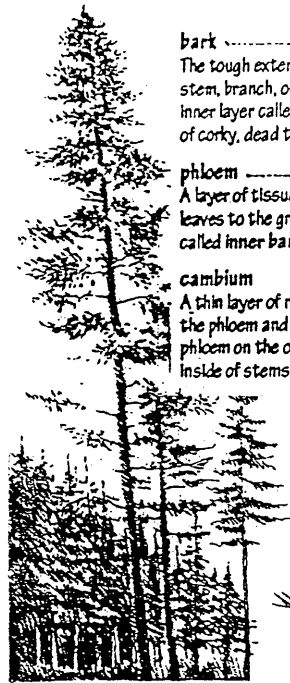

bark
The tough external covering of a woody stem, branch, or root, composed of a living inner layer called phloem and an outer bark of corky, dead tissue.

phloem
A layer of tissue that carries food from the leaves to the growing parts of a tree. Also called inner bark.

cambium
A thin layer of reproductive tissue between the phloem and xylem, which produces new phloem on the outside and new xylem on the inside of stems, branches, and roots.


softwood
The wood from a conifer. The term is not descriptive of the actual softness of the wood.

conifer
Any of various predominantly evergreen, cone-bearing trees, as pine, fir, hemlock, and spruce.

evergreen
Having foliage that remains green and functional throughout the year or through more than one growing season.


crown
The leaves and living branches of a tree.

trunk
The main stem of a tree apart from its branches and roots.

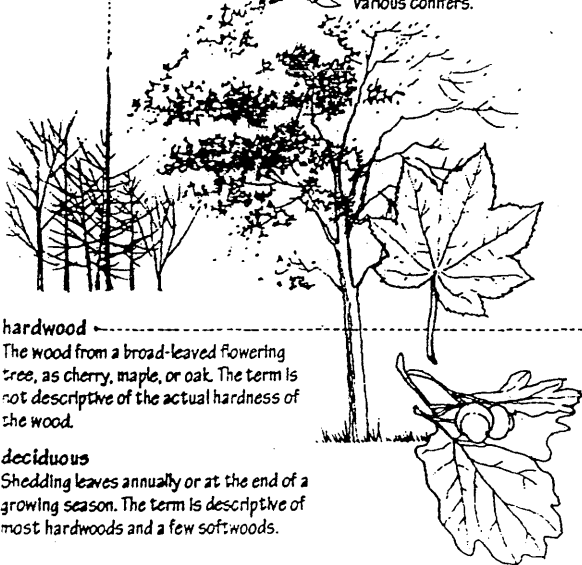

hardwood
The wood from a broad-leaved flowering tree, as cherry, maple, or oak. The term is not descriptive of the actual hardness of the wood.

deciduous
Shedding leaves annually or at the end of a growing season. The term is descriptive of most hardwoods and a few softwoods.

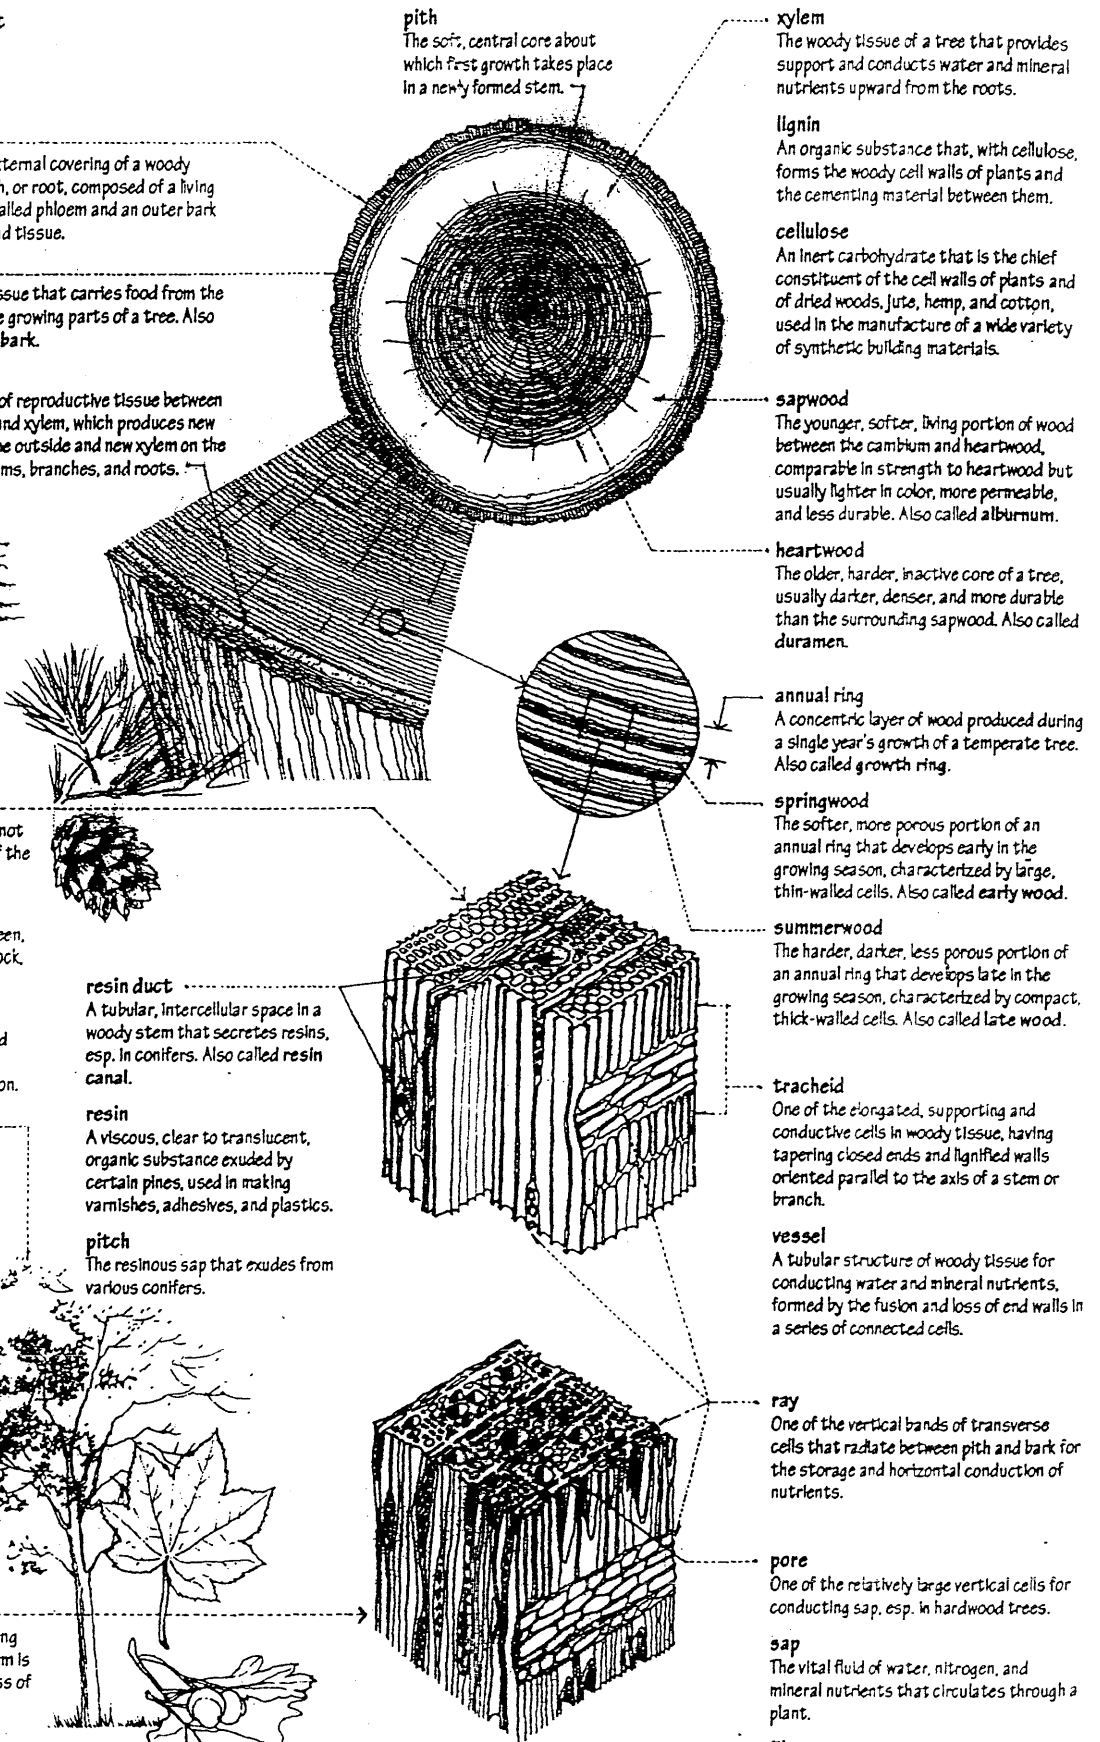

pith
The soft, central core about which first growth takes place in a newly formed stem.

xylem
The woody tissue of a tree that provides support and conducts water and mineral nutrients upward from the roots.

lignin
An organic substance that, with cellulose, forms the woody cell walls of plants and the cementing material between them.

cellulose
An inert carbohydrate that is the chief constituent of the cell walls of plants and of dried woods, jute, hemp, and cotton, used in the manufacture of a wide variety of synthetic building materials.

sapwood
The younger, softer, living portion of wood between the cambium and heartwood, comparable in strength to heartwood but usually lighter in color, more permeable, and less durable. Also called alburnum.

heartwood
The older, harder, inactive core of a tree, usually darker, denser, and more durable than the surrounding sapwood. Also called duramen.

annual ring
A concentric layer of wood produced during a single year's growth of a temperate tree. Also called growth ring.

springwood
The softer, more porous portion of an annual ring that develops early in the growing season, characterized by large, thin-walled cells. Also called early wood.

summerwood
The harder, darker, less porous portion of an annual ring that develops late in the growing season, characterized by compact, thick-walled cells. Also called late wood.

tracheid
One of the elongated, supporting and conductive cells in woody tissue, having tapering closed ends and lignified walls oriented parallel to the axis of a stem or branch.

vessel
A tubular structure of woody tissue for conducting water and mineral nutrients, formed by the fusion and loss of end walls in a series of connected cells.

ray
One of the vertical bands of transverse cells that radiate between pith and bark for the storage and horizontal conduction of nutrients.

pore
One of the relatively large vertical cells for conducting sap, esp. in hardwood trees.

sap
The vital fluid of water, nitrogen, and mineral nutrients that circulates through a plant.

fiber
One of the slender, thick-walled cells which together serve to strengthen plant tissue.

timber
Wood suitable for use as a building material.

log
A length of trunk or large limb of a felled tree, ready for sawing.

rough lumber
Lumber that is sawn, edged and trimmed, but not surfaced.

dressed lumber
Lumber that is surfaced with a planing machine to attain a smooth surface and uniform size.

lumber
The timber product manufactured by sawing, resawing, passing lengthwise through a planing machine, cross-cutting to length, and grading.

seasoned
Of or pertaining to lumber that has been dried to reduce its moisture content and improve its serviceability.

kiln-dried
Of or pertaining to lumber seasoned in a kiln under controlled conditions of heat, air circulation, and humidity.

air-dried
Of or pertaining to lumber seasoned by exposure to the atmosphere.

surfaced green
Of or pertaining to dressed lumber having a moisture content exceeding 19% at the time of manufacture.


surfaced dry
Of or pertaining to dressed lumber having at a moisture content of 19% or less at the time of manufacture.

equilibrium moisture content
The moisture content at which wood neither gains nor loses moisture when surrounded by air at a given temperature and relative humidity.

fiber-saturation point
The stage in the drying or wetting of wood at which the cell walls are fully saturated but the cell cavities are void of water, ranging from a moisture content of 25% to 32% for commonly used species. Further drying results in shrinkage and generally greater strength, stiffness, and density of the wood.

moisture content
The amount of water contained in a wood piece, expressed as a percentage of the weight of the wood when oven-dry.

oven-dry
Of or pertaining to lumber dried to a point at which no moisture can be extracted when exposed in a kiln to a temperature of 214° to 221°F (101° to 105°C).

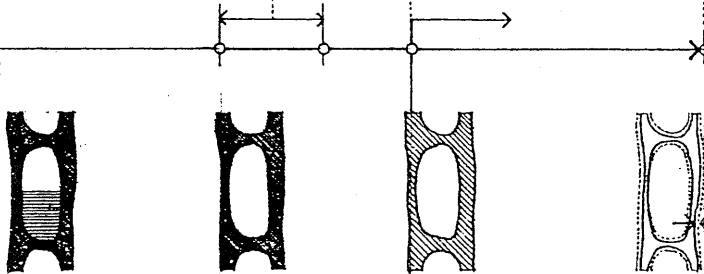

shrinkage
The dimensional contraction of a wood piece occurring when its moisture content falls below the fiber-saturation point. Shrinkage is very slight along the grain, but significant across the grain.


working
The alternate swelling and shrinkage of seasoned wood occurring with changes in moisture content caused by changes in relative humidity of the surrounding air.

acclimatize
To store wood products, as millwork and flooring, in an interior space until the materials adapt to the moisture content and temperature of the new environment.

tangential shrinkage
Wood shrinkage in a direction tangent to the growth rings, about double that of radial shrinkage.


radial shrinkage
Wood shrinkage perpendicular to the grain, across the growth rings.

longitudinal shrinkage
Wood shrinkage parallel to the grain, about 2% of radial shrinkage.

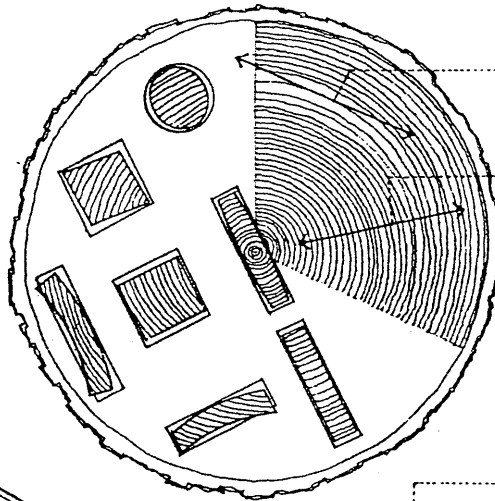


nominal dimension
The dimension of lumber before drying and surfacing, used for convenience in defining size and computing quantity. Nominal dimensions are always written without inch marks. Also called nominal size.

dressed size
The dimension of lumber after seasoning and surfacing, from $\frac{3}{8}$ to $\frac{3}{4}$ in. (9.5 to 19.1 mm) less than the nominal dimension. A dressed size is always written with inch marks ("). Also called dressed dimension.

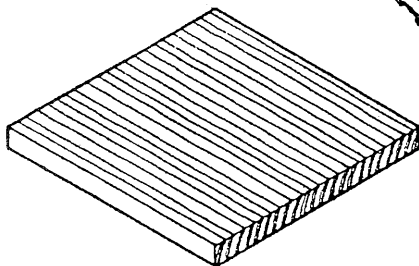

board foot
A unit of quantity for lumber equal to the volume of a piece whose nominal dimensions are 12 in. (304.8 mm) square and 1 in. (25.4 mm) thick.


board measure
Lumber measurement in board feet.



WOOD

grain
The direction, size, arrangement, and appearance of the fibers in a piece of dressed wood.

edge grain
Wood grain resulting from quartersawing, having the annual rings forming an angle of 45° or more with the broad faces of a piece. Also called **vertical grain**.



quartersaw
To saw quartered logs approximately at right angles to the annual rings.

warp
Any deviation from a plane or true surface of a board or panel, usually caused by uneven drying during the seasoning process or by a change in moisture content.

cup
A curvature across the width or face of a wood piece, measured at the point of greatest deviation from a straight line drawn from edge to edge of the piece.

bow
A curvature along the length of a wood piece, measured at the point of greatest deviation from a straight line drawn from end to end of the piece.

crook
A curvature along the edge of a wood piece, measured at the point of greatest deviation from a straight line drawn from end to end of the piece.

twist
A warp resulting from the turning of the edges of a wood piece in opposite directions.

shake
A separation along the grain of a wood piece, usually between the annual rings, caused by stresses on a tree while standing or during felling.


pitch pocket
A well-defined opening between the annual rings of a softwood, containing or having once contained solid or liquid pitch.

check
A lengthwise separation of wood across the annual rings, caused by uneven or rapid shrinkage during the seasoning process.


split
A check that extends completely through a board or wood veneer. Also called **through check**.

wane
The presence of bark or absence of wood at corner or along an edge of a piece.

flat grain
Wood grain resulting from plain-sawing, having the annual rings forming an angle of less than 45° with the broad faces of a piece.



plain-saw
To saw a squared log into boards with evenly spaced parallel cuts. Also called **bastard-saw**.

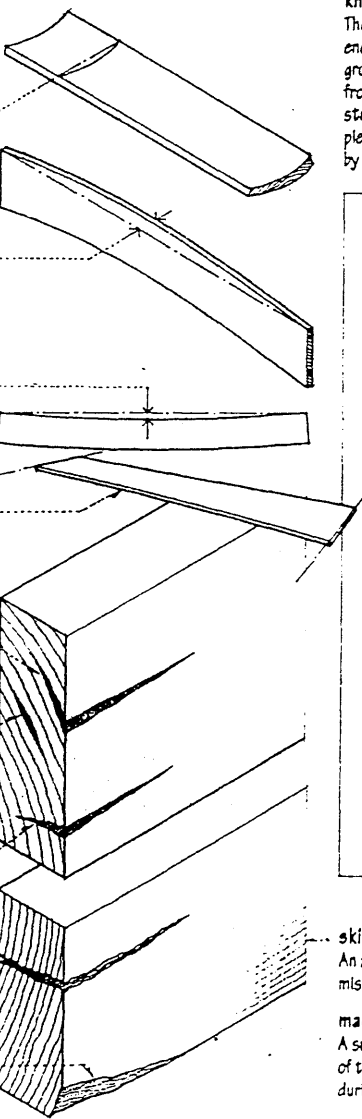


mixed grain
Any combination of edge-grained and flat-grained lumber.

end grain
Wood grain resulting from a cut across the grain.

crosscut
A cut made across the grain of wood.

rip
To saw wood in the direction of the grain. Also called **ripsaw**.

knot
The base of a woody branch enclosed by a subsequent growth of wood in the stem from which it rises. In the structural grading of a wood piece, knots are restricted by size and location.

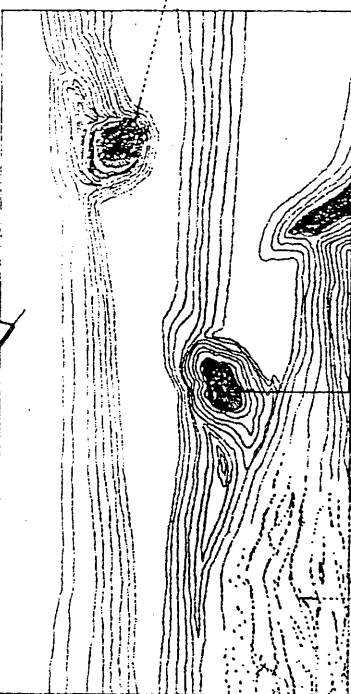

diagonal grain
Wood grain having the annual rings at an angle to the length of a piece, resulting from sawing at an angle to the axis of a log.

cross grain
Wood grain having the cells and fibers running transversely or diagonally to the length of a piece as a result of sawing, or irregularly as a result of a growth characteristic.

close grain
Wood grain characterized by narrow, inconspicuous annual rings with little difference in pore size between springwood and summer wood.

coarse grain
Wood grain characterized by wide, conspicuous annual rings with considerable contrast in pore size between springwood and summerwood.

coarse texture
Wood grain having large pores. Also called **open grain**.

fine texture
Wood grain having small, closely spaced pores.

raised grain
A dressed wood surface having the denser summerwood rising above the softer springwood.

live knot
A knot having annual rings intergrown with those of the surrounding wood. Live knots are allowable in structural timber within certain size limits. Also called **intergrown knot**.

sound knot
A knot that is solid across its face, at least as hard as the surrounding wood, and undecayed.


tight knot
A knot held firmly in place by growth or position.

dead knot
A knot having annual rings not intergrown with those of the surrounding wood. Encasement may be partial or complete, but a dead knot is considered to be a defect since it can easily loosen or be knocked out. Also called **encased knot**, **loose knot**.

decay
The decomposition of wood by fungi and other microorganisms, resulting in softening, loss of strength and weight, and often a change of texture and color.

dry rot
A decay of seasoned timber caused by fungi that consume the cellulose leaving a soft, brittle skeleton readily reduced to powder.

pecky
Having isolated spots of incipient decay from fungi, as pecky cypress or pecky cedar.

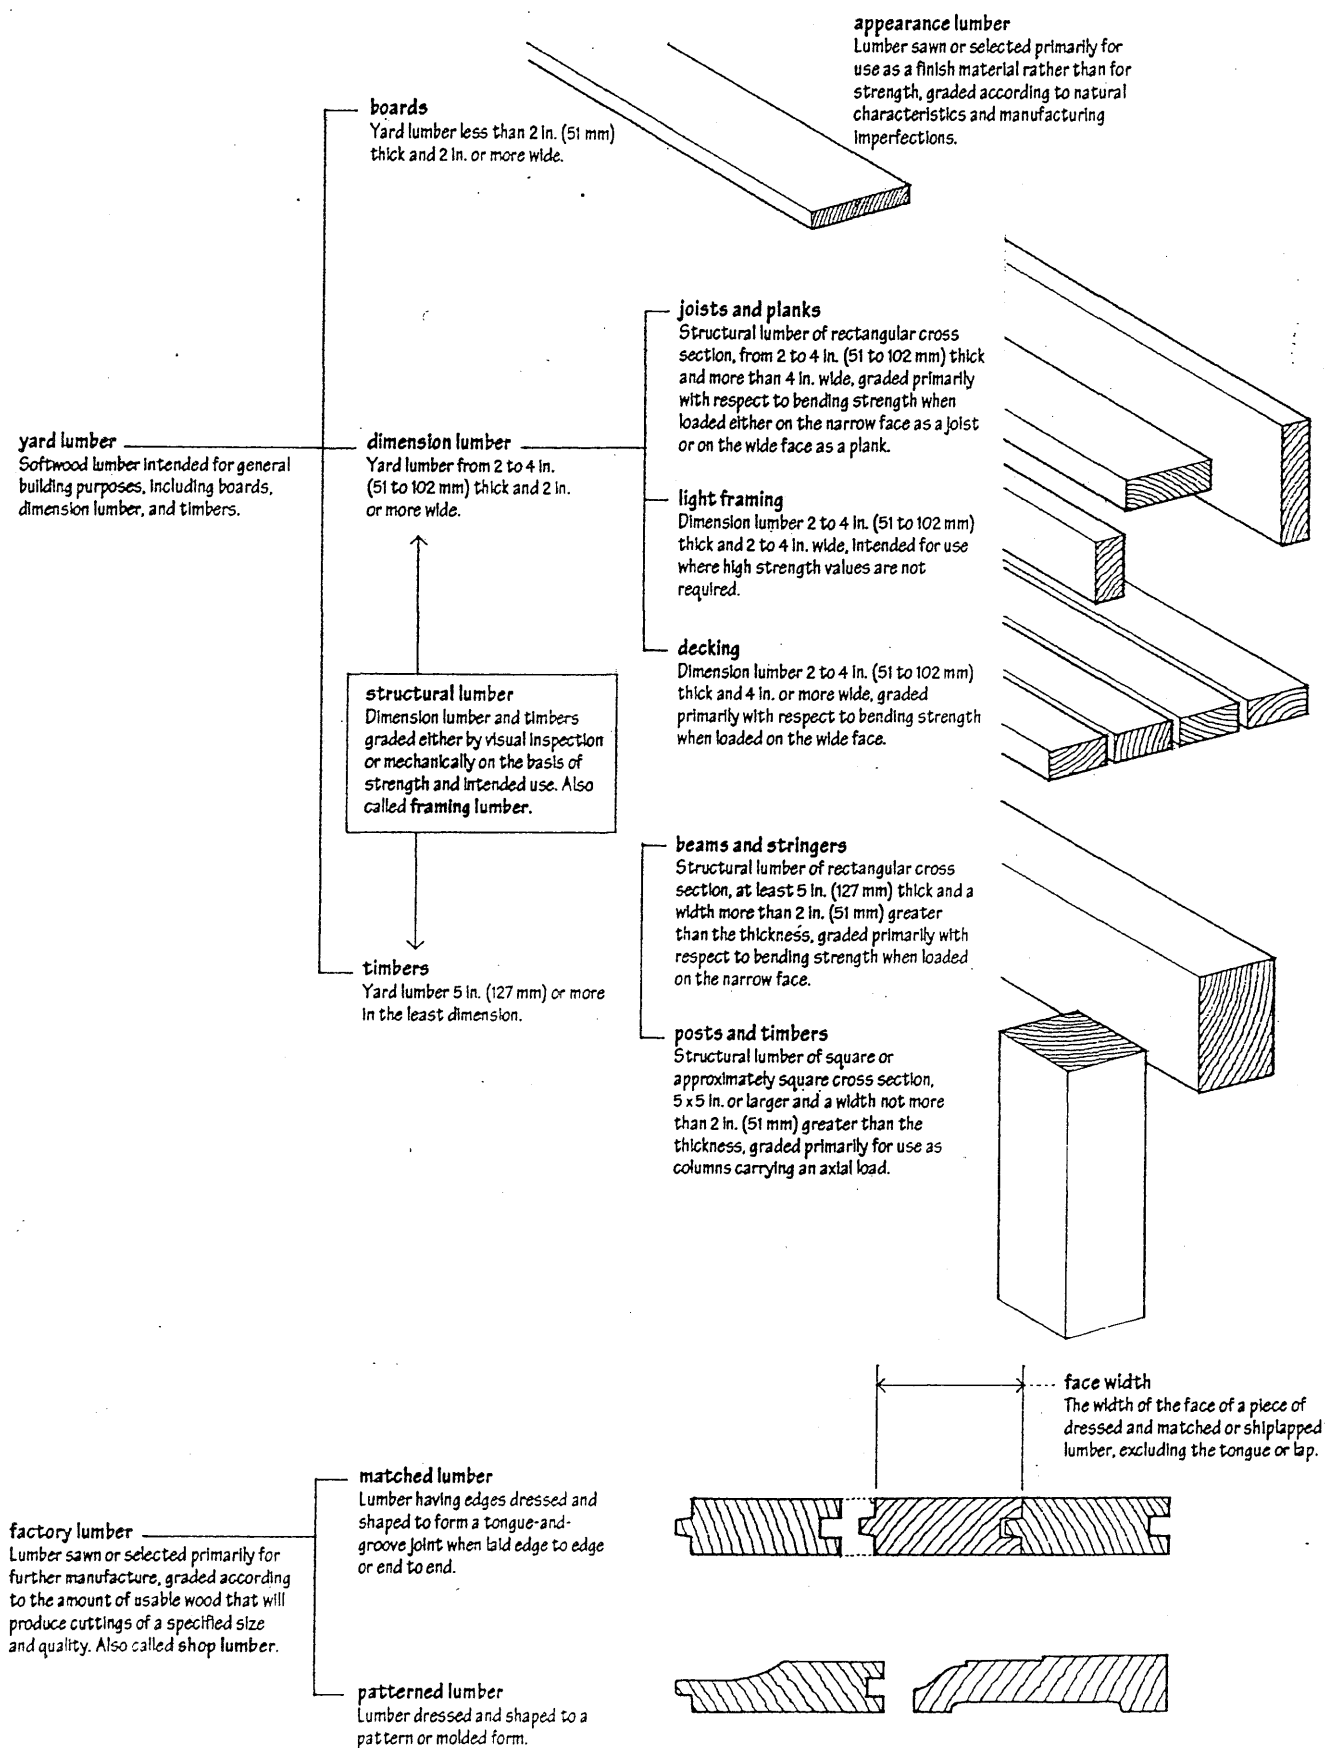

WOOD

visual grading

The visual examination and grading of structural lumber by trained inspectors according to quality-reducing characteristics that affect strength, appearance, durability, or utility.

machine rating


The grading of structural lumber by a machine that flexes a test specimen, measures its resistance to bending, calculates its modulus of elasticity, and electronically computes the appropriate stress grade, taking into account such factors as the effects of knots, slope of grain, growth rate, density, and moisture content. Also called **machine stress-rating**.

grademark

A stamp applied to each piece of lumber indicating the assigned stress grade, mill of origin, moisture content at time of manufacture, species or species group, and the grading authority.

slope of grain

The angle of grain relative to a line parallel to the length of a wood piece.




treated wood

Wood that has been coated or impregnated with chemicals to improve its resistance to decay, insect infestation, or fire.

pressure-treated wood

Wood impregnated with chemicals applied under pressure to reduce its resistance to decay and insect infestation.



non-pressure-treated wood

Wood coated, dipped, or impregnated with a preservative under atmospheric pressure.

fire-retardant wood

Wood treated with mineral salts impregnated under pressure to reduce flammability or combustibility. The salts react chemically at temperatures below the ignition point of wood, causing the combustible vapors normally generated in the wood to break down into water and carbon dioxide.

stress grade

Any of the grades of structural lumber for which a set of base values and corresponding modulus of elasticity is established for a species or group of species by a grading agency.

design value

Any of the allowable unit stresses for a species and grade of structural lumber obtained by modifying the base value by factors related to size and conditions of use.

MACHINE RATED

W[®] 12 HEM
S-DRY FIR
1650 Fb 1.5E

size-adjusted value


A base value for a species or group of species of structural lumber, adjusted for cross-sectional size.

base value

Any of the allowable unit stresses for bending, compression perpendicular and parallel to grain, tension parallel to grain, horizontal shear, and corresponding modulus of elasticity, established by a grading agency for various species and grades of structural lumber. Base values must be adjusted first for size and then for conditions of use.

=

X

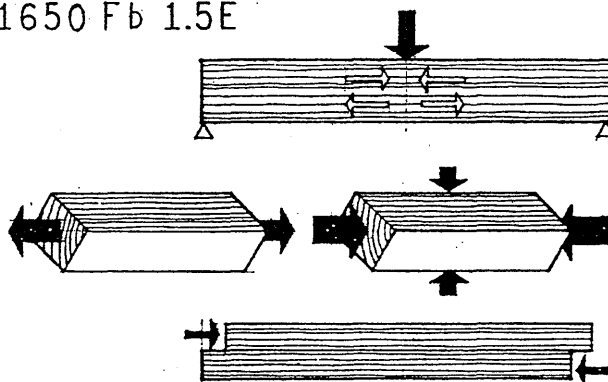

full-cell process


A process for pressure-treating wood in which a vacuum is first drawn to remove air from the wood fibers and allow the preservative to be absorbed by the cell walls, after which pressure is applied to force additional preservative into the cell cavities. The full-cell process leaves the maximum amount of preservative in the wood.

empty-cell process

A process for pressure-treating wood in which the pressure of the entering preservative entraps air in the wood fibers, which expands when the pressure is released to expel excess preservative from the cell cavities. The empty-cell process yields a drier product while ensuring deep, uniform penetration of the preservative.

vacuum process

A non-pressure treatment in which a vacuum or partial vacuum exhausts air from the cells and pores of the wood while atmospheric pressure forces preservative into the wood.



preservative

Any of various substances for coating or impregnating wood in order to protect it against wood-destroying fungi and insects.



size factor

A coefficient for modifying the base values of a species and grade of lumber according to the cross-sectional size of the piece.

repetitive member factor

A coefficient for increasing the size-adjusted values of repetitive members, since the sharing of the load by the pieces enhances the strength of the entire assembly.

repetitive member

Any of a series of three or more light framing members, as joists or rafters, spaced not more than 24 in. (610 mm) on center and joined by sheathing, decking, or other load-distributing members.

duration of load factor

A coefficient for increasing the size-adjusted values of a wood member subject to a short-term load, since wood has the property of carrying substantially greater maximum loads for short durations than for long durations of loading.

horizontal shear factor

A coefficient for increasing the size-adjusted horizontal shear value of a wood member having shakes, checks, or splits when their length is known and any increase in length is not anticipated.

flat use factor

A coefficient for increasing the size-adjusted bending value for planking having a face width of 4 in. (102 mm) or more.

wet use factor

A coefficient for decreasing the size-adjusted values for wood members when their moisture content will likely exceed 19% in use.

water-borne preservative

An inorganic, water-soluble compound, as ammoniacal copper arsenite (ACA) or chromated copper arsenite (CCA), used as a wood preservative. ACA and CCA affix chemically to the wood cell walls and is resistant to leaching. The copper acts as a fungicide while the arsenate is toxic to wood-destroying insects. Wood treated with ACA and CCA is odorless and paintable.

oil-borne preservative


An organic chemical dissolved in a petroleum oil carrier, as pentachlorophenol or copper naphthenate, used as a wood preservative. Pentachlorophenol, the most commonly used oil-borne preservative, has a persistent odor, is insoluble in water, and is highly toxic not only to fungi and insects but also to humans and plants.

creosote

An oily liquid of aromatic hydrocarbons obtained by the distillation of coal tar, used as a wood preservative for marine installations or for severe exposures to wood-destroying fungi and insects. Creosote and creosote solutions have a penetrating odor and render wood unpaintable.


ferrule

A metal ring or cap placed around the end of a wooden post or handle to prevent splitting.



bracket load

An eccentric load applied at some point below the upper end of a timber column, the static effect of which is assumed to be equivalent to the same load applied axially plus an additional side load applied at midheight.

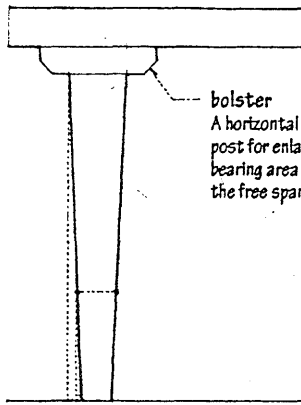


bolster

A horizontal timber on a post for enlarging the bearing area and reducing the free span of a beam.

box column

A built-up column having a hollow, square or rectangular cross section.



solid column


A wood column consisting of a single piece of solid-sawn or glued-laminated timber, usually square or rectangular in cross section.

tapered column

A wood column having a cross section that diminishes along its length. In determining the slenderness ratio for a tapered column, the least dimension is taken as the sum of the minimum diameter or least dimension and one-third the difference between the minimum and maximum diameters or lesser and greater dimensions.




built-up column

A wood column formed by fastening or gluing cover plates to two or more parallel planks, or boxing planks around a solid core. A built-up column is never equal in strength to a solid column of comparable material and overall dimensions.

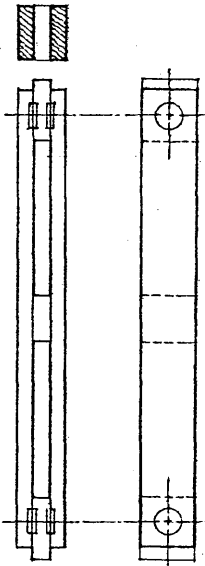


spaced column

A wood column consisting of two or more parallel members separated at their ends and midpoints by blocking, and joined at the ends by timber connectors capable of developing the required shear resistance.



flitchplate

A steel plate for reinforcing a flitch beam.



built-up beam

A vertically laminated wood beam made by fastening together two or more smaller members with bolts, lag screws, or spikes, equal in strength to the sum of the strengths of the individual pieces if none of the laminations are spliced.

box beam


A beam having a hollow, rectangular cross section, made by gluing two or more plywood or oriented strandboard webs to sawn or laminated veneer lumber flanges.

I-beam

A beam made by gluing sawn or laminated veneer lumber flanges along the top and bottom edges of a single plywood or oriented strandboard web. Also called I-joist.

flitch beam

A vertically laminated beam consisting of timbers set on edge and bolted side by side to steel plates or sections. Also called flitch girder, sandwich beam.

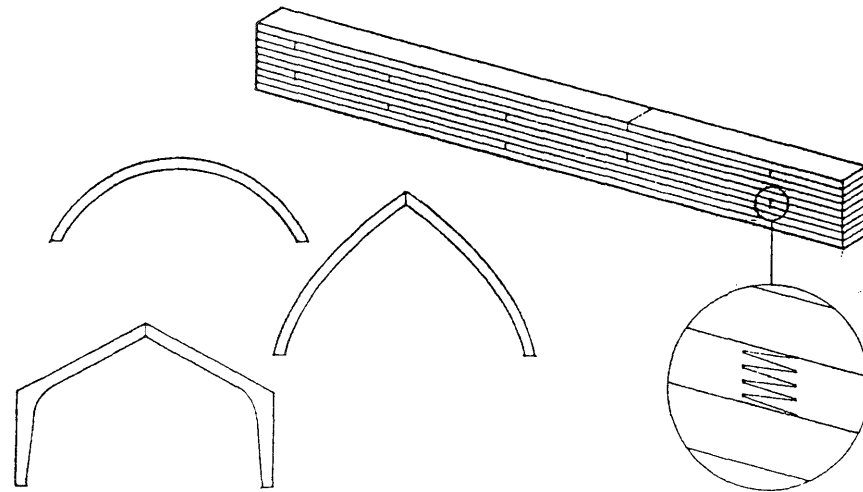

examples of glue-laminated timber shapes

glued-laminated timber

A structural lumber product made by laminating stress-grade lumber with adhesive under controlled conditions, usually with the grain of all plies being parallel. The advantages of glued-laminated timber over dimension lumber are generally higher allowable unit stresses, improved appearance, and availability of various sectional shapes. Glue-laminated timbers may be end-joined with scarf or finger joints to any desired length, or edge-glued for greater width or depth. Also called glulam.



appearance grade

One of three grades of glue-laminated timber – premium, architectural, and industrial – based on surface appearance as affected by growth characteristics, wood fillers, and dressing operations.

WOOD

plywood

A wood panel product made by bonding veneers together under heat and pressure, usually with the grain at right angles to each other and symmetrical about the center ply.

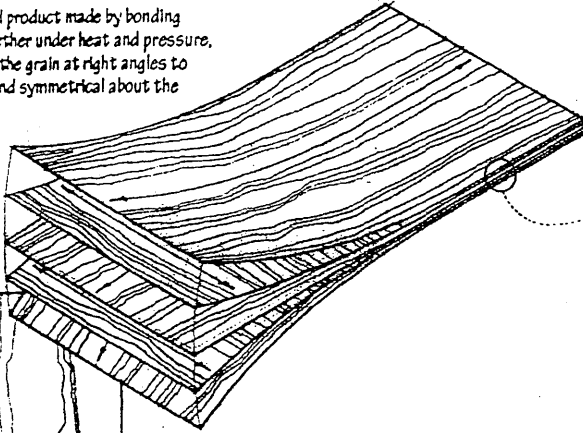

span rating

A number specifying the maximum recommended center-to-center spacing in inches of the supports for a structural wood panel spanning with its long dimension across three or more supports.

exposure durability

A classification of a wood panel product according to its ability to withstand exposure to weather or moisture without weakening or warping.

exterior

An exposure durability classification for structural wood panels manufactured with a waterproof glue for use as siding or other continuously exposed applications.

exposure 1

An exposure durability classification for structural wood panels manufactured with an exterior glue for use in protected construction subject to repeated wetting.

exposure 2


An exposure durability classification for structural wood panels manufactured with an intermediate glue for use in fully protected construction subject to a minimum of wetting.

exterior plywood

A plywood panel consisting of C-grade veneers or better, bonded with a fully waterproof glue for permanent exposure to weather or moisture.

interior plywood

A plywood panel made with D-grade veneers or better, bonded with an exterior, intermediate, or interior glue.



high-density overlay

An exterior wood panel having a resin-fiber overlay on both sides providing a smooth, hard, abrasion-resistant surface, used for concrete forms, cabinets, and countertops. Abbr.: HDO

medium-density overlay



An exterior wood panel having a phenolic or melamine resin overlay on one or both sides providing a smooth base for painting. Abbr.: MDO

specialty panel

Any of various wood panel products, as grooved or rough-sawn plywood, intended for use as siding or paneling.


texture 1-11

An exterior plywood panel having grooves 1/4 in. (6.4 mm) deep and 3/8 in. (9.5 mm) wide, spaced 4 or 8 in. (102 or 203 mm) on center.

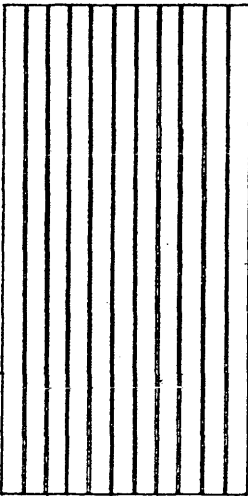

group number

A number identifying one of five groups of species used for the face and back veneers of a plywood panel, the species being classified on the basis of bending strength and stiffness, with Group 1 containing the stiffest species and Group 5 the least stiff.

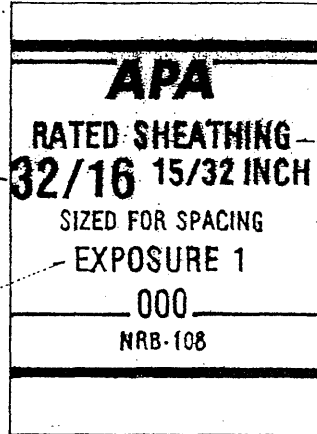

panel grade

The grade of a wood panel product identified by the face and back veneer grades or by its intended use.

engineered grade

The grade of a structural wood panel based on its intended use as sheathing, subflooring, or in the fabrication of box beams and stressed-skin panels.

gradestamp

A trademark of the American Plywood Association (APA), stamped on the back of a structural wood panel product to identify the panel grade, thickness, span rating, exposure durability classification, mill number, and National Research Board (NRB) report number.

veneer grade

A grade defining the appearance of a veneer in terms of growth characteristics and the number and size of repairs that may be made during manufacture.

N-grade

A smooth softwood veneer of all heartwood or all sapwood, free from open defects with only a few well-matched repairs.

A-grade

A smooth, paintable softwood veneer with a limited number of neatly made repairs parallel to the grain.

B-grade

A softwood veneer having a solid surface with circular repair plugs, tight knots, and minor splits permitted.

C-grade


A softwood veneer having tight knots and knotholes of limited size, synthetic or wood repairs, and discoloration and sanding defects that do not impair the strength of the panel.

C-plugged grade

An improved C-grade softwood veneer having smaller knots and knotholes, some broken grain, and synthetic repairs.

D-grade

A softwood veneer having large knots and knotholes, pitch pockets, and tapering splits.

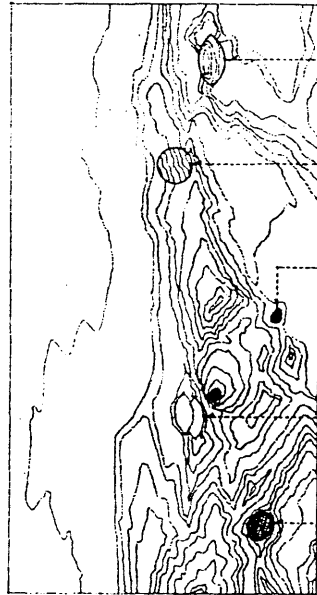

premium grade

The highest grade of hardwood veneer, permitting only a few small burls, pin knots, and inconspicuous patches.

good grade

A grade of hardwood veneer similar to premium grade except that matching of veneer faces is not required.

sound grade


A sound, smooth hardwood veneer free of open defects but containing streaks, discoloration, patches, and small sound tight knots.

utility grade

A hardwood veneer permitting discoloration, streaks, patches, tight knots, small knotholes and splits.

backing grade

A grade of hardwood veneer similar to utility grade but permitting larger defects not affecting the strength or durability of the panel.

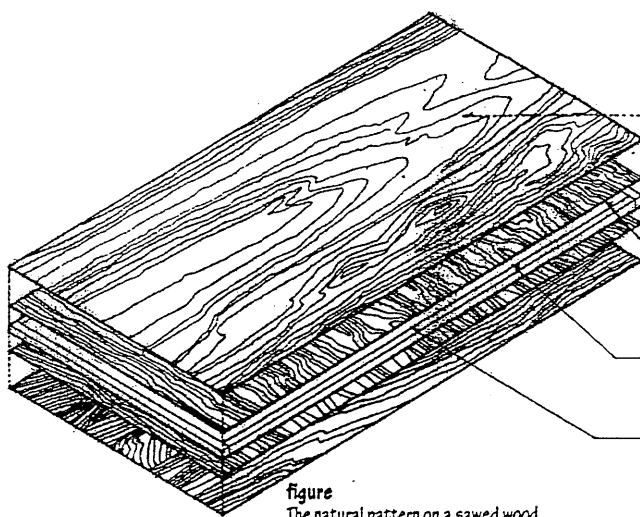**figure**

The natural pattern on a sawed wood surface produced by the intersection of annual rings, knots, burls, rays, and other growth characteristics.

decorative plywood

Hardwood-faced plywood manufactured for use as paneling or in cabinetry and furniture.

veneer

A thin sheet of wood rotary cut, sliced, or sawn from a log or flitch and used as a superior facing to inferior wood or bonded together to form plywood.

crossband

A layer of veneer immediately adjacent to and at right angles to the face plies in a plywood panel.

core

The center of a plywood panel, consisting of veneers, sawn lumber, or composition board.

banding


The solid wood stock extending around the sides of a veneered panel, concealing the core and facilitating the shaping of the panel edges.

matching


Arranging sheets of veneers so as to emphasize the color and figure of the wood.

book matching


Arranging veneers from the same flitch alternately face up and face down to produce symmetrical mirror images about the joints between adjacent sheets.

**herringbone matching**


Book matching in which the figures in adjacent sheets slope in opposite directions.

**slip matching**








Arranging adjacent sheets of veneer from the same flitch side by side without turning so as to repeat the figure.

**diamond matching**


Arranging four diagonally cut sheets of a veneer to form a diamond pattern about a center.

**random matching**


Arranging veneers to intentionally create a casual, unmatched appearance.

**rotary cutting**


The rotating of a log against the cutting edge of a knife in a lathe, producing a continuous veneer with a bold, variegated ripple figure.

**flat slicing**


The longitudinal slicing of a half-log parallel to a line through its center, producing a veneer having a variegated wavy figure. Also called plain slicing.

**quarter slicing**

The longitudinal slicing of a quarter log perpendicular to the annual rings, producing a series of straight or varied stripes in the veneer.

**half-round slicing**

The slicing of a flitch mounted off-center in the lathe, slightly across the annual rings, producing characteristics of both rotary cutting and flat slicing.

**flitch**

A longitudinal section of a log to be cut into veneers.

rift cutting

The slicing of oak and similar species perpendicular to the conspicuous, radiating rays so as to minimize their appearance.

WOOD

oriented strandboard

A nonveneered wood panel product commonly used for sheathing and as subflooring, made by bonding three or five layers of long, thin wood strands under heat and pressure using a waterproof adhesive. The surface strands are aligned parallel to the long axis of the panel, making the panel stronger along its length.

Abbr.: OSB

waterboard

A nonveneered panel product composed of large, thin wood flakes bonded under heat and pressure with a waterproof adhesive. The planes of the wafers are generally oriented parallel to the plane of the panel but their grain directions are random, making the panel approximately equal in strength and stiffness in all directions in the plane of the panel.

composite panel

A wood panel product consisting of two face veneers bonded to a reconstituted wood core.

particleboard

A nonveneered wood panel product made by bonding small wood particles under heat and pressure, commonly used as a core material for decorative panels and cabinetwork, and as underlayment for floors. Also called chipboard.

parallel strand lumber

A structural lumber product made by bonding long, narrow wood strands together under heat and pressure using a waterproof adhesive. Parallel strand lumber is a proprietary product marketed under the trademark, Parallam, used as beams and columns in post-and-beam construction and for beams, headers, and lintels in light frame construction.

Abbr.: PSL

laminated veneer lumber

A structural lumber product made by bonding layers of wood veneers together under heat and pressure using a waterproof adhesive. Having the grain of all veneers run in the same longitudinal direction results in a product that is strong when edge loaded as a beam or face loaded as a plank. Laminated veneer lumber is marketed under various brand names, as Microlam, and used as headers and beams or as flanges for prefabricated wood I-joists. Abbr.: LVL

fiberboard

A building material made of wood or other plant fibers compressed with a binder into rigid sheets.

hardboard

A very dense, compressed wood fiberboard.

tempered hardboard


A hardboard impregnated with a drying oil or other oxidizing resin and baked to improve its hardness and moisture resistance.

Masonite

Trademark for a brand of tempered hardboard.

Peg-Board

Trademark for a brand of tempered hardboard having regularly spaced perforations into which hooks may be inserted for the storage or display of articles.

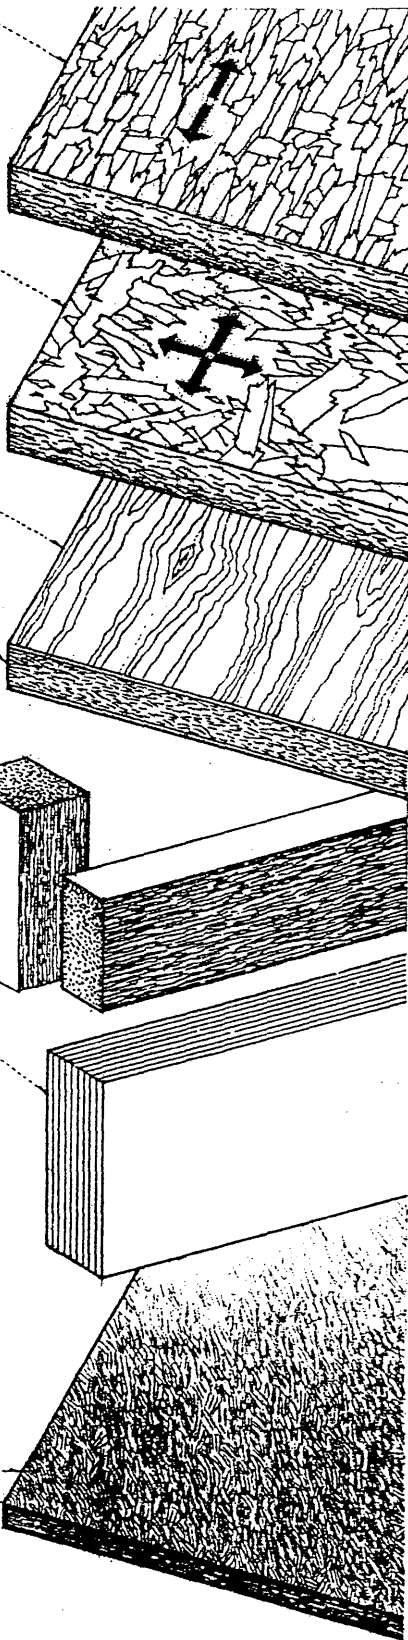

Aa

- Aaron's rod 185
- abacus 180
- Abram's law 44
- abrasion resistance 165
- abrasion-resistance index 165
- abscissa 108
- absolute humidity 120
- absolute scale 117
- absolute temperature 117
- absolute zero 117
- absorber 124
- absorbing well 223
- absorptance 143
- absorption 18, 160, 165, 231
- absorption bed 201
- absorption coefficient 231
- absorption field 201
- absorption refrigeration 124
- absorption trench 201
- absorption unit 231
- abstract 52, 59
- abstract expressionism 135
- A bulb 144
- abutment 13, 206
- Abyssinian well 221
- acanthus 181
- accelerated aging 165
- accelerated weathering 165
- acceleration of gravity 167
- accelerator 43
- accent lighting 148
- access 57
- access flooring system 93
- accident 59
- acclimatize 277
- accommodation 264
- accordion door 62
- accouplement 179
- achromatic 39
- acorn nut 84
- acoustical analysis 230
- acoustical ceiling 31
- acoustical cloud 230
- acoustical design 230
- acoustical door 65
- acoustical plaster 188
- acoustical tile 31
- acoustical treatment 230
- acoustic decking 93
- acoustic mass 232
- acoustics 230
- acre 166
- acropolis 250
- acroterium 250
- acroterion 250
- acrylic resin 192
- acrylonitrile-butadiene-styrene 192
- act curtain 257
- act drop 257
- actinic ray 187
- action 58
- active earth pressure 100
- active leaf 62
- active solar-heating system 226
- acute 109
- acute angle 108
- adaptation 148
- additive 43, 52
- additive color 38
- address 59
- adhered veneer 156
- adiabatic cooling 120
- adiabatic heating 120
- adjacent spaces 218
- adjustable doorframe 65
- adjustable tie 156
- admixture 43
- adobe 34
- adsorption 165
- advancing color 39
- aerator 197
- aerial perspective 72
- aerodynamic damping 245
- aerodynamic oscillation 154
- aesthetics 10
- A-frame 104
- aggregate 43
- agitator truck 46
- agora 250
- A-grade 282
- agreement 54
- airborne sound 230
- air chamber 198
- air change 127
- air conditioner 124
- air conditioning 124
- air curtain 62
- air cushion 198
- air-dried 277

- air duct 122
- air-entraining agent 43
- air-entraining portland cement 42
- air gap 198
- air-handling unit 125
- air-inflated structure 168
- air mile 166
- air-supported structure 168
- air switch 79
- air terminal 77
- air trap 198
- air-water system 126
- airway 119
- aisle 35, 257
- alabaster 188
- albarium 189
- albronze 175
- albumum 276
- alcid 175
- alcove 216
- alidade 247
- aligning punch 86
- alignment 54
- alignment valve 199
- alkyd paint 187
- alkyd resin 187
- all-air system 126
- allée 27
- Allen head 83
- allowable bearing capacity 100
- allowable bearing pressure 100
- allowable load 240
- allowable pile load 102
- allowable soil pressure 100
- allowable stress 164
- allowable stress design 240
- allowable unit stress 164
- alloy 170
- alloy steel 170
- allure 37
- all-water system 126
- almemar 250
- alpha-beta brass 175
- altar 35, 250
- alternating current 75
- alternative 58
- alternator 75
- altitude 109, 226
- alto-relievo 182
- alumina 175
- aluminum 175
- aluminum brass 175
- aluminum bronze 175
- aluminum oxide 175
- alure 37
- amalaka 253
- ambiance 217
- ambient sound 231
- ambiguity 59
- ambo 35
- ambon 35
- ambulatory 35, 37
- amenity 58
- American bond 20
- American standard beam 172
- American standard channel 172
- Americans with Disabilities Act 51
- amorphous 161
- amortizement 262
- amperage 74
- ampere 74
- amphiprostyle 251
- amphitheater 256
- amplitude 152, 228
- anaglyph 182
- analogous color 39
- analogy 59
- analysis 58
- analytical drawing 66
- analytique 67
- anamorphosis 73
- Anatolia 128
- anchor 65, 206, 269
- anchorage 202, 206, 242
- anchor bolt 267
- anchored veneer 156
- ancon 186
- ang 254
- angel light 275
- angle 108, 172
- angle bead 190
- angle cleat 174
- angle clip 174
- angle iron 172
- angle joint 140
- angle of incidence 143
- angle of reflection 143
- angle of refraction 143
- angle of repose 270
- angle of slide 270
- angle tile 214
- angle valve 199
- Anglo-Saxon architecture 131
- angstrom 142
- anhydrous 188
- animated 217
- anion 161
- anisotropic 162
- anneal 169
- annealed glass 112
- annual ring 276
- annular vault 263
- annulet 180
- annunciator 81
- anode 74
- anodize 171
- anomaly 54
- anse de panier 14
- anta 251
- antefix 250
- anteroom 216
- anthemion 184
- anthropology 11
- anthropometry 57
- anthropomorphize 57
- antic 183
- anticlastic 219
- anticorrosive paint 187
- anticum 250
- antimony 175
- anti-scald faucet 197
- anvil 102
- apartment building 139
- apartment house 139
- apophyge 181
- apophysis 181
- apothem 109
- appearance grade 281
- appearance lumber 279
- apprentice 208
- appliance circuit 77
- applied force 97
- appliqué 182
- apron 257, 271
- apron piece 235
- apse 35
- apsis 35
- apteral 251
- aquifer 196
- arabesque 184
- arabesque 179
- arbor 27
- arc 86, 110
- arcade 36
- arcature 36
- arc-boutant 262
- arc doubleau 263
- arch 12
- arch action 13
- arch axis 13
- arch brace 210
- arch corner bead 190
- archetype 59
- arching 100
- architect 48
- architectonics 11
- architectural bronze 175
- architectural concrete 47
- architectural hardware 114
- architectural terra cotta 34
- architecture 9
- architrave 179, 186
- archivolt 12
- arch order 251
- arcuate 36, 106
- arc welding 86
- are 166
- area 166
- area drain 223
- area of refuge 91
- area plan 69
- area source 147
- areaway 23
- arena theater 257
- areostyle 179
- ark of the covenant 250
- armature 75
- armored cable 78
- arris 185
- arris fillet 214
- arris gutter 209
- arris tile 214
- art 10
- Art Deco 135
- artesian well 196

- articulate 141
- artificial horizon 247
- artificial sky 150
- articulation 52
- Art Nouveau 134
- Arts and Crafts Movement 134
- A/SB bulb 144
- ashlar 158
- ashpit 87
- ashpit door 87
- aspect 59, 264
- aspect ratio 109
- asphalt 215
- asphalt mastic 176
- asphalt shingle 212
- Assyrian architecture 129
- astragal 62, 185
- asymptote 110
- atlas 250
- atmosphere 167
- atmospheric pressure 167
- atom 161
- atomic number 161
- atomic weight 161
- atrium 26, 35, 137
- attenuation 230
- Atterberg limits 225
- attic 23
- Attic base 181
- attic ventilator 127
- audio frequency 229
- auditorium 258
- auditory fatigue 229
- aureole 183
- ~~automatic closing fire assembly 89~~
- automatic door 62
- automatic door bottom 114
- automatic fire extinguishing system 90
- autumnal equinox 226
- auxiliary rafter 210
- avant-garde 135
- average transmission loss 232
- award 49
- awning 274
- awning window 273
- axial force 162
- axial load 162
- axial stress 162
- axis 55
- axis of abscissas 108
- axis of ordinates 108
- axis of symmetry 55
- axonometric 71
- axonometric projection 71
- azimuth 246
- ~~Aztec architecture 132~~
- Bb**
- back 271
- backband 271
- backbend 65
- backcheck 114
- backfill 222
- backflap hinge 115
- backflow 198
- backflow valve 198
- background 265
- background noise 231
- background noise level 231
- back hearth 87
- backing 95, 156, 211, 267
- backing board 191
- backing grade 283
- backlight 148
- back plaster 156
- backset 116
- ~~back-siphonage 198~~
- backsplash 198
- backstage 258
- backup rod 178
- backup wall 269
- back vent 200
- backwater valve 198
- baffle 146
- baguette 185
- bailey 98
- Bakelite 193
- balance 55
- balanced door 62
- balanced sash 272
- balanced section 202
- balanced step 234
- balconet 273
- balcony 24, 258
- baldachin 35
- baldaquin 35
- ballast 145
- ball-bearing hinge 115
- ball cock 198
- ballflower 183
- balloon frame 267
- baluster 235
- balustrade 235
- band 228
- bandage 61
- banderole 184
- banding 283
- bandrole 184
- banister 235
- bank 80
- baptism 35
- baptistery 35
- bar 172
- barbacan 99
- bargeboard 211
- barge couple 211
- barge course 214
- bar joist 173
- bark 276
- barometer 167
- barometric pressure 167
- Baroque architecture 133
- barrel roof 208
- ~~barrel shell 218~~
- barrel vault 263
- barrier-free 57
- barrow 248
- bartizan 99
- bartracery 275
- base 109, 153, 179
- base anchor 65
- baseboard 186
- baseboard heater 123
- basecoat 187, 188
- base flashing 177
- base isolation 245
- baseline 72, 246, 247
- basement 23
- basement wall 266
- base metal 86, 170
- base molding 186
- base plate 174
- base screed 190
- base shear 153
- base shear coefficient 153
- base sheet 215
- base shoe 186
- base value 280
- basic wind speed 154
- basilica 35, 251
- basket-handle arch 14
- bas-relief 182
- basso-relievo 182
- bastard pointing 155
- bastard-saw 278
- bastion 98
- bat 19
- bathtub 198
- batted surface 237
- batten 214, 257, 268
- batten door 64
- batten seam 214
- batter 270
- batter board 221
- batter pile 102
- battery 74, 200
- batt insulation 119
- battlement 99
- Bauhaus 135
- bauxite 175
- bay 24, 239
- Bayer process 175
- bay window 274
- B bulb 144
- bead 86, 178, 185, 214
- bead and reel 185
- bead molding 28
- beak 185
- beam 15, 149
- beam-and-girder slab 204
- beam ceiling 30
- beam fill 93
- beam pocket 93
- beams and stringers 279
- beam seat 85
- beam spread 149
- bearing 241, 246
- bearing stiffener 173
- bearing stratum 102
- bearing stress 241
- bearing wall 266
- bearing wall system 244
- beauty 10
- Beaux Arts architecture 132
- bed 155

- bedding 113
bedding plane 237
bed joint 155
bed molding 179
bedrock 224
beehive tomb 248
behavioral science 11
Belfast truss 261
Belgian 261
bell 103, 181, 199
bell-and-spligot 199
bell arch 14
bell bucket 103
below grade 222
belt course 159
belvedere 27
bema 35, 250
bench mark 247
bench terrace 222
bending 163
bending member 238
bending moment 15
bending stress 15
bent 105
bent approach 255
bent bar 203
bentonite 224
berm 98, 227
Bernoulli equation 154
Bernoulli's theorem 154
béton armé 202
béton brut 47
bevel 116, 141
bevel siding 268
B-grade 282
bidding 49
bidet 198
~~bidet door 62~~
bifurcation 40
bilateral symmetry 55
bilection 268
bi-level 138
~~bi-level 169, 185~~
bimain 250
bimetallic element 121
binder 107, 158, 187
binding beam 107
binding rafter 210
binocular vision 264
bin wall 270
bird's-beak 185
bird's-mouth 211
biscuit 32
bisque 32
bisque-fired 32
bit 116
bite 113
bitumen 215
black label 213
blackplate 172
blank 169
~~blanket insulation 119~~
blank jamb 63
blast furnace 170
blast-furnace slag 170
bleeder 123
bleeder valve 123
bleeding 46
blind 24
blind arcade 36
blind casing 272
blind door 64
blind floor 92
blinding glare 148
blind mortise 141
blind-nail 82
blind row 257
blindstory 24
blind wall 266
block 26
block flooring 94
blocking 267
bloom 169
blooming mill 169
blow 221
blower 125
blow molding 192
blue label 213
bluestone 236
board and batten 268
board foot 277
boarding 268
board measure 277
boards 279
boasted surface 237
BOCA National Building Code 51
body 32, 111
boil 221
boiler 123
bolection 268
bolster 12, 45, 281
bolt 84, 116
boltel 185
bond 20, 157, 161, 202
bond beam 160
bond-beam block 160
bond breaker 178
bond coat 33
bond course 20
bonded 48
bonded posttensioning 207
bonded terrazzo 94
bonderize 171
bond face 178
bonding agent 94, 190
bonding layer 204
bond plaster 188
bondstone 158
bond stress 202
bonnet 87, 122, 199
bonnet tile 214
book matching 283
boot 122
border 257
borrowed light 274
borrow pit 222
boss 159, 263
Boston hip 213
Boston ridge 213
bottom bar 203
bottom car clearance 80
bottom rail 64
boulder 224
boundary cable 29
boutil 185
bow 278
bower 99
Bow's notation 260
bowstring truss 261
bowtel 185
bow window 274
box beam 281
box column 174, 281
box cornice 213
box culvert 223
boxed frame 272
box girder 173
box gutter 209
box-head window 272
box nail 82
box office 258
box sill 267
box stair 235
box strike 116
Boyle's law 167
brace 243
braced core 245
braced frame 104, 107, 243
braced tube 245
brace molding 185
bracket 210, 235
bracket load 281
brad 82
branch 197
branch circuit 77
branch drain 200
branch interval 200
branch vent 200
brass 175
brattice 99
brazo 86
breakdown voltage 78
~~breakdown 78~~
break joints 212
break line 68
breast beam 107
breastsummer 107
breast timber 45
breast wall 270
breezeway 138
brick 18
brick grade 18
brick molding 271
brick type 18
brickwork 20
bridge 257
bridge lamp 147
bridging 92
bride joint 141
brightness 38, 142
brightness ratio 148
brilliant 38
Brinell number 165
brise-soleil 227
British thermal unit 117

- brittleness 164
- broken pediment 186
- broken rangework 158
- bronze 175
- Bronze Age 128
- broom finish 47
- brown coat 188
- brownstone 139, 236
- brush 75
- ~~brush 135~~
- BT bulb 145
- buck 63
- bucket trap 123
- buckling 40
- buckling load 40
- Buddha 253
- Buddhism 253
- Buffalo box 196
- buffer 80
- buggy 46
- bugle head 83
- building 21
- building brick 18
- building code 51
- building drain 200
- building official 49
- building paper 268
- building permit 49
- building separation 153
- building sewer 200
- building stone 237
- building storm drain 223
- building storm sewer 223
- building trap 200
- building type factor 153
- built-up beam 281
- built-up column 174, 281
- built-up roofing 215
- bulb 103, 144
- bulk-active structure 238
- bulkhead 23, 45, 80
- bulking 165
- bulk modulus 162
- bull float 47
- bullnose 185
- bullnose block 160
- bullnose corner bead 190
- bull's nose 185
- bullstretcher 19
- bumper 114
- bundled tubes 245
- bungalow 138
- bungalow court 138
- burden 221
- ~~bus 115, 218~~
- bus bar 76
- bus duct 78
- bushhammered finish 47
- bushing 78
- busway 78
- butsu 255
- buttsuden 255
- ~~butt 115, 218~~
- butterfly 140
- butterfly roof 208
- butterfly wedge 140
- butt hinge 115
- butt joint 140
- butt-joint glazing 113
- buttonhead 83
- butt plate 174
- butress 262
- butress pier 262
- butts and bounds 246
- butt splice 203
- butt weld 86
- Butyl 193
- butyl rubber 193
- BX cable 78
- Byzantine architecture 130
- Cc**
- cabinet drawing 71
- cable 28, 78
- cable loop 168
- cable molding 185
- cable-restrained pneumatic structure 168
- cable-stayed structure 29
- cable structure 28
- cable support 242
- cable tray 78
- CA bulb 144
- cadastral survey 246
- cadmium 175
- cairn 248
- calsson 30, 103
- calcine 42
- calcined gypsum 188
- calcium hydroxide 157
- calcium oxide 157
- calendering 192
- calfs tongue 184
- call button 81
- calorie 117
- cab 157
- cam 116
- camber 15
- camber bar 87
- camber piece 12
- camber slip 12
- cambium 276
- camelback truss 261
- cam handle 273
- camouflage 265
- campanile 36
- camp ceiling 30
- cancelli 35
- candela 142
- candle 142
- candlepower 142
- candlepower distribution curve 146
- canephora 250
- cant 109
- cant bay window 274
- cantharus 35
- cantilever 17
- cantilever beam 17
- cantilevered step 235
- cantilever footing 101
- cantilever method 105
- cantilever wall 270
- canton 266
- cant strip 177
- cap 199
- cap bead 113
- cap block 160
- cap flashing 177
- Cape Cod 138
- capillarity 177
- capillary action 177
- capillary attraction 177
- capillary break 177
- capital 179
- cap nut 84
- cap plate 174
- cap receiver 177
- capscrew 83
- cap sealant 113
- cap sheet 215
- capstone 159
- caravansary 252
- carbide 175
- carbon 170
- carbon steel 170
- car frame 81
- carri 248
- Carolingian architecture 131
- Carpenter Gothic 134
- carpet 95
- carpet cushion 95
- carpet pad 95
- carpet tile 95
- carriage 235
- carriage bolt 84
- carriage porch 25
- Cartesian coordinate 108
- Cartesian space 217
- cartoon 67
- cartouché 183
- cartridge fuse 76
- carved work 237
- caryatid 250
- cased opening 63
- cased pile 103
- case-harden 169
- casemate 98
- casement 273
- casement door 64
- casement stay 273
- casement window 273
- casing 63, 103
- casing bead 190
- casing nail 82
- castellated beam 173
- castellated nut 84
- casting 169, 192
- casting bed 206
- cast-in-place concrete 46
- cast-in-place concrete pile 103
- cast-in-situ concrete 46
- cast iron 170
- castle 99
- castle nut 84
- cast stone 237
- Catal Hüyük 128

- catalyst 192
- catch basin 223
- catenary 28
- cathedral 37
- Catherine wheel 36
- cathetus 181
- cathode 74
- cathodic protection 171
- cation 161
- caulicle 181
- cauliculus 181
- caulk 178
- causeway 249
- caustic lime 157
- cavalier drawing 71
- cavetto 185, 249
- cavetto cornice 249
- cavity wall 156
- cavo-relievo 182
- C bulb 144
- ceiling 30
- ceiling cavity 149
- ceiling joist 211
- cell 74
- cella 250
- cellar 23
- cellular decking 93
- cellular mat 101
- cellular wall 270
- cellulose 276
- Celsius scale 117
- Celtic cross 183
- cement 42
- cement content 44
- cement-lime mortar 157
- cement mortar 157
- cement paste 43
- cement temper 188
- cenotaph 251
- center 110, 111, 217
- centering 12
- centering shim 113
- centerline 68, 110
- center of gravity 96
- center of mass 96
- center of resistance 244
- center of rigidity 244
- center of vision 72
- center-to-center 267
- Centigrade scale 117
- centimeter 166
- central air conditioning 125
- central axis of vision 72
- central heating 121
- centralized organization 218
- centrifugal fan 127
- centroid 96
- ceramic 32
- ceramic bond 32
- ceramic mosaic tile 33
- ~~ceramic tile~~
- ceramic ware 32
- cercis 256
- certificate of occupancy 49
- cesspool 201
- C-grade 282
- chain 247
- chair 45
- chair rail 186
- chaitya 253
- chamber grave 248
- chamfer 140
- chamfer strip 45
- chancel 37
- chandelier 147
- chantry 37
- chaos 54
- chapel 37, 99
- chapter 37
- chapter house 37
- charrette 58
- chase 122
- chase mortise 141
- chat-sawn 237
- chattri 253
- Chavin 129
- check 278
- checker 184
- checkered plate 172
- check rail 272
- check throat 271
- check valve 199
- cheek 209
- check cut 211
- chemical bond 161
- chemin-de-ronde 99
- chevet 37
- chevron 184
- Chicago School 135
- chigi 255
- chilled water plant 125
- chiller 125
- chimney 87
- chimney arch 87
- chimney bar 87
- chimney breast 87
- chimney cap 87
- chimney cheek 87
- chimney corner 87
- chimney effect 127
- chimney pot 87
- ~~chimney stack~~
- Ch'in 129
- china 32
- china clay 32
- Chinese architecture 128
- Chinese lacquer 187
- chinoiserie 133
- chipboard 284
- Chi-Rho 183
- chisel point 82
- choir 37
- chord 110, 259
- chorten 253
- chorus 256
- Chou 129
- chrismon 183
- Christianity 35
- chroma 38
- chrome 171
- chromeplate 171
- chromium 171
- chudo 255
- chumon 255
- chute 46
- ciborium 35
- CIE 150
- cinder 170
- Cinquecento architecture 133
- cinqfoil 275
- circle 110
- circuit 74
- circuit breaker 76
- circuit vent 200
- circular mill 166
- circular stair 234
- circulation 218
- circumference 110
- circumvallate 98
- cistern 196
- citadel 99
- city planning 10
- civilization 128
- cladding 171
- claim 27
- clapboard 268
- class A 89
- class A fire 90
- class B 89
- class B fire 90
- class C 89
- class C fire 90
- class D 89
- class D fire 90
- class E 89
- Classic 130
- Classical architecture 130
- classicism 133
- Classic Revival 133
- clay 224
- clay loam 224
- cleanout 157, 200
- clear sky 150
- clear span 15
- clearstory 274
- cleat 214
- cleavage plane 237
- clerestory 274
- clevis 84
- climbing form 45
- clinch 82
- clinker 18, 42
- clip joint 155
- clitral 251
- cloister 37
- cloister garth 37
- cloister vault 263
- close 37
- closed cornice 213
- closed plan 216
- closed string 235
- closed valley 212
- close grain 278
- closer 20, 155
- closet bend 199

- closure 20, 265
 cloudy sky 150
 clustered organization 218
 cluster housing 139
 coach screw 83
 coal tar 215
 coarse aggregate 43
 coarse grain 278
 coarse texture 278
 coaxial cable 78
 cobble 224
 cobblestone 224
 cock bead 268
 cocking piece 213
 Code of Hammurabi 129
 coefficient of elasticity 164
 coefficient of expansion 165
 coefficient of heat transfer 118
 coefficient of utilization 149
 coffer 30
 cofferdam 221
 coherent 54
 cohesionless soil 225
 cohesive soil 225
 coil 75, 126
 coincident 109
 coke 170
 cold-air return 122
 cold-cathode lamp 145
 cold-draw 169
 cold-process roofing 215
 cold-roll 169
 cold-working 169
 collage 54
 collapse mechanism 243
 collar 177
 collar beam 211
 collar joint 155
 collar tie 211
 collector 226
 collegiate Gothic 134
 collimate 146
 collinear forces 96
 Colonial architecture 133
 colonial siding 268
 colonnade 25
 color 38
 color circle 39
 colorfast 187
 coloring agent 43
 color rendering Index 145
 color scheme 39
 color temperature 145
 color triangle 39
 color wheel 39
 column 40, 179
 column base 85
 column cap 85
 column capital 205
 column-cover-and-spandrel system 269
 columination 179
 column strip 204
 colymbethra 28
 combed finish 189
 combination door 64
 combination window 274
 combined footing 101
 combined sewer 223
 combined stresses 41, 163
 combplate 81
 combustible 88
 combustible construction 51
 combustion air 121
 comfort envelope 120
 comfort zone 120
 commercial bronze 175
 commodity 10
 common alloy 175
 common bond 20
 common brass 175
 common brick 18
 common dovetail 141
 common lap 212
 common logarithm 229
 common nail 82
 common rafter 210
 commons 139
 common vent 200
 communicate 58
 communion table 35
 compact fluorescent lamp 145
 compaction 225
 complementary color 39
 complexity 54
 compluvium 137
 components of a force 96
 composite column 203
 composite decking 93
 Composite order 181
 composite panel 284
 composite pile 102
 composite truss 261
 composite wall 156
 composition 53
 compound column 203
 compressibility 162
 compression 162
 compression gasket 113
 compression member 238
 compression molding 192
 compression reinforcement 202
 compression splice 203
 compression test 44, 162
 compressive force 162
 compressive refrigeration 124
 compressive strain 162
 compressive stress 162
 compressor 124
 concatenation 55
 concave 110
 concave joint 155
 concealed grid 31
 concealed hinge 115
 conceive 58
 concentrated load 151
 concentric 110
 concentric tendon 207
 concept 59
 conception 67
 concrete 42
 concrete block 160
 concrete brick 160
 concrete masonry unit 160
 concrete mixer 46
 concrete nail 82
 concurrent forces 96
 condensate 176
 condensation 176
 condense 161
 condenser 124
 condominium 139
 conduction 118
 conductivity 74
 conductor 78
 conduit 78
 cone 45
 cone bolt 45
 cone of vision 72
 configurationism 265
 Confucianism 129
 congé 185
 congruent 109
 conical vault 263
 conic section 111
 conifer 276
 connected load 77
 connection 59
 connector 79
 conoid 220
 consistency 44
 console 186
 consolidation 46, 100
 constancy 265
 constant-air-volume system 126
 construction 48, 49, 50
 construction class 51
 construction documents 50
 construction drawings 68
 construction joint 178
 construction load 151
 construction manager 48
 construction type 51
 Constructivism 135
 consultant 48
 contact pressure 100
 content 53
 continental seating 257
 continuity 54, 265
 continuity of outline 72
 continuous beam 17
 continuous footing 101
 continuous hinge 115
 continuous plate 194
 continuous slab 204
 continuous vent 200
 contour 66
 contour drawing 66
 contour interval 69
 contour line 69
 contract 49
 contract documents 50
 contract drawings 68
 contraction joint 178
 contract limit 221
 contractor 48

- ul style="list-style-type: none; padding-left: 0;">
- contradiction 54
- contrast 54
- contrast ratio 148
- contributory area 241
- contrive 58
- control joint 178, 190
- control-joint block 160
- controlled fill 222
- control panel 80
- convection 118
- convector 123
- convenience outlet 79
- convergence 73, 264
- conversion burner 121
- conversion table 166
- convex 110
- cool 39
- coolant 124
- cooling degree-day 124
- cooling load 124
- cooling medium 124
- cooling tower 125
- co-op 139
- cooperative 139
- cooperative apartment 139
- coordinate 108
- coordinator 116
- copal 187
- coped joint 140
- copestone 159
- coping 266
- coping block 160
- coplanar forces 96
- copolymer 192
- copper 175
- copper roofing 214
- corbel 155
- corbel arch 14
- corbeling 155
- corbel vault 262
- corbie gable 159
- corblestep 159
- cord 79
- cordon 98, 159
- cone 65, 75, 160, 225, 283
- coreboard 191
- core test 44
- Corinthian order 181
- cork tile 95
- corner bead 190
- corner block 160
- corner board 268
- corner brace 267
- corner lath 190
- corner post 267
- corner reinforcement 190
- cornice 179, 186
- cornice lighting 147
- cornice return 213
- corona 179
- coronet 186
- corporation cock 196
- corporation stop 196
- correction line 246
- corridor 216
- corrosion 171
- corrugated fastener 82
- corrugated metal 172
- corrugated roofing 214
- cortile 26
- cosecant 109
- cosine 109
- cosine law 142
- cotangent 109
- coulomb 28
- counterbore 84
- counterbrace 259
- counterflashing 177
- counterfort 270
- counterlight 150
- counterpoint 54
- counterpoise 55
- counterscarp 98
- countersink 83
- counterweight 80
- couple 96, 211
- couple-close 211
- coupling 199
- course 155, 246
- coursed ashlar 158
- coursed rubble 158
- court 26
- courtyard 26
- covalent bond 161
- cove 30, 185
- cove ceiling 30
- cove lighting 147
- cover 202
- coverage 187, 212
- covering power 187
- cover plate 173
- cowl 87
- C-plugged grade 282
- CPM 49
- cracked section 202
- cracking load 202
- cradle vault 263
- cramp iron 158
- crawlspace 23
- crazing 47
- creative imagination 59
- creativity 59
- creep 165
- cremorne bolt 273
- crenel 99
- crenelated 99
- crenelle 99
- creosote 280
- crepidoma 250
- crescent 139
- crescent truss 261
- crib 270
- cribbling 270
- cribwork 270
- cricket 209
- cripple 267
- cripple jack 211
- criterion 58
- critical angle 233
- critical buckling load 40
- critical buckling stress 40
- critical density 225
- critical height 270
- critical section 202
- critical void ratio 225
- crocket 37
- cromlech 248
- crook 278
- cross 183, 199
- crossband 65, 283
- cross bracing 243
- crossbridging 92
- cross-contour drawing 66
- crosscut 278
- cross formée 183
- cross-garnet 115
- cross grain 278
- crosshatching 66
- crossing 36
- cross-lap joint 141
- crosslight 150
- crossover 199
- cross section 70
- cross tee 31
- cross vault 263
- cross ventilation 127
- crowfoot 68
- crown 12, 276
- crown glass 112
- crown molding 186
- crown post 261
- crown tile 214
- crowstep 159
- cruck 210
- crushed gravel 224
- crushed rock 224
- crushed stone 224
- crypt 37
- crystal 161
- cube 111
- cubic measure 166
- cubism 135
- cul-de-four 61
- cull 18
- cult temple 249
- culture 128
- culvert 223
- cup 278
- cupola 61
- curb 208
- curb box 196
- curb cock 196
- curb cut 221
- curb roof 208
- curb stop 196
- cure 47
- current 74
- curtail 235
- curtail step 235
- curtain 98
- curtain wall 269
- curve 110
- Curvilinear style 132
- curvilinear tracery 275
- cushion 102

- cushion block 102
 cushion head 102
 cushion rafter 210
 cusp 110, 275
 cusplation 275
 cut and fill 222
 cut-and-mitered string 235
 cutaway 71
 cut nail 82
 cutoff 223
 cutoff stop 65
 cut pile 95
 cut stone 237
 cut string 235
 cycloid 110
 cyclone cellar 23
 cyclopean 158
 cyclostyle 251
 cylinder 111, 116
 cylinder glass 112
 cylindrical surface 219
 cyma 185
 cyma recta 185
 cyma reversa 185
 cymatium 179, 181
 cyrtostyle 251
- Dd**
- Dacron 193
 dado 140, 179, 268
 dado joint 140
 dagoba 253
 daibutsu 255
 damp 245
 damp check 177
 damp course 177
 damper 87, 125
 damping 152
 damping mechanism 245
 dampproofing 176
 dancette 184
 dancing step 234
 dancing winder 234
 dap 140
 darby 47
 dark 38
 Dark Ages 130
 dash-bond coat 28
 dashed line 68
 dash-tracweled finish 189
 datum 58, 247
 daubing 189
 day 271
 daylight 150
 daylight factor 150
 daylighting 150
 dead 76, 230
 dead-air space 119
 deadbolt 116
 dead knot 278
 dead load 151
 deadlock 116
 deadman 270
 dead shore 222
 deambulatory 37
- decastyle 179
 decay 278
 decay rate 230
 decibel 229
 deciduous 276
 deck 25, 93
 decking 93, 279
 deconstruction 135
 decorated shed 135
 Decorated style 132
 decorative plywood 283
 deep 38
 deep beam 203
 deep foundation 102
 defector sheave 80
 deflection 15
 deformation 164
 deformed bar 202
 degree 108
 degree-day 121
 degree of freedom 105
 degree of indeterminacy 105
 degree of redundancy 105
 delight 10
 deluge system 90
 demand factor 77
 demirelief 182
 demountable partition 266
 density 167
 dentil 181
 dentil band 184
 depressed tendon 207
 descriptive geometry 69
 descriptive specification 50
 design 52, 58
 design-build 48
 design concept 59
 design drawing 67
 design load 240
 design principle 54
 design process 58
 design value 280
 design wind pressure 154
 design wind velocity 154
 de Stijl 135
 detached dwelling 138
 determinate 105
 develop 58
 developed length 199
 developer 48
 devise 58
 dewater 221
 dew point 120
 dew-point temperature 120
 D-grade 282
 diaconicon 35
 diagonal 73, 109, 261
 diagonal bracing 243
 diagonal grain 278
 diagonal point 73
 diagonal rib 263
 diagonal sheathing 268
 diagonal slating 213
 diagonal tension 203
 diagonal vanishing point 73
- diagram 53
 diameter 110
 diamond matching 283
 diamond point 82
 diaper 184
 diaphragm 243
 diastyle 179
 diazoma 256
 dicalcium silicate 42
 die 169, 179
 die casting 169
 dielectric 78
 dielectric strength 78
 differential leveling 247
 differential settlement 100
 diffracted sound 230
 diffraction 143
 diffuse 143
 diffuser 122, 146
 diffusion 143
 dimension line 68
 dimension lumber 279
 dimension shingles 213
 dimension stone 237
 dimensional stability 165
 dimetric projection 71
 diminishing course 213
 dimmer 79
 dimmer switch 79
 dipteral 251
 direct current 75
 direct glare 148
 direct-indirect lighting 148
 direction 55
 direct lighting 148
 Directoire style 133
 direct placement 46
 direct return 123
 directrix 111
 direct sound 230
 direct stress 162, 259
 disability glare 148
 discharge lamp 145
 discharging arch 266
 discomfort glare 148
 discontinuous construction 232
 discontinuous diaphragm 244
 discontinuous shear wall 244
 discrimination 264
 displuviate 137
 disposal 198
 disposal field 201
 disposer 198
 distance point 73
 distance separation 89
 distributed load 151
 distribution box 201
 distribution cap 168
 distribution line 201
 distribution of base shear 153
 distribution panel 77
 distribution pipe 201
 distribution rib 204
 distyle 179
 distyle in antis 251

- ul style="list-style-type: none; padding-left: 0;">
- diversion box 201
- diversity factor 77
- dodecahedron 111
- dodecastyle 179
- dog-leg stair 234
- dogtooth 184
- dogtrot 138
- dolly 86
- Dolly Varden siding 268
- dolmen 248
- dolomite 236
- dome 60, 205
- doujon 99
- door 62
- door bevel 63
- door buck 63
- door chain 114
- door check 114
- door clearance 63
- door contact 81
- doorframe 63
- door interlock 81
- doorjamb 63
- doorknob 116
- door opener 62
- doorplate 114
- door pull 114
- doorskin 28
- doorstop 63, 114
- Doppler effect 228
- Doric cyma 185
- Doric order 180
- dormer 209
- dormer window 274
- dosing chamber 201
- dosseret 36
- dotted line 68
- dou 254
- double-acting door 62
- double-acting hinge 115
- double angle 172
- double-bevel weld 86
- double-cable structure 29
- double complementary 39
- double-corner block 160
- double-curvature structure 29
- double doors 62
- double-egress frame 65
- double-extra-strong pipe 172
- double-framed roof 210
- double glazing 113
- double grid 239
- double-hung window 272
- double jack rafter 211
- double-L stair 234
- double overhanging beam 17
- double-return stair 234
- double roof 210
- double-strength glass 112
- double tee 206
- double-vee weld 86
- doubling course 212
- dougong 254
- dovetail 141
- dovetail halving 141
- dovetail hinge 115
- dovetail joint 141
- dowel 85, 178
- dowel pin 85
- downdraft 87
- downfeed distribution system 197
- downlight 147
- downspout 209
- draft 58, 67, 87, 237
- drafted margin 237
- drafting 68
- draft stop 89
- dragged finish 189
- dragon beam 211
- dragon piece 211
- dragon tile 211
- drain 200
- drainage mat 176
- drainage system 200
- drainage tile 201
- drainfield 201
- drainspout 209
- drain tile 201
- draped tendon 207
- Dravidian 130
- drawbore 141
- drawbore pin 141
- drawbridge 99
- drawdown 196
- drawing 66
- drawn finish 169
- drawn glass 112
- dress circle 258
- dressed dimension 277
- dressed lumber 277
- dressed size 277
- dressed stone 237
- dressling 271
- dressling room 258
- drift 13, 86, 152
- driftbolt 82
- drift index 153
- drift limitation 153
- drift pin 82, 86
- drip 271
- drip cap 271
- drip edge 212
- drip molding 271
- dripstone 159
- drive band 102
- drivescrew 82
- drive shoe 102
- driving sheave 80
- dromos 248
- drop 122, 180, 263
- drop arch 14
- drop ceiling 31
- drop chute 46
- droplight 147
- drop panel 205
- dropped ceiling 31
- dropped girt 107
- drop-point slating 213
- drop siding 268
- drop stage 257
- drop tee 199
- drop window 272
- drum 61, 180
- drum trap 198
- drum wall 227
- dry-bulb temperature 120
- dry glazing 113
- drying oil 187
- drying shrinkage 47
- dry mix 44
- dry-pack 174
- dry-pipe system 90
- dry-press process 18
- dry return 123
- dry rot 278
- dry-shake finish 47
- dry standpipe 90
- drywall 191
- drywall frame 65
- dry well 223
- dual-duct system 126
- dual system 244
- dual vent 200
- duct 78, 122
- ductility 164
- ducting 122
- duct liner 122
- ductwork 122
- dumbwaiter 80
- dungeon 99
- duodecastyle 179
- duomo 132
- duplex 138, 139
- duplex apartment 139
- duplex house 138
- duralumin 175
- duramen 276
- duration of load factor 280
- Dutch bond 20
- Dutch Colonial 138
- Dutch door 64
- Dutch lap 212
- dwarf wall 267
- dye 187
- dynamic fit 57
- dynamic load 151
- dynamic pile formula 102
- dynamics 58, 97
- dynamic wind pressure 154

Ee

- ul style="list-style-type: none; padding-left: 0;">
- Early Christian Architecture 130
- Early English style 132
- Early French style 132
- Early Renaissance 132
- early wood 276
- earthenware 32
- earth pressure 151
- earthquake 152
- earthquake load 152
- earth tieback wall 270
- earthwork 221
- eased edge 140
- easement 140, 221
- eaves 209

- eaves course 214
- eaves flashing 212
- eaves trough 209
- E bulb 145
- eccentric 110
- eccentric bracing 244
- eccentric force 162
- eccentricity 41
- eccentric load 162
- eccentric tendon 207
- echinus 180, 181
- echo 230
- eclectic 134
- eclecticism 134
- economy 58
- economy brick 19
- economy wall 156
- ectype 59
- edge 111, 218
- edge block 113
- edge clearance 113
- edge distance 84
- edge grain 278
- edge joint 140
- edger 47
- edifice 22
- effective area of concrete 202
- effective area of reinforcement 202
- effective depth 202
- effective length 17, 41
- effective length factor 41
- effective prestress 206
- effective span 15
- effective temperature 120
- efficacy 144
- efficiency apartment 139
- efflorescence 18
- effluent 201
- egg and dart 181
- egg and tongue 181
- eggcrate 146
- eggshell 187
- egg stone 236
- Egyptian architecture 128
- Egyptian Gorge 249
- eightpenny nail 82
- el 26, 199
- elastic deformation 164
- elastic design 240
- elasticity 164
- elastic limit 164
- elastic modulus 164
- elastic range 164
- elastomer 193
- elastomeric 215
- elastomeric roofing 215
- elbow 199
- electrical metallic tubing 78
- electric arc 86
- electric cell 74
- electric charge 74
- electric elevator 80
- electric furnace 121
- electric heat 123
- electricity 74
- electric motor 75
- electrode 74
- electrolysis 171
- electrolyte 74
- electrolytic protection 171
- electromotive force 74
- electron 161
- electroplate 171
- electrovalent bond 161
- element 161
- elevation 70, 247
- elevator 80
- elevator car 81
- elevator car safety 80
- elevator pit 80
- elevator shaft 80
- ell 26, 199
- ellipse 110, 111
- ellipsoid 111
- elliptical stair 234
- elliptical surface 220
- elliptic paraboloid 219
- elongation 162
- embattlement 99
- embedded space 218
- embedment length 202
- emboss 182
- embrasure 99, 159
- emergency generator 75
- emergency lighting 91
- emissivity 112, 119
- emphasis 54
- Empire style 133
- empty-cell process 280
- enamel 32, 187
- encased knot 278
- encelnte 99
- encroachment 221
- end-bearing pile 102
- end distance 84
- end grain 278
- end joint 140
- endlap 212
- end-lap joint 141
- end-nail 82
- endurance ratio 165
- endwall 223
- energy 167
- energy code 51
- energy efficiency rating 124
- enfilade 216
- engage 59
- engaged column 266
- engawa 137
- engineer 48
- engineered brick 19
- engineered grade 282
- engineering 11
- engineer's chain 247
- English bond 20
- English cross bond 20
- engrave 182
- enneastyle 179
- entablature 179
- entasis 180
- enthalpy 120
- entrained air 42
- environmental design 10
- envision 59
- EPDM 215
- epicenter 152
- epinaos 250
- epoxy mortar 157
- epoxy resin 193
- épure 67
- equal leg angle 172
- equal loudness contour 229
- equiangular 109
- equilateral 109
- equilateral arch 14
- equilibrant 97
- equilibrium 55, 97
- equilibrium diagram 97
- equilibrium moisture content 277
- equinox 226
- equipole 55
- equivalent load 151
- equivalent round 172
- equivalent thickness 160
- ER bulb 144
- erect 49
- erection bracing 151
- erection stress 151
- ergonomics 57
- escalator 81
- escarp 98
- esconson 63
- escutcheon 116
- esonarthex 35
- esquisse 67
- esthetics 10
- Etruscan architecture 129
- Euclidean geometry 108
- Euclidean space 217
- Euler buckling load 40
- eurythmy 56
- eustyle 179
- evaluate 58
- evaluation 58
- evaporate 161
- evaporative cooling 120
- evaporator 124
- evergreen 276
- evolute 110
- excavation 221
- excelsior 119
- exedra 35
- exfoliation 43
- exhaust air 125
- exhaust fan 127
- exhedra 35
- existing grade 222
- exit 91
- exit access 91
- exit corridor 91
- exit court 91
- exit discharge 91
- exit door 91
- exit light 91
- exit passageway 91

- exit stairway 91
exonarthex 35
expanded clay 43
expanded metal 172
expanded-metal lath 190
expanded plastic 119
expanded shale 43
expanded slate 43
expanded view 71
expansion bend 197
expansion bolt 84
expansion joint 178
expansion joint cover 178
expansion loop 197
expansion screed 190
expansion shield 84
expansion sleeve 84, 178
expansion valve 124
expansivity 165
exploded view 71
explosive rivet 86
exposed aggregate finish 47
exposed grid 31
exposure 212
exposure 1 282
exposure 2 282
exposure condition 154
exposure durability 282
expression 128
extended plenum system 122
extended-service lamp 144
extensibility 178
extension bolt 116
extension casement hinge 273
extensometer 162
exterior 282
exterior angle 109
exterior exit 91
exterior exit balcony 91
exterior panel 205
exterior plywood 282
exterior wall 266
external reflected component 150
external wall 266
extra-strong pipe 172
extrados 12
extruded polystyrene 119
extrusion 169
eye 264
eyebolt 84
eyebrow 209
eyelid 99
- Ff**
fabric 53
fabricate 50
facade 24
face 98
face brick 18
face clearance 113
faced block 160
faced wall 156
face glazing 113
face-nail 82
faceplate 79, 116
face putty 113
face shell 160
face string 235
face width 279
facing 156
facing brick 18
factored load 240
factored load design 240
factor of safety 240
factory lumber 279
Fahrenheit scale 117
fall 200
false front 24
falsework 49
fan 127
fan-coil unit 126
fancy 59
fanlight 63
fan truss 261
fan vault 263
fascia 181, 213
fascia board 213
fastening 82
fastest-mile wind speed 154
fast-pin hinge 115
fast-track 49
fatigue 165
fatigue limit 165
fatigue ratio 165
fat mix 157
faucet 197
fault 76, 152
feasibility study 49
feather 140
Federal style 133
feedback 58
feeder 75
feint 177
female 199
fenestration 24
ferrocement 202
ferroconcrete 202
ferrous metal 170
ferrule 281
Fertile Crescent 128
festoon 184
fiber 276
fiberboard 119, 284
fiberboard sheathing 119
Fiberglas 119
fiberglass 119
fiberglass-reinforced concrete 202
fiberglass-reinforced plastic 193
fiberglass shingle 212
fiber-saturation point 277
Fibonacci series 56
field 155
fielded panel 268
field of vision 264
fieldstone 237
field tile 214
figure 109, 265, 283
figured glass 112
figure-ground 265
filament 144
fillgree 182
fill 222
filler 192
filler metal 86
filler plate 174
fillet 181, 185
filleting 177
fillet weld 86
fillister head 83
film 192
filter 125
filter fabric 176
final prestress 206
fine aggregate 43
fine grading 222
fine texture 278
finger joint 140
finial 37
finish coat 187, 188
finish floor 92
finish flooring 94
finish grade 222
finish hardware 114
finishing 47
finishing nail 82
finish string 235
Fink truss 261
fin tube 123
fire-alarm system 90
fire area 89
fire assembly 89
firebox 87
firebreak 89
firebrick 18
fire clay 18
fire curtain 257
firecut 93
fire damper 89
fire-detection system 90
fire door 89
fire escape 91
fire hazard 88
fire hose 90
fire hydrant 90
fire load 88
fireplace 87
fireplug 90
fireproofing 88
fire pump 90
fire-rated 88
fire-resistance rating 88
fire-resistive 88
fire-retardant paint 187
fire-retardant wood 280
fire safety 88
fire screen 87
fire separation 89
firestop 267
fire wall 89
fire window 89
fire zone 89
firing 32
firmness 11
first floor 23
fish joint 140

- fishplate 140
- fixed arch 13
- fixed connection 242
- fixed-end beam 17
- fixed-end connection 242
- fixed frame 104
- fixed joint 242
- fixed light 273
- fixed sash 273
- fixture drain 200
- fixture unit 197
- Flamboyant style 132
- flame finish 237
- flame retardant 88
- flame-spread rating 88
- flange 173
- flange angle 173
- flank 98
- flanking path 232
- flap hinge 115
- flare header 20
- flashing 18, 177
- flash point 88
- flat 139, 187, 257
- flat arch 14
- flat grain 278
- flat head 83
- flat-joint pointing 155
- flat plate 205
- flat roof 208
- flat slab 205
- flat slicing 283
- flat truss 261
- flat use factor 280
- flèche 37
- Flemish bond 20
- Flemish cross bond 20
- Flemish diagonal bond 20
- fleur-de-lis 184
- flexible 238
- flexible duct 122
- flexible metal conduit 78
- flexure formula 16
- flier 234
- flies 257
- flight 233
- fitch 283
- fitch beam 281
- fitch girder 281
- fitch plate 281
- float 47
- float finish 47, 189
- float glass 112
- floating coat 188
- floating foundation 101
- float switch 79
- float valve 198
- flocked carpet 95
- flood lamp 147
- flood level 198
- floodlight 147
- floor 23, 92
- floor anchor 85
- floor cavity 149
- floor closer 114
- floor covering 95
- floor framing 92
- flooring nail 82
- floor plan 69
- Florentine mosaic 182
- flowing tracery 275
- flow pressure 197
- flow rate 198
- flue 87
- flue lining 87
- fluid 161
- fluid-applied roofing 215
- fluid ounce 166
- fluorescence 145
- fluorescent lamp 145
- flush bead 268
- flush bolt 116
- flush door 65
- flush frame 65
- flush girt 107
- flush glazing 113
- flush joint 140, 155
- flushometer valve 198
- flush panel 268
- flute 180
- fluting 180
- flutter 154, 230
- flux 86
- flux-cored arc welding 86
- fly ash 42
- flying buttress 262
- flying form 45
- flying shore 221
- fly loft 257
- fly rafter 211
- foamed plastic 119
- foamed-in-place insulation 119
- foam glass 119
- foam rubber 193
- focus 217
- focusing 230
- foil 275
- foil-backed gypsum board 191
- folded plate 194
- folding casement 273
- folding door 62
- foliated 184
- foliation 275
- folly 27
- font 35
- foot 166
- foot-candle 142
- foot cut 211
- footing 100
- foot-lambert 142
- footlights 257
- footpace 234
- foot-pound 167
- force 96
- force arm 96
- forced warm-air heating 122
- forecourt 25
- foreground 265
- foreshortening 73
- forge 169
- form 45, 52, 53
- form-active structure 238
- form decking 93
- formeret 263
- Formica 193
- form liner 45
- form nail 82
- form tile 45
- formula weight 161
- formwork 45
- fortification 98
- forum 251
- foundation 100
- foundation drain 176
- foundation investigation 225
- foundation wall 101
- Four Noble Truths 253
- four-pipe system 126
- four-way switch 79
- fox bolt 84
- foxtail wedge 141
- fox wedge 141
- foyer 258
- fractable 159
- fracture 164
- frame 104
- framed connection 174
- framed tube 245
- frame house 267
- frame system 244
- framework 106
- framing 106
- framing anchor 85
- framing plan 69
- Franklin stove 121
- free-body diagram 97
- free fall 46
- freehand drawing 66
- freestone 237
- freight elevator 80
- French arch 14
- French door 64
- French drain 223
- French window 273
- frequency 228
- fresco 182
- fresh air 125
- fresh-air inlet 200
- Fresnellens 146
- fret 184
- frictional damping 245
- friction pile 102
- frieze 179, 186
- frit 32
- front 27
- front hearth 87
- frontispiece 24
- front of the house 258
- frost boil 100
- frost heave 100
- frostline 100
- frustum 111
- fuel-contribution rating 88
- fulcrum 97
- full-cell process 280

- full frame 107
- full-penetration weld 86
- full-surface hinge 115
- function 58
- functional dimension 57
- functional grouping 216
- Functionalism 135
- fundamental 228
- fundamental frequency 228
- fundamental period of vibration 152
- funicular arch 13
- funicular curve 28
- funicular polygon 28
- funicular shape 28
- funicular structure 28
- funicular truss 259
- furnace 121
- furring 190
- fuse 76
- fusible alloy 76
- fusible link 89
- fusible metal 76
- fusion-bonded carpet 95
- Gg**
- gabion 270
- gable 208
- gable dormer 209
- gable roof 208
- gable wall 266
- gable window 274
- gadroom 185
- gage 172
- gain 115, 141
- galilee 37
- galleria 27
- gallery 36, 216, 258
- gallet 158
- gallon 166
- galvanic cell 74
- galvanic corrosion 171
- galvanic series 171
- galvanize 171
- galvanized iron 171
- gambrel roof 208
- garden apartment 139
- garden-wall bond 20
- garderobe 99
- gargoyle 37
- garret 158
- garth 37
- gas 161
- gas furnace 121
- gasket 199
- gas welding 86
- gate contact 81
- gate valve 199
- gathering 122
- auge 19, 95, 172, 212
- auged plaster 188
- auging plaster 188
- autama Buddha 253
- azebo 27
- bulb 144
- general contractor 48
- general diffuse lighting 148
- general lighting 148
- general purpose circuit 77
- generator 75, 111, 124
- generatrix 111
- geodesic dome 60
- geometric 52
- geometrical stair 234
- Geometric style 132
- geometric tracery 275
- geometry 108
- Georgian architecture 133
- geotechnical 225
- geotextile 176
- gestalt 265
- Gestalt psychology 265
- gesture 66
- gesture drawing 66
- gfrc 202
- gib door 64
- gingerbread 134
- girder 106
- girt 107, 269
- glacis 98
- glare 148
- glass 112
- glass block 112
- glass brick 112
- glass door 64
- glassed surface 237
- glass mullion system 113
- glass size 113
- glass wool 119
- glaze 32
- glaze coat 187
- glazed wall tile 33
- glaze-fired 32
- glazier's point 113
- glazing 113
- glazing bar 271
- glazing bead 113
- glazing brad 113
- glazing compound 113
- glazing size 113
- glazing stop 113
- glazing tape 113
- globe valve 199
- gloss 187
- glory 183
- glued-laminated timber 281
- glulam 281
- gneiss 236
- godroom 185
- gold bronze 175
- golden mean 56
- golden section 56
- gong 254
- good grade 283
- gooseneck lamp 147
- gopuram 253
- gorge 98
- Gothic arch 14
- Gothic architecture 132
- Gothic Revival 134
- government system 246
- grab bar 198
- gradation 55
- grade 222
- grade beam 101
- graded aggregate 43
- grade line 222
- grademark 280
- Grade N 160
- grade stake 222
- gratestamp 282
- grade strip 45
- Grade S 160
- gradin 256
- gradine 256
- grading plan 69
- graffiti 182
- graffito 182
- grain 237, 278
- gram 167
- gram calorie 117
- grand tier 258
- granite 236
- granular material 225
- graphic 73
- graphic scale 69
- gravel 224
- gravel drain 176
- gravel stop 215
- gravity 167
- gravity hinge 115
- gravity wall 270
- gravity water system 197
- gray 39
- gray scale 38
- grease interceptor 201
- grease trap 201
- great circle 60
- great hall 99
- Great Wall of China 129
- Greek architecture 129
- Greek cross 183
- Greek temple 250
- Greek theater 256
- green 157
- Greenfield conduit 78
- green room 258
- grid 68, 101, 257
- gridiron 257
- grid organization 218
- grid structure 195
- griffe 183
- griffin 183
- grillage 101
- grille 122
- grisaille 66
- groin 263
- groin rib 263
- groin vault 263
- grommet 78
- groove weld 86
- gross cross-sectional area 160
- grotesque 183
- ground 76, 190, 265
- ground acceleration 152
- ground beam 101

- groundbreaking 221
- ground coat 187
- ground color 187
- grounded conductor 76
- ground fault 76
- ground-fault interrupter 76
- ground floor 23
- grounding electrode 76
- grounding outlet 79
- grounding plug 79
- ground light 150
- ground line 72
- ground plane 72
- ground slab 101
- groundwater 223
- ground wire 76
- group number 282
- grout 157
- grouted frame 65
- grouted masonry 157
- grout lift 157
- grout pour 157
- growth ring 276
- gryphon 183
- gudgeon 115
- gulde meridian 246
- gulde rail 80
- gullloche 184
- gula 185
- gulou 254
- Gunitite 46
- Gunter's chain 247
- Gupta 130
- gusset 261
- gust factor 154
- gutta 180
- guttae band 180
- gutter 209
- gutter hanger 209
- guy cable 29
- gypsum 188
- gypsum board 191
- gypsum lath 190
- gypsum-perlite plaster 188
- gypsum plaster 188
- gypsum sheathing 191
- gypsum-vermiculite plaster 188

- Hh**
- halden 255
- half-blind dovetail 141
- half-lap joint 141
- half-mortise hinge 115
- halfpace landing 234
- half relief 182
- half round 185
- half-round slicing 283
- halfspace landing 234
- half-surface hinge 115
- half-timber 107
- half-turn stair 234
- hall 216
- hallway 216
- halo 183
- halogen lamp 144
- halved joint 141
- hammer beam 210
- hammer-beam roof 210
- hammer brace 210
- hammer post 210
- hand 114
- handrail 233
- handsplit-and-resawn shake 213
- hanger 85
- Hanging Gardens of Babylon 129
- hanging gutter 209
- hanging step 235
- hanging stile 64, 272, 273
- haptic 57
- Harappa 128
- hardboard 284
- hard-burned 32
- hard finish 188
- hard light 148
- hardness 165
- hard steel 170
- hardware 188
- hardware 114
- hardware cloth 172
- hard water 197
- hardwood 276
- harmonic 228
- harmonic motion 152
- harmonic progression 56
- harmonic series 56
- harmony 54
- harped tendon 207
- hashira 255
- hatching 66
- Hather 249
- Hathor-headed 249
- Hathoric 249
- haunch 12, 17
- haunched tenon 141
- head 63, 197, 213
- header 19, 92
- header block 160
- head flashing 271
- heading course 20
- head joint 155
- headlap 212
- headroom 233
- headwall 223
- head bead 113
- hearing 229
- hearing loss 229
- hearth 87
- heartwood 276
- heat 117
- heat-absorbing glass 112
- heat capacity 117
- heat content 120
- heat exchanger 124
- heating degree-day 121
- heating load 121
- heating medium 121
- heat of condensation 161
- heat of fusion 161
- heat of hydration 47
- heat of solidification 161
- heat of vaporization 161
- heat pump 124
- heat-resistant paint 187
- heat sink 124
- heat-strengthened glass 112
- heat-treatable alloy 175
- heat treatment 169
- heavy-timber construction 51
- hectare 166
- heel 259
- Helan 131
- height 109
- height factor 154
- helicline 233
- hellodon 150
- helix 110, 181
- Hellenic 129
- Hellenistic 129
- heptastyle 179
- hermetic 112
- herringbone 184
- herringbone matching 283
- hertz 228
- hexagon 109
- hexagram 183
- hexahedron 111
- hexastyle 179
- hexhead 84
- hiding power 187
- HID lamp 145
- hierarchy 54
- high altar 37
- high chair 45
- high-density overlay 282
- high gloss 187
- high-intensity discharge lamp 145
- high key 66
- high-lift grouting 157
- highlight 70, 148
- high-output lamp 145
- high polymer 192
- high-pressure laminate 193
- high-pressure sodium lamp 145
- high-range sealant 178
- high relief 182
- High Renaissance 133
- high-rise 22
- high-strength bolt 174
- high-strength low-alloy steel 170
- high-tech 135
- high-tension bolt 174
- high-velocity duct 126
- high-voltage 75
- Hinduism 253
- hinge 115
- hinged frame 104
- hinge joint 242
- hinge stile 64
- hip 209
- hip jack 211
- hipped gable 208
- hipped roof 208
- hip rafter 211
- hip roof 208
- hip tile 214

- history 128
- Hitite architecture 129
- hogan 136
- hoisting cable 80
- hoisting machinery 80
- hoistway 80
- hoistway door 80
- holddown 85
- holddown clip 214
- hollow-backed 94
- hollow-core door 65
- hollow-core slab 206
- hollow masonry unit 160
- hollow-metal door 65
- hollow-metal frame 65
- hollow tile 34
- hollow unit masonry 157
- Holy Ark 250
- holy of holies 250
- homogeneous 54
- honden 255
- hondo 255
- honed finish 237
- honeycomb 47
- honeycomb slating 213
- honeycomb work 252
- honeycomb ornament 184
- hood 87
- hood mold 274
- hook 202
- Hooke's law 164
- hoop force 60
- hoop line 60
- hopper 273
- hopper light 273
- hopper window 273
- horizon 224
- horizontal line 72
- horizontal 108
- horizontal circle 247
- horizontal diaphragm 243
- horizontal exit 91
- horizontal force factor 153
- horizontal furnace 121
- horizontally sliding window 272
- horizontal shearing stress 15
- horizontal torsion 153
- horn 271
- horse 189, 235
- horsed mold 189
- horsepower 167
- horseshoe arch 14
- hose bibb 197
- hosecock 197
- hospital light 273
- hospital stop 65
- hospital window 273
- hot 76
- hot-dip galvanizing 171
- hot-roll 169
- hot-rolled finish 169
- hot-water heating 123
- hot-working 169
- house 136
- house curtain 257
- housed joint 140
- house drain 200
- housed string 235
- houselights 257
- house sewer 200
- house storm drain 223
- house storm sewer 223
- house trap 200
- housing unit 139
- Howe 261
- H-pile 102
- HP-shape 172
- HPS lamp 145
- Hsia 128
- hue 38
- human engineering 57
- human scale 56
- humidifier 125
- humidity ratio 120
- hung sash 272
- hung-span 17
- hurricane anchor 85
- hurricane tie 85
- hut 136
- HVAC 125
- hydrant 90
- hydrated lime 157
- hydration 47
- hydraulic cement 42
- hydraulic elevator 81
- hydrogen bond 161
- hydronic heating 123
- hygrometer 120
- hypaethral 251
- Hypalon 215
- hypar 219
- hyperbola 110, 111
- hyperbolic paraboloid 219
- hyperboloid 220
- hypethral 251
- hypocenter 152
- hypostyle hall 249
- hypotenuse 109
- hypothesis 58
- hypotrachelium 180
- hysteresis damping 245
- li
- I-beam 173, 281
- ice dam 212
- icon 35
- iconostasis 35
- icosahedron 111
- idea 59
- idle sheave 80
- IES 150
- igloo 136
- igneous rock 236
- ignition point 88
- I-joist 281
- illumiance 142
- illumination 142
- image 59, 66
- imagination 59
- Imbrex 214
- Imbrication 184, 212
- Impact factor 151
- Impact insulation class 232
- Impact load 151
- Impact noise 232
- Impervious soil 225
- Implement 58
- Impluvium 137
- Importance factor 154
- Impost 12
- Impost block 36
- Inactive leaf 62
- In-and-out bond 158
- Inca architecture 132
- Incandescence 144
- Incandescent lamp 144
- Inch 166
- Inch-pound 167
- Incidence 143
- Inclined lift 81
- Increaser 199
- Indeterminate 105
- Indian architecture 129
- India rubber 193
- Indirect glare 148
- Indirect lighting 148
- Indirect waste pipe 200
- Individual circuit 77
- Individual vent 200
- Induction unit 126
- Inert gas 161
- Inert gas configuration 161
- Inert-gas shielded arc welding 86
- Inertia 97
- Inertia block 232
- Infiltration 118
- Inflection 58, 110
- Inflection point 17
- Inform 59
- Infrared 142
- Infrared lamp 144
- Ingenhook 87
- Ingot 169
- Initial prestress 206
- Initiation 58
- Injection molding 192
- Inlay 182
- Inner bark 276
- Inner hearth 87
- Instant-start lamp 145
- Instrument station 247
- Insulating concrete 43
- Insulating glass 112
- Insulating gypsum lath 190
- Insulator 78
- Insurance 48
- Intaglio 182
- Integrated ceiling 31
- Intensity 38
- Intercepting drain 223
- Intercolumniation 179
- Interdome 61
- Interference 231
- Intergrown knot 278
- Interior angle 109

- Interior design 10
 Interior panel 205
 Interior plywood 282
 Interior wall 266
 Interlacing arcade 36
 Interlocking joint 158
 Interlocking spaces 218
 Interlocking tile 214
 Intermediate column 40
 Intermediate rib 263
 Intermediate stiffener 173
 Internal damping 245
 Internal dormer 274
 Internal reflected component 150
 International style 135
 International System of Units 166
 Intersecting arcade 36
 Interstice 218
 Interstitial 239
 Intertriglyph 180
 Interval 55
 Intonaco 189
 Intrados 12
 Intuition 59
 Intumescent paint 88
 Inverse-square law 142
 Inverted tee 206
 Invisible hinge 115
 Involute 110
 Ion 161
 Ionic bond 161
 Ionic order 181
 IR lamp 144
 Iron 170
 Irregular grid 239
 Irregular mass 244
 Irregular structure 244
 Islam 131
 Islamic architecture 131
 Isobar 102
 Isocephalic 73
 Isochart 146
 Isolated footing 101
 Isolation joint 178
 Isolation mount 232
 Isolux line 146
 Isometric 71
 Isometric projection 71
 Isosceles 109
 Isostatic plate 194
 Isostatics 194
 Isotropic 162
 Italian Renaissance architecture 132
 Ivan 252
 Iwan 252

Jj
 Jack 206, 211
 Jack arch 14
 Jacking force 206
 Jack rafter 211
 Jalousie 273
 Jalousie window 273
 Jamb 63
 Jamb anchor 65
 Jamb block 160
 Jambstone 159
 Japanese architecture 131
 Japanese lacquer 187
 J-bolt 84
 Jerkinhead 208
 Jerusalem cross 183
 Jib door 64
 Joggle 140, 210
 Joggle piece 210
 Joggle post 210
 Joinery 140
 Joint compound 191
 Joint filler 178
 Joint movement 178
 Joint reinforcement 157
 Joint sealant 178
 Joint tape 191
 Joist 92
 Joist anchor 85
 Joist band 204
 Joist girder 173
 Joists and planks 279
 Joist slab 204
 Joule 167
 Joule's law 74
 Judas 114
 Judas hole 114
 Judgment 58
 Jugendstil 134
 Jumbo brick 19
 Junction box 78
 Jutty 107
 Juxtaposition 54

Kk
 Ka'aba 252
 Kairo 255
 Kakemono 137
 Kalamein door 65
 Kaolin 32
 Kasuga-zukuri 255
 Katsuogi 255
 K-brace 243
 Keel 185
 Keene's cement 188
 Keep 99
 Kelvin 117
 Kelvin scale 117
 Ken 137
 Kerf 31
 Kerfing 186
 Kern 41
 Kern area 41
 Kern point 41
 Key 66, 116, 141, 189, 263
 Key course 262
 Keyed joint 141
 Keyhole 116
 Key pattern 184
 Keystone 12
 Key switch 79
 Keyway 45, 116
 Khmer 253
 Kibla 252
 Kick plate 114, 235
 Kiln 18
 Kiln-dried 277
 Kilocalorie 117
 Kilogram 167
 Kilogram calorie 117
 Kilometer 166
 Kilowatt 74
 Kilowatt-hour 74
 Kinesthesia 57
 Kinetic theory of heat 165
 Kingbolt 261
 King closer 20
 King post 210
 King rod 261
 King truss 210
 Kip 167
 Kite winder 234
 Kiva 136
 Knee 105
 Knee brace 243
 Kneeler 159
 Knee wall 211
 Knife-blade fuse 76
 Knife switch 79
 Knitted carpet 95
 Knob-and-tube wiring 79
 Knockdown frame 65
 Knockout 114
 Knockout 78
 Knot 278
 Knuckle 115
 Kodo 255
 Kondo 255
 Koran 252
 Kraft paper 119
 Kung 254

Ll
 Label 159
 Labeled 89
 Labyrinth 37
 Lac 187
 Laced valley 212
 Lacing 174
 Lacquer 187
 Lacunar 30
 Ladder 233
 Lady chapel 37
 Lag 12
 Lag bolt 83
 Lagging 221
 Lag screw 83
 Laitance 46
 Lally column 174
 Lamassu 248
 Lambert 142
 Lambert's law 142
 Lamella 195
 Lamella roof 195
 Laminate 193
 Laminated block 94
 Laminated glass 112
 Laminated veneer lumber 284
 Lamp 144

- ul style="list-style-type: none; padding-left: 0;">
- lamp base 144
- lamp diameter 144
- lamp holder 144
- lamp lumens depreciation 149
- lamp socket 144
- lanal 25
- lancet arch 14
- landing 80, 234
- landing bread 235
- landscape architecture 11
- land survey 246
- lantern 61, 81
- lap dovetail 141
- lap joint 141
- lap siding 268
- lap splice 203
- lap weld 86
- large calorie 117
- Lascaux Cave 128
- lat 253
- latch 116
- latchbolt 116
- latent heat 117
- lateral bracing 41, 243
- lateral buckling 16
- lateral load 152
- lateral reinforcement 203
- lateral stability 243
- late wood 276
- latex 187
- latex paint 187
- lath 190
- Latin cross 183
- latitude 226
- lattice 27, 161
- lattice dome 60
- lattice truss tube 245
- lavatory 198
- law of action and reaction 97
- law of inertia 97
- law of reflection 143
- layer board 209
- L-beam 206
- leach 201
- lead 79, 175
- leader 68, 122, 209
- leader head 209
- lead wedge 177
- leaf 62, 115
- lean mix 157
- lean-to 208
- lean board 209
- ledger 267
- ledger beam 206
- ledger strip 267
- leeward 154
- left-hand 114
- left-hand reverse 114
- legal description 246
- lending institution 48
- length 166
- lengthening joint 140
- lens 146
- lenticular structure 28
- Lesbian cyena 185
- let in 267
- letter slot 114
- level 247
- leveling 247
- leveling rod 247
- lever 97
- lever handle 116
- lever operator 273
- lever tumbler 116
- lewis 156
- lewis bolt 84
- Lexan 192
- licensed 48
- lierne 263
- lift 45, 80
- lift-off hinge 115
- lift-slab construction 50
- lift stage 257
- light 142, 271
- light center length 144
- light frame construction 106
- light framing 279
- lighting 148
- lighting fixture 146
- light loss factor 149
- lightness 38
- lightning arrester 77
- lightning rod 77
- light strip 147
- lightweight block 160
- lightweight concrete 43
- light wood frame construction 51
- lignin 276
- lime 157
- lime mortar 157
- lime plaster 188
- lime putty 188
- limestone 236
- limit design 240
- limit switch 80
- line 52, 66, 108
- linear diffuser 31
- linear metal ceiling 31
- linear organization 218
- linear perspective 72
- linear source 147
- linear structure 238
- line drop 75
- line of action 96
- line of thrust 13
- line of travel 234
- line voltage 75
- lingdao 254
- link dormer 209
- linked spaces 218
- linoleum 95
- lintel 266
- lintel block 160
- lip 116
- liquefaction 153
- liquid-filled column 88
- liquid limit 225
- list 185
- liter 166
- live 76, 230
- live knot 278
- live load 151
- liwan 252
- load 77, 124, 151
- load balancing 207
- load-bearing partition 266
- load-bearing wall 266
- load combination 151
- load factor 77
- load-factor design 240
- load flow 241
- load reduction 151
- load strip 241
- load trace 241
- loom 224
- lobby 258
- local buckling 259
- local color 70
- local lighting 148
- local symmetry 55
- lock 116
- locking handle 273
- lock nut 84
- lock rail 64
- lock seam 214
- lockset 116
- lock stile 64
- lockstrip gasket 113
- lock washer 84
- loess 224
- loft 22, 36
- loft building 22
- log 277
- logarithm 229
- loge 258
- loggia 26
- Lombard architecture 131
- long-and-short work 158
- long column 40
- longhouse 136
- longitude 226
- longitudinal reinforcement 203
- longitudinal section 70
- longitudinal shrinkage 277
- long-life lamp 144
- lookout 211
- loom 79
- loophole 99
- loop pile 95
- loop vent 200
- loose-fill insulation 119
- loose fit 216
- loose-joint hinge 115
- loose knot 278
- loose-pin hinge 115
- loss of prestress 206
- lotus 184
- lotus capital 249
- loudness 229
- lounge 258
- louver 64, 107, 146
- louvered ceiling 31
- louvered door 64
- low-e glass 112
- low-emissivity glass 112

- low-lift grouting 157
 low-key 66
 low-pressure laminate 193
 low-pressure sodium lamp 145
 low relief 182
 low-rise 22
 lowside window 274
 low-voltage 77
 LPS lamp 145
 L sill 267
 L stair 234
 lucarne 61, 274
 Lucite 192
 lug sill 271
 lumber 277
 lumen 142
 lumen method 149
 luminaire 146
 luminaire dirt depreciation 149
 luminaire efficiency 146
 luminance 142
 luminous ceiling 31
 luminous flux 142
 luminous intensity 142
 lunette 61
 luthern 274
 lux 142
 lychnoscope 274
- Mm**
 machicolation 99
 machine beam 80
 machine bolt 84
 machine burn 278
 machine rating 280
 machine room 81
 machine screw 83
 machine stress-rating 280
 made ground 222
 madrasah 252
 Magen David 28
 magnesium 175
 magnetic north 246
 maldan 252
 mall slot 114
 main 122, 197
 main member 241
 main runner 31
 maintenance factor 149
 major axis 110
 maksoorah 252
 malachite 236
 male 199
 malleable 170
 malleable cast iron 170
 Maltese cross 183
 mandapa 253
 mandira 253
 mandorla 183
 mandrel 103
 manganese 175
 manganese bronze 175
 manhole 223
 manifold 122
 Mannerism 133
 mansard 208
 mansard roof 208
 mantel 87
 mantelpiece 87
 manteltree 87
 marble 236
 margin 212
 marigold window 36
 marine varnish 187
 marquee 258
 mascaron 183
 mashrebeeyeh 274
 masjid 252
 mask 183
 Masonite 284
 masonry 155
 masonry arch 12
 masonry cement 157
 masonry nail 82
 mass 67, 167, 217
 massing 52
 mast 29
 mastaba 249
 Masterformat 50
 mastic 95, 176
 mat 101
 matched lumber 279
 matching 283
 material 161
 matter 161
 Maurya 129
 maximum demand 77
 maximum overall length 144
 Maxwell diagram 260
 Mayan architecture 130
 meander 184
 mean radiant temperature 120
 means of egress 91
 measure 166
 measuring point 73
 Mecca 252
 mechanical bond 190
 mechanical drawing 68
 mechanical equipment room 125
 mechanical equivalent of heat 167
 mechanical property 162
 mechanical scale 56
 mechanical system 121
 mechanical ventilation 127
 mechanics 97
 medallion 183
 mediating space 218
 Medieval architecture 130
 medium-density overlay 282
 medium-range sealant 178
 medium steel 170
 meeting rail 272
 meeting stile 64, 273
 megalith 248
 megaron 250
 medan 252
 melamine resin 193
 melon dome 252
 membrane 168
 membrane stresses 219
 menhir 248
 mercury lamp 145
 mercury switch 79
 mercury-vapor lamp 145
 merge 27
 meridian 226
 meridional force 60
 meridional line 60
 merlon 99
 mesa 136
 mesh 172
 meshrebeeyeh 274
 Mesoamerica 130
 Mesopotamia 128
 metal 169
 metal decking 93
 metal lath 190
 metallic bond 161
 metal pan 31
 metamorphic rock 236
 metaphor 59
 meter 166
 metes and bounds 246
 metes-and-bounds survey 246
 method of joints 260
 method of sections 260
 metope 180
 metric sabin 231
 metric system 166
 metric ton 167
 mew 139
 meydan 252
 mezzanine 23, 258
 mezzo-relievo 182
 Microlam 284
 micrometer 166
 micron 166
 micropascal 229
 Middle Ages 130
 middle strip 204
 middle-third rule 41
 mid-rise 22
 mihrab 252
 mil 166
 mildew 176
 mild steel 170
 mile 166
 mill construction 51
 mill finish 169
 milliliter 166
 millimeter 166
 mill scale 169
 mimbar 252
 minaret 252
 mineral-insulated cable 78
 mineral spirits 187
 mineral wool 119
 Minoan architecture 128
 minor axis 110
 minster 132
 minute 108
 miscellaneous channel 172
 Mission Style 134
 mission tile 214
 mist coat 187

- ul style="list-style-type: none; padding-left: 0;">
- miter 140
- miter dovetail 141
- mitered halving 141
- miter joint 140
- mix design 44
- mixed grain 278
- mixer 197
- mixing box 126
- mixing faucet 197
- mixing ratio 120
- mixing valve 199
- mixing water 43
- Mixtec architecture 131
- moat 99
- Moche 129
- Mochica 129
- mock-up 58
- model 58, 59
- model code 51
- modeling 66
- modernism 135
- Modernismo 134
- modify 58
- modillion 181
- modular brick 19
- modular coordination 50
- modular design 50
- module 50, 56
- modulus of elasticity 164
- modulus of rigidity 163
- modulus of torsion 163
- Mogen David 183
- Mogul architecture 133
- Mohammed 131, 252
- Mohs' scale 165
- moisture content 277
- moisture expansion 165
- moisture protection 176
- mold 169, 185
- molded insulation 199
- molded polystyrene 119
- molding 185
- molding plaster 189
- mole 161
- molecular weight 161
- molecule 161
- Molly 84
- moment 96
- moment arm 96
- moment center 96
- moment connection 174
- moment diagram 17
- moment distribution method 105
- moment of inertia 16
- moment-resisting frame 104, 244
- Monel metal 214
- monochromatic 39
- monolith 248
- monolithic terrazzo 94
- monomer 192
- monopteron 251
- monotony 54
- Moor 131
- Moorish arch 14
- Moorish architecture 131
- mopboard 186
- mortar 157
- mortise 141
- mortise-and-tenon joint 141
- mortise hinge 115
- mortise joint 141
- mortise lock 116
- mortuary temple 249
- mosaic 182
- Moslem 252
- mosque 252
- motif 184
- motte 98
- motte and bailey 98
- mouchette 275
- moulding 185
- movable partition 266
- movement 55, 66
- moving load 151
- moving sidewalk 81
- moving staircase 81
- moving stairway 81
- Mozarabic style 131
- MR bulb 144
- M-shape 172
- Mudéjar 132
- Mudéjar architecture 132
- mudsill 267
- Muhammad 131
- Muhammadanism 131
- mullion 62, 268, 271
- multibay frame 105
- multifamily 139
- multifoil 275
- multi-outlet assembly 78
- multistory frame 105
- multizone system 126
- Munsell System 38
- muntin 64, 271
- Muntz metal 175
- muqarna 252
- mural 182
- mushroom construction 205
- musjid 252
- Muslim 252
- Muslim architecture 131
- mutule 180
- Mycenaean architecture 129
- Mylar 193
- Nn**
- Nagare-zukuri 255
- nail 82
- nailing strip 82
- nandaimon 255
- nanometer 142
- naos 250
- Nara 131
- narthex 35
- natural cement 42
- natural grade 222
- natural period of vibration 152
- natural rubber 193
- natural ventilation 127
- nautical mile 166
- naval brass 175
- nave 35
- neat plaster 188
- necessarium 99
- neck 84
- necking 180
- necropolis 249
- needle 222
- needle beam 222
- needlepunched carpet 95
- negative friction 102
- negative ion 161
- negative moment 17
- negative shear 17
- Neo-Babylonian architecture 129
- Neoclassicism 133
- Neolithic 128
- neon lamp 145
- neoprene 193
- net cross-sectional area 160
- net structure 168
- net tracery 275
- neutral 76
- neutral axis 15
- neutron 161
- newel 81, 234, 235
- newel cap 235
- newel drop 235
- newel post 235
- New Kingdom 249
- newton 167
- newton-meter 167
- Newton's first law of motion 97
- Newton's second law of motion 97
- Newton's third law of motion 97
- N-grade 282
- nickel 175
- nimbus 183
- nipple 199
- noble gas 161
- noble metal 171
- node 259
- nog 107
- nogging 107
- noise 231
- noise criteria curve 231
- noise reduction 231
- noise reduction coefficient 231
- nominal dimension 19, 277
- nominal size 277
- nonbearing partition 266
- nonbearing wall 266
- noncombustible construction 51
- nonconcurrent forces 96
- nonconforming 51
- nonferrous metal 175
- non-heat-treatable alloy 175
- non-load-bearing partition 266
- non-load-bearing wall 266
- nonmetallic sheathed cable 78
- nonobjective 52
- nonparallel system 244
- non-pressure-treated wood 280
- nonrecoverable light loss factor 149
- nonrepresentational 52

nonstaining mortar 157
 nonvitreous 32
 normal force method 154
 normal stress 162
 Norman architecture 131
 Norman brick 19
 Norman Conquest 131
 north arrow 69
 Norwegian brick 19
 nosing 233, 262
 notice to proceed 49
 novelty sliding 268
 nut 84
 nylon 192

Oo

obelisk 249
 object line 68
 oblate 111
 oblate spheroid 111
 oblique 71, 108
 oblique projection 71
 oblique section 70
 obscure glass 112
 obsidian 236
 obtuse 109
 obtuse angle 108
 occupancy load 151
 occupancy separation 89
 occupant load 91
 octagon 109
 octahedron 111
 octastyle 179
 octave 228
 oculus 61
 oeil-de-boeuf 274
 off-center 110
 offset bend 203
 ogee 185
 ogee arch 14
 ogive 263
 ohm 74
 Ohm's law 74
 oil-borne preservative 280
 oil-canning 214
 oil furnace 121
 oillet 99
 oil of turpentine 187
 oil paint 187
 oil stain 187
 oil varnish 187
 olfactory 57
 olive hinge 115
 olive knuckle hinge 115
 Olmec architecture 129
 on center 267
 one-point perspective 73
 one-sheet hyperboloid 220
 one-way 238
 one-way slab 204
 onion dome 36
 oolite 236
 opaque 143
 opaque stain 187
 open boarding 213

open cornice 213
 open eaves 213
 open-end block 160
 open grain 278
 opening leaf 62
 open mortise 141
 open plan 216
 open riser 235
 open-riser stair 235
 open slating 213
 open string 235
 open-string stair 235
 open-timbered 107
 open valley 212
 open-web steel joist 173
 openwork 182
 opera house 258
 operable window 273
 opisthodomos 250
 opposition 54
 optical illusion 264
 optical mixing 38
 optical plummet 247
 optimum moisture content 225
 opus Alexandrinum 182
 opus sectile 182
 opus vermiculatum 182
 orchestra 256, 258
 orchestra pit 257
 orchestra shell 257
 order 12, 54
 ordinary construction 51
 ordinate 108
 organic 52
 Organic architecture 135
 organic soil 224
 organization 53
 oriel 274
 orientation 27, 264
 oriented strandboard 284
 originality 59
 ornament 182
 orthogonal projection 69
 orthographic projection 69
 oscillate 152
 oscillation 152
 Osirian column 249
 Ottoman architecture 132
 Ottonian architecture 131
 oublette 99
 outer hearth 87
 outlet 79
 outlet box 79
 outline 66
 outlook 217
 outrigger 211
 outside air 125
 outwork 98
 oval head 83
 oven-dry 277
 overburden 221
 overcast sky 150
 overcloak 214
 overdoor 63
 overflow 198

overhanging beam 17
 overhead concealed closer 114
 overhead door 62
 overreinforced section 202
 overturning moment 153
 ovolo 185
 owner 48
 oxye 274
 oxidation 171
 oxide 171
 oyelet 99

Pp

pace 234
 packaged air conditioner 124
 pagoda 254
 pal-lou 254
 paint 187
 paint system 187
 palazzo 26
 pale 38, 98
 pallsade 98
 Palladiana 94
 Palladian motif 274
 Pallava 130
 palm capital 249
 palmette 184
 pan 204
 pan-and-roll tiling 214
 pane 271
 panel 50, 64, 76, 204, 259, 268
 panelboard 76
 panel clip 212
 panel grade 282
 paneled door 64
 panel heating 123
 paneling 268
 panel length 259
 panel load 259
 panel point 259
 panel strip 204
 panel system 269
 panel wall 156
 panhead 83
 panic bar 116
 panic bolt 116
 panic hardware 116
 pantheon 251, 253
 pantile 214
 pan tread 235
 paper-backed lath 190
 parabola 110, 111
 parabolic reflector 146
 parabolic surface 220
 paraboloid 219
 paradise 37
 parallel drawing 71
 Parallax 284
 parallax 264
 parallel 74, 108
 parallel-chord truss 261
 parallel forces 96
 parallelogram 109
 parallelogram law 96
 parallel strand lumber 284

- parapet 98, 266
- parapet skirting 177
- parascenium 256
- PAR bulb 144
- parquet 87, 176, 189
- parquetry 87, 189
- parquing 176
- parliament hinge 115
- parados 256
- parquet 94
- parquet circle 258
- parquetry 94
- parterre 27, 258
- Parthian architecture 129
- parti 53
- partial-penetration weld 86
- partial prestressing 206
- particleboard 284
- particle-size distribution 43
- parting bead 272
- parting compound 45
- parting strip 272
- partition 266
- partition block 160
- party wall 266
- pascal 167
- passage 67
- passage grave 248
- passenger elevator 80
- passing 177
- passive earth pressure 100
- passive solar heating 227
- pass-through 274
- pastiche 183
- Paternoster 185
- path 218
- patina 175
- patio 26
- pattern 53, 265
- patterned glass 112
- patterned lumber 279
- paumelle 115
- pavement saw 47
- pavertile 33
- pavilion 24, 27
- pavilion roof 208
- P-delta effect 41
- pea gravel 224
- peanut gallery 258
- pearlite 43
- pearl molding 185
- pebble 224
- pebble dash 189
- pecky 278
- pedestal 179
- pedestal pile 103
- pediment 250
- Peg-Board 284
- pendant 147, 263
- pendant post 210
- pendentive 61
- pendentive bracketing 252
- pendentive dome 61
- penetrating stain 187
- penetration resistance 225
- penetration test 225
- penny 82
- pent 208
- pentagon 109
- pentastyle 179
- penthouse 80, 139, 208
- pentice 208
- people mover 81
- percentage reinforcement 202
- perception 265
- perched water table 223
- percolation test 201
- perforated gypsum lath 190
- perforated shell tube 245
- perforated tracery 275
- performance specification 50
- pergellisol 224
- pergola 27
- perimeter heating 122
- perimeter loop system 122
- perimeter radial system 122
- period 152
- periodic motion 152
- periodic table 161
- peripteral 251
- peristyle 137
- perlite 43
- perm 176
- permafrost 224
- permanent set 164
- permeability 225
- permeance 176
- perpend 158
- Perpendicular style 132
- perpendicular tracery 275
- Perslan 129
- Persian architecture 129
- personal distance 57
- personal space 57
- perspective 59, 72, 73
- perspective projection 72
- pervious soil 225
- petcock 123
- phantom 71
- phantom line 71
- pharaoh 249
- phase 58, 76, 228
- phenolic resin 193
- phenoplast 193
- Phillips head 83
- phloem 276
- phon 229
- phosphor 145
- phosphor bronze 175
- photochemical 187
- pi 110
- piano hinge 115
- piano nobile 26
- plazza 27
- pickle 171
- pictograph 182
- pictorial space 72
- picture mold 186
- picture plane 72
- picture rail 186
- picture window 274
- plend 185
- pler 103, 266
- plg 170
- plg iron 170
- plgment 187
- plgmented stain 187
- plgtail 79
- plaster 266
- plaster block 160
- pile 95, 102
- pile cap 103
- pile density 95
- pile driver 102
- pile eccentricity 102
- pile foundation 102
- pile ring 102
- pile tolerance 102
- pile weight 95
- pillar 40
- pilot hole 83
- piloti 26
- pin 242
- pin joint 242
- pinned connection 242
- pint 166
- pinnacle 262
- pintle 115
- pipe 199
- pipe batten 257
- pipe column 174
- pipe fitting 199
- pipe pile 102
- plsay 34
- pisé 34
- pisé de terre 34
- pitch 83, 95, 208, 228, 276
- pitched roof 208
- pitched truss 261
- pitch-faced 237
- pitching piece 235
- pitch pocket 278
- pit dwelling 136
- pith 276
- pivoted door 62
- pivoted window 273
- place 217
- placement 46
- place of beginning 246
- plafond 30
- plain lap 141
- plain rail 272
- plain-saw 278
- plain slicing 283
- plan 69
- plane 109
- plane geometry 109
- plane survey 246
- plane truss 259
- plank-and-beam construction 106
- plank flooring 94
- plank house 136
- plant 186
- planted stop 63
- plan view 69

- plaster 188
- plasterboard 191
- plaster bond 190
- plasterer's putty 188
- plaster of Paris 188
- plastic 192
- plastic deformation 164
- plastic flow 164
- plastic foam 119
- plastic hinge 104
- plasticity index 225
- plasticizer 157, 192
- plastic laminate 193
- plastic limit 225
- plastic mix 44
- plastic range 164
- plastic soil 225
- plat 246
- plate 152, 172, 194, 267
- plate action 194
- plate cut 211
- plate girder 173
- plate glass 112
- plate rail 186
- plate tracery 275
- plate tread 235
- platform frame 267
- Platonic solid 111
- plaza 27
- plenum 31, 122
- plenum barrier 232
- plenum chamber 127
- plenum ventilation 127
- Flexiglas 192
- plinth 159, 179, 186
- plinth block 186
- plinth course 159
- plot plan 69
- plug 79, 199
- plug fuse 76
- plumb 211
- plumbing 196
- plumbing fixture 198
- plumbing wall 199
- plywood 282
- pneumatic placement 46
- pneumatic riveter 86
- pneumatic structure 168
- pneumatic water supply 197
- poché 69
- pocket door 62
- pocket piece 272
- podium 250, 256
- point 54, 108, 155
- point-bearing pile 102
- pointed arch 14
- point method 149
- point of refusal 102
- point of resistance 102
- point of support 242
- point source 147
- Poisson's ratio 162
- polar angle 108
- polar axis 108
- polar coordinate system 108
- polarized 79
- pole 106
- pole construction 106
- pole house 106
- pole plate 210
- polished work 237
- polycarbonate 192
- polychromatic 39
- polyester 193
- polyethylene 192
- polygon 109
- polygon method 96
- polyhedron 111
- polymer 192
- polymerization 192
- polypropylene 192
- polystyrene 192
- polythene 192
- polyurethane 193
- polyurethane foam 119
- polyurethane varnish 187
- polyvinyl butyral 192
- polyvinyl chloride 192
- polyvinyl resin 192
- pony wall 267
- porcelain 32
- porcelain enamel 32
- porch 25
- pore 276
- portal 25, 105
- portal method 105
- portcullis 99
- porte-cochère 25
- portico 25
- portland cement 42
- portland cement mortar 33
- portland cement-lime stucco 189
- portland cement stucco 189
- positive ion 161
- positive moment 17
- positive shear 17
- post 40
- post-and-beam construction 106
- post-and-lintel construction 106
- post base 85
- post cap 85
- Postclassic 132
- postern 25, 99
- postforming 193
- postiche 183
- posticum 250
- post-modernism 135
- postoccupancy evaluation 49
- posts and timbers 279
- posttension 207
- potable water 196
- potential 74
- potential difference 74
- pound 167
- power 74, 167
- power trowel 47
- pozzolan 42
- practice 59
- Prairie School 138
- Pratt 261
- preaction system 90
- precast concrete 206
- precast concrete pile 102
- Preclassic 128
- Pre-Columbian 130
- prefabricate 50
- prefabricated flue 87
- preferred angle 233
- prefinished gypsum board 191
- preheat lamp 145
- preheater 125
- prehistoric 128
- prehung door 65
- premium grade 283
- preparation 58
- pre-posttension 207
- presbytery 37
- presentation drawing 67
- preservative 280
- pressure 167
- pressure bulb 102
- pressure coefficient 154
- pressure drop 197
- pressure-equalized design 177
- pressure forming 192
- pressure head 197
- pressure-treated wood 280
- prestress 206
- prestressed concrete 206
- pretension 206
- primary air 126
- primary beam 106
- primary cable 29
- primary color 39
- primary compression 100
- primary consolidation 100
- primary member 241
- prime coat 187
- primer 178, 187
- principal 210
- principal beam 106
- principal meridian 246
- principal rafter 210
- principal reinforcement 204
- principal stresses 16
- principle 59
- prism 111
- prismatic lens 146
- process 58
- profile 66, 185, 247
- program 58
- project 59
- projected area method 154
- projected window 273
- projection 69, 265
- projet 59
- prolate 111
- prolate spheroid 111
- promenade 27
- promenade tile 33
- pronaos 250
- proof stress 164
- property 162
- property line 221
- proportion 56

- proportional limit 164
proposal 58
proprietary specification 50
propylon 249
proscenium 256
proscenium arch 256
prospect 217
prostyle 251
protected membrane roof 215
protected noncombustible construction 51
protected opening 89
protected ordinary construction 51
protected light frame construction 51
prosthesis 35
proton 161
proton number 161
prototype 59
proxemics 57
proximity 54, 265
PS bulb 144
pseudodipteral 251
pseudoperipteral 251
psychrometer 120
psychrometric chart 120
pteroma 251
pteron 251
public way 91
puddle weld 86
pueblo 136
pull bar 114
pulley stile 272
pump 125
punching shear 205
purfle 184
purlin 210
purpose 58
push plate 114
putty 113
pynostyle 179
pylon 249
pyramid 111, 249, 252
Pythagorean theorem 109
- Qq**
qibla 252
Qin 129
quadrangle 27
quadrant 110
quadrilateral 109
quadripartite vault 263
quarry-faced 237
quarry tile 33
quart 166
quarterpace landing 234
quarter round 185
quartersaw 278
quartershing 283
quarterspace landing 234
quarter-turn stair 234
quartz heater 123
quartzite 236
quartz lamp 144
quatrefoil 275
Quattrocento architecture 132
queen closer 20
queen post 210
queen truss 210
quench 169
Quetzalcoatl 131
quicklime 157
quirk 140, 268
quoin 158
- Rr**
rabbet 140
rabbeted stop 63
rabbet joint 140
raceway 78
racking 243
radial dome 60
radial organization 218
radial shrinkage 277
radial symmetry 55
radian 108
radiant heat 120
radiant heating 123
radiation 118
radiator 123
radius 110
radius of gyration 40
radius vector 108
raft 101
rafter 211
rafter tail 213
rail 64
railing 235
rainbow roof 208
rainscreen 177
rainscreen principle 177
raised-chord truss 261
raised flooring system 93
raised girt 107
raised grain 278
raised panel 268
raising plate 267
rake 209, 268
raked joint 155
raker 221
rake tile 214
raking riser 233
raking shore 221
rambler 138
rammed earth 34
ramp 233, 235
rampant arch 14
rampant vault 263
rampart 98
random ashlar 158
random matching 283
random rubble 158
random shingles 213
random slates 213
range 155, 246
range line 246
ranger 45
rapid-start lamp 145
rated life 144
rath 253
ratio 56
Rationalism 134
ravelin 98
raw water 196
ray 276
Rayonnant style 132
R bulb 144
reactive force 97
ready-mixed concrete 46
ready-mixed plaster 188
real 59
reason 59
rebar 202
rebate 140
receding color 39
receptor 198
recessed grid 31
recharge 223
recoverable light loss factor 149
rectangle 109
rectangular 109
rectangular coordinate system 108
rectangular system 246
rectilinear 109
Rectilinear style 132
rectilinear tracery 275
red brass 175
red label 213
reducer 199
reduction 175
reduction of area 162
redundancy 105
reeding 185
reentrant 109
reentrant corner 244
reevaluation 58
reference specification 50
referential drawing 67
refine 58
reflectance 143
reflected ceiling plan 69
reflected color 38
reflected glare 148
reflected plan 69
reflected sound 230
reflecting surface 230
reflection 143
reflective glass 112
reflective insulation 119
reflector 146
refraction 143
refractory 18
refrigerant 124
refuge 217
Regency style 133
register 122
registered 48
reglet 177
regula 180
regular 54, 109, 111
regular bevel 116
regular grid 239
regular structure 244
regulating line 66
reheat coil 126
reinforced concrete 202
reinforced concrete beam 203

- reinforced concrete column 203
- reinforced concrete slab 204
- reinforced grouted masonry 157
- reinforced hollow-unit masonry 157
- reinforcement 202
- reinforcing bar 202
- reinforcing edge cable 168
- relative humidity 120
- release agent 45
- relief 70, 182
- relief valve 123
- relief vent 200
- relieving arch 266
- Renaissance 132
- Renaissance architecture 132
- rendering 67
- rendering coat 189
- repetition 55
- repetitive member 280
- repetitive member factor 280
- repose 54, 217
- reproductive imagination 59
- reservoir 196
- residual stress 169
- resilient channel 232
- resilient clip 232
- resilient flooring 95
- resilient mounting 232
- resin 192, 276
- resin canal 276
- resin duct 276
- resinous matrix 94
- resistance 74
- resistance welding 86
- resisting moment 15
- resistivity 74
- resonance 152, 230
- respond 36
- restoring moment 153
- restrictive covenant 51
- resultant 96
- retaining wall 270
- retarder 43
- reticulate 184
- reticulated tracery 275
- retrochoir 37
- return 186
- return air 125
- return bend 199
- return-corner block 160
- return grille 122
- return pipe 126
- return wall 266
- reveal 63
- revent 200
- reverberation 230
- reverberation time 230
- reverse bevel 116
- reverse return 123
- reverse-trap 198
- reversible lock 116
- revet 270
- revetment 270
- revolving door 62
- rheostat 79
- rhythm 55
- rib 263
- ribband 267
- ribbed mat 101
- ribbed slab 204
- ribbed vault 263
- ribbon 267
- ribbon strip 267
- ribbon course 212
- ribbon window 274
- rib lath 190
- rib vault 263
- rich mix 157
- Richardsonian Romanesque 134
- ridge 209
- ridge beam 211
- ridge board 211
- ridgecap 212
- ridge course 212
- ridged baffle 146
- ridgepiece 211
- ridgepole 211
- ridge rib 263
- ridge roll 214
- ridge tile 214
- rift cutting 283
- right angle 108
- right circular cone 111
- right circular cylinder 111
- right-hand 114
- right-hand reverse 114
- righting moment 153
- right triangle 109
- rigid 238
- rigid arch 13
- rigid board insulation 119
- rigid connection 242
- rigid frame 104
- rigid joint 242
- rigid metal conduit 78
- rim joist 92
- rim lock 116
- ring-shank nail 82
- rip 278
- riprap 270
- ripsaw 278
- rise 12, 80, 208, 233
- riser 197, 233
- riser-tread ratio 233
- rising hinge 115
- rivet 86
- rivet set 86
- riwaq 252
- rock 236
- rock caisson 103
- rock-cut tomb 249
- rock-faced 237
- rock lath 190
- Rockwell number 165
- rock wool 119
- Rococo 133
- rod 166, 247
- rodding 46
- rolled glass 112
- roller joint 242
- roller support 242
- rolling door 62
- rollock 19
- roll roofing 215
- roll seam 214
- Roman arch 14
- Roman architecture 130
- Roman brick 19
- Romanesque architecture 131
- Roman theater 256
- Rome 130
- Romex cable 78
- rood 37
- rood screen 37
- roof 208
- roof drain 209
- roof flange 177
- roof framing 211
- roofing 212
- roofing bond 215
- roofing felt 215
- roofing nail 82
- roofing paper 215
- roofing tile 214
- roof plan 69
- room 216
- room acoustics 230
- room cavity 149
- room cavity ratio 149
- room surface dirt depreciation 149
- root 86, 141
- rose 116, 184
- rose window 37
- rosette 184
- rotary cutting 283
- rotation 97
- rotational surface 220
- roto operator 273
- rotunda 26
- rough buck 63
- roughcast 189
- rough coat 189
- rough floor 92
- rough grading 222
- rough hardware 114
- roughing-in 199
- rough lumber 277
- rough opening 63
- rough stringer 235
- round arch 14
- round head 83
- round point 82
- route 140
- row house 139
- rowlock 19
- row spacing 84
- rubber 193
- rubber-base paint 187
- rubber tile 95
- rubble 158
- ruled surface 220
- run 208, 233
- Rundbogenstil 134
- rung 233
- running bond 20

- running mold 189
- rutoff 223
- runway 258
- rustic 158
- rustication 158
- rustication strip 45
- rustic joint 158
- rustic siding 268
- rustic slates 213
- rustic terrazzo 94
- rust-inhibiting paint 187
- R-value 118
- Ss**
- sabin 231
- sack 44
- sacred 248
- sacrificial anode 171
- sacristy 35
- saddle 63, 209
- saddleback coping 266
- saddle coping 266
- saddle joint 159
- saddle surface 219
- safety curtain 257
- safety factor 240
- safety glass 112
- safety nosing 235
- safety tread 235
- safety valve 123
- safing 269
- sag 28
- sahn 252
- sailor 19
- salient 54, 109
- sally port 98
- saltbox 138
- sanctuary 35
- sanctum sanctorum 250
- sand 224
- sand clay 224
- sand-cushion terrazzo 94
- sand filter 201
- sand-float finish 189
- sand-lime brick 160
- sand pile 103
- sandstone 236
- sand-struck brick 18
- sandwich beam 281
- sandwich panel 50
- sanitary base 33
- sanitary cross 199
- sanitary sewer 200
- sanitary stop 65
- sanitary tee 199
- sanitary ware 198
- sap 276
- sapwood 276
- sarcophagus 35
- sash 271
- sash balance 272
- sash bar 271
- sash block 160
- sash chain 272
- sash cord 272
- sash fast 272
- sash fastener 272
- sash line 272
- sash ribbon 272
- sash stop 272
- sash weight 272
- Sassanian architecture 130
- satin finish 187
- saturated air 176
- saturation 38
- saturation coefficient 18
- saucer dome 60
- sawtooth roof 208
- S bulb 144
- scaffold 49
- scaffold nail 82
- scagliola 189
- scale 56, 69, 166, 169
- scalene 109
- scaling 47
- scallop 184
- scarce ment 159
- scarf joint 140
- scarp 98
- scheme 59
- Schwedler dome 60
- science 11
- scissors truss 261
- sconce 147
- sconcheon 63
- scored block 160
- scotia 181
- SCR brick 19
- scratch coat 188
- screed 47, 190
- screen 266, 274
- screen block 160
- screen door 64
- screw 83
- screw eye 83
- screw nail 82
- scribbling 66
- scribed joint 140
- scrim 190
- scroll 184
- scum 201
- scum clear space 201
- scuncheon 63
- scupper 209
- scutcheon 116
- seal 68
- sealer 187
- seasoned 277
- seat 199
- seat angle 174
- seat cut 211
- seated connection 174
- seating 257
- secant 109
- second 108
- secondary beam 106
- secondary cable 29
- secondary color 39
- secondary consolidation 100
- secondary member 241
- secondary stresses 259
- secret dovetail 141
- section 70, 246
- section line 70
- section modulus 16
- sector 110
- secular 248
- security glass 112
- sedimentary rock 236
- see 264
- seepage pit 201
- segmental arch 14
- segregation 46
- seismic 152
- seismic coefficient 153
- seismic force 152
- seismic joint 244
- seismic zone factor 153
- select 58
- selective absorption 38
- self-centering lath 190
- self-closing fire assembly 89
- self-furring lath 190
- self-tapping screw 83
- Seljuk architecture 132
- selvage 116, 215
- semicircular dome 60
- semidetached dwelling 138
- semidirect lighting 148
- semidome 61
- semigloss 187
- semi-indirect lighting 148
- semivitreous 32
- sensible heat 117
- septic tank 201
- serdab 249
- serendipity 59
- serial distribution 201
- series 74
- Serlian motif 274
- serpentine 236
- service 75
- service conductor 75
- service drop 75
- service entrance conductor 75
- service equipment 75
- service lateral 75
- service load 240
- service pipe 196
- service raceway 78
- service sink 198
- service switch 76
- service temperature 193
- set 47, 82
- setback 221
- set screw 83
- setting block 113
- setting shrinkage 47
- settlement 100
- settlement load 151
- set-up 247
- severy 262
- sewage 200
- sewage treatment plant 201
- sewer 200

- sexpartite vault 263
- Sezession 134
- sgraffito 182
- shade 39,70
- shades and shadows 70
- shading 66
- shading coefficient 112
- shadow 70
- shadow block 160
- shaft 179,262
- shaft grave 248
- shake 213,278
- shallow foundation 100
- Shang 128
- shank 82
- shape 52
- shear 163
- shear center 16
- shear diagram 17
- shear force 163
- shear head 205
- shearing force 163
- shearing resistance 225
- shearing strain 163
- shearing strength 225
- shearing stress 163
- shear modulus 163
- shear plate 85,173
- shear strain 163
- shear stress 163
- shear stud 93
- shear wall 243
- sheath 207
- sheathing 212,268
- sheath pile 221
- she bolt 45
- shed dormer 209
- shed roof 208
- sheet glass 112
- sheeting 192
- sheet metal 172
- sheet-metal screw 83
- sheet pile 221
- Sheetrock 191
- shell 21,161,219
- shellac 187
- shellac varnish 187
- shelter 136
- shielded cable 78
- shielded metal arc welding 86
- shielding angle 146,273
- Shimmet-zukuri 255
- shiner 19
- shingle 212
- Shingle style 134
- shingle tile 214
- Shinto 255
- ship lap 268
- ship's ladder 233
- shock 76
- shoe 102,186,209,259,267
- shoin 137
- shoin-zukuri 137
- shoji 137
- shoplumber 279
- shore 221
- shoring 221
- shoro 255
- short 76
- short circuit 76
- short column 40
- short ton 167
- shotcrete 46
- shot-sawn 237
- shoulder 98,141
- shoulder miter 140
- shoved joint 155
- shower 198
- shreadhead 208
- shrinkage 277
- shrinkage limit 225
- shrinkage reinforcement 204
- shrink-mixed concrete 46
- shutoff valve 196
- shutter blind 227
- shutter panel 227
- shutting stile 64
- siamese 90
- side cut 211
- sidelap 212
- sidelight 63,148
- slidesway 104
- sliding 268
- slightline 72,258
- slin 52
- sikhara 253
- sikra 253
- siliceous 42
- silicon 175
- silicon bronze 175
- silicone 193
- silicone rubber 193
- sill 63,267
- sill anchor 85
- sill block 160
- sillcock 197
- sill plate 267
- sill sealer 267
- sit 224
- similar 109
- similarity 54,265
- simple beam 17
- simulate 58
- simultaneous contrast 265
- sine 109
- single-acting door 62
- single-bay frame 105
- single-bevel weld 86
- single-curvature structure 29
- single-duct system 126
- single-hung window 272
- single-phase 76
- single-strength glass 112
- single tee 206
- single-vee weld 86
- sink 198
- sinking 115
- siphon-jet 198
- siphon-vortex 198
- site 221
- site coefficient 153
- site drainage 223
- site plan 69
- sitework 221
- SI unit 166
- sixteenpenny nail 82
- size-adjusted value 280
- sized slates 213
- size factor 280
- size perspective 72
- skeleton construction 106
- skene 256
- sketch 67
- skew 159
- skew arch 12
- skewback 14
- skew corbel 159
- skew grid 195
- skew lines 108
- skim coat 188
- skin friction 102
- skip 278
- skip sheathing 213
- skirt 186,271
- sky component 150
- skylight 150,209
- skyscraper 22
- slab 26
- slab on grade 101
- slag 170
- slaked lime 157
- slat block 94
- slate 236
- slating nail 213
- sleepers 94
- slenderness ratio 40
- sliding 154
- sliding door 62
- sliding sash 272
- slip 37
- slip form 45
- slip matching 283
- slip mortise 141
- slipped grid 239
- slip sill 271
- slope of grain 280
- slop sink 198
- slot diffuser 31
- slot mortise 141
- slotted head 83
- sludge 201
- sludge clear space 201
- slump 44
- slump block 160
- slump cone 44
- slump test 44
- slurry wall 221
- slype 37
- small calorie 117
- smalto 182
- smelt 170
- smoke chamber 87
- smoke detector 90
- smoke-developed rating 88
- smoke dome 87

- ul style="list-style-type: none; padding-left: 0;">
- smokeproof enclosure 91
- smoke shelf 87
- smokestack 87
- smoke vent 89
- snap tie 45
- snow load 151
- soap 19
- soapstone 236
- society 128
- sociology 11
- socket 79
- socketed caisson 103
- sod house 136
- sodium lamp 145
- sodium-vapor lamp 145
- soffit 180
- soft-burned 32
- softening point 193
- soft joint 156
- soft light 148
- soft-mud process 18
- soft steel 170
- soft story 244
- softwood 276
- soil 224
- soil analysis 224
- soil binder 270
- soil class 224
- soil mechanics 225
- soil pipe 200
- soil pressure 100
- soil profile 224
- soil stabilizer 270
- soil stack 200
- soil structure 225
- soil vent 200
- solar 107
- solar collector 226
- solar constant 226
- solar energy 226
- solar-heating system 226
- solar house 226
- solar orientation 226
- solar path diagram 226
- solar screen 227
- solder 86
- soldier 19
- soldier beam 221
- soldier course 20
- soldier pile 221
- sole 267
- solepiece 267
- soleplate 267
- solid 111, 161
- solid angle 142
- solid block flooring 94
- solid bridging 92
- solid column 281
- solid-core door 65
- solid flat slab 206
- solid geometry 111
- solidify 161
- solid masonry 156
- solid masonry unit 160
- solid-top block 160
- sollar 107
- solvent 187
- sone 229
- Sonotube 45
- sorin 255
- sound 228
- sound-absorbing masonry unit 160
- sound grade 283
- sound-insulating door 65
- sound insulation 232
- sound intensity 229
- sound-intensity level 229
- sound isolation 232
- sound knot 278
- sound level meter 229
- sound power 229
- sound-power level 229
- sound pressure 229
- sound-pressure level 229
- soundproof 230
- sound transmission class 232
- sound wave 228
- space 217
- spaced column 281
- spaced sheathing 213
- spaced slating 213
- space frame 195
- space heater 123
- space heating 121
- space planning 10
- spacer 45, 113
- space truss 195
- spacing criteria 149
- spading 46
- spalling 47
- span 15
- spandrel 12, 269
- spandrel beam 269
- spandrel glass 112, 269
- spandril 12, 269
- Spanish tile 214
- span rating 282
- spark arrester 87
- spark gap 77
- spar varnish 187
- spat 65
- spatial edge 72
- spatter dash 189
- specialty panel 282
- specifications 50
- specific conductance 74
- specific gravity 167
- specific heat 117
- specific humidity 120
- specific resistance 74
- specific volume 167
- spectral distribution curve 145
- spectrum 38
- specular 143
- speculation 59
- speculative builder 48
- speed of sound 228
- sphere 111
- spherical surface 220
- spheroid 111
- sphinx 249
- spigot 197, 199
- spike 82
- spike-and-ferrule 209
- spike grid 85
- spill 147
- spill light 147
- spindle 116
- spiral 110
- spiral column 203
- spiral reinforcement 203
- spiral stair 234
- spire 36
- spirit level 247
- spirits of turpentine 187
- spirit stain 187
- spirit varnish 187
- splash block 209
- splay 63, 185
- splayed coping 266
- splice plate 174
- spline 31, 140
- split 278
- split complementary 39
- split-face block 160
- split-faced 237
- split-level 138
- split-ring 85
- spot 147, 257
- spot elevation 247
- spotlight 147, 257
- spray-on fireproofing 88
- spread 122
- spreader 45
- spread footing 101
- spring 113
- spring 12
- spring balance 272
- spring equinox 226
- springer 12
- spring hinge 115
- springing 12
- spring steel 170
- springwood 276
- sprinkler head 90
- sprinkler system 90
- sprinklered 90
- sprocket 213
- spur 183
- square 109, 212
- squared rubble 158
- square head 84
- square measure 166
- square splice 140
- squinch 61
- S-shape 172
- stability 243
- stabilizer 192
- stabilizing moment 153
- stack 122, 200
- stack bond 20
- stack partition 199
- stack vent 200
- stadia 247
- stadia rod 247

- staff bead 271
 stage 257
 stagehouse 257
 staggered course 212
 staggered joints 212
 staggered-stud partition 232
 staging 49
 stain 187
 stained glass 37
 stainless steel 170
 stair 233
 staircase 235
 stairhead 233
 stair headroom
 stair lift 81
 stair rod 235
 stairway 233
 stairwell 233
 stalactite work 252
 stamba 253
 stanchion 235
 standing leaf 62
 standard atmosphere 167
 Standard Building Code 51
 standard candle 142
 standard hook 202
 standard pipe 172
 standard terrazzo 94
 standby generator 75
 standing seam 214
 standing wave 231
 standpipe 90
 staple 82
 star 183
 Star of David 183
 starter 145
 starter tile 214
 starting course 212
 star vault 263
 statically equivalent 97
 static fit 57
 static load 151
 static load test 102
 statics 97
 station 247
 station point 72
 statute mile 166
 stove church 36
 Steamboat Gothic 134
 steam heating 123
 steam trap 123
 steatite 236
 steel 170
 steel beam 173
 steel column 174
 steeple 36
 Steiner tunnel test 88
 stela 250
 stellar vault 263
 step 233
 step-down transformer 75
 step flashing 177
 stepped flashing 177
 stepped footing 101
 stepped ramp 233
 stepping off 211
 step-up transformer 75
 steradian 142
 stereobate 250
 Stick style 134
 stick system 269
 stiffback 45
 stiffener 173
 stiff mix 44
 stiff-mud process 18
 stiffness 164
 stile 64
 Stile Liberty 134
 stilt 106
 stilted arch 14
 stilted vault 263
 stipple-troweled finish 189
 stippling 66
 stirrup 203
 stoa 250
 stone 236
 Stone Age 128
 Stonehenge 248
 stoneware 32
 stool 271
 stoop 25
 stop 63, 186, 272
 stop bead 272
 stop chamfer 140
 stopped dado 140
 stopped mortise 141
 storm cellar 23
 storm door 64
 storm drain 223
 storm sewer 223
 storm window 274
 story 22, 24
 story drift 153
 story shear 153
 stovebolt 84
 stovepipe 121
 straight flight 234
 straight-run stair 234
 straight-split shake 213
 strain 162
 strain gauge 162
 strain-hardening range 164
 straining beam 210
 straining piece 210
 straining sill 210
 strain-rate effect 165
 strand 206
 strap footing 101
 strap hinge 115
 strapwork 184
 stratification 46
 stratum 224
 strength 162
 strength of materials 162
 stress 162
 stress concentration 163
 stress design 240
 stressed-skin panel 50
 stress grade 280
 stress relaxation 165
 stress relieving 169
 stress reversal 259
 stress-strain diagram 164
 stress trajectories 16
 stretcher 19
 stretcher block 160
 stretcher bond 20
 stretching course 20
 strla 180
 strike 116
 strike plate 116
 string 235
 stringboard 235
 string course 159
 stringer 92, 235
 strip 83
 strip flooring 94
 strip footing 101
 strip lath 190
 strongback 45
 struck joint 155
 structural analysis 240
 structural clay tile 34
 structural design 240
 structural dimension 57
 structural facing tile 34
 structural failure 240
 structural grid 239
 structural insulating roof deck 215
 structural lightweight concrete 43
 structural lumber 279
 structural member 238
 structural pattern 239
 structural rating 240
 structural sealant 113
 structural sheathing 268
 structural steel 173
 structural tee 172
 structural tubing 172
 structural unit 239
 structure 53, 238
 structure-borne sound transmission 232
 strut 238
 stub tenon 141
 stucco 189
 stud 267
 studio apartment 139
 stud partition 267
 stud wall 267
 study 67
 stupa 253
 style 128
 Style Moderne 135
 stylobate 250
 Styrofoam 119
 subbasement 23
 subcasing 63
 subcontractor 48
 subdiagonal 261
 subfloor 92
 subgrade 222
 submerged arc welding 86
 subpurlin 210
 sub sill 271
 subsoil 224

substation 75
 subtractive color 38
 substrate 101, 178
 substratum 101
 substructure 21
 subsurface drainage 223
 subsurface investigation 225
 subsurface sand filter 201
 subtractive 52
 suction 18, 190
 suite 216
 sulfate action 42
 Sumerian architecture 128
 summer 107
 summer solstice 226
 summertree 107
 summerwood 276
 sump 200
 sump pump 200
 sun control 227
 sun deck 227
 sunk draft 237
 sunk panel 268
 sunk relief 182
 sunlight 150
 sun parlor 227
 sun porch 227
 sunroom 227
 sunshade 227
 supercolumniation 256
 superplasticizer 43
 superstructure 21
 supply air 125
 supply pipe 126
 support condition 242
 surbased arch 14
 surcharge 270
 surface 111
 surface-active agent 43
 surface-active structure 238
 surface bonding 160
 surface condensation 176
 surface drainage 223
 surfaced dry 277
 surfaced green 277
 surface structure 238
 surface tension 177
 surfactant 43
 surround 27, 268
 surround theater 257
 survey 246
 surveyor's chain 247
 survey plat 246
 suspended ceiling 31
 suspended-span 17
 suspension bridge 29
 suspension structure 29
 swale 223
 swan's neck pediment 186
 sway brace 243
 sweating 176
 sweep 62
 sweep fitting 199
 swinging door 62
 swirl finish 47

switch 79
 switchboard 75
 switchgear 75
 switchgear room 75
 symbol 52
 symmetry 55
 synagogue 250
 synclastic 220
 synectics 59
 synthesis 58
 synthetic rubber 193
 syringe 249
 system 21
 systems building 50
 systyle 179

Tt

tabernacle 36, 250
 tabernacle frame 186
 table 159, 183
 tablero 252
 tablet 183
 tactile texture 52
 taenia 180
 tag 177
 tail 213
 tail cut 213
 tail fin 159
 tailing 159
 tailpiece 92, 211
 talud 252
 tambour 61
 tana 137
 Tang 254
 tangent 109, 110
 tangential shrinkage 277
 tangential stress 163
 Tao 129
 Taoism 129
 tap 83, 197
 tapered column 281
 tapered end form 204
 tapered split shake 213
 tapping screw 83
 target 247
 task lighting 148
 taste 10
 tatami 137
 T-bar 172
 TB bulb 144
 T-beam 203
 T bulb 145
 teaser 257
 techniques 11
 technique 66
 technology 11
 tectonics 11
 tee 172, 199, 253
 teepee 136
 tegula 214
 telamon 250
 tell 128
 temenos 250
 temper 169
 temperature 117

temperature effect 165
 temperature reinforcement 204
 tempered glass 112
 tempered hardboard 284
 template 266
 template hinge 115
 temple 248
 Temple of Solomon 250
 templet 266
 tendon 206
 tenia 180
 tenon 141
 tensile force 162
 tensile strain 162
 tensile strength 162
 tensile stress 162
 tensile test 162
 tension 54, 162
 tension-control bolt 174
 tension member 238
 tension reinforcement 202
 tension ring 60
 tent structure 168
 tepee 136
 terminal 79
 terminal reheat system 126
 terminal unit 126
 terminal velocity 122
 termite shield 267
 terne metal 175
 terneplate 175
 terra cotta 34
 terrace 25, 139
 terrace house 139
 terrazzo 94
 terreplein 98
 territoriality 57
 tertiary beam 106
 tertiary color 39
 tertiary member 241
 tessera 182
 test 58
 test cylinder 44
 test pit 221
 tetrahedron 111
 tetrastyle 179
 texture 52, 53
 texture 1-11 282
 texture perspective 72
 thatch 107
 theater 256
 theater-in-the-round 257
 theodolite 247
 theory 59
 therm 117
 thermal barrier 118
 thermal break 118
 thermal comfort 120
 thermal conductance 118
 thermal conductivity 118
 thermal contraction 165
 thermal expansion 165
 thermal finish 237
 thermal insulation 119
 thermal resistance 118

- thermals shock 165
- thermal stress 165
- thermal transmittance 118
- thermocouple 121
- thermoforming 192
- thermometer 117
- thermoplastic 192
- thermoset 193
- thermosetting plastic 193
- thermostat 121
- thick-set process 33
- thimble 121
- thin-bed process 33
- thin-coat plaster 188
- T-hinge 115
- thinner 187
- thin-set terrazzo 94
- thin shell 219
- tholbate 61
- tholos 248
- thread 83
- three-coat plaster 188
- three-hinged arch 13
- three-hinged frame 104
- three-phase 76
- three-point perspective 73
- three-quarter-turn stair 234
- three-way lamp 144
- three-way switch 79
- threshold 63, 218
- threshold of hearing 229
- threshold of pain 229
- throat 65, 86, 87
- through check 278
- through stone 158
- through tenon 141
- through-wall flashing 177
- throw 122, 149
- thrust 13
- thrust stage 257
- thumbnut 84
- thumbscrew 83
- Tlahuanaco 130
- tie 156, 238
- tieback 221
- tie beam 103, 210
- tied column 203
- tier 258
- tierraceron 263
- tie rod 13
- tight fit 216
- tight knot 278
- tile accessory 33
- tile grout 33
- tile tie 214
- tilting fillet 214
- tilt-up construction 50
- timber 277
- timber connector 85
- timber pile 102
- timbers 279
- time-delay fuse 76
- time of haul 46
- tin 171
- tinplate 171
- tin roofing 214
- tint 39
- tinted glass 112
- to 255
- toe 86, 270
- toenail 82
- toggle bolt 84
- toggle switch 79
- toilet 198
- toilet partition 198
- tokobashira 137
- tokonoma 137
- Toltec architecture 131
- ton 167
- tone 39
- tongue-and-groove 140
- tongued miter 140
- tonne 167
- ton of refrigeration 124
- tooled joint 155
- tooled surface 237
- toothed plate 85
- top bar 203
- top car clearance 80
- topcoat 187
- top cut 211
- tope 253
- toplary 27
- toplap 212
- top out 49
- topping 94, 204, 206
- top plate 267
- top rail 64
- topsoil 224
- torana 253
- torchlere 147
- toril 255
- tormentor 257
- torque 163
- torsion 163
- torsional irregularity 244
- torus 181, 220
- totem 136
- totempole 136
- tou 254
- toughness 164
- tou-kung 254
- tourelle 99
- tower 26
- Tower of Babel 248
- town planning 10
- township 246
- trabeate 106
- trace 66
- tracery 275
- tracheld 276
- trachelium 180
- track lighting 147
- tract house 138
- traction elevator 80
- transept 36
- transfer column 105
- transfer girder 105
- transfer molding 192
- transformation 58
- transformer 75
- transformer vault 75
- transit 247
- transition 218
- transitional structure 239
- transit-mixed concrete 46
- translation 97
- translational surface 219
- translucent 143
- transmission loss 232
- transmittance 143
- transom 63
- transom light 63
- transom window 63
- transparent 143
- transverse arch 262
- transverse force 163
- transverse load 163
- transverse rib 263
- transverse section 70
- transverse shear 15
- trap 198
- trapezium 109
- trapezoid 109
- trave 107
- travel 80
- traveling cable 80
- traverse 246
- travertine 236
- tread 233
- tread return 235
- treated wood 280
- trefoil 275
- trefoil arch 14
- trellis 27
- tremie 221
- triad 39
- triangle 109
- triangle method 96
- triangular arch 14
- triangulation 247
- tribunal 251
- tribune 35, 251
- tributary 241
- tributary area 241
- tributary load 241
- tricalcium aluminate 42
- tricalcium silicate 42
- triforium 37
- triglyph 180
- trigonometric function 109
- trigonometry 109
- trilateration 247
- trillith 248
- trillithon 248
- trim 186
- trimetric projection 71
- trimmer 33, 92
- trimmer arch 87
- tripartite vault 263
- triphosphor 145
- triple point 117
- triplex 138
- tristyle 179
- triumphal arch 251

INDEX

orking load 240
orking stress 164
orking stress design 240
ork plane 149
oven carpet 95
oven valley 212
oven-wire fabric 202
eathe 184, 234
eathe piece 234
ought iron 170
-shape 172
ye 199
ythe 155

x
axis 108
bracing 243
coordinate 108
a 128
lem 276

y
ung-shao 128
rd 166
rd lumber 279
axis 107
coordinate 107
eld point 102, 164
eld strength 164
n 128
ke 45, 272
ung's modulus 162
ngang 254
rt 136

z
potec architecture 130
shiki 137
xis 108
zar 172
coordinate 108
e 172
hith 150
o-force member 259
nglou 254
ou 129
gurati 248
c 171
ada 252
al cavity method 149
e 126
ing ordinance 51
horus 180
nger 133

Architecture is an art for all to learn because all are concerned with it. —John Ruskin • Architecture depends on Order, Arrangement, Eurythmy, Symmetry, Propriety, and Economy. All of these must be built with due reference to durability, convenience, and beauty. Durability will be assured when foundations are carried down to the solid ground and materials wisely and liberally selected; convenience, when the arrangement of the apartments is faultless and presents no hindrance to use, and when each class of building is assigned to its suitable and appropriate exposure; and beauty, when the appearance of the work is pleasing and in good taste, and when its members are in due proportion according to correct principles of symmetry. —Vitruvius • Architecture is the masterly, correct and magnificent play of masses brought together in light. —Le Corbusier • Anyone entering on the study of architecture must understand that even though a plan may have abstract beauty on paper, the four facades may seem well balanced and the total volume well proportioned, the building itself may turn out to be poor architecture. Internal space, that space which cannot be completely represented in any form, which can be grasped and felt only through direct experience, is the protagonist of architecture. To grasp space, to know how to see it, is the key to the understanding of building. —Bruno Zevi • Architecture, painting, and sculpture are called the fine arts. They appeal to the eye as music does to the ear. But architecture is not judged by visual appeal alone. Buildings affect all of the human senses — sound, smell, touch, taste, and vision. —Forrest Wilson • It became apparent to us that architecture is generally assumed to be a highly specialized system with a set of prescribed technical goals rather than a sensual social art responsive to real human desires and feelings. This limitation is most frighteningly manifested in the reliance on two-dimensional diagrams that lay more stress on the quantifiable features of building organization than on the polychromatic and three-dimensional qualities of the whole architectural experience. —Kent Bloomer & Charles Moore • The only way you can build, the only way you can get the building into being, is through the measurable. You must follow the laws of nature and use quantities of brick, methods of construction, and engineering. But in the end, when the building becomes part of living, it evokes unmeasurable qualities, and the spirit of its existence takes over. —Louis Kahn • Built environments have various purposes: to shelter people and their activities and possessions from the elements, from human and animal enemies, and from supernatural powers; to establish place; to create a humanized, safe area in a profane and potentially dangerous world; to stress social identity and indicate status; and so on. Thus the origins of architecture are best understood if one takes a wider view and considers sociocultural factors, in the broadest sense, to be more important than climate, technology, materials, and economy. In any situation, it is the interplay of all these factors that best explains the form of buildings. No single explanation will suffice, because buildings — even apparently humble dwellings — are more than material objects or structures. They are institutions, basic cultural phenomena. People think environments before they build them. Thought orders space, time, activity, status, roles, and behavior. But giving physical expression to ideas is valuable. Encoding ideas makes them useful mnemonics; ideas help behavior by reminding people of how to act, how to behave, and what is expected of them. It is important to stress that all built environments — buildings, settlements, and landscapes — are one way of ordering the world by making ordering systems visible. The essential step, therefore, is the ordering or organizing of the environment. —Amos Rapaport • Ruskin said: 'Great nations write their autobiographies in three manuscripts, the book of their deeds, the book of their words and the book of their art. Not one of these books can be understood unless we read the two others, but of the three the only trustworthy one is the last.' On the whole I think this is true. If I had to say which was telling the truth about society, a speech by a minister of housing or the actual buildings put up in his time, I should believe the buildings. —Kenneth Clark • We require of any building, that it act well, and do the things it was intended to do in the best way; that it speak well, and say the things it was intended to say in the best words; that it look well, and please us by its presence, whatever it has to do or say. —John Ruskin • Architecture also exists without necessary assistance from an architect; and architects sometimes create buildings which are not architecture. —Norval White • Architecture is produced by ordinary people, for ordinary people; therefore it should be easily comprehensible to all. —Steen Eiler Rasmussen